


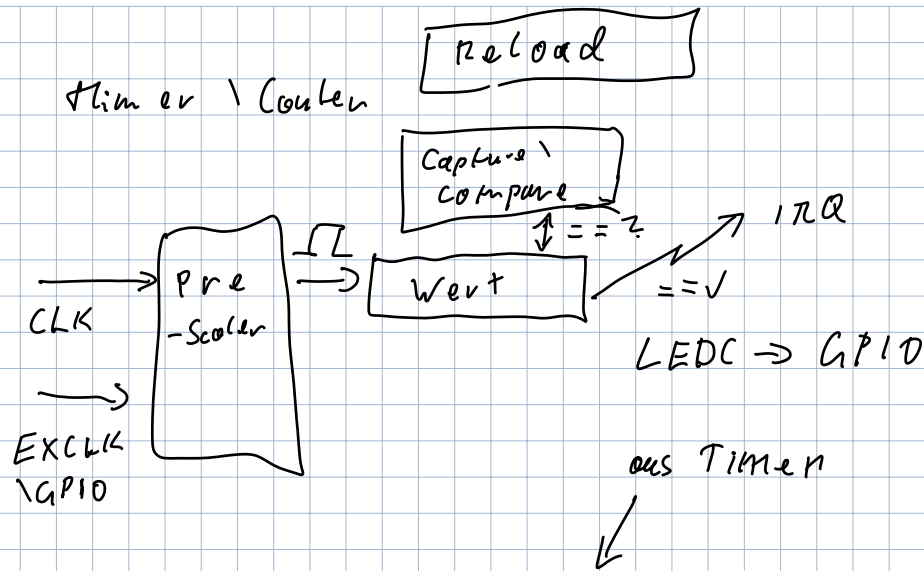

```
uint16_t now = getTicks();
if (now - LastTime > 100) {
    // interpretation:
    // als int16_t!
    LastTime = now;
}
// now > LastTime + 100
if (LastTime + 100 < now) {
```

uint16_t [0, 65535]

z.B. LastTime

Bei Zeiten uint16_t subtrahieren

Capture Mode:




Silizium Oszillatoren
 $\pm 10\%$

Quarz ± 50 ppm
million

$$p \sim C U^2 f = [\text{Gate Kapazität}] \cdot [\text{Spannung}]^2 \cdot [\text{frequenz}]$$

Logikap Controllen $\rightarrow$ 2x Core vergleicht Register

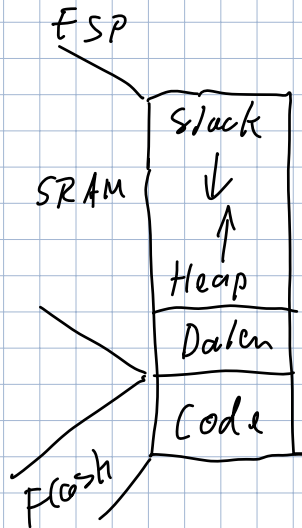

def section = "
 naked

intrinsische Fkt
 intrinsics.h