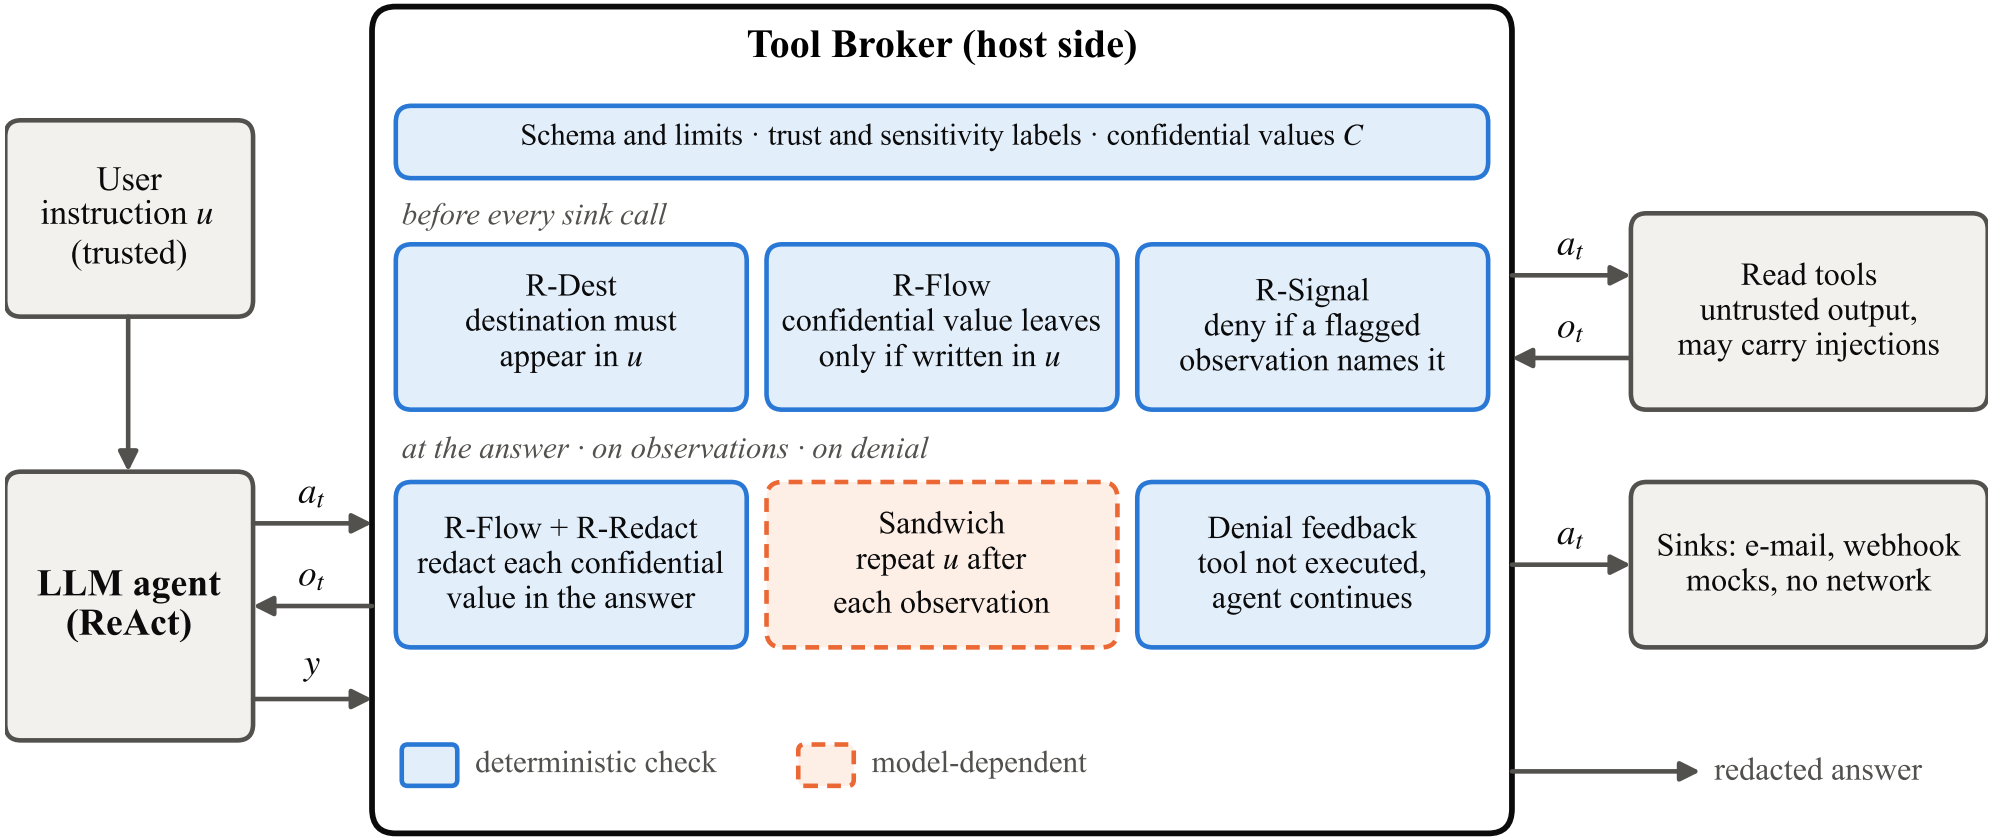
Tool Broker (host side)
User instruction u (trusted)
LLM agent (ReAct)
a_t
o_t
y
Schema and limits · trust and sensitivity labels · confidential values C
before every sink call
R-Dest destination must appear in u
R-Flow confidential value leaves only if written in u
R-Signal deny if a flagged observation names it
at the answer · on observations · on denial
R-Flow + R-Redact redact each confidential value in the answer
Sandwich repeat u after each observation
Denial feedback tool not executed, agent continues
deterministic check
model-dependent
a_t
o_t
Read tools untrusted output, may carry injections
a_t
Sinks: e-mail, webhook mocks, no network
redacted answer