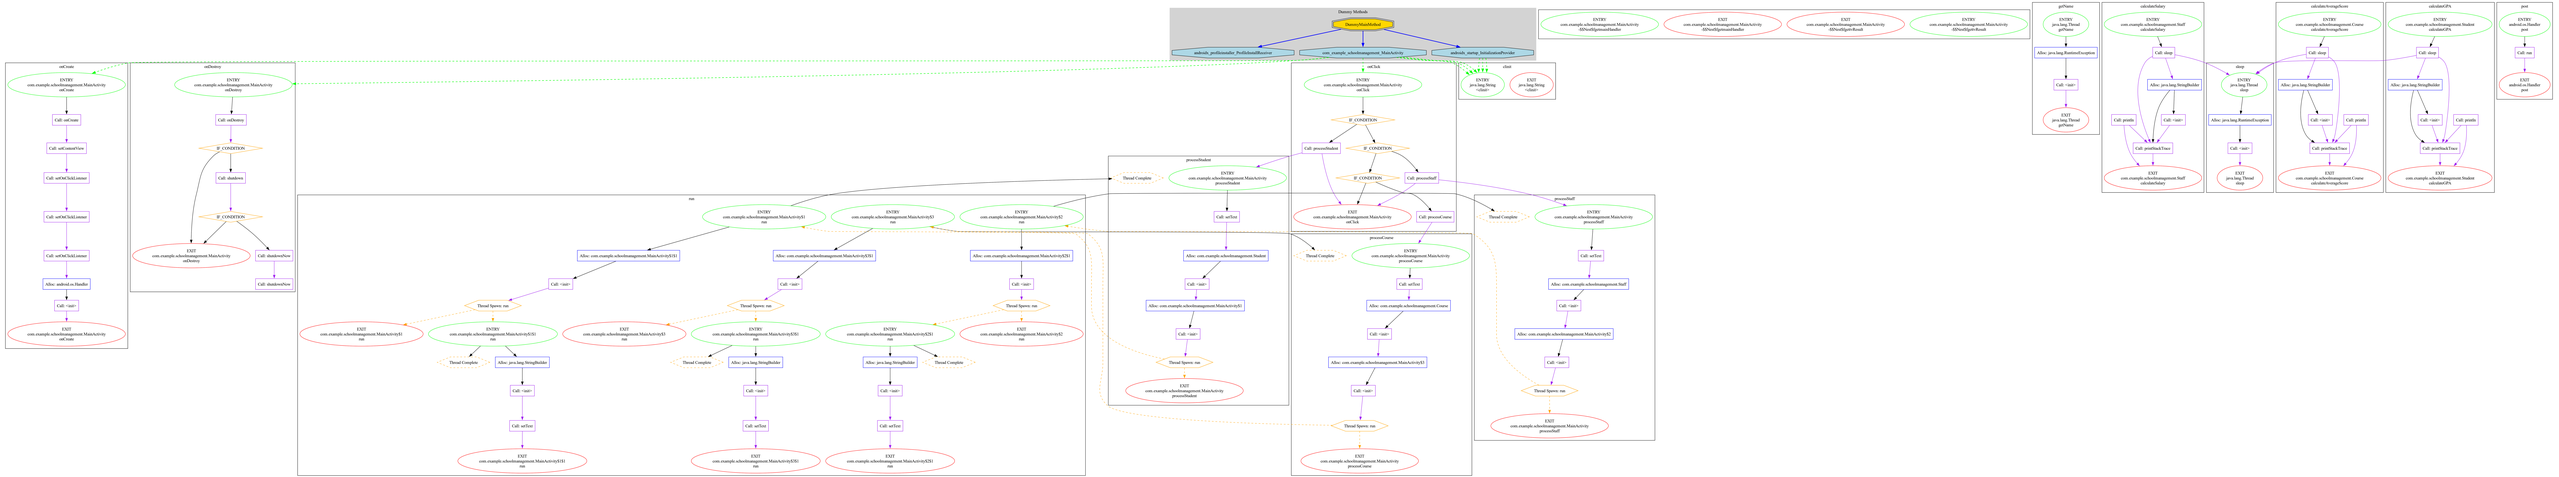
Dummy Methods
DummyMainMethod
androidx_profileinstaller_ProfileInstallReceiver
com_example_schoolmanagement_MainActivity
androidx_startup_InitializationProvider
onCreate
ENTRY com.example.schoolmanagement.MainActivity onCreate
Call: onCreate
Call: setContentView
Call: setOnClickListener
Call: setOnClickListener
Call: setOnClickListener
Alloc: android.os.Handler
Call: <init>
EXIT com.example.schoolmanagement.MainActivity onCreate
onDestroy
ENTRY com.example.schoolmanagement.MainActivity onDestroy
Call: onDestroy
IF_CONDITION
Call: shutdown
IF_CONDITION
EXIT com.example.schoolmanagement.MainActivity onDestroy
Call: shutdownNow
Call: shutdownNow
onClick
ENTRY com.example.schoolmanagement.MainActivity onClick
IF_CONDITION
Call: processStudent
IF_CONDITION
IF_CONDITION
Call: processStaff
EXIT com.example.schoolmanagement.MainActivity onClick
Call: processCourse
client
ENTRY java.lang.String <clinit>
EXIT java.lang.String <clinit>
ENTRY com.example.schoolmanagement.MainActivity fillNestEnumerationBundle
EXIT com.example.schoolmanagement.MainActivity fillNestEnumerationBundle
EXIT com.example.schoolmanagement.MainActivity fillNestEnginerRound
ENTRY com.example.schoolmanagement.MainActivity fillNestEnginerRound
getName
ENTRY java.lang.Thread getName
Alloc: java.lang.RuntimeException
Call: <init>
THROW java.lang.Thread getName
calculateSalary
ENTRY com.example.schoolmanagement.Staff calculateSalary
Call: sleep
Alloc: java.lang.StringBuilder
Call: println
Call: <init>
Call: printStackTrace
EXIT com.example.schoolmanagement.Staff calculateSalary
sleep
ENTRY java.lang.Thread sleep
Alloc: java.lang.RuntimeException
Call: <init>
EXIT java.lang.Thread sleep
calculateAvergeScore
ENTRY com.example.schoolmanagement.Course calculateAvergeScore
Call: sleep
Alloc: java.lang.StringBuilder
Call: <init>
Call: println
Call: printStackTrace
EXIT com.example.schoolmanagement.Course calculateAvergeScore
calculateGPA
ENTRY com.example.schoolmanagement.Student calculateGPA
Call: sleep
Alloc: java.lang.StringBuilder
Call: <init>
Call: println
Call: printStackTrace
EXIT com.example.schoolmanagement.Student calculateGPA
post
ENTRY android.os.Handler post
Call: run
EXIT android.os.Handler post
processStudent
Thread Complete
ENTRY com.example.schoolmanagement.MainActivity processStudent
Call: setTest
Alloc: com.example.schoolmanagement.Student
Call: <init>
Alloc: com.example.schoolmanagement.MainActivity$1
Call: <init>
Thread Spawn: run
EXIT com.example.schoolmanagement.MainActivity processStudent
processCourse
Thread Complete
ENTRY com.example.schoolmanagement.MainActivity processCourse
Call: setTest
Alloc: com.example.schoolmanagement.Course
Call: <init>
Alloc: com.example.schoolmanagement.MainActivity$1
Call: <init>
Thread Spawn: run
EXIT com.example.schoolmanagement.MainActivity processCourse
processStaff
Thread Complete
ENTRY com.example.schoolmanagement.MainActivity processStaff
Call: setTest
Alloc: com.example.schoolmanagement.Staff
Call: <init>
Alloc: com.example.schoolmanagement.MainActivity$2
Call: <init>
Thread Spawn: run
EXIT com.example.schoolmanagement.MainActivity processStaff
run
ENTRY com.example.schoolmanagement.MainActivity$1 run
Alloc: com.example.schoolmanagement.MainActivity$1
Call: <init>
Thread Spawn: run
EXIT com.example.schoolmanagement.MainActivity$1 run
ENTRY com.example.schoolmanagement.MainActivity$1 run
Thread Complete
Alloc: java.lang.StringBuilder
Call: <init>
Call: setTest
EXIT com.example.schoolmanagement.MainActivity$1 run
ENTRY com.example.schoolmanagement.MainActivity$3 run
Alloc: com.example.schoolmanagement.MainActivity$3
Call: <init>
Thread Spawn: run
EXIT com.example.schoolmanagement.MainActivity$3 run
ENTRY com.example.schoolmanagement.MainActivity$3 run
Thread Complete
Alloc: java.lang.StringBuilder
Call: <init>
Call: setTest
EXIT com.example.schoolmanagement.MainActivity$3 run
ENTRY com.example.schoolmanagement.MainActivity$2 run
Alloc: com.example.schoolmanagement.MainActivity$2
Call: <init>
Thread Spawn: run
EXIT com.example.schoolmanagement.MainActivity$2 run
ENTRY com.example.schoolmanagement.MainActivity$2 run
Alloc: java.lang.StringBuilder
Thread Complete
Call: <init>
Call: setTest
EXIT com.example.schoolmanagement.MainActivity$2 run