A Beginner's Guide to Project 1 11-711: Algorithms for NLP

Fall 2019

A Beginner's Guide to Project 1

Fall 2019

Table of Contents

- 1 Install the Required Software
- 2 Getting Started with Your Project
- 3 Eclipse Basic Usages
- 4 Navigating the Starter Code
- **5** Your Work
- 6 Java Basics


2 Getting Started with Your Project

3 Eclipse Basic Usages

- 4 Navigating the Starter Code
- **5** Your Work
- 6 Java Basi

Install Eclipse

Link: https://www.eclipse.org/downloads/

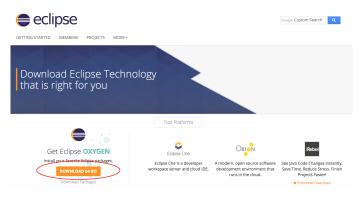

• Follow their instructions

Is Your Mac 64-bit?

- May create unexpected results with HashMap, HashSet, etc.
- What you see on your computers may be different from what we see when grading
- Do this in your Terminal
 - \$ getconf LONG_BIT
- Most of your Mac computers are compatible with 64 bits.

Install Apache Ant

- On Mac
 - \$ /usr/bin/ruby -e "\$(curl -fsSL https://raw.githubusercontent.com/Homebrew/install/master/install)"
 \$ brew install ant
- On Linux
 - \$ sudo apt-get update
 \$ sudo apt-get install ant
- On Windows
 - DIY: https://www.mkyong.com/ant/how-to-install-apache-ant-on-windows/

- 1 Install the Required Software
- 2 Getting Started with Your Project

3 Eclipse Basic Usages

- 4 Navigating the Starter Code
- 5 Your Work
- 6 Java Basi

Download Project Code

- Starter code:
 - https://storage.googleapis.com/11711/code1.tar.gz
- Data:

```
https://storage.googleapis.com/11711/data1.tar.gz
```

- Unzip
 - \$ tar -xzf code1.tar.gz
 - \$ tar -xzf data1.tar.gz

Try Running the Starter Code

- Go to code1
 - \$ ant -f build_assign1.xml
 - \$ export DATA_PATH="/absolute/path/to/your/data/folder"
 - \$ java -cp assign1.jar:assign1-submit.jar -server -mx500m \
 edu.berkeley.nlp.assignments.assign1.LanguageModelTester \
 -path \$DATA_PATH -lmType UNIGRAM

Automatize Your Workflow

- Create a run.sh script that launches your experiment
 - \$ vim run.sh
 - \$ # copy the scripts from the previous slide
 - \$ # changing UNIGRAM to TRIGRAM
 - \$ chmod 777 run.sh
- Now you can run your experiment with 1 command
 - \$./run.sh
- Much less frustration when working on large projects


Carnegie Mellon

- 1 Install the Required Software
- 2 Getting Started with Your Project
- 3 Eclipse Basic Usages
- 4 Navigating the Starter Code
- **5** Your Work
- 6 Java Basi

Launch Eclipse and Create your Workspace

Carnegie Mellon


• This is **not** where your code lives

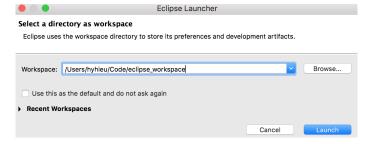


Launch Eclipse and Create your Workspace

Carnegie Mellon


• Looks like this when done correctly

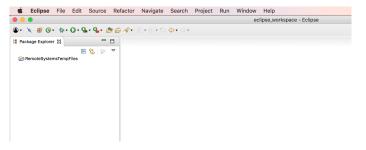

Create Your Eclipse Project

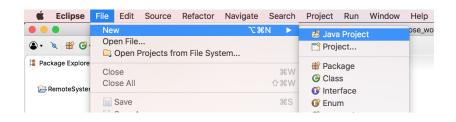

Create Your Eclipse Project

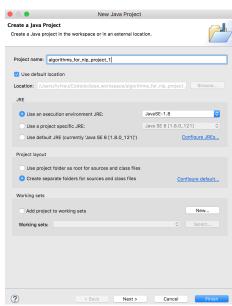

A Beginner's Guide to Project 1

Create Your Eclipse Project

• The project folder lives in your workspace




• The code does not.


Carnegie Mellon

- 1 Install the Required Software
- 2 Getting Started with Your Project


3 Eclipse Basic Usages

- 4 Navigating the Starter Code
- **5** Your Work
- 6 Java Basi

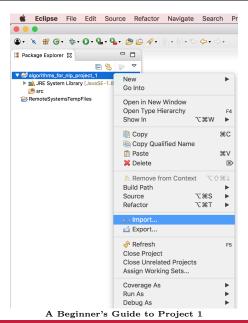


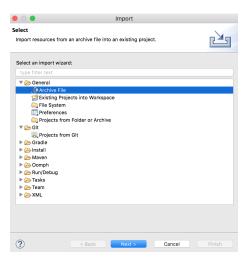

• Point to where you downloaded the code

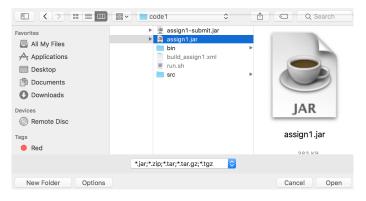

• Looks like this if done correctly

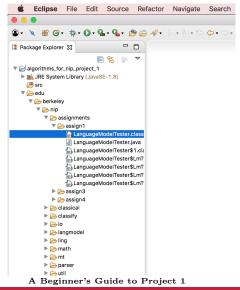

Carnegie Mellon


- 1 Install the Required Software
- 2 Getting Started with Your Project

3 Eclipse Basic Usages

- 4 Navigating the Starter Code
- **6** Your Work
- 6 Java Basi

Write Your Code

• Open the file LmFactory.java



• It's tricky




Write Your Code

• Looks like this if done correctly

```
package edu.berkeley.nlp.assianments.assian1.student;
 3@import java.util.List;
 5 import edu.berkelev.nlp.lanamodel.LanauageModelFactorv;
 6 import edu.berkeley.nlp.langmodel.NgramLanguageModel;
    import edu.berkeley.nlp.assignments.assign1.student.KneserNeyLanguageModel;
    public class LmFactory implements LanguageModelFactory
10 {
120
       * Returns a new NaramLanauageModel: this should be an instance of a class that you implement.
14
       * Please see edu.berkeley.nlp.langmodel.NgramLanguageModel for the interface specification.
16
       * @param traininaData
        public NgramLanguageModel newLanguageModel(Iterable<List<String>> trainingData) {
            return new KneserNeyLanguageModel(trainingData);
20
22 }
```


Open code1 from Eclipse

• Easier to navigate and organize your files




Open code1 from Eclipse

Select the folder with build_assign1.xml

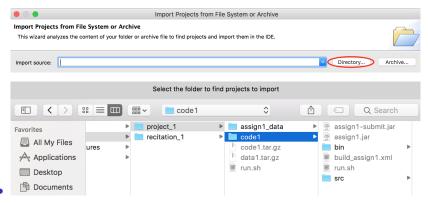

Open code1 from Eclipse

• Looks like this if done correctly

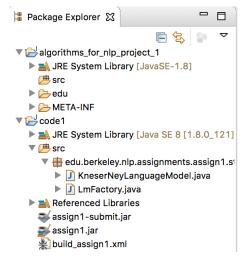

Carnegie Mellon

- 1 Install the Required Software
- 2 Getting Started with Your Project

3 Eclipse Basic Usages

- 4 Navigating the Starter Code
- **5** Your Work
- 6 Java Basics

- 15-110: Principles of Computing
- http://www.cs.cmu.edu/~jxc/100.html

A Beginner's Guide to Project 1

Questions?

L