




Genetic Algorithm Search for Stable Vacua in Type IIB String Theory: A Computational Approach

74

Brandon Marquez-Salazar¹ | Cesar Damian¹ | Angel Diaz-Pacheco¹

1. Universidad de Guanajuato

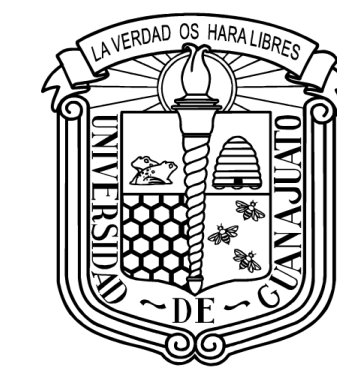

Campus Irapuato-Salamanca

División de Ingenierías
Departamento de
Ingeniería Eléctrica

ABSTRACT

The exploration of high-dimensional, non-linear potential landscapes is a central computational challenge. In string theory the search for stable vacua can be treated as an optimisation problem in order to include metaheuristic algorithms. In this work, a simple Genetic Algorithm (GA) is tailored to the optimisation of a type IIB string theory potential with torsion, extending the analysis of a previous work.

OBJECTIVE

Extending previous work done in using GA instead of Simulate Annealing. This approach aims to use a poblation based algorithm instead of a single-point based like the original for further exploration and thus, further finding of stable configurations.

INTRODUCTION

The application of computational intelligence to string theory has grown steadily over the past decade, with metaheuristics playing an increasingly central role in navigating the enormous space of possible vacuum configurations. In previous works GAs demonstrated being useful for vacua search in the field of string theory, searching configurations in less time and with less resources than using brute force and discovering new stable vacua configurations.

METHODOLOGY

This study implements 4 penalisation elements in a fitness function which is intended to be minimised. The penalisation elements are *descriptors* from the potential effective function

$$V_{eff} = \frac{A_{H_3} s}{\tau^3} + \frac{A_{F_3}}{s \tau^3} + \frac{A_{F_5}}{\tau^4} + \frac{A_3 \% N_3}{\tau^3} + \frac{A_{\hat{D}5}}{s^{1/2} \tau^{5/2}}$$


The descriptors are

$$\begin{aligned} f_{grad} &= |\nabla \% V_{eff}|^2 \\ p_{pos} &= |\% V_{eff}| - \% V_{eff} \\ p_{tr} &= |tr(\mathbf{H})| - tr(\mathbf{H}) \\ p_{disc} &= |\Delta| - \Delta \text{ with } \Delta = \det(\mathbf{H}) - \frac{1}{4} (tr \mathbf{H})^2 \end{aligned}$$

For a basic GA from MEALPY modulus and collect the results.

Finally, a **grid** search will be implemented to find a better model which is able to find higher amount of stable de Sitter vacua and the smallest fitness and potential effective values.

RESULTS

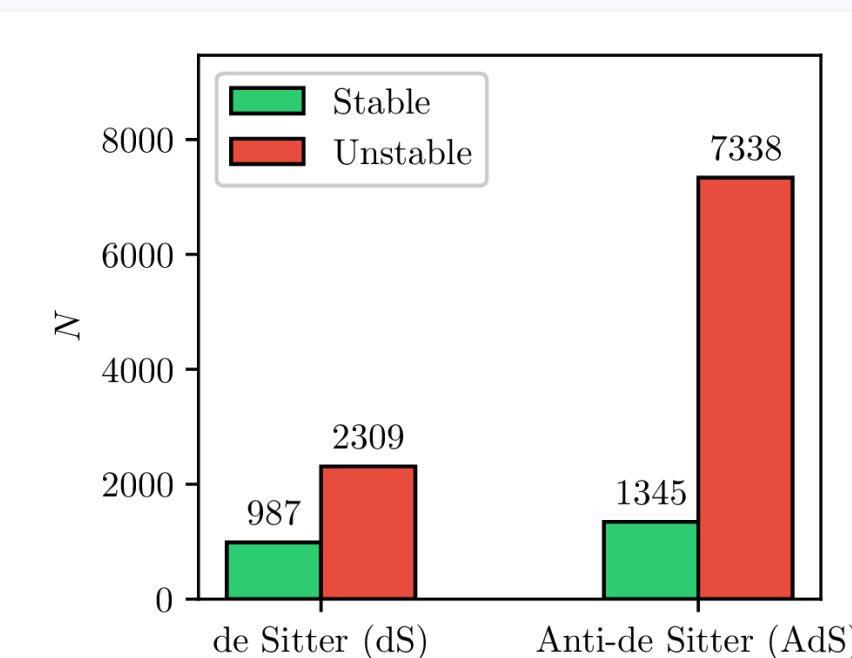


After the search, **11 979** vacua were found.

987 dS stables
1 345 AdS stables

Some vacua were found to have interesting behaviours after lifting such as No visible change, Massive lowering, Only s affected.

The term $A_3 N_3$ was found to be consistently definite negative even though the bounds were $|A_3 N_3| < 100$

After the grid, it was found that, from 4 models, the best one was the one with 50 generations, 20 individuals, 0.5 of cross probability and 0.6 of mutation probability.

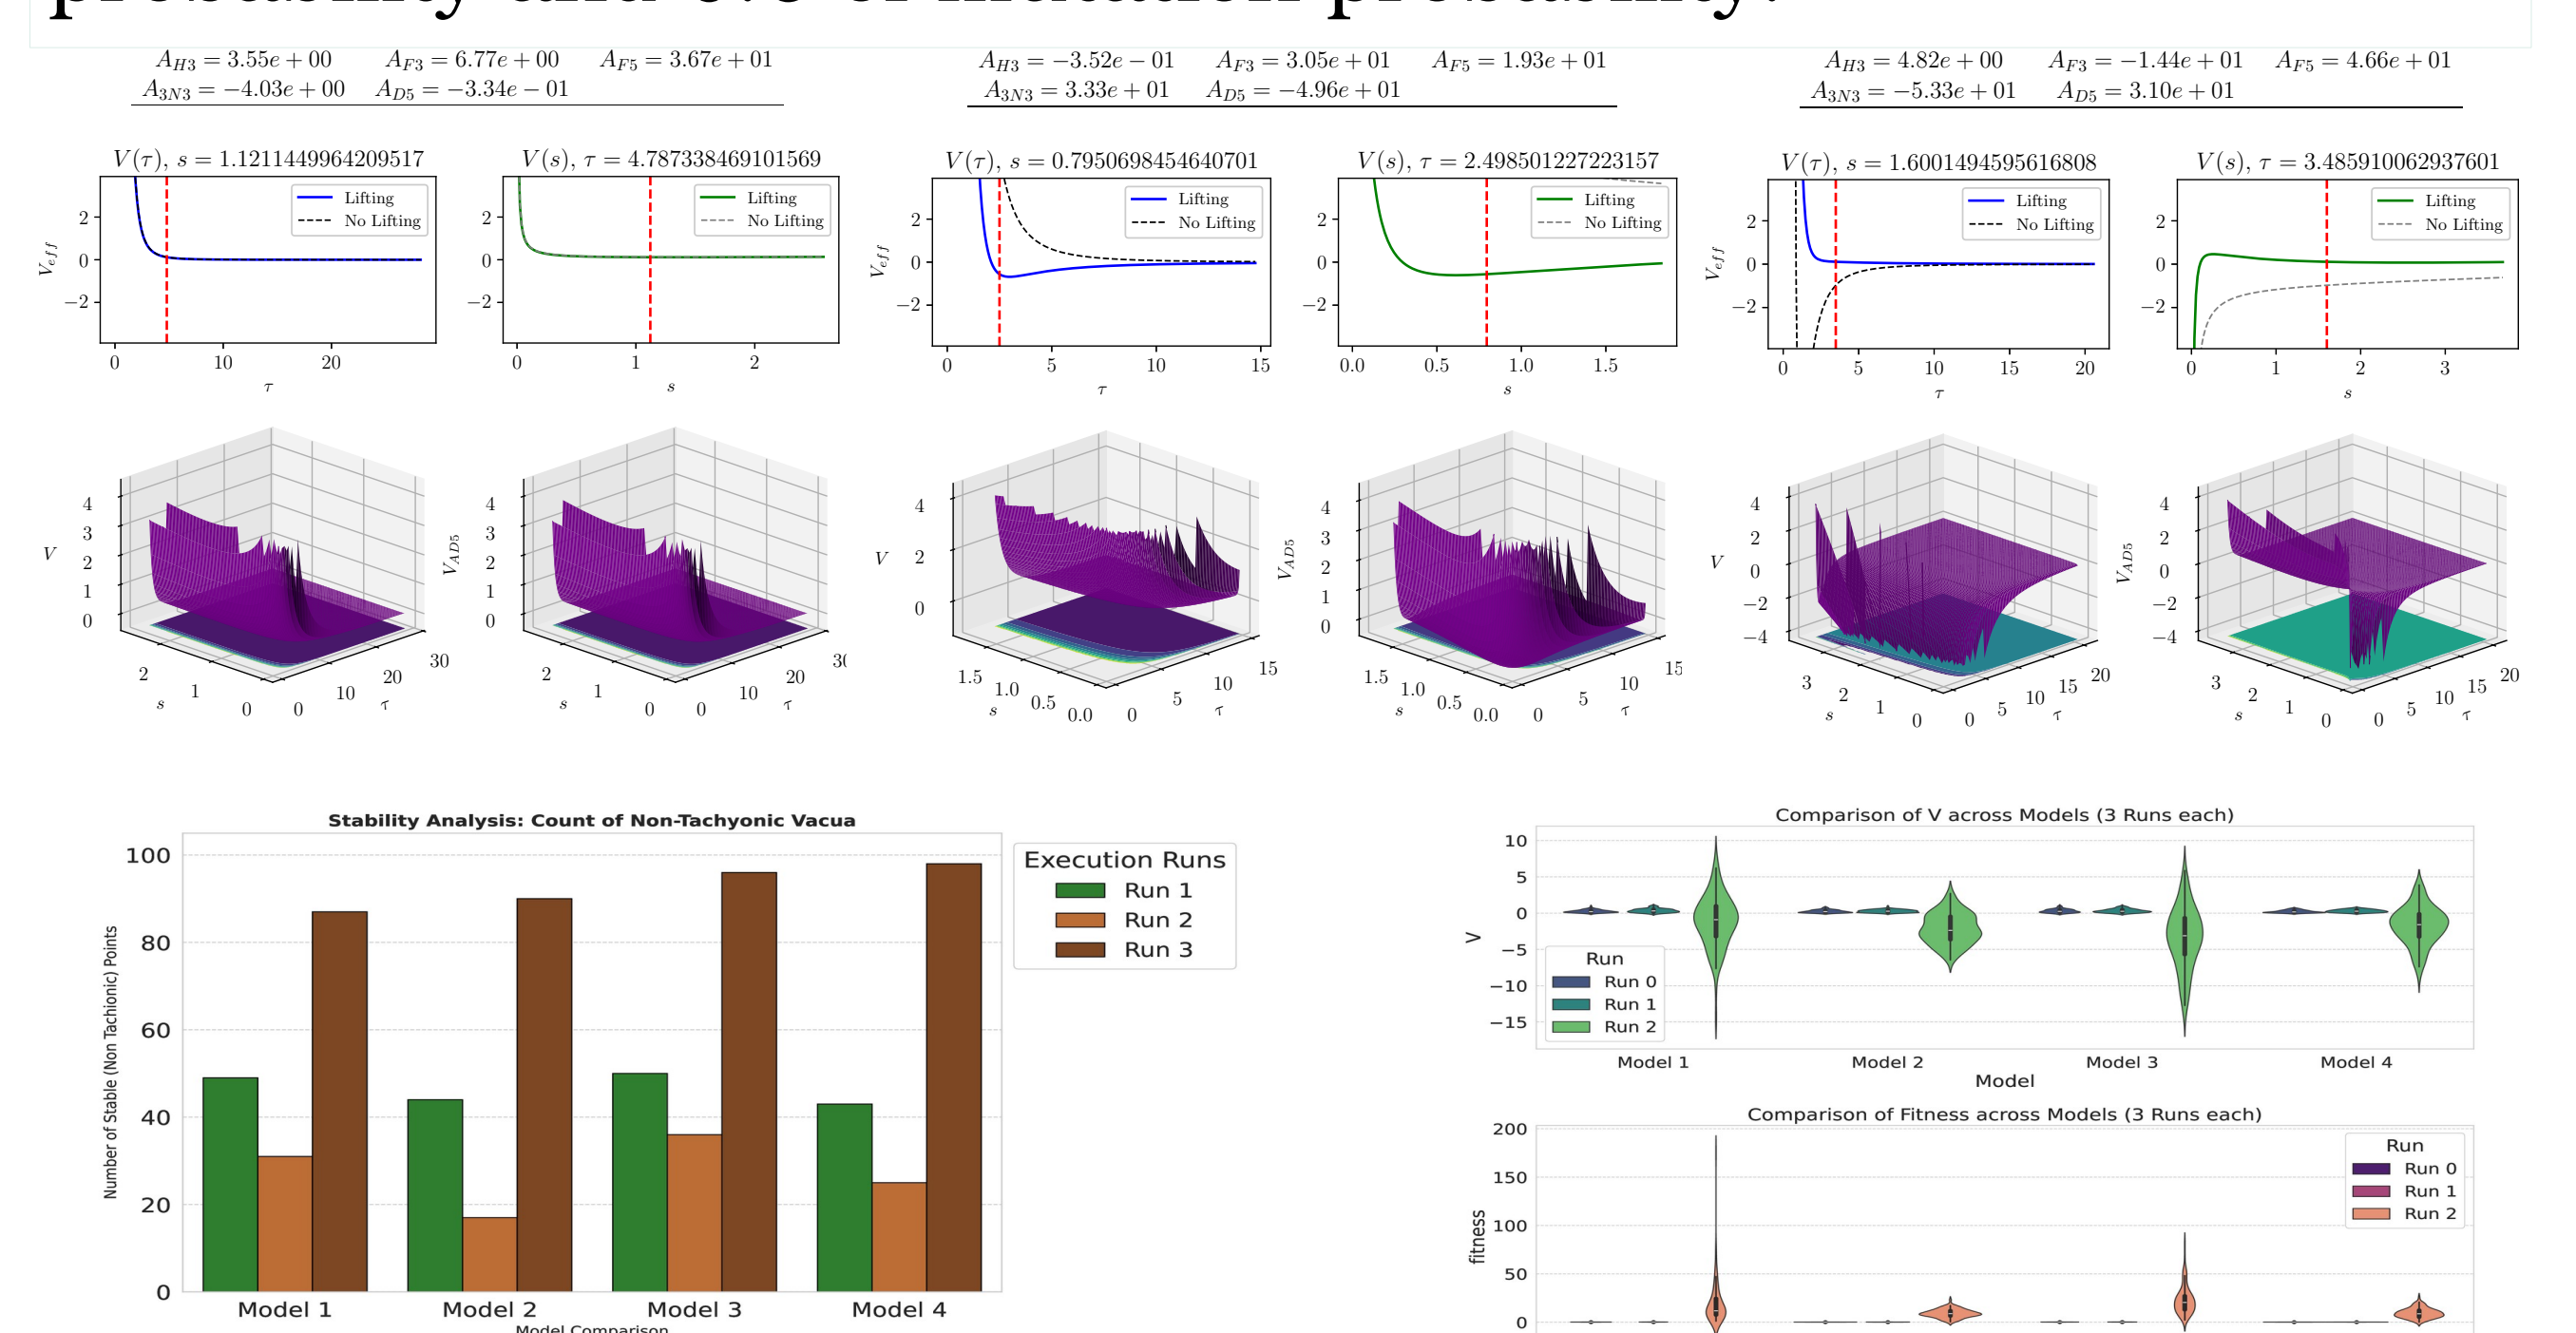

CONCLUSIONS

In this work 11 979 critical points were discovered, confirming stable de Sitter vacua. Systematic comparison of non-lifted vs. lifted potentials revealed new behaviours (vacuum type changes, single-modulus lifting, flattening). The coefficient $A_3 N_3$ naturally converged to negative values, matching physical expectations. Some numerical instabilities remain, but grid analysis shows GA tuning improves results. Future work will test other nature-inspired algorithms.

REFERENCES

- Abel, S., Rizos, J.: Genetic algorithms and the search for viable string vacua. *Journal of High Energy Physics* 2014(8) (Aug 2014). DOI: 10.1007/JHEP08(2014)010
- Cole, A., Krippendorff, S., Schachner, A., Shiu, G.: Probing the structure of string theory vacua with genetic algorithms and reinforcement learning (2021)
- Damian, C., Loaiza-Brito, O.: Metastable vacua from torsion and machine learning. *The European Physical Journal C* 82(12) (Dec 2022). DOI: 10.1140/epjc/s10052-022-11118-x
- Eiben, A., Smith, J.: *Introduction to Evolutionary Computing*. Springer Berlin Heidelberg (2015). DOI: 10.1007/978-3-662-44874-8




Sociedad Mexicana de
Inteligencia Artificial



UNIVERSIDAD AUTÓNOMA DEL
ESTADO DE MORELOS



INSTITUTO NACIONAL
DE ELECTRICIDAD Y
ENERGÍAS LIMPIAS

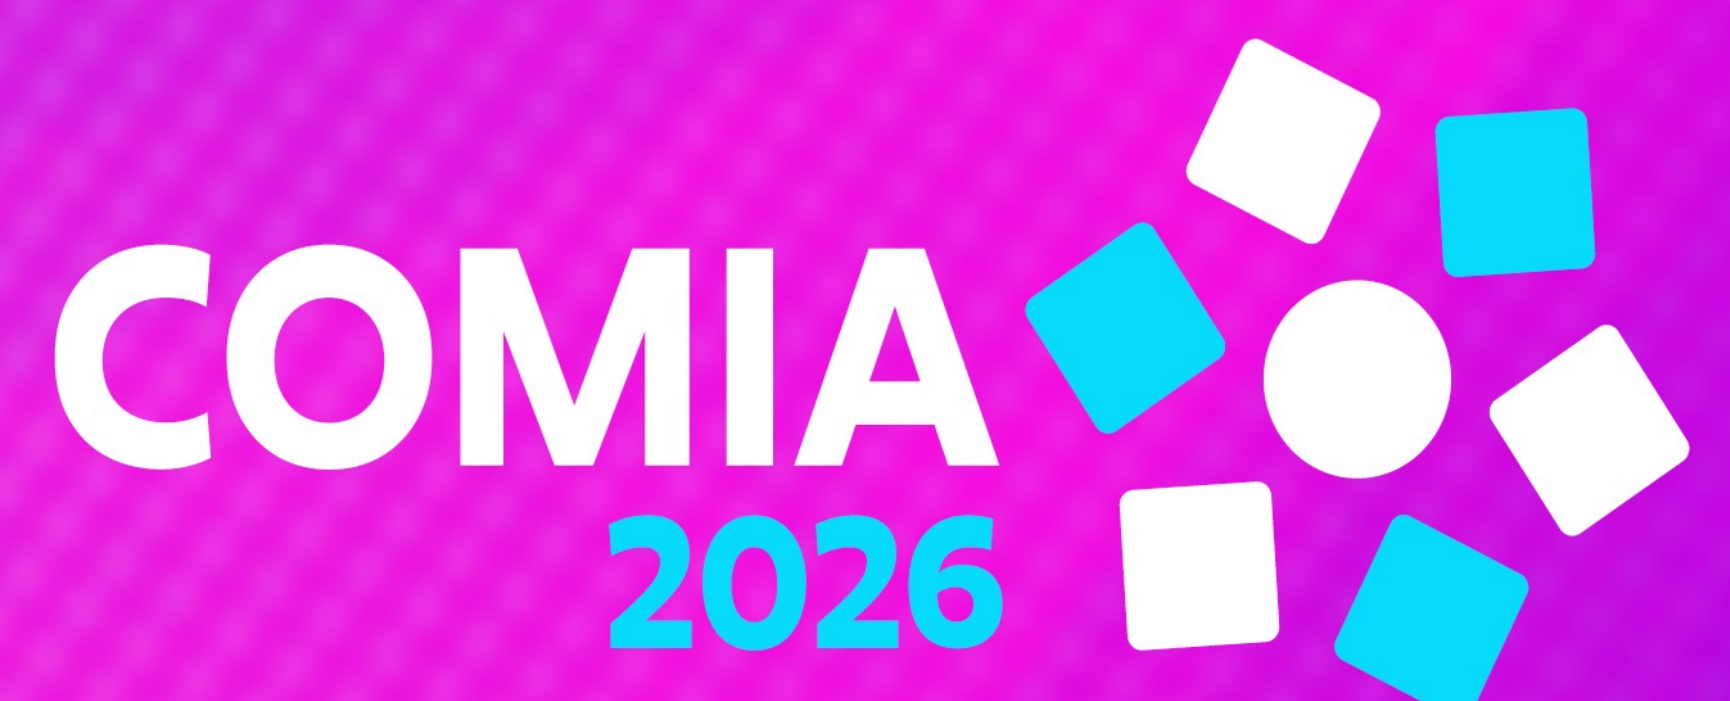

El mejor póster presentado será premiado durante la Cena de Gala.

La presentación de pósters es una herramienta clave para la divulgación científica, ya que permite a los autores desarrollar habilidades de síntesis, dominio del tema y comunicación efectiva, al tiempo que fomenta la retroalimentación directa y la creación de redes de colaboración.

El día de la sesión de póster se evaluarán los siguientes criterios:

1. Originalidad y relevancia del trabajo

2. Exposición oral en la sesión de póster

3. Cumplimiento de los siete elementos marcados en el ejemplo
4. Se valorará la inclusión de elementos visuales

5. Utilización de la plantilla oficial

Ejemplo de uso:

1. Fotografía del autor que presentará (9cm de diámetro)

2. Título del trabajo

3. Logotipos de institución o empresa

4. Num de artículo

5. Nombre del autor(es)

6. Nombre de la institución educativa o empresa

7. Secciones

Debe contener al menos: resumen, objetivo, introducción, metodología, resultados, conclusiones, referencias.

1. Sociedad Mexicana de Inteligencia Artificial.

2. Universidad Autónoma del Estado de Morelos

Abstract

Objective

Introduction

Methodology

Results

Conclusion

References

01

02

03

- IMPORTANTE:**
- A) Medida de impresión A0 (84,1 cm x 118,9 cm)
 - B) Mantener la distribución de los elementos del 1 al 6
 - C) El acomodo del punto 7 y la elección tipográfica son libres