Laraib Qadeer

Roll No: FA24-BCS-047

Lab statement

Lab 2: Responsive Navbar and Grid Drill

Difficulty: Easy–Medium · Covers: Lectures 7–10 · Folder: lab-2/

Task: A smaller rehearsal for Assignment 2, focused only on responsive mechanics. Build:


- A responsive navbar with the logo on the left, links in the center, and a cart icon on the right. Below 768px, it collapses into a hamburger menu.
- A product grid with 4 columns on desktop, 2 on tablet, and 1 on phone.

Use Flexbox or Grid, plus Bootstrap or Tailwind. Placeholder text and images are fine. The goal is the responsive behavior, not the final design.


Deliverables: index.html, your CSS or framework files, and the completion PDF with screenshots at phone, tablet, and desktop widths.

Screenshots


Desktop (4 columns)

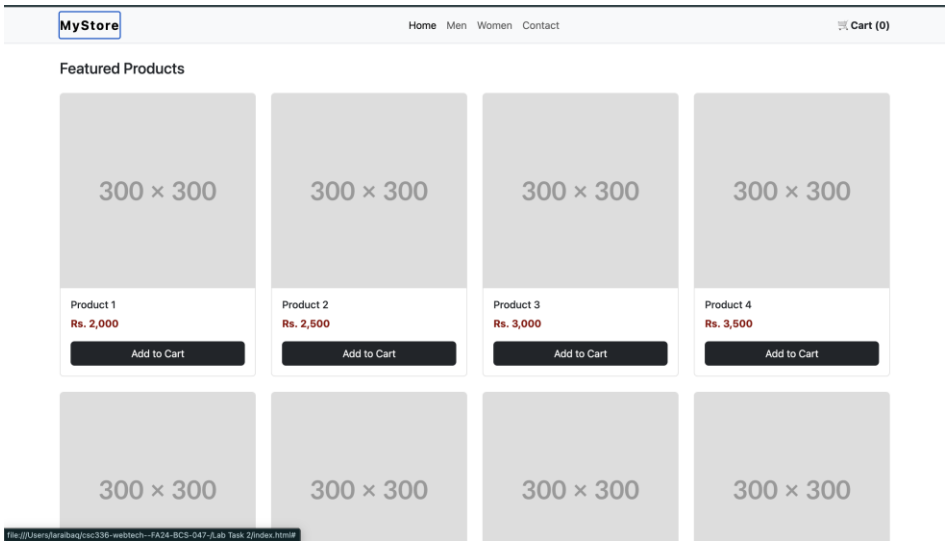


Tablet, 768px (2 columns)

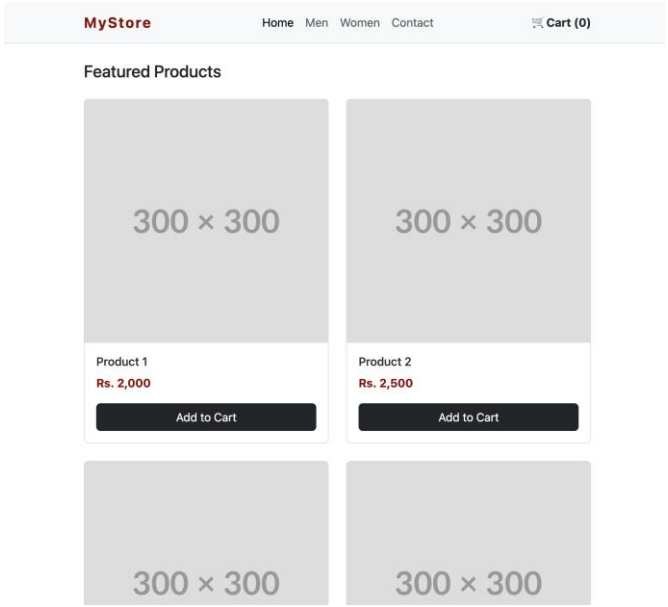

Phone (1 column), menu closed

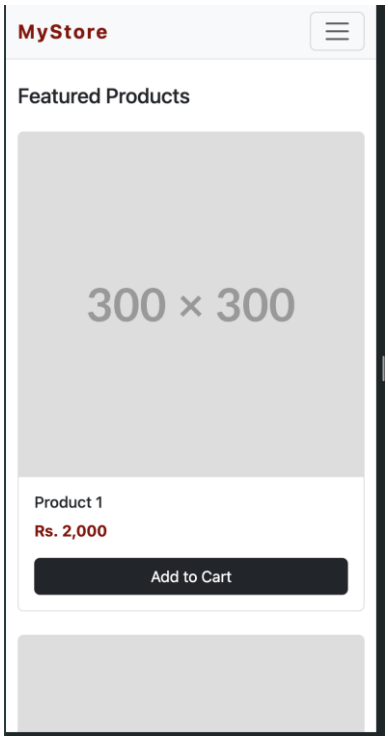

Phone, hamburger menu open

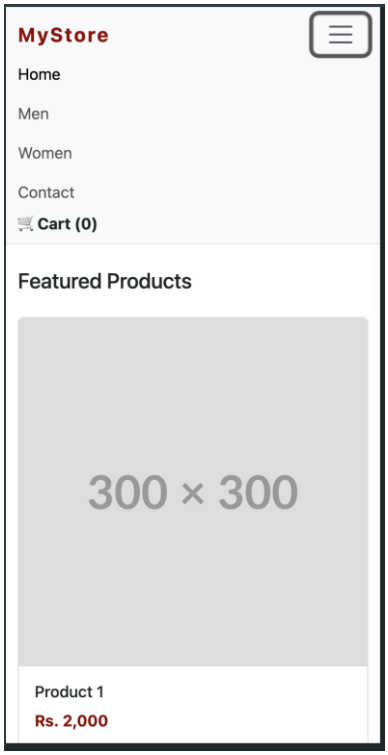

Card hover effect



Product 1

Rs. 2,000

Add to Cart

Code

index.html

```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Lab 2 </title>


<link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/css/bootstrap.min.css"
rel="stylesheet">
<link rel="stylesheet" href="style.css">
</head>
<body>

<header class="site-header">
<nav class="navbar navbar-expand-md bg-light border-bottom site-nav">
<div class="container">

<a class="navbar-brand fw-bold brand-logo" href="#">MyStore</a>

<button class="navbar-toggler menu-toggle" type="button"
data-bs-toggle="collapse" data-bs-target="#main-menu"
aria-controls="main-menu" aria-expanded="false"
aria-label="Toggle navigation">
<span class="navbar-toggler-icon"></span>
</button>

<div class="collapse navbar-collapse" id="main-menu">

<ul class="navbar-nav mx-auto nav-links">
<li class="nav-item"><a class="nav-link active" href="#">Home</a></li>
<li class="nav-item"><a class="nav-link" href="#">Men</a></li>
<li class="nav-item"><a class="nav-link" href="#">Women</a></li>
<li class="nav-item"><a class="nav-link" href="#">Contact</a></li>
</ul>

<a class="nav-link cart-link" href="#">
🛒 Cart (<span id="cart-count">0</span>)
</a>

</div>
</div>
</nav>
</header>


<main class="site-main container py-4">

<h1 class="h4 mb-4">Featured Products</h1>

<section class="product-grid row row-cols-1 row-cols-md-2 row-cols-lg-4 g-4">

<article class="col">
<div class="product-card card h-100">
```

```
<img class="product-card-image card-img-top" src="https://placehold.co/300x300" alt="Product 1">
<div class="card-body">
<h2 class="product-card-name h6">Product 1</h2>
<p class="product-card-price">Rs. 2,000</p>
<button class="add-to-cart-btn btn btn-dark w-100" type="button">Add to Cart</button>
</div>
</div>
</article>

<article class="col">
<div class="product-card card h-100">
<img class="product-card-image card-img-top" src="https://placehold.co/300x300" alt="Product 2">
<div class="card-body">
<h2 class="product-card-name h6">Product 2</h2>
<p class="product-card-price">Rs. 2,500</p>
<button class="add-to-cart-btn btn btn-dark w-100" type="button">Add to Cart</button>
</div>
</div>
</article>

<article class="col">
<div class="product-card card h-100">
<img class="product-card-image card-img-top" src="https://placehold.co/300x300" alt="Product 3">
<div class="card-body">
<h2 class="product-card-name h6">Product 3</h2>
<p class="product-card-price">Rs. 3,000</p>
<button class="add-to-cart-btn btn btn-dark w-100" type="button">Add to Cart</button>
</div>
</div>
</article>

<article class="col">
<div class="product-card card h-100">
<img class="product-card-image card-img-top" src="https://placehold.co/300x300" alt="Product 4">
<div class="card-body">
<h2 class="product-card-name h6">Product 4</h2>
<p class="product-card-price">Rs. 3,500</p>
<button class="add-to-cart-btn btn btn-dark w-100" type="button">Add to Cart</button>
</div>
</div>
</article>

<article class="col">
<div class="product-card card h-100">
<img class="product-card-image card-img-top" src="https://placehold.co/300x300" alt="Product 5">
<div class="card-body">
<h2 class="product-card-name h6">Product 5</h2>
<p class="product-card-price">Rs. 4,000</p>
<button class="add-to-cart-btn btn btn-dark w-100" type="button">Add to Cart</button>
</div>
</div>
</article>

<article class="col">
<div class="product-card card h-100">
<img class="product-card-image card-img-top" src="https://placehold.co/300x300" alt="Product 6">
<div class="card-body">
<h2 class="product-card-name h6">Product 6</h2>
<p class="product-card-price">Rs. 4,500</p>
<button class="add-to-cart-btn btn btn-dark w-100" type="button">Add to Cart</button>
```

```
</div>
</div>
</article>

<article class="col">
<div class="product-card card h-100">
<img class="product-card-image card-img-top" src="https://placehold.co/300x300" alt="Product 7">
<div class="card-body">
<h2 class="product-card-name h6">Product 7</h2>
<p class="product-card-price">Rs. 5,000</p>
<button class="add-to-cart-btn btn btn-dark w-100" type="button">Add to Cart</button>
</div>
</div>
</article>

<article class="col">
<div class="product-card card h-100">
<img class="product-card-image card-img-top" src="https://placehold.co/300x300" alt="Product 8">
<div class="card-body">
<h2 class="product-card-name h6">Product 8</h2>
<p class="product-card-price">Rs. 5,500</p>
<button class="add-to-cart-btn btn btn-dark w-100" type="button">Add to Cart</button>
</div>
</div>
</article>

</section>
</main>

<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/js/bootstrap.bundle.min.js">
</script>
</body>
</html>
```

Style.css

```
.brand-logo {
color: darkred;
letter-spacing: 2px;
}

.cart-link {
font-weight: bold;
}

.product-card {
border: 1px solid #ddd;
transition: box-shadow 0.2s;
}

.product-card:hover {
box-shadow: 0 4px 12px rgba(0, 0, 0, 0.15);
}

.product-card-price {
color: darkred;
font-weight: bold;
```

```
}
```