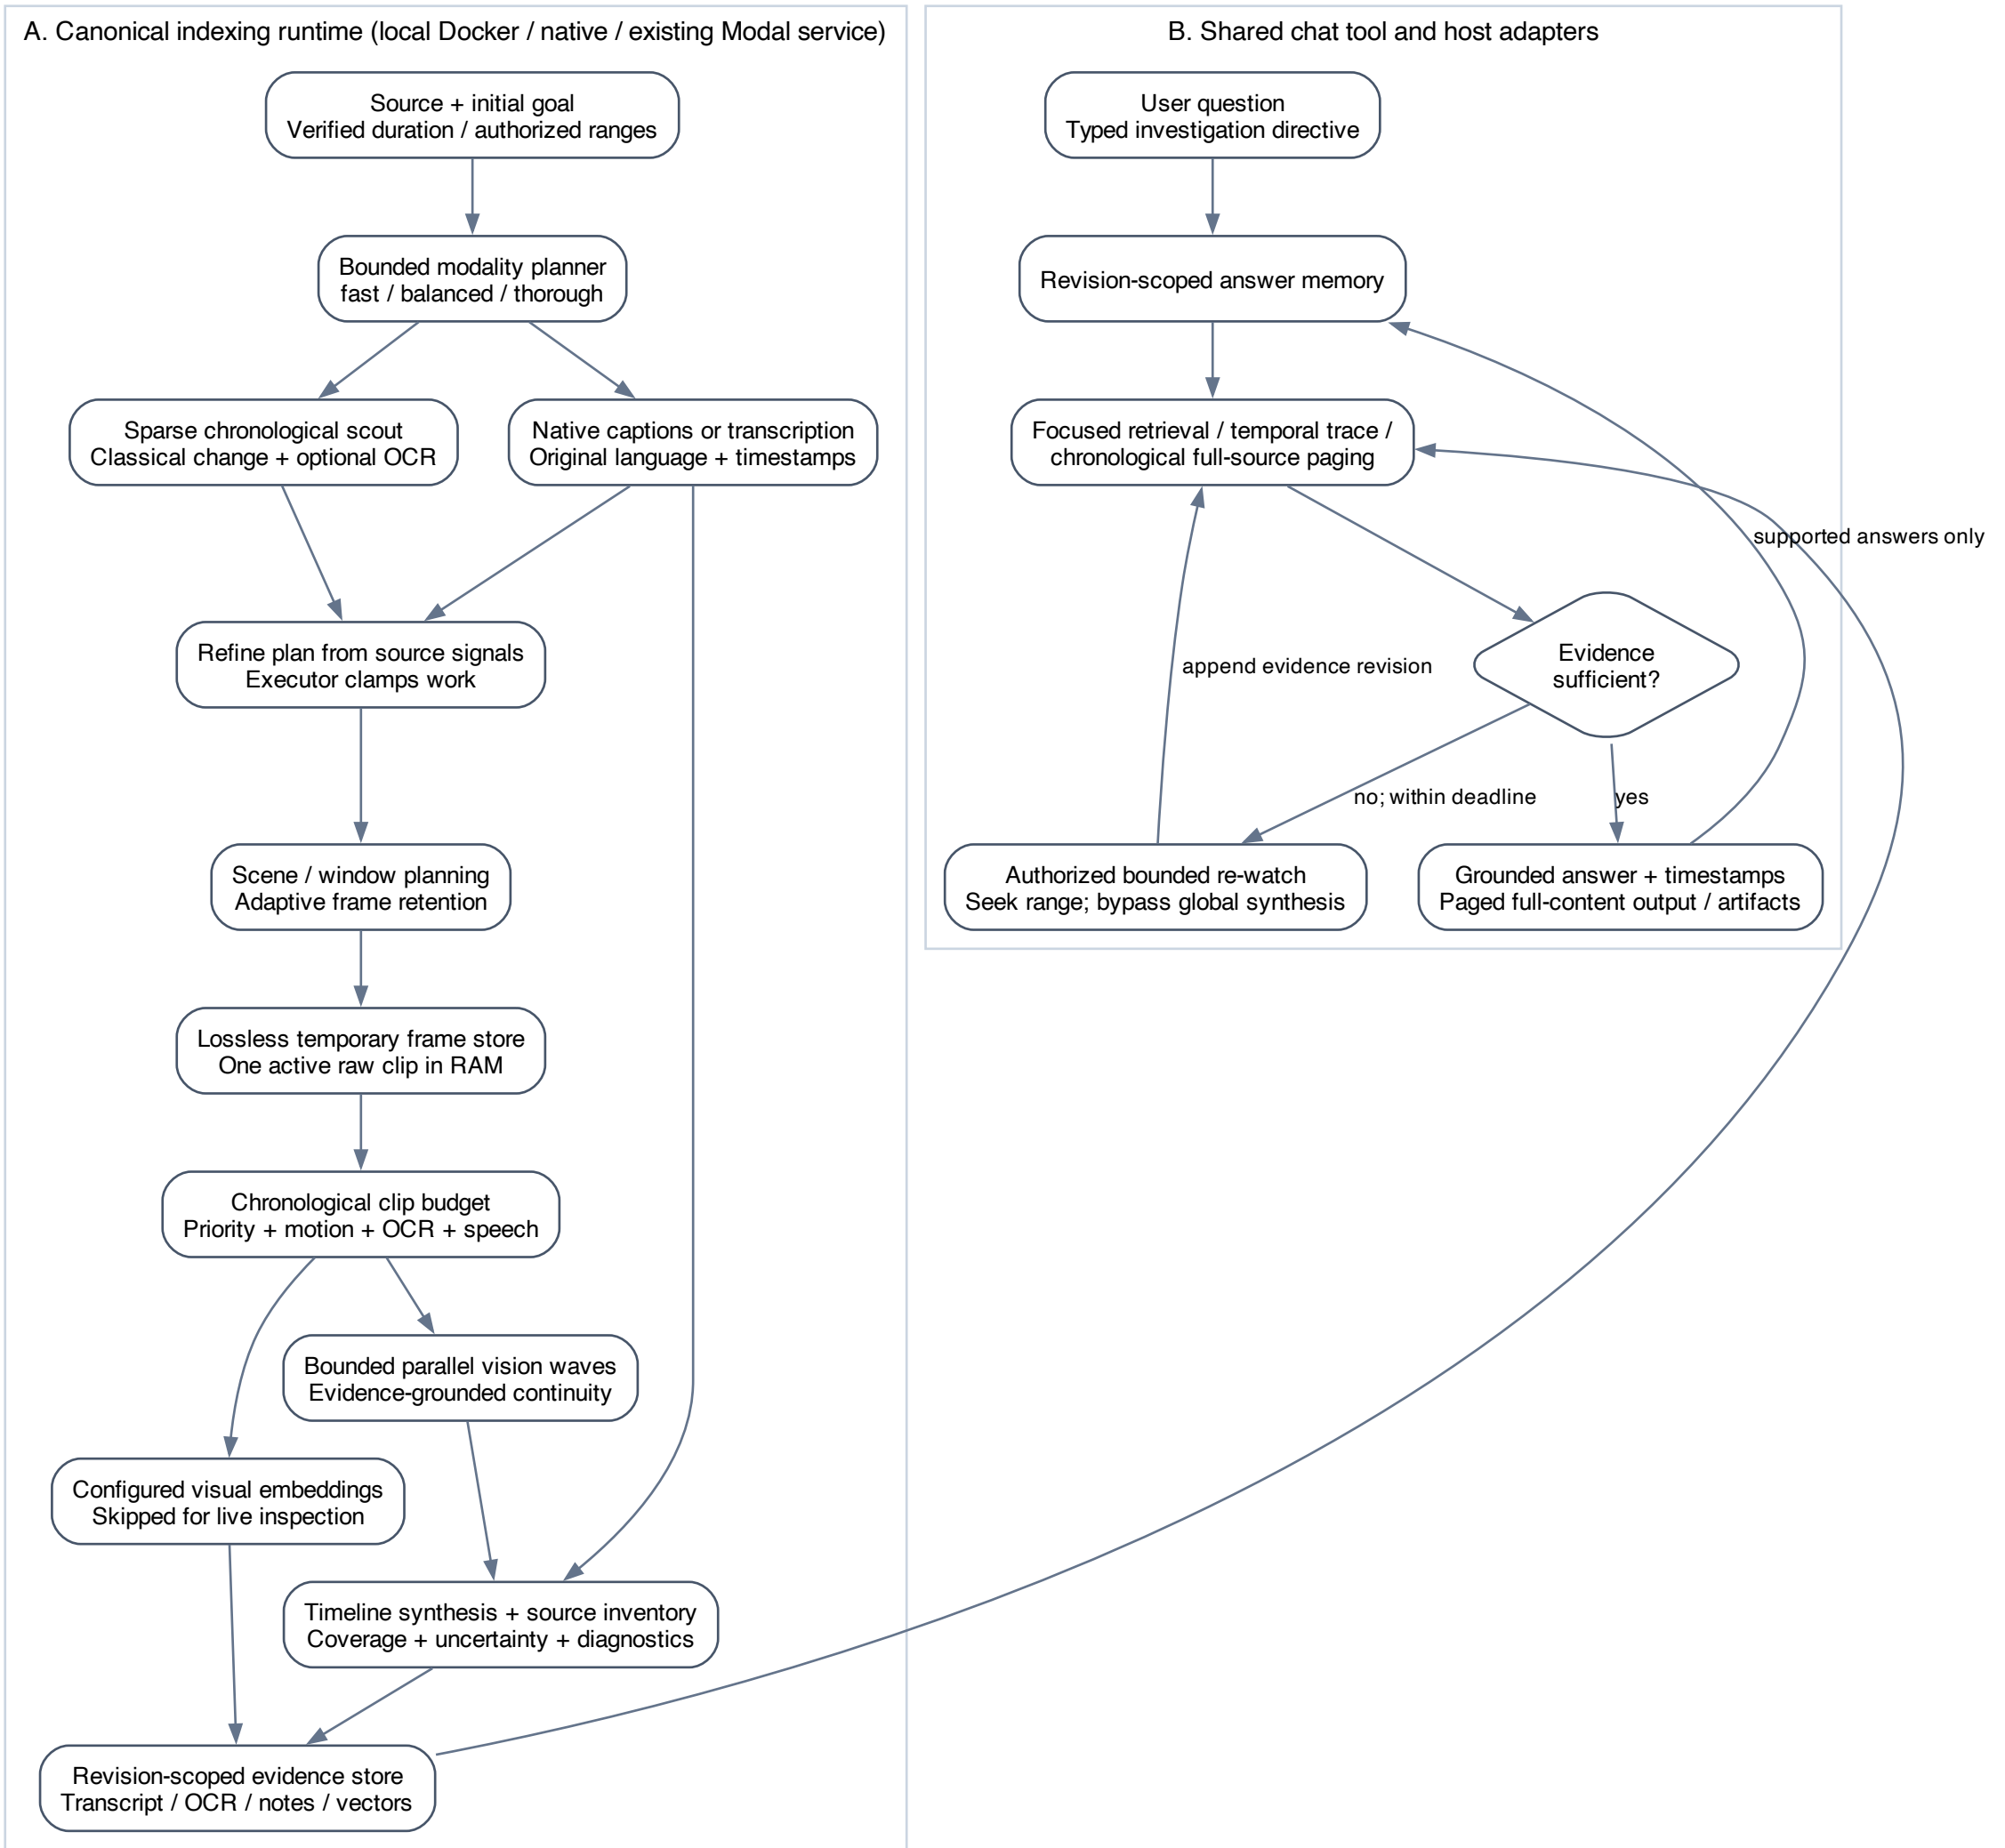
A. Canonical indexing runtime (local Docker / native / existing Modal service)
Source + initial goal
Verified duration / authorized ranges
Bounded modality planner
fast / balanced / thorough
Sparse chronological scout
Classical change + optional OCR
Native captions or transcription
Original language + timestamps
Refine plan from source signals
Executor clamps work
Scene / window planning
Adaptive frame retention
Lossless temporary frame store
One active raw clip in RAM
Chronological clip budget
Priority + motion + OCR + speech
Bounded parallel vision waves
Evidence-grounded continuity
Configured visual embeddings
Skipped for live inspection
Timeline synthesis + source inventory
Coverage + uncertainty + diagnostics
Revision-scoped evidence store
Transcript / OCR / notes / vectors
B. Shared chat tool and host adapters
User question
Typed investigation directive
Revision-scoped answer memory
Focused retrieval / temporal trace /
chronological full-source paging
Evidence
sufficient?
append evidence revision
no; within deadline
yes
supported answers only
Authorized bounded re-watch
Seek range; bypass global synthesis
Grounded answer + timestamps
Paged full-content output / artifacts