

# Indholdsfortegnelse

---

<b>Kapitel 1</b>	<b>Indledning</b>	<b>1</b>
<b>Kapitel 2</b>	<b>Opgavebeskrivelse</b>	<b>2</b>
<b>Kapitel 3</b>	<b>Systembeskrivelse</b>	<b>3</b>
3.1	System setup . . . . .	3
3.2	Hardware . . . . .	3
3.3	Software . . . . .	3
<b>Kapitel 4</b>	<b>Robot Operating System (ROS)</b>	<b>4</b>
<b>Kapitel 5</b>	<b>Metode</b>	<b>5</b>
5.1	Vision system . . . . .	5
5.1.1	MATLAB - Color Thresholder . . . . .	5
5.1.2	OpenCV vision . . . . .	7
<b>Kapitel 6</b>	<b>Resultater</b>	<b>8</b>
<b>Kapitel 7</b>	<b>Diskussion</b>	<b>9</b>
<b>Kapitel 8</b>	<b>Konklusion</b>	<b>10</b>
<b>Appendiks A</b>	<b>MATLAB Vision</b>	<b>11</b>
A.1	VisionSimulation.m . . . . .	11
A.2	findBlue . . . . .	12
A.3	findRed . . . . .	13
A.4	findGreen . . . . .	14
A.5	findYellow . . . . .	15

# Indledning 1

---

I den industrielle verden i dag anvendes robotter i høj grad. Robotterne bruges til at lette arbejdsburden for den almindelige arbejder, og for at opnå en hurtigere arbejds gang. Robotterne er simpelthen med til at fremme arbejdsprocessen, da virksomhederne er interesseret i at holde omkostningerne lave. For industri verden er det billigere at have en robot der kan arbejde fireogtyve timer i døgnet end et menneske, som har krav på en pause en gang i mellem. Robotterne kan for eksempel bruges til, at overvåge andre systemer, og give feedback på de data som den har adgang til. Robotterne er ofte meget effektive og ikke mindst præcise i deres arbejde, og kan derfor spare virksomheder for menneskelige fejl. Mennesker flytter sig mere og mere fra at skulle være i den fysiske del af en produktion, til at være i den kreative del, altså udviklingsledet. Robotterne overtager stille og roligt den fysiske del og er de kommet for at blive.

# Opgavebeskrivelse 2

---

# Systembeskrivelse 3

---

3.1 System setup

3.2 Hardware

3.3 Software

# Robot Operating System (ROS) 4

---

# Metode 5


## 5.1 Vision system

Overordnet beskrivelse af vision systemet.

### 5.1.1 MATLAB - Color Thresholder


MATLAB's applikation Color Thresholder er blevet brugt til at bestemme, hvilket color space og hvilke farvegrænseværdier, der er mest optimale til at identificere de farvede klodser med webcamet.

I Color Thresholder indlæses et billede, taget med webcamet, hvorpå en klods af hver farve er repræsenteret. Valget af color space baseres på hvor klodserne adskiller sig mest fra bordpladen. På figur 5.1 ses det, at der i color spacet HSV er størst kontrast mellem klodser og bordplade. Det vælges derfor at arbejde i color spacet HSV.

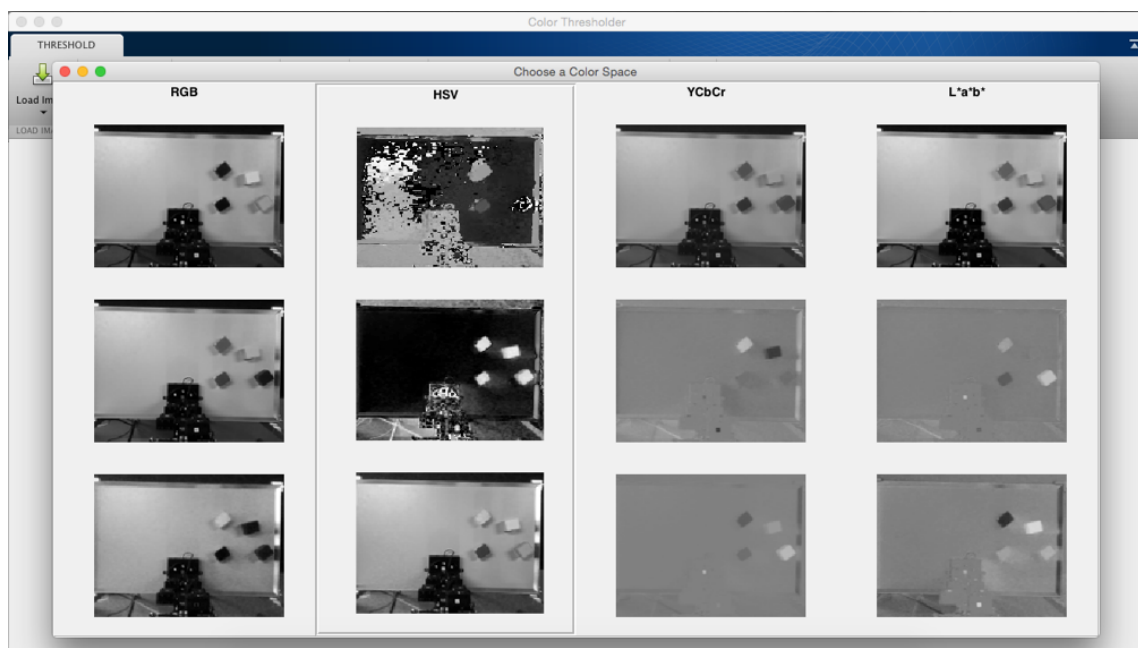

**Figur 5.1.** MATLAB's applikation Color Thresholder til identifikation af optimalt color space.

Color Thresholder bruges derefter til at finde grænseværdierne til hhv. H, S og V kanalerne, til identifikation af de forskelligt farvede klodser. Figur 5.2 på næste side er et eksempel på grænseværdierne til identifikation af den blå klods.

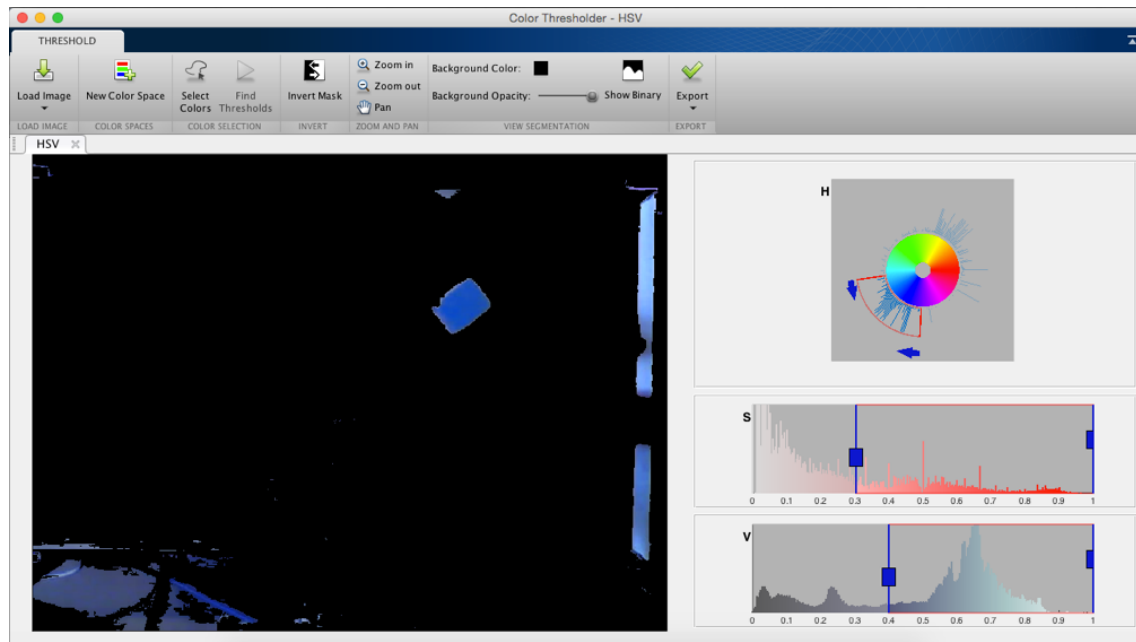

**Figur 5.2.** Identifikation af blå klods i MATLAB's applikation Color Thresholder i color space HSV


For hver farve blev følgende grænseværdier identificeret (se bilag A på side 11 for funktioner til identifikation af hver farve):

Farve	H	S	V
Blå	0.515-0.790	0.300-1.000	0.400-1.000
Rød	0.900-0.080	0.300-1.000	0.000-1.000
Grøn	0.200-0.415	0.300-1.000	0.000-1.000
Gul	0.115-0.210	0.300-1.000	0.400-1.000

**Table 5.1.** Grænseværdier til identifikation af de fire farver, blå, rød, grøn og gul. MATLAB range 0-1.

Det ses på figur 5.2, at nogen områder uden for bordpladen ikke forsvinder helt ved denne segmentering, da de har farver, der ligger tæt på om den blå klods. Dette ville løses ved at beskære billedet således, at kun bordpladen vises på billedet. Derudover skal der kun identificeres klodser på højre side af billedet, hvorfor billedet beskæres yderligere, så kun det interessante område er vises.

Figur 5.3 på den følgende side viser resultatet på MATLAB analysen, som beskærer billedet og identificerer klodser i de fire farver, blå, rød, grøn og gul. Se bilag A på side 11 for script og funktioner brugt i analysen. Det ses på figur 5.3 på den følgende side, at det vil være nødvendigt at implementerer en grænseværdi for størrelsen af klodserne, da der er små områder der ikke er forsvundet helt ved segmenteringen.

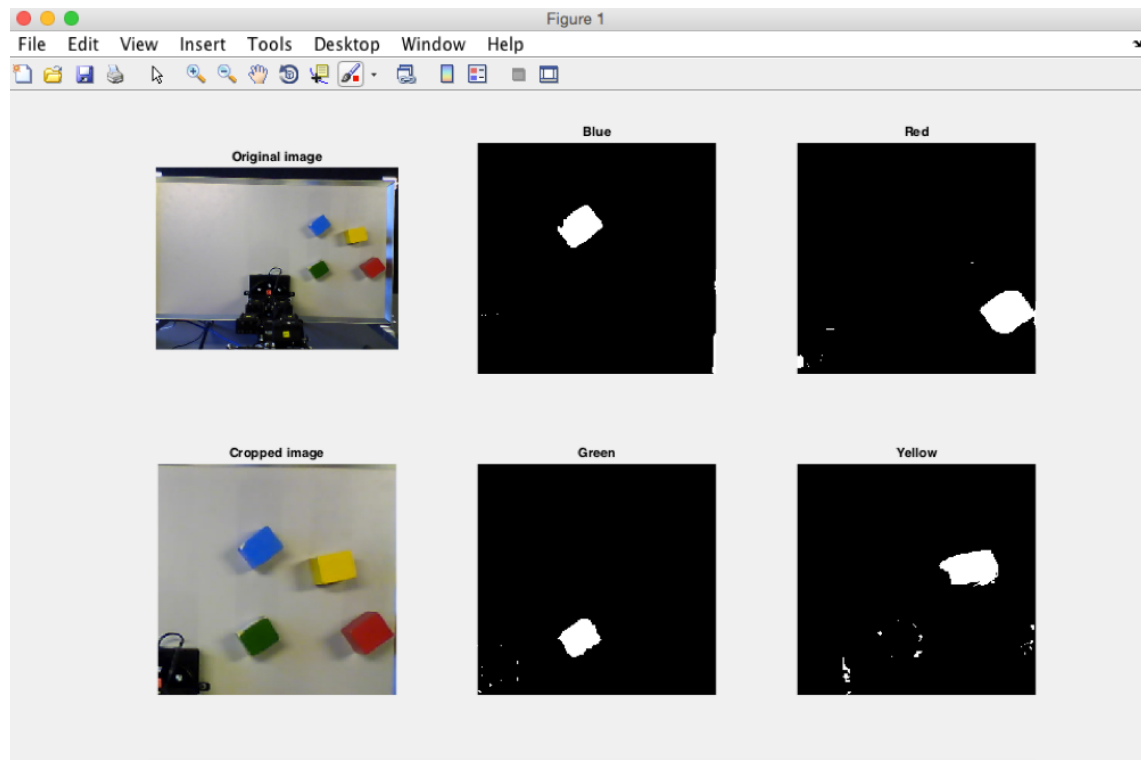

*Figur 5.3.* Resultat af MATLAB analysen

### 5.1.2 OpenCV vision



# Resultater 6

---

# Diskussion 7

---

# Konklusion 8

---

## A.1 VisionSimulation.m

```
image = imread('image3.jpg'); % Read image

subplot(2,3,1)
imshow(image);
title('Original image');

imageCrop = imcrop(image,[300 45 310 300]); % Crop image

subplot(2,3,4)
imshow(imageCrop);
title('Cropped image');

imageBlue = findBlue(imageCrop); % findBlue function created by Color
    Thresholder App
subplot(2,3,2)
imshow(imageBlue);
title('Blue');

imageRed = findRed(imageCrop); % findRed function created by Color
    Thresholder App
subplot(2,3,3)
imshow(imageRed);
title('Red');

imageGreen = findGreen(imageCrop); % findGreen function created by
    Color Thresholder App
subplot(2,3,5)
imshow(imageGreen);
title('Green');

imageYellow = findYellow(imageCrop); % findYellow function created by
    Color Thresholder App
subplot(2,3,6)
imshow(imageYellow);
title('Yellow');
```

*Figur A.1.* MATLAB code for scriptet VisionSimulation.

## A.2 findBlue

```
function [BW,maskedRGBImage] = findBlue(RGB)
% Auto-generated by colorThresholder app on 05-Oct-2016
%-----
% Convert RGB image to chosen color space
I = rgb2hsv(RGB);

% Define thresholds for channel 1 based on histogram settings
channel1Min = 0.515; %Conversion to openCV range channel1Min*180
channel1Max = 0.790; %Conversion to openCV range channel1Max*180

% Define thresholds for channel 2 based on histogram settings
channel2Min = 0.300; %Conversion to openCV range channel2Min*255
channel2Max = 1.000; %Conversion to openCV range channel2Max*255

% Define thresholds for channel 3 based on histogram settings
channel3Min = 0.400; %Conversion to openCV range channel3Min*255
channel3Max = 1.000; %Conversion to openCV range channel3Min*255

% Create mask based on chosen histogram thresholds
BW = (I(:,:,1) >= channel1Min ) & (I(:,:,1) <= channel1Max) & ...
      (I(:,:,2) >= channel2Min ) & (I(:,:,2) <= channel2Max) & ...
      (I(:,:,3) >= channel3Min ) & (I(:,:,3) <= channel3Max);

% Initialize output masked image based on input image.
maskedRGBImage = RGB;

% Set background pixels where BW is false to zero.
maskedRGBImage(repmat(~BW,[1 1 3])) = 0;
```

*Figur A.2.* MATLAB kode for funktionen findBlue.

### A.3 findRed

```
function [BW,maskedRGBImage] = findRed(RGB)
% Auto-generated by colorThresholder app on 05-Oct-2016
%-----
% Convert RGB image to chosen color space
I = rgb2hsv(RGB);

% Define thresholds for channel 1 based on histogram settings
channel1Min = 0.900; %Conversion to openCV range channel1Min*180
channel1Max = 0.080; %Conversion to openCV range channel1Max*180

% Define thresholds for channel 2 based on histogram settings
channel2Min = 0.300; %Conversion to openCV range channel2Min*255
channel2Max = 1.000; %Conversion to openCV range channel2Max*255

% Define thresholds for channel 3 based on histogram settings
channel3Min = 0.0; %Conversion to openCV range channel3Min*255
channel3Max = 1.000; %Conversion to openCV range channel3Min*255

% Create mask based on chosen histogram thresholds
BW = ( (I(:,:,1) >= channel1Min) | (I(:,:,1) <= channel1Max) ) & ...
      (I(:,:,2) >= channel2Min ) & (I(:,:,2) <= channel2Max) & ...
      (I(:,:,3) >= channel3Min ) & (I(:,:,3) <= channel3Max);

% Initialize output masked image based on input image.
maskedRGBImage = RGB;

% Set background pixels where BW is false to zero.
maskedRGBImage(repmat(~BW,[1 1 3])) = 0;
```

*Figur A.3.* MATLAB kode for funktionen findRed.

## A.4 findGreen

```
function [BW,maskedRGBImage] = findGreen(RGB)
% Auto-generated by colorThresholder app on 05-Oct-2016
%-----
% Convert RGB image to chosen color space
I = rgb2hsv(RGB);

% Define thresholds for channel 1 based on histogram settings
channel1Min = 0.200; %Conversion to openCV range channel1Min*180
channel1Max = 0.415; %Conversion to openCV range channel1Max*180

% Define thresholds for channel 2 based on histogram settings
channel2Min = 0.300; %Conversion to openCV range channel2Min*255
channel2Max = 1.000; %Conversion to openCV range channel2Max*255

% Define thresholds for channel 3 based on histogram settings
channel3Min = 0.000; %Conversion to openCV range channel3Min*255
channel3Max = 1.000; %Conversion to openCV range channel3Min*255

% Create mask based on chosen histogram thresholds
BW = (I(:,:,1) >= channel1Min ) & (I(:,:,1) <= channel1Max) & ...
      (I(:,:,2) >= channel2Min ) & (I(:,:,2) <= channel2Max) & ...
      (I(:,:,3) >= channel3Min ) & (I(:,:,3) <= channel3Max);

% Initialize output masked image based on input image.
maskedRGBImage = RGB;

% Set background pixels where BW is false to zero.
maskedRGBImage(repmat(~BW,[1 1 3])) = 0;
```

*Figur A.4.* MATLAB kode for funktionen findGreen.

## A.5 findYellow

```
function [BW,maskedRGBImage] = findYellow(RGB)
% Auto-generated by colorThresholder app on 05-Oct-2016
%-----
% Convert RGB image to chosen color space
I = rgb2hsv(RGB);

% Define thresholds for channel 1 based on histogram settings
channel1Min = 0.115; %Conversion to openCV range channel1Min*180
channel1Max = 0.210; %Conversion to openCV range channel1Max*180

% Define thresholds for channel 2 based on histogram settings
channel2Min = 0.300; %Conversion to openCV range channel2Min*255
channel2Max = 1.000; %Conversion to openCV range channel2Max*255

% Define thresholds for channel 3 based on histogram settings
channel3Min = 0.403; %Conversion to openCV range channel3Min*255
channel3Max = 1.000; %Conversion to openCV range channel3Min*255

% Create mask based on chosen histogram thresholds
BW = (I(:,:,1) >= channel1Min ) & (I(:,:,1) <= channel1Max) & ...
      (I(:,:,2) >= channel2Min ) & (I(:,:,2) <= channel2Max) & ...
      (I(:,:,3) >= channel3Min ) & (I(:,:,3) <= channel3Max);

% Initialize output masked image based on input image.
maskedRGBImage = RGB;

% Set background pixels where BW is false to zero.
maskedRGBImage(repmat(~BW,[1 1 3])) = 0;
```

*Figur A.5.* MATLAB kode for funktionen findYellow.