

HCI Evaluation

Part One

Dr Jon Bird
jon.bird@bristol.ac.uk

Thanks to Stuart Gray, Pete Bennett, Simon Lock, Thomas Bale, Harry Field who developed some of these slides

Images are royalty free from www.pexels.com

Today's Lecture

- What is HCI evaluation?
- Why is it important
- The Think Aloud evaluation technique
- Heuristic evaluation



HCI Evaluation

- Evaluation is a crucial part of the user-centred development process – we want to ensure our software meets our users' requirements
- The focus of this lecture is on Think Aloud technique and Heuristic Evaluation, which are two of the most widely used evaluation methods in industry
- They are methods that we recommend you carry out on your game as part of your group project – you can write up the results in your report



Why is evaluation important?

- *“Iterative design, with its repeating cycle of design and testing, is the only validated methodology in existence that will consistently produce successful results. If you don’t have user-testing as an integral part of your design process you are going to throw buckets of money down the drain.”*

Bruce Tognazzini (we’ll meet him later in the lecture)



The Think Aloud evaluation technique

用词语表达

- Users are asked to verbalise what they are thinking and doing as they perform a task using your software
- The Think Aloud technique provides insights into the user experience of using your software
- It can identify issues with the software e.g. navigation problems or content that can be improved
- It can be used as part of the software development process to iteratively improve software or used with a finished product



Benefits of Think Aloud

- Cheap
- Relatively easy
- It provides insight into people's experiences as they interact with your product
- It can be carried out with low numbers of participants
- Fits in with most software development processes



Drawbacks of Think Aloud

- it relies on people verbalising thoughts and impressions, rather than objective measures
- Participants may say what they believe to be the right answer rather than what they really think (social desirability). This can distort your results and conclusions



Planning a Think Aloud evaluation

- Decide what questions you want your study to answer. For example, whether users can find particular content or what their understanding is of the information presented.
- Write down the tasks you want the user to complete while using your software
- Decide how many participants you want to recruit and how long you want the sessions to last (45 to 90 minutes works well)




Carrying out a Think Aloud evaluation 1

- Have a **facilitator** to run the evaluation and one or two observers to take notes on what the user says
- Explain to the participants how a think aloud works: they should tell you their thoughts, reactions and emotions as they occur while they are performing the task
- Explain that there is no right answer and it's fine to be critical



Carrying out a Think Aloud evaluation 2

- Ask the participants to complete the tasks you have planned. This should be **uninterrupted** as far as possible, although the facilitator will probably need to give some prompts.
 - If the user goes silent then prompt them to verbalise their thoughts by saying “what are you thinking”
-

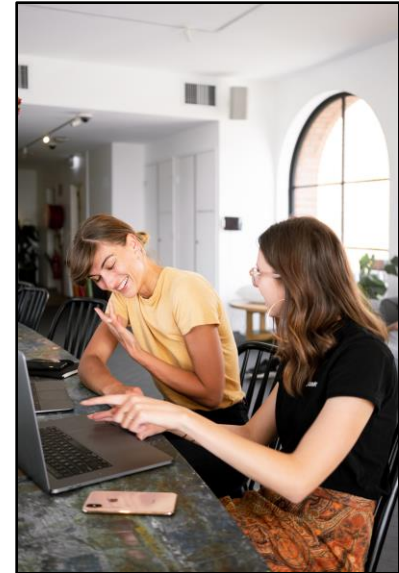

Analysing a Think Aloud evaluation

- Put the written notes together from both
observes in to one document
- Organise the notes into meaningful
categories e.g. what features helped users;
what features led to problems; any
additional features that users wanted.
- You can make your own meangingul
categories
- Count the number of times users comment
about different categories to identify the
biggest issues



Jakob Nielsen – heuristic evaluation




Nielsen, J., and Molich, R. (1990).
Heuristic evaluation of user interfaces,
CHI'90, 249-256.

<https://www.nngroup.com/articles/how-to-conduct-a-heuristic-evaluation/>

Nielsen Norman group


<http://www.nngroup.com/>

- The Nielsen Norman group is a UX research and consulting firm
- It was founded by two big figures in the HCI world:
 - Don Norman coined the term “user experience” and developed a set of design heuristics
 - Jakob Nielsen also developed a set of usability heuristics and was a pioneer of heuristic evaluation

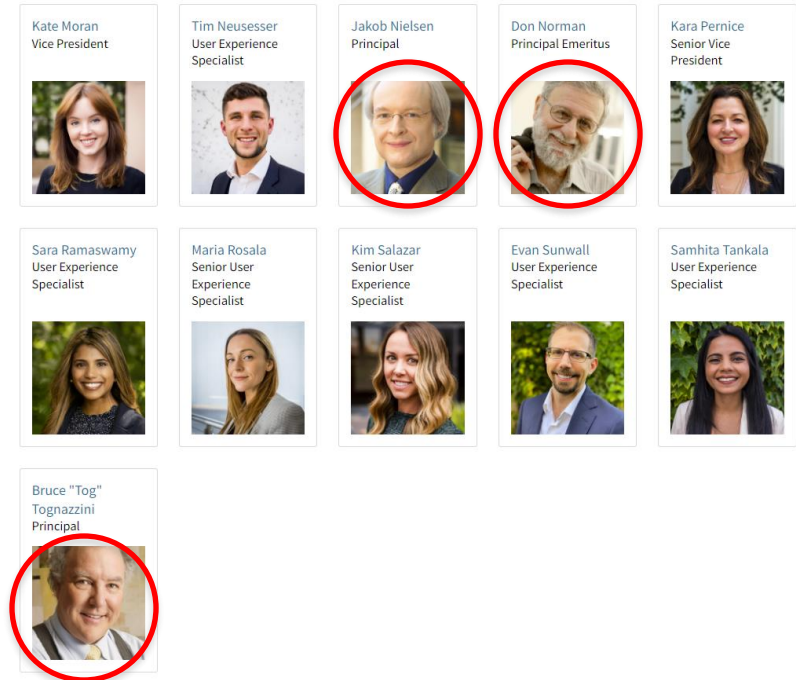

What is a heuristic?

- A rule of thumb
- Experienced-based strategies
- E.g. if you're doing some DIY then 'measure twice, cut once' is a useful heuristic

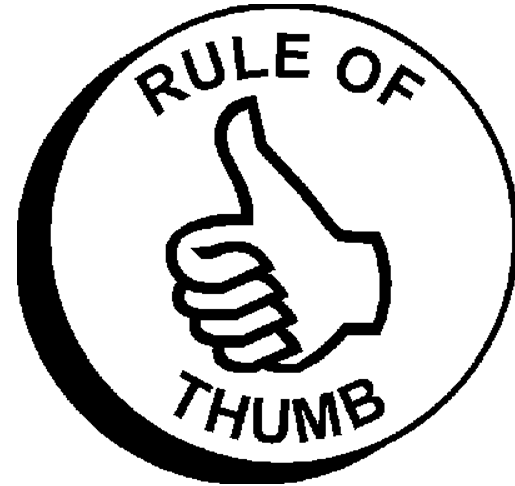

Heuristic evaluation 1


- An evaluation technique conducted **without** users
- Also known as **expert** evaluation as it's sometimes carried out by external experts (sometimes by the development team) aka evaluators
- It's a type of **analytical** evaluation, that is, based on a set of principles or a model...
- ...rather than by observing users (which is known as **empirical** evaluation)

经验主义



Heuristic evaluation 2

- It's an inspection method – it involves inspecting a design to find usability problems
- This involves asking whether the design complies with usability principles (a set of heuristics)

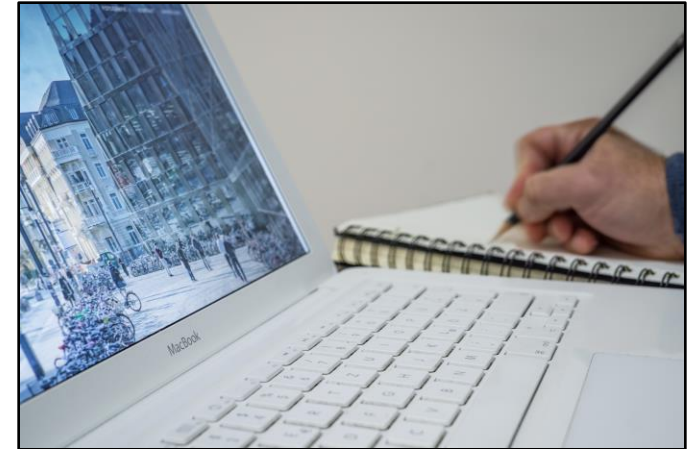

Heuristic evaluation is widely used because...

- It's cheap (only needs a small number of evaluators and no specialist equipment or labs)
- Relatively easy to carry out (can do it after a few hours of training)
- Instant gratification – lists of problems are **available immediately** after the inspection
- It fits in with most software development processes used in industry
- It's a very cost effective: benefit-cost ratio of 48: cost of \$10,500; expected benefits \$500,000 (Nielsen 1994).



Where are the users?


- Heuristic evaluation is based on HCI researchers' extensive experience of designing and evaluating interfaces
- By focusing on users, HCI researchers learned what works and what doesn't
- Their experience is distilled into **usability principles** (a set of heuristics)
- The principles represent the findings from thousands of user studies
- They have been used for over 30 years



What are Nielsen's 10 principles of heuristic evaluation?

- visibility of system status
 - match between system and real world
 - user control and freedom
 - consistency and standards
 - error prevention
 - recognition rather than recall
- flexibility and efficiency of use 审美的
 - aesthetic and minimalist design
 - help users recognise, diagnose and recover from errors
 - help and documentation

Nielsen's 10 principles of heuristic evaluation (minimal information)


- 
- feedback
 - metaphor
 - user control and freedom
 - consistency 一致性
 - error prevention
 - recognition not recall
- flexible use
 - minimal information
 - error recognition and recovery
 - help

Visibility of system status - feedback

- Inform the user about what's going on:
 - show appropriate feedback and progress
 - do not show blank screens
 - do not show static "load" or progress messages



Visibility of system status: examples

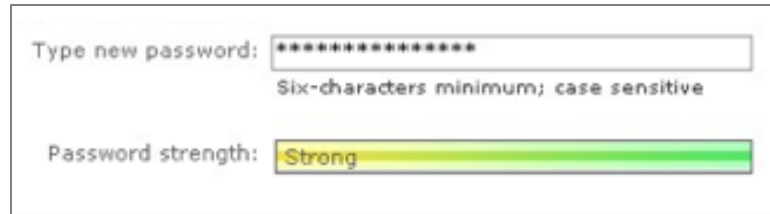

Type new password:


Six-characters minimum; case sensitive


Password strength: Strong

The screenshot shows a password creation interface. It has a text input field for a new password, currently filled with asterisks. Below the input field is a hint: 'Six-characters minimum; case sensitive'. Below that is a 'Password strength' indicator, which consists of a horizontal bar with a yellow-to-green gradient and the word 'Strong' written on it.

Microsoft Live

Password strength is shown
as the password is entered.
Colors are used to augment
the message.

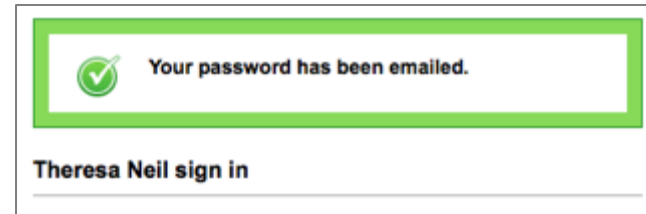

 Your password has been emailed.

Theresa Neil sign in


The screenshot shows a confirmation message. It is enclosed in a green-bordered box. Inside the box, on the left, is a green circular icon with a white checkmark. To the right of the icon is the text 'Your password has been emailed.'. Below the green box, the text 'Theresa Neil sign in' is displayed, followed by a horizontal line.

Tick


A feedback message is
displayed when an action is
performed

Match between system and real world - metaphor

- There must be a match between the system's interface controls and the real world
- The system should speak the users' language, with words, phrases and concepts familiar to the user, rather than system-oriented terms
- Follow real-world conventions, making information appear in a natural and logical order

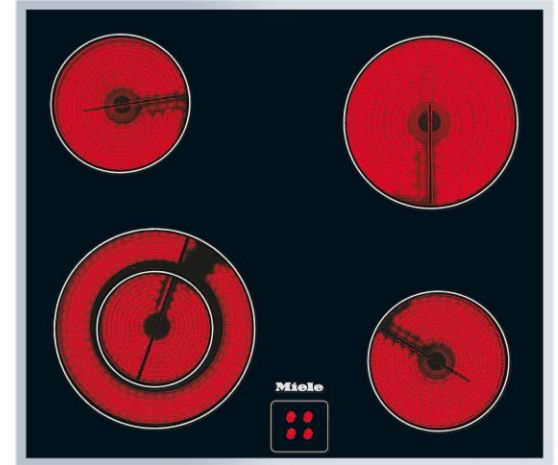

Match between system and real world - examples

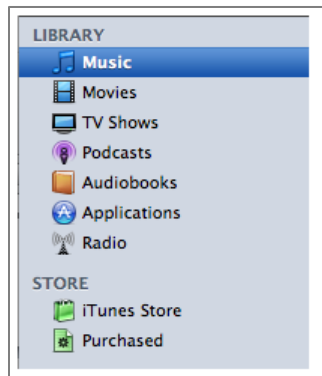

iTunes


Organized as a library that contains your media library: music, movies, TV shows, audiobooks. Beneath the Library is the Store where you can buy more media to put in your Library.

User control and freedom - navigation

- Users often choose system functions by mistake and will need a clearly marked “emergency exit” to leave the unwanted state without having to go through an extended dialog.
- Support undo and redo and a clear way to navigate.
- Provide bread crumbs to clearly show where the user is.




User control and freedom - examples

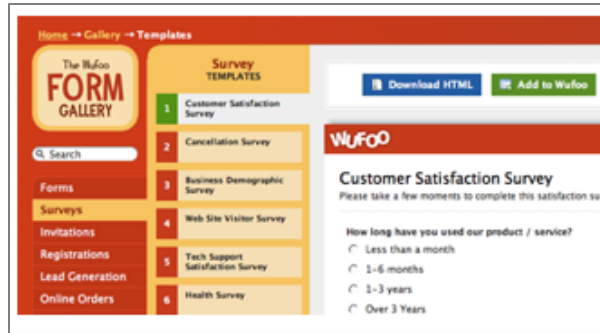

Wufoo

Clearly marks where the person is and where they can go by showing the selection in each menu

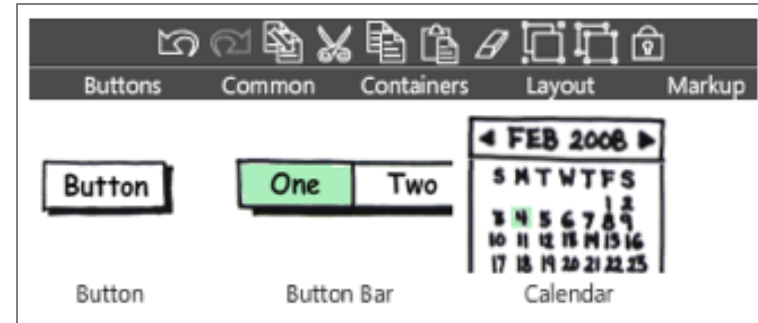

Balsamiq


Undo and Redo buttons are available in the toolbar, and can also be accessed with the standard keyboard shortcuts

Consistency and standards

- Users should not have to wonder whether different words, situations, or actions mean the same thing.
- Follow platform conventions.



Consistency: examples

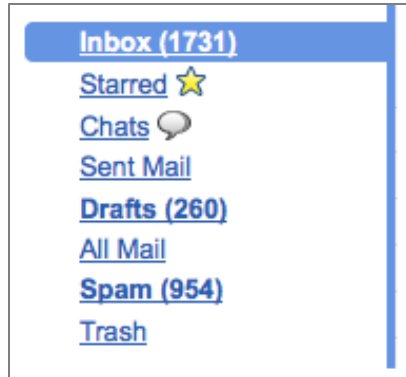

Gmail

When Gmail was designed, they based the organizational folders on the same ones used in other client email applications: Inbox, Drafts, Sent Mail.



Microsoft Office

Word, Excel, and PowerPoint all use the same style toolbar with the same primary menu options: Home, Insert, Page Layout.

Error prevention

- Even better than good error messages is a careful design which prevents a problem from occurring in the first place.
- Either eliminate error-prone conditions or check for them and present users with a confirmation option before they commit to the action.




Error prevention: examples



Yammer

Disables the update button after it is clicked, so the person cannot update the post twice by accident

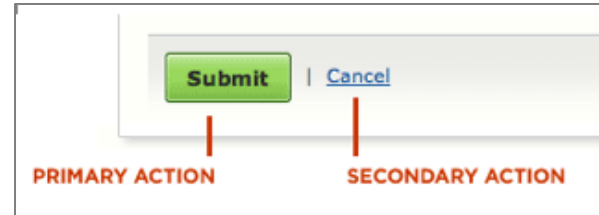

Example from “Web form Design: Filling in the Blanks” by Luke W.


Make the primary action prominent with a larger click area. Cancel and other secondary actions are just shown as links

Recognition rather than recall

- Minimize the user's memory load.
- Make objects, actions, and options visible.
- The user should not have to remember information from one part of the dialogue to another.
- Instructions for use of the system should be visible or easily retrievable whenever appropriate.




Recognition: examples

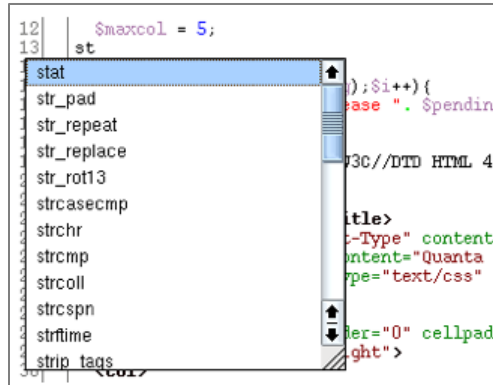

Quanta IDE

Auto completion for coding in a development environment

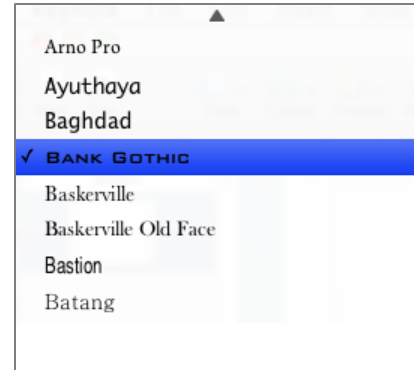

Keynote

Previews the fonts you can pick from, instead of just the font name

Flexibility and efficiency of use

- Accelerators — unseen by the novice user — may often speed up the interaction for the expert user so that the system can cater to both inexperienced and experienced users
- Allow users to tailor frequent actions

Edit	
<u>U</u> ndo	Ctrl+Z
<u>R</u> edo	Ctrl+Y
Cu <u>t</u>	Ctrl+X
<u>C</u> opy	Ctrl+C
<u>P</u> aste	Ctrl+V
Select <u>A</u> ll	Ctrl+A

Flexibility and efficiency: examples

Common Shortcuts	
Add Action	Return
New Window	⌘N
Synchronize with Server	⌘S
Clean Up	⌘K
Planning Mode	⌘1
Context Mode	⌘2
Inbox	⌘1
Quick Entry	⌘Space
<small>Quick Entry's shortcut can be customized in Preferences</small>	

OmniFocus

List of keyboard shortcuts and accelerators

Styles	
Basic	
Basic (No Grid)	
Gray	
Gray Headers	
Gray Fill	
Beige	
Ledger	
Blue	
Blue Headers	
Blue Fill	
Gravity	
sum	23.2264292787289
avg	1.78664840605607
min	0.00086222222222...
max	10
count	13


	A	B	C
3	Mean	1.81	1.85
4	Median	1.81	1.85
5	Standard deviation	0.03	0.04
6	Variance	0.00086	0.00138
7	Alpha	0.05	0.05
8	T-value	2.26	2.26
9	Confidence interval	0.01820	0.02304
10	Upper limit	1.82620	1.87704
11	Lower limit	1.78980	1.83096
12	T-interval	0.02100	0.02659
13	Upper limit	1.82900	1.88059
14	Lower limit	1.78700	1.82741

Numbers by Apple


Previews common function results on the left when a column is selected, more efficient than clicking on an action in the toolbar

Aesthetic and minimalist design

- Dialogues should not contain information which is irrelevant or rarely needed
- Every extra unit of information in a dialogue competes with the relevant units of information and diminishes their relative visibility
- Visual layout should respect the principles of contrast, repetition, alignment, and proximity.

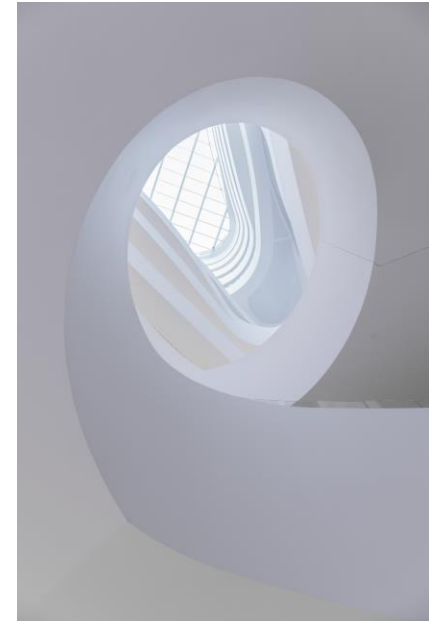

Aesthetics: example

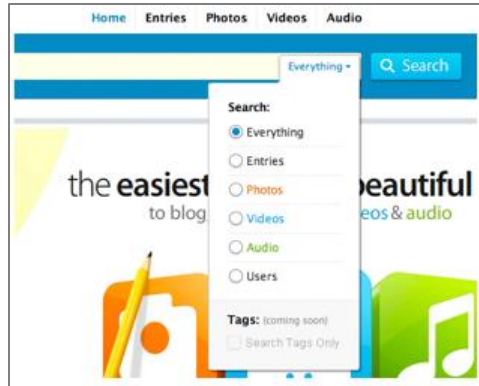


Kontain's search menu exemplifies the four principles of visual design:

1. Contrast: bold text is used for the two labels in the search
2. Repetition: the orange, blue, and green text match the media types
3. Alignment: strong left alignment of text, right aligned drop down
4. Proximity: a light rule is used to separate tags from the other options

Help users recognise, diagnose and recover from errors

- Help users recognize, diagnose, and recover from errors.
- Error messages should be expressed in plain language (no jargon), precisely indicate the problem, and constructively suggest a solution.

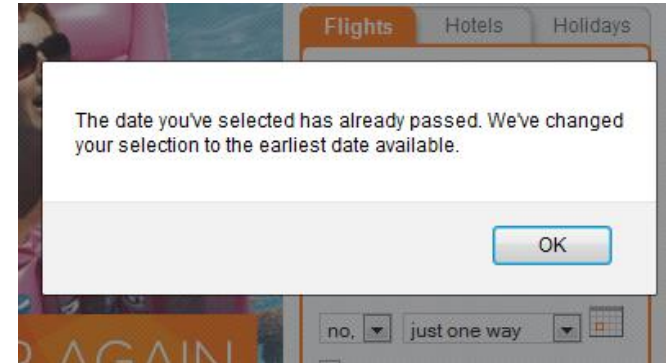

Error recognition and recovery: examples

Or start a new account

Choose a username (no spaces)

bert

Choose a password

Retype password

Email address (must be real!)

not an email

☒ Send me occasional Digg updates.

bert is already taken. Please choose a different username.

Passwords must be at least 6 characters and can only contain letters and numbers.

The email provided does not appear to be valid

Digg

Provides immediate feedback with specific instructions



Humorous 'Page Not Found' Error

Uses a funny image and text, but provides viable alternatives (article listings and blog link) and a course of action (report it)

Help and documentation

- Even though it is better if software can be used without documentation, it may be necessary to provide help and documentation.
- Any such information should be contextual, easy to search, focused on the user's task, list concrete steps to be carried out, and not be too large.

The screenshot shows a web form for a travel purchase. The form includes the following fields and elements:

- Card type:** A dropdown menu with "MasterCard" selected. Below it is a link: [Don't see your card type?](#)
- Expiration date:** Two dropdown menus for "Month" and "Year".
- Card Number:** A text input field. To its right is a link: [What's this](#)
- Cardholder name (as on card):** A label for the next field.
- First name:** A text input field.

A contextual help popup is displayed over the "Card type" dropdown. The popup has a title bar that says "Don't see your card type?". The main text inside the popup reads: "Only the forms of payment in the list are accepted for this travel purchase. Some forms of payment may not be available for all transactions." At the bottom right of the popup is a "Close window" button with a close icon.

Help and documentation: examples



Picnik


Contextual tips in Picnik are clear and easy to navigate



GoodBerry



Embedded videos can be used to showcase features as well as get people started using the product

How many evaluators are needed for heuristic evaluation?

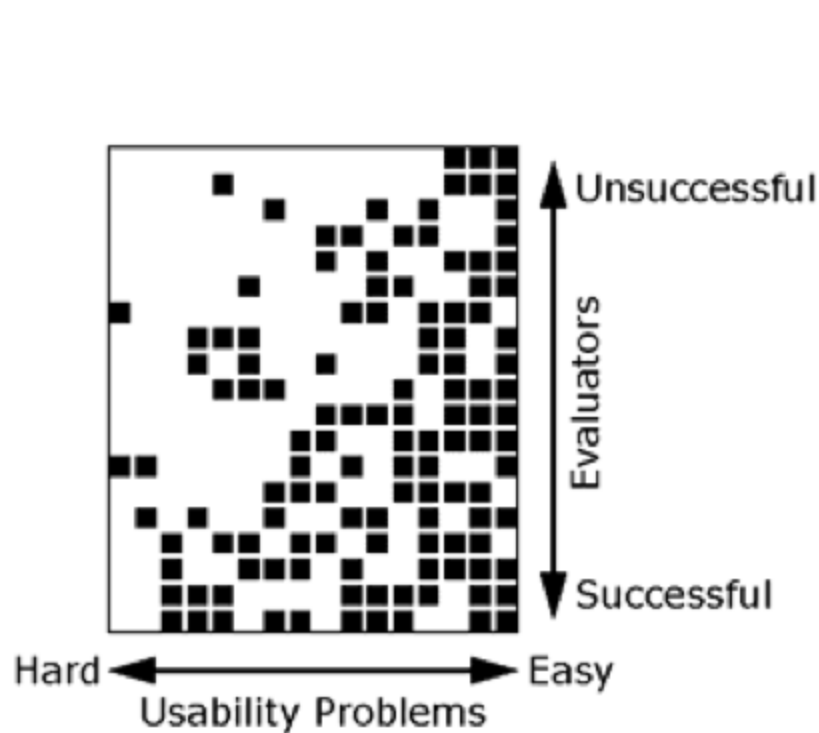

Practical considerations

ratio 比率

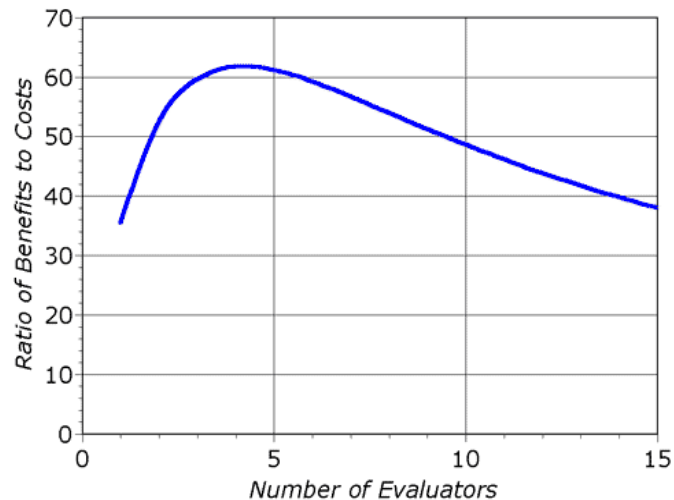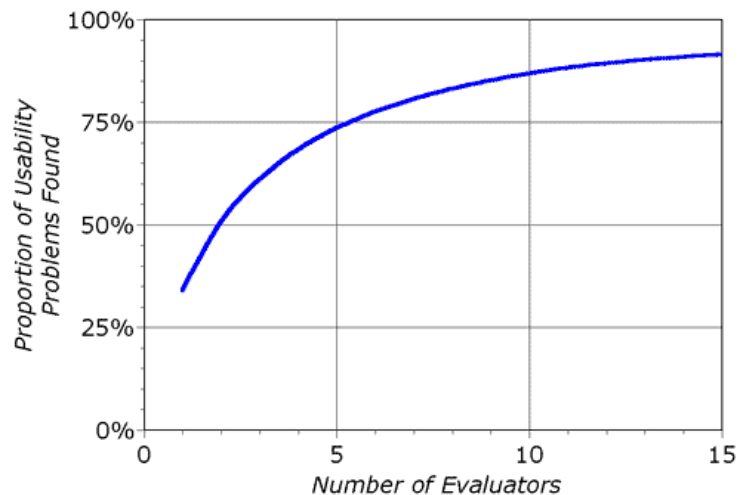

How to run a heuristic evaluation 1

- Each of the 3 – 5 evaluators does a heuristic evaluation of an interface alone
- Sometimes a facilitator can record the evaluator's comments, sometimes the evaluator does it
- A facilitator **can** answer evaluators' questions, in contrast to traditional user testing, particularly if it's not a walk up and use system
- Heuristic evaluation can be done on paper prototypes



How to run a heuristic evaluation 2

- Heuristic evaluations typically last 1 – 2 hours, but it does depend on the complexity of the software
- The expert goes through the interface several times – first time to get a feel for the system, second time to focus on specific elements
- Evaluators can be given scenarios that describe typical usage scenarios (built from a task analysis of users)
- Evaluators produce a list of usability problems: the usability principle and the design feature that violated it



Benefits of heuristic evaluation

- Cheap
- Relatively easy
- Instant gratification lists of problems are available immediately after the inspection
- It can be carried out with low numbers of participants
- Fits in with most software development processes
- Cost effective



Drawbacks of heuristic evaluation


- Important issues may get missed
- Might identify false issues
- Many trivial issues are often identified,
making it seem overly critical
- Experts have biases



Reading

- *Interaction Design: Beyond Human-Computer Interaction* covers all HCI evaluation techniques. It's available through the university library as an eBook. Read about the evaluation techniques covered in this lecture to deepen your understanding
- Read the original Nielsen paper on heuristic evaluation:

<https://www.nngroup.com/articles/how-to-conduct-a-heuristic-evaluation/>

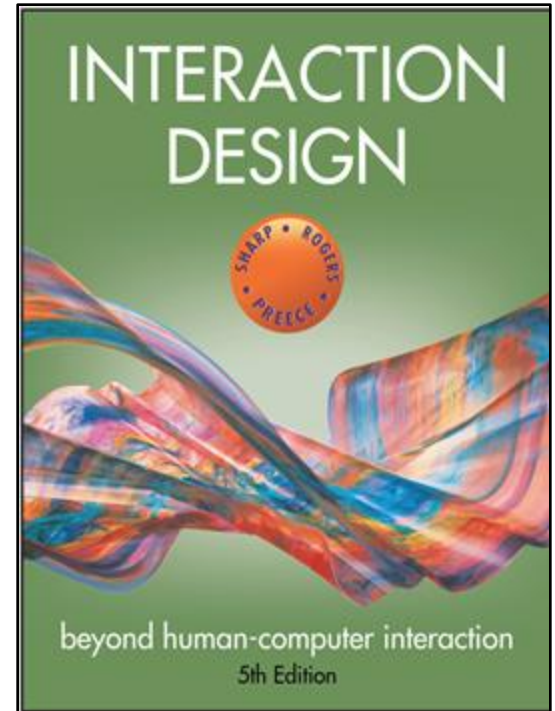

Reading 2

- Explore the materials (papers, articles and videos) on heuristic evaluation on the Nielsen Norman group website:

<https://www.nngroup.com/articles/ten-usability-heuristics/>



Before the workshop today

- Please review the lecture materials on the Think Aloud and Heuristic Evaluation techniques
- Your workshop activities will involve evaluating your games using these two techniques

