



APPS@UCU

Rust #1: Motivation and Introduction

Sultanov Andriy



Contents

- 1 What are we doing here?
- 2 Motivation
- 3 A short history of systems programming
- 4 Pitfalls of the old ways
- 5 Where and why is Rust better?
- 6 Basic syntax and ecosystem
- 7 Ownership and lifetimes
- 8 A simple practice project

What are we doing here?

Why are we here?

We are here to learn a new way of thinking about complex computer systems with the help of the Rust programming language.

What this entails

We will have to do a few things in order to gain the most in the short amount of time we have:

- Listen and ask questions during the lecture
- Complete short homework exercises
- Work our way through a final group project
- Read/Watch/Listen/Do anything and everything we can lay our eyes upon!

Rust doesn't solve all of your problems

While Rust does solve most memory safety issues (more on this later), most bugs are still caused by tired and underslept programmers.

Your health is more important than your work.

Rust doesn't solve all of your problems

Developing more secure and memory-safe code in abstract sounds good. But it's not always.

Developing a secure drone strike system won't help anyone.

Secure face recognition system for the police won't help anyone either.

A secure app that serves as a tool to further underpay and undermine the vulnerable workforce will bring far more trouble if it's unhackable using simple memory exploits.

Motivation

Who is interested in Rust?

Rust is the most loved language for the fifth year in a row!

(86.% of StackOverflow users)

Rust is used in production in an increasing number of companies: Mozilla, Atlassian, Microsoft, Google, Godot, 1Password, Dropbox, Zeplin, npm, Academia.edu, Sentry, Cloudflare, Coursera, Figma, Postmates etc.

But Rust's concepts will help in many other languages as well!

Why should you be interested in Rust?

Rust is an extremely interesting and relatively new language that can be used in a lot of domains, including, but not limited to:

- Web through WebAssembly
- Operating Systems
- Embedded Software
- Large Systems Software
(Browsers, Servers, Databases etc.)
- Games, GUI, CLI applications too!

Resources



Applications



Books



Practice



Extra

All of these can be found in our repository!
And even more are available online!

A short history of systems programming

The origins of C

The C programming language appeared during Unix development in 1972.

Since it was created for a specific purpose and a specific computer, on the one hand it adapted to the needs of the programmers, and on the other it adopted a large amount of somewhat unique and unpopular ideas and concepts.



Possible solutions

C++ is born to help address some of these problems, introduces 'zero cost' abstractions, aimed at providing a nice interface for the programmer to use which compiles down to an almost ideal machine code.

Still has the old instruments, hangs on to C's machine model and tries to encourage using the new modern safe concepts, **which are not ideal either**.

Modern ideas

In the meantime, languages like Java, Ruby and Python start sprawling up, presenting another model of growth - they are garbage-collected and are able to present even more complex abstractions (at the expense of the speed).

Go and others try to tackle C's speed and low-levelness, **unsuccessfully**.

Pitfalls of the old ways

Memory layout

```
int test()
```

```
{
```

```
    int b = 5;
```

```
    return b;
```

```
}
```

```
int main()
```



```
{
```

```
    int a = test();
```

```
    return a;
```

```
}
```

Memory layout

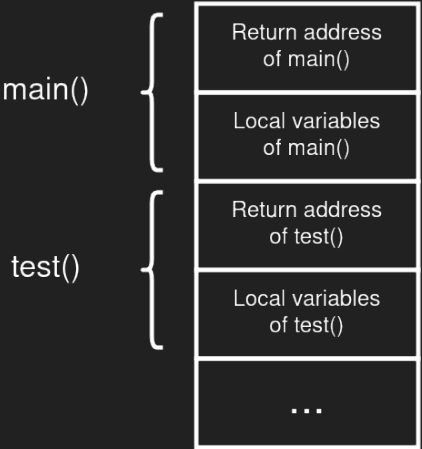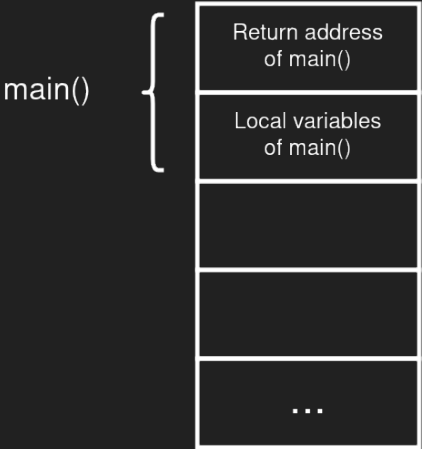

Buffer overflows

```
int main()
{
    char s[100];
    int i;
    printf("\nEnter a string : ");
    gets(s);

    return 0;
}
```

Null pointers

```
int test(int* pointer)
{
    *pointer = 5;
    return 0;
}
```

```
int main()
{
    char* text = malloc(10);
    *text = 'c';
    return 0;
}
```

Dangling pointers

```
int *test()
{
    int y=10;
    return &y;
}
```

```
int main()
{
    int *p = test();
    printf("%d", *p);
    return 0;
}
```

Invalidated iterators and double free

```
void main()
{
    Vec*vec=vec_new();
    vec__push(vec, 107);

    int* n = &vec->data[0];
    vec__push(vec,110);
    printf("%d\n", *n);

    free(vec->data);
    vec__free(vec);
}
```

No real error checking

```
int main()
{
    /*
     * Returns -1 for ERROR #1
     * Returns -2 for ERROR #2
     * .....
     * */
}
```

And many more...

- Memory leak - you can forget to free data
- Thread unsafety - another function can be modifying the same memory

Where and why is Rust better?

What is Rust?

Safe, Fast, Easy to write. Choose three

A modern systems programming language.

First stable version in 2014.

Gets rid of unnecessary old ideas, combining them with some of the fresh concepts.

Almost everything makes sense

It does not care about C's old ways from the 70s which have been kept up in many languages and systems since.

It does not try to needlessly attach new stupid things to it. Easily gets rid of bad ideas since it's a young language.

Memory safety guarantees

Rust guarantees, at compile time, that programs are memory-safe.

This means:

- No buffer overflows
- Everything is bounds-checked
(e.g. no null pointers, no dangling pointers)
- No data races (general thread-safety)
- No memory is ever written to by two things at a time
- No memory is ever written and read at the same time

Tradeoffs

These guarantees don't come without a cost.

Some of them include:

- Relatively long compile time
- You sometimes have to fight with the compiler (It's always right though, and even tries to help)
- A whole new different approach to things
- It's a young language! (This also means you can help)

Improvements in almost every field

Rust does not only get rid of the problems of C and garbage-collected languages.

It tries to be better at a lot of other things:

- Super great error handling!
- Algebraic data types!
(Functional programming concept)
- Advanced macro processing!
- Speed increase from C since programs often know what to expect!

An amazing ecosystem

Rust has a great ecosystem:

- **rustc** compiler is super helpful, and has great IDE integrations!
- **cargo** is a unified standard for:
 - Package management (pip, yay)
 - Dependency resolving (setup.py, requirements.txt)
 - Project management (makefile, CMake)
 - Testing (gtest etc.)
 - Documentation (pandoc, asciidoc etc.)
- **rustfmt** is a standard formatter
- **clippy** is a standard linter

Basic syntax and ecosystem

Hello world!

All of the code snippets for this lecture are available in the repository!

```
fn main() {  
    println!("Hello, world!");  
}
```

```
$ rustc main.rs
```

```
$ ./main
```

```
Hello, world!
```

Hello cargo!

```
$ cargo new hello__cargo
```

```
$ cd hello__cargo
```

```
$ ls
```

```
$ cat Cargo.toml
```

```
$ cat src/main.rs
```

```
$ cargo build
```

```
$ target/debug/hello__cargo
```

```
$ cargo run
```

Ownership and lifetimes

Ownership and lifetimes

Abstract

How would a safe system look like?

Let's go over a few main points:

- There can be many readers with no writers at the same time
- There can be only one writer with no readers at the same time
- Values can be used only as long as they still exist

Ownership and lifetimes

General

In Rust's terminology, there are two notions of borrowing:

- Shared reference `&`
- Mutable reference `&mut`

Rust forces us to abide by the following principles:

- We can have multiple shared (immutable) references at once (with no mutable references) to a value.
- We can have only one mutable reference at once (no shared references to it)
- A reference cannot outlive its referent
- A mutable reference cannot be aliased
(You can only move the value to a new owner)

Ownership and lifetimes

General

The lifetime of a value starts when it's created and ends the last time it's used.

Rust computes lifetimes at compile time, we don't have to do any allocations and frees, Rust borrows and drops memory for us.

Ownership and lifetimes

Examples

1st example. Does this compile and why?

```
fn main()
{
    let s: String = "text".to_string();
    let u = s;
    println!("{}", s);
}
```

2nd example. Does this compile and why?

```
fn main()
{
    let s: String = "text".to_string();
    let u = s;
    println!("{}", u);
}
```

Ownership and lifetimes

Examples

```
fn om_nom_nom(s: String)
{
    println!("I have consumed {}", s);
}

fn main()
{
    let s: String = "text".to_string();
    om_nom_nom(s);
    println!("{}", s);
}
```


Ownership and lifetimes

Examples

I've got to add more examples!

A simple practice project

Guessing game

Basics

Let's make a simple guessing game!

```
use std::io;

fn main() {
    println!("Guess the number!");

    println!("Please input your guess.");

    let mut guess = String::new();

    io::stdin()
        .read_line(&mut guess)
        .expect("Failed to read line");

    println!("You guessed: {}", guess);
}
```

Guessing game

Cargo dependencies

Let's add a random number generator. We have to add a dependency for **rand** crate for this. (crates are Rust's libraries and modules)

Add this to your Cargo.toml file:

```
[dependencies]  
rand = "0.5.5"
```

Guessing game

Random number generation

```
use std::io;
use rand::Rng;

fn main() {
    println!("Guess the number!");

    let secret_number = rand::thread_rng().gen_range(1, 101);

    println!("The secret number is: {}", secret_number);

    println!("Please input your guess.");

    let mut guess = String::new();

    io::stdin()
        .read_line(&mut guess)
        .expect("Failed to read line");

    println!("You guessed: {}", guess);
}
```

Guessing game

(Wrong) Input comparison

```
use rand::Rng;
use std::cmp::Ordering;
use std::io;

fn main() {
    // --snip--

    println!("You guessed: {}", guess);

    match guess.cmp(&secret_number) {
        Ordering::Less => println!("Too small!"),
        Ordering::Greater => println!("Too big!"),
        Ordering::Equal => println!("You win!"),
    }
}
```

Guessing game

Input comparison

```
// --snip--

let mut guess = String::new();

io::stdin().read_line(&mut guess).expect("Failed to read line");

let guess: u32 = guess.trim().parse().expect("Please type a number!");

println!("You guessed: {}", guess);

match guess.cmp(&secret_number) {
    Ordering::Less => println!("Too small!"),
    Ordering::Greater => println!("Too big!"),
    Ordering::Equal => println!("You win!"),
}
}
```

Guessing game

Looping

```
// --snip--

println!("The secret number is: {}", secret_number);

loop {
    println!("Please input your guess.");

    // --snip--

    match guess.cmp(&secret_number) {
        Ordering::Less => println!("Too small!"),
        Ordering::Greater => println!("Too big!"),
        Ordering::Equal => println!("You win!"),
    }
}
}
```


Guessing game

Breaking out of the loop

```
// --snip--
```

```
match guess.cmp(&secret_number) {  
    Ordering::Less => println!("Too small!"),  
    Ordering::Greater => println!("Too big!"),  
    Ordering::Equal => {  
        println!("You win!");  
        break;  
    }  
}  
}  
}
```

Guessing game

Handling invalid input

```
// --snip--

io::stdin()
    .read_line(&mut guess)
    .expect("Failed to read line");

let guess: u32 = match guess.trim().parse() {
    Ok(num) => num,
    Err(_) => continue,
};

println!("You guessed: {}", guess);

// --snip--
```

More on cargo

```
$ cargo build
```

```
$ cargo run
```

```
$ cargo new
```

```
# Building a release binary:
```

```
# (Takes more time, optimizes more)
```

```
$ cargo build --release
```

```
$ target/release/main
```

```
# Generate the documentation of the dependencies:
```

```
$ cargo doc --open
```

```
# Running unit tests and integration tests:
```

```
$ cargo test
```

Thank you!

Interesting readings

C, C++ critique:

Creators Admit UNIX, C Hoax

C++?? : A Critique of C++ (or Programming and Language Trends of the 1990s)

No, C++ still isn't cutting it.

Rust history:

C++ && Rust : "Access All Arenas"

Considering Rust:

Mastering the AP CS Curriculum Without Using C++

Why not Rust?

Why is Rust the Most Loved Programming Language?

Falling in love with Rust

Rust after the honeymoon

The relative performance of C and Rust