

Adatbázisrendszerek II

11. gyakorlat

László Andrea

DJ7PNE

```

create table Naplo5(Esemeny varchar(20), Adat varchar(100), Datum timestamp);

create table Vasarlo(vID char(3), nev varchar2(30), cim varchar(30), fizmod number(3,0));

create or replace trigger TB after insert on Vasarlo for each row
begin
    insert into Naplo5 values('insert', :new.vID || '_' || :new.nev || '_' || :new.cim, sysdate);
end;

insert into vasarlo values('v01', 'Kék alma', 'Mc. Kék u.12', 2);
insert into vasarlo values('v02', 'Zöld Gabi', 'Mc. Hó u.72', 3);
insert into vasarlo values('v03', 'Fekete Ferenc', 'Mc. Kőu u.25', 1);
insert into vasarlo values('v09', 'Hó Manó', 'Nyék Tóu u.74', 2);
insert into vasarlo values('v10', 'Ká Rozi', 'Nyék Kau u.5', 3);

```

	ESEMENY	ADAT	DATUM
1	insert v01	Kék alma Mc. Kék u.12	22-ÁPR. -20 11.02.17,000000000
2	insert v02	Zöld Gabi Mc. Hó u.72	22-ÁPR. -20 11.02.17,000000000
3	insert v03	Fekete Ferenc Mc. Kőu u.25	22-ÁPR. -20 11.02.17,000000000
4	insert v09	Hó Manó Nyék Tóu u.74	22-ÁPR. -20 11.02.17,000000000
5	insert v10	Ká Rozi Nyék Kau u.5	22-ÁPR. -20 11.02.17,000000000

	VID	NEV	CIM	FIZMOD
1	v01	Kék alma	Mc. Kék u.12	2
2	v02	Zöld Gabi	Mc. Hó u.72	3
3	v03	Fekete Ferenc	Mc. Kőu u.25	1
4	v09	Hó Manó	Nyék Tóu u.74	2
5	v10	Ká Rozi	Nyék Kau u.5	3

```
drop trigger TB;
```

Trigger TB dropped.

```
create or replace trigger TM after update on Vasarlo for each row
```

begin

```
insert into Naplo5 values('Módosítás', :new.vID || '_' || :old.vID || ',' || :new.nev || '_' || :old.nev || ',' || :new.cim || '_' || :old.cim || ',' || :new.fizmod || '_' || :old.fizmod, sysdate);
```


end;

```
update vasarlo set nev = 'Kő Rozi' where vID = 'v10';
```

```
update vasarlo set nev = 'Tél Apó' where vID = 'v09';
```

⁶	Módosítás v10	v10,	Kő Rozi	Ká Rozi,	Nyék Kau u.5	Nyék Kau u.5,	3	3	22-ÁPR.	-20	11.15.09,
⁷	Módosítás v09	v09,	Tél Apó	Hó Manó,	Nyék Tóu u.74	Nyék Tóu u.74,	2	2	22-ÁPR.	-20	11.15.31,

drop trigger TM;

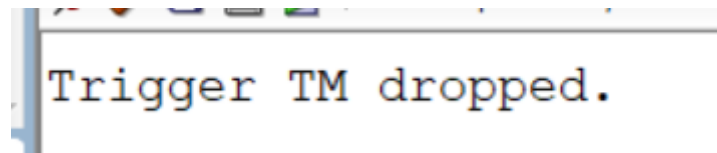


create or replace trigger TT after delete on Vasarlo for each row

begin

```
insert into Naplo5 values('Delete', :old.vID || '_' || user ,sysdate);
```

end;




```
delete from vasarlo where vID = 'v10';
```

```
delete from vasarlo where vID = 'v09';
```

⁸	Delete	v10	H22	DJ7PNE					22-ÁPR.	-20	11.22.31,
⁹	Delete	v09	H22	DJ7PNE					22-ÁPR.	-20	11.22.31,

drop trigger TT;



```
create table Termek(tkod char(3), nev varchar(20), ar number(38,0), leiras varchar2(20), kategoria char(3) );
```

```
insert into termek values('t01', 'sör', 200, 'világos', 'k02');  
insert into termek values('t02', 'bor', 200, 'vörös', 'k02');  
insert into termek values('t03', 'zsömlé', 20, 'kerek', 'k01');  
insert into termek values('t04', 'zsír', 100, 'disznó', 'k01');  
insert into termek values('t05', 'paprika', 100, 'zöld', 'k01');  
insert into termek values('t06', 'csipsz', 300, 'sajtos', 'k01');
```

```
create or replace procedure ModT as
```

```
begin
```

```
end;
```