


CHART AXES · MATRIX-GRID · SCATTER · QUADRANT · GANTT

One grammar for an axis. Position says what it means.

Four components named their axes four different ways — by counting code spans, by an arrow glyph, by a keyword prefix. They now share one bracketed list, and where you put it is what tells the engine whether it names the axes or renames the key.


The axis line sits above the chart.

First member names the column axis, second the row axis. Arrows are drawn, not typed.

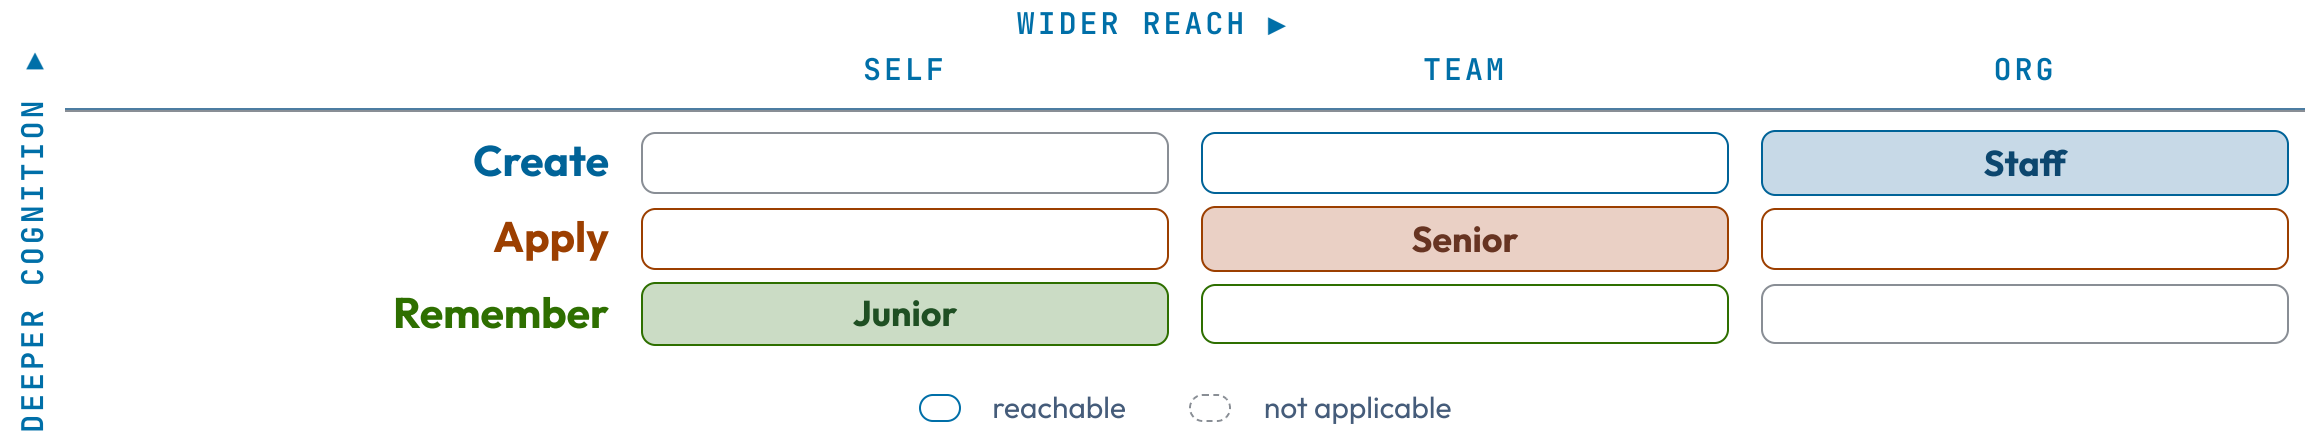


The same shape below the grid renames the key.


Nothing about the two spans distinguishes them. Only where they sit.

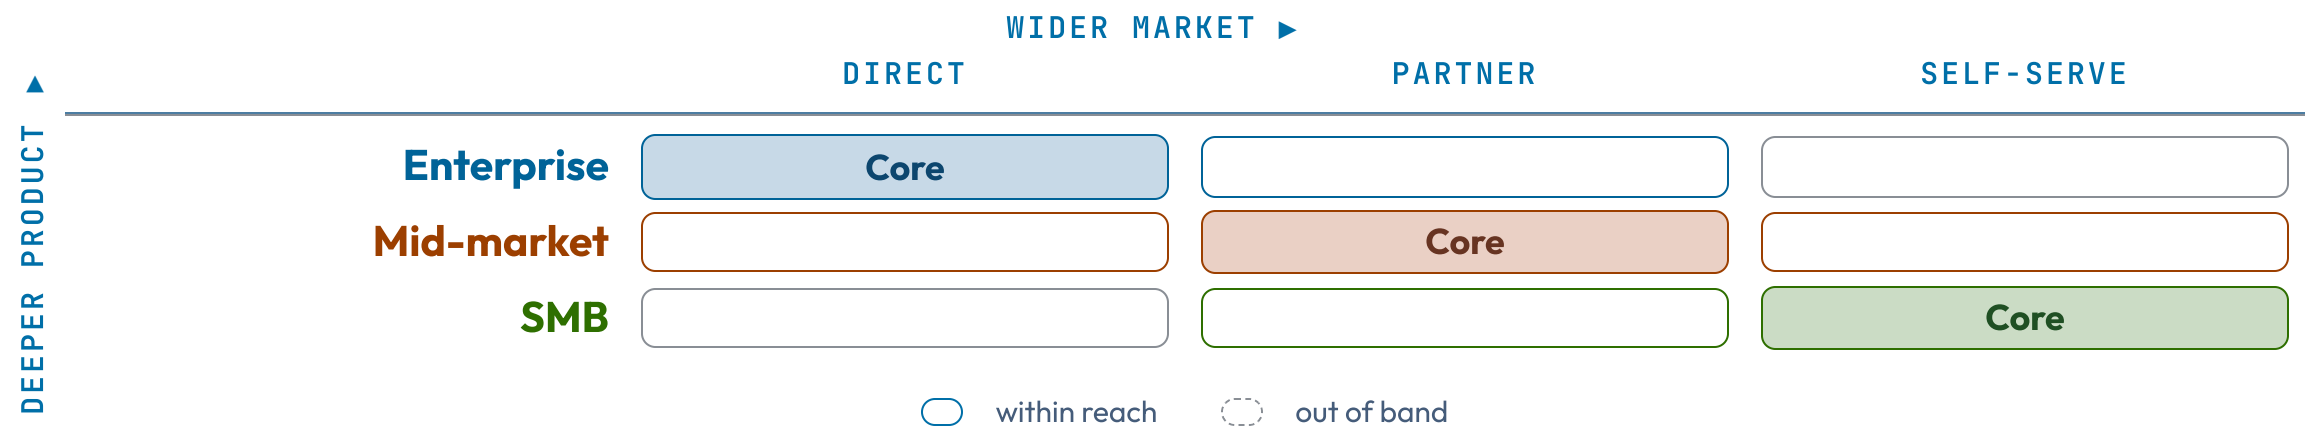

The same line reads on a scatter.

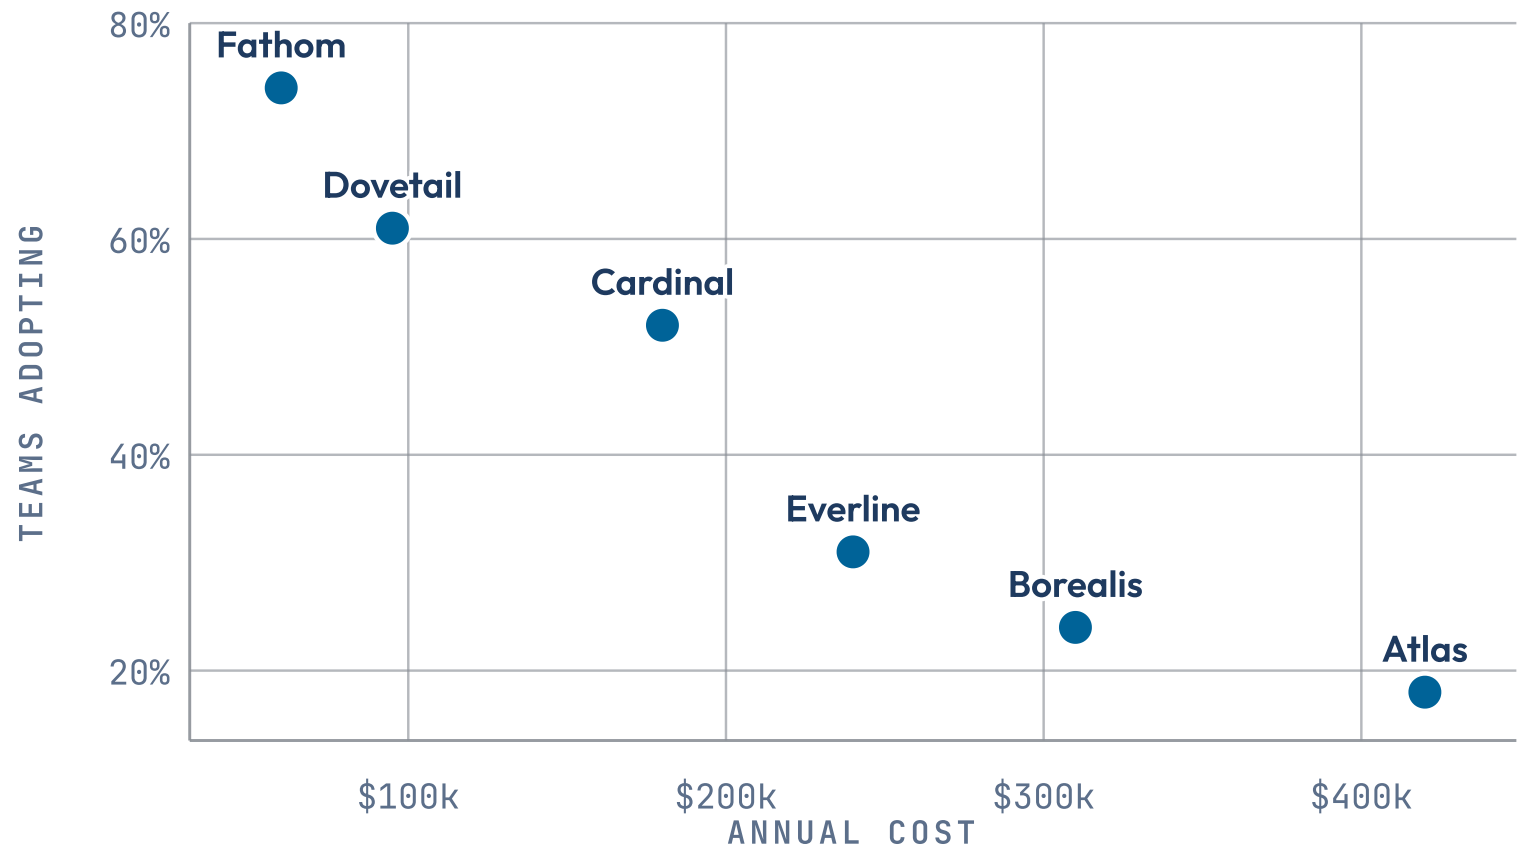


A third member sizes the dot.

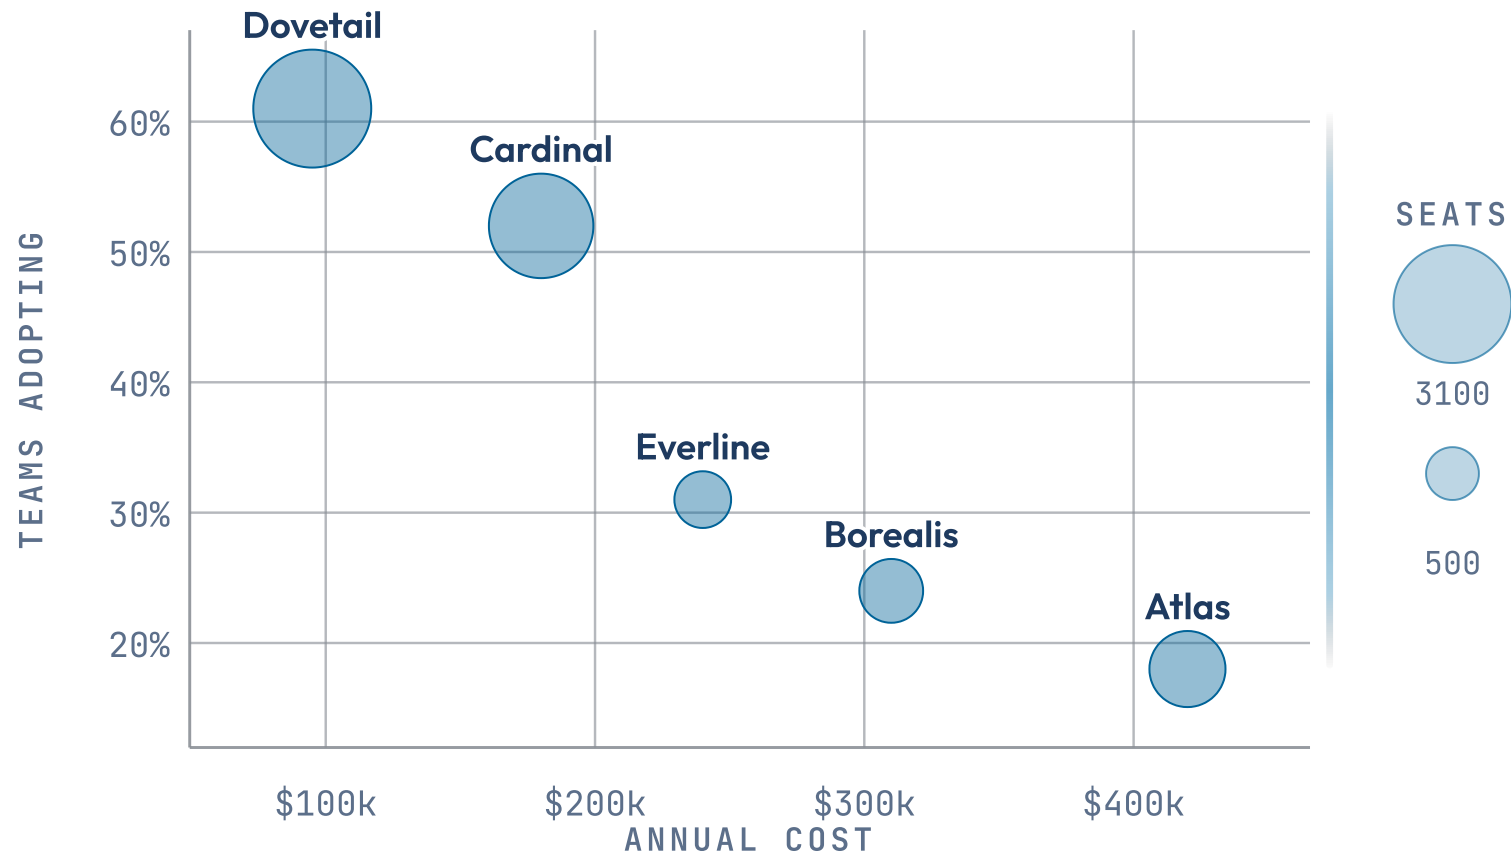

Quotes are optional, and they are not decoration.


Unquoted, every comma splits. Quoted, a comma is part of the name.

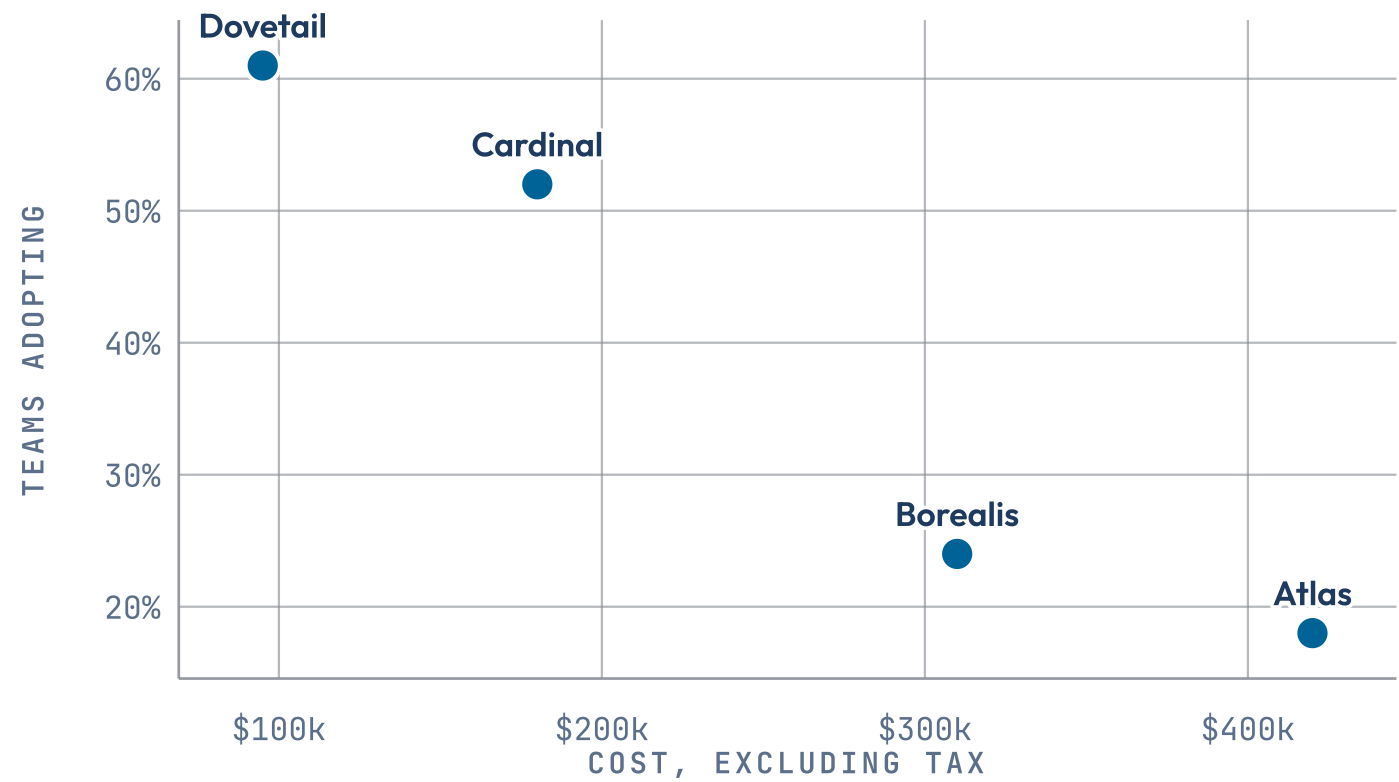

Quotes protect a comma, so this is two axes and not three


Each threshold sits in the axis it cuts.

The eyebrow above is not a list, so it stays an eyebrow; the list below it sets both domains and draws both cutoff lines.

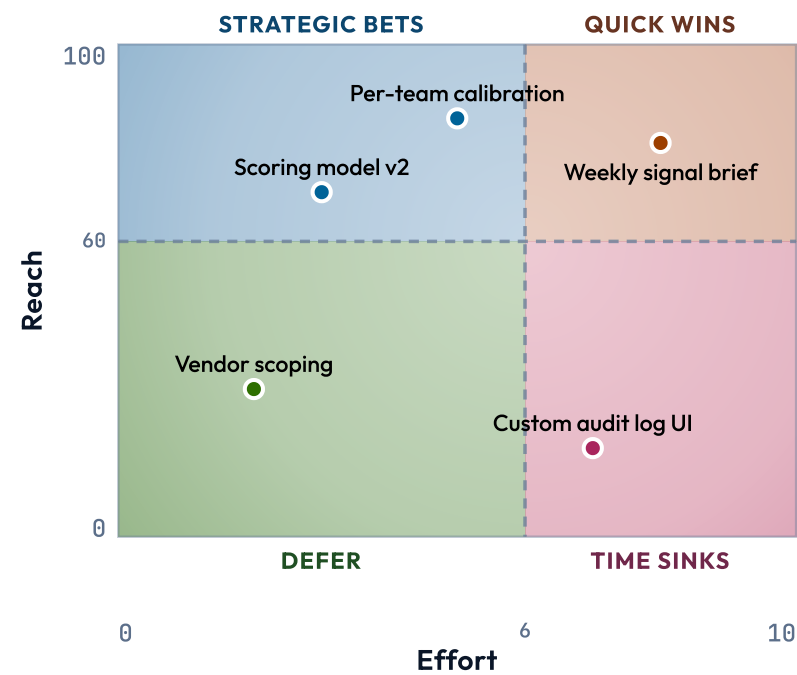


2026 Q1 .. 2026 Q4 today Q3

Gantt keeps its pills, and they still work.

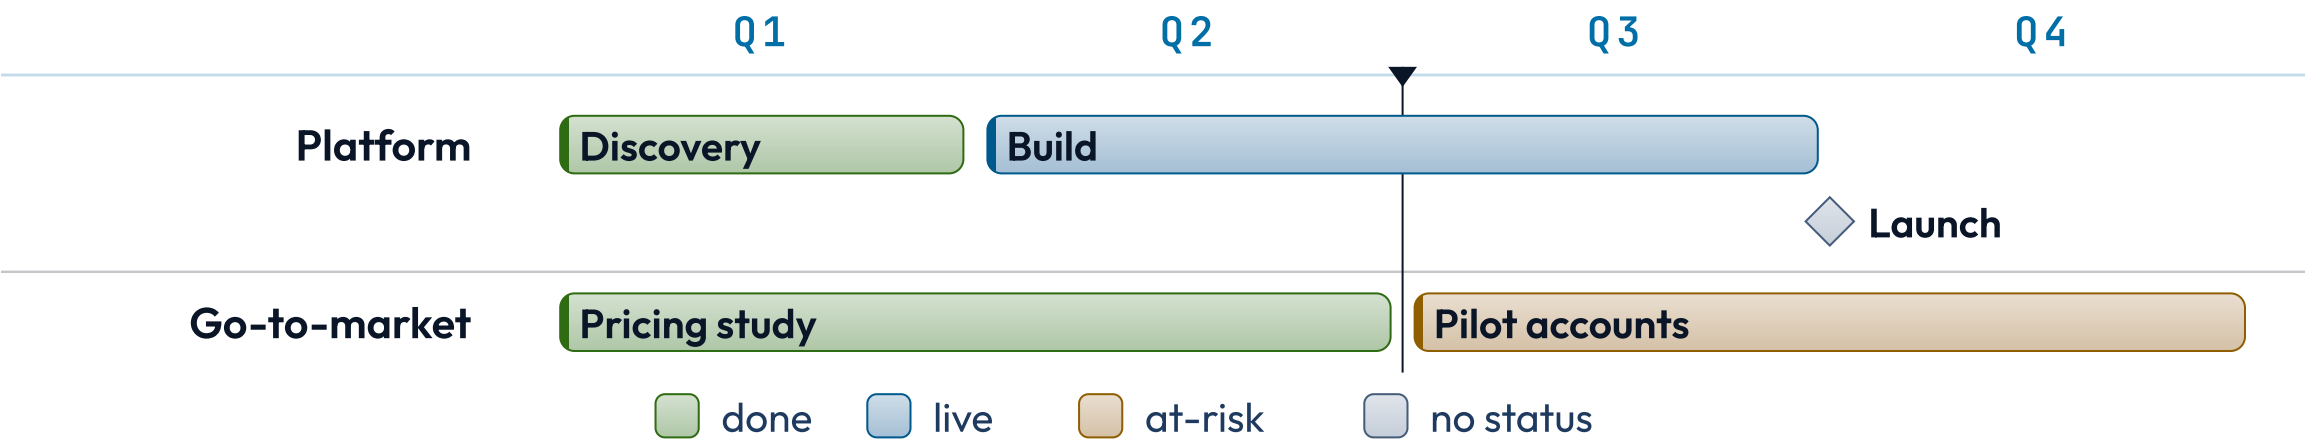

The bracketed form draws the identical chart.

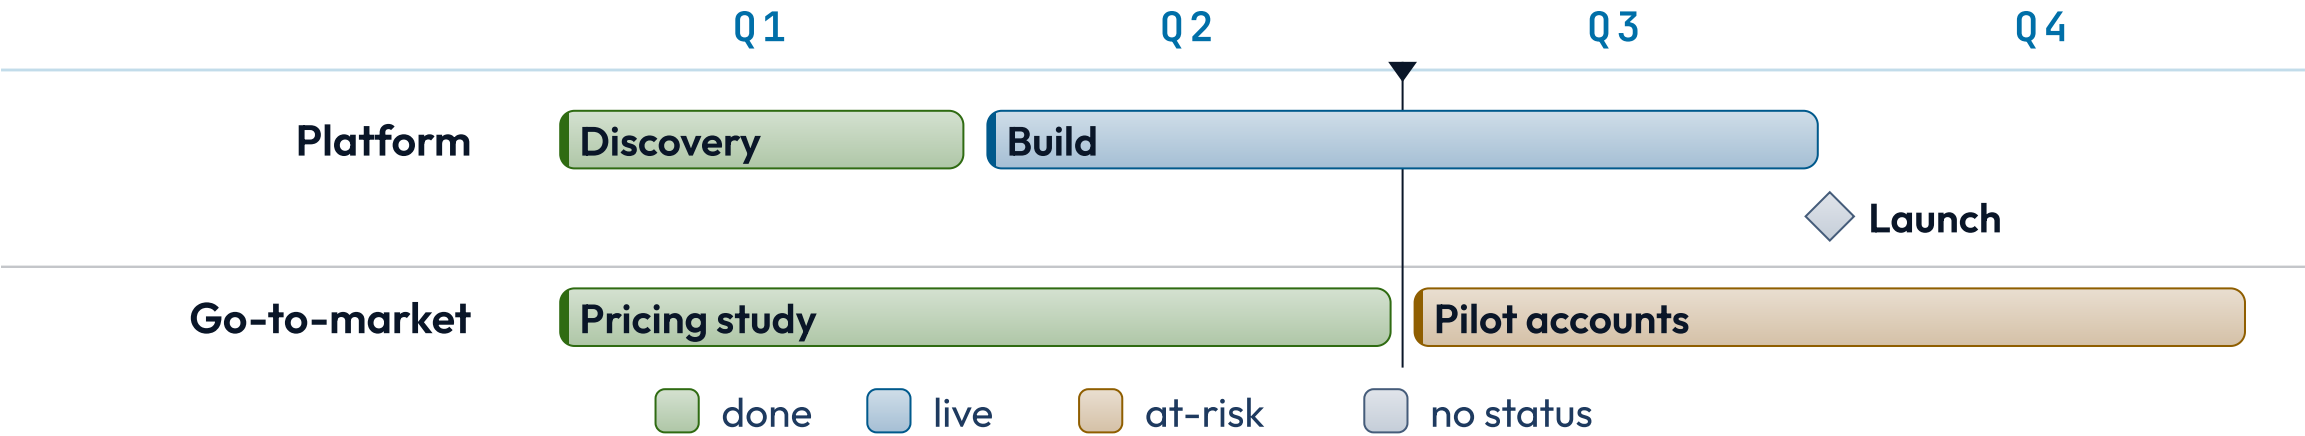

Four grammars, one list.

- matrix-grid and scatter
 - Counted code spans — two meant an axis, one meant an eyebrow. A label set was forbidden from being two spans as a result.
- quadrant
 - An arrow glyph, needing a carve-out in the typed-glyph gate, and a detached `targets` suffix read by counting positions. The carve-out is gone.
- gantt
 - Keyword-tagged pills, and already the closest to right — it ships the `..` range this grammar adopts. The pills stay; the list works beside them.