


EVIDENCE · SCATTER · SERIES

quadrant


Native 2×2 scatter chart — items plotted on two continuous axes.

The quadrant scatters items on two axes.


Effort in analyst-weeks; reach as the percent of teams that would adopt it, optimistically.

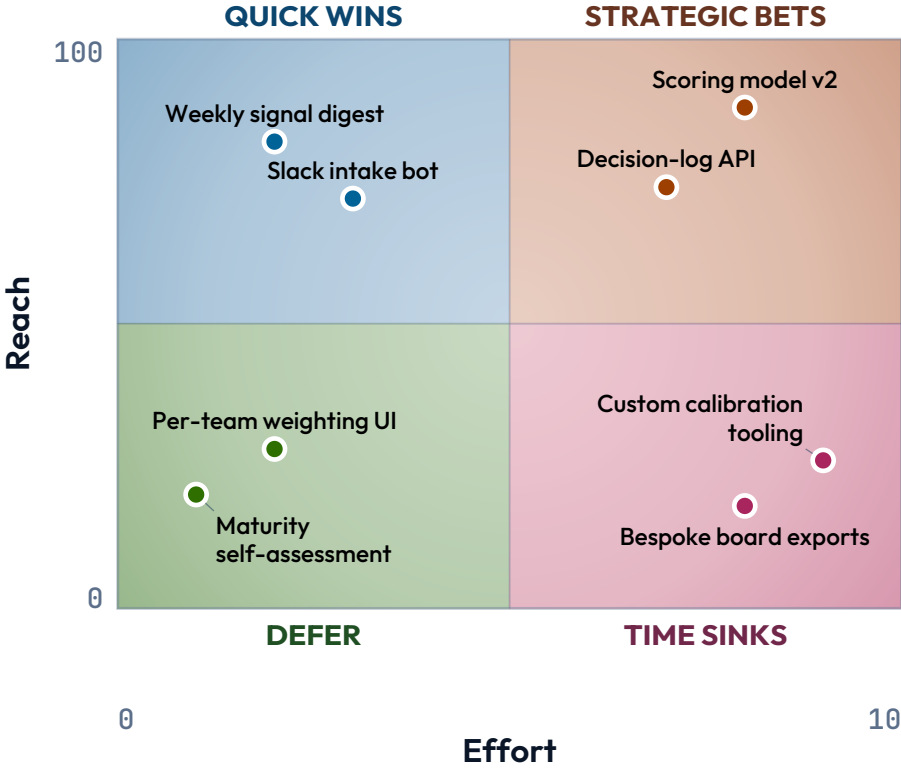

bubble sizes each point by a third value.

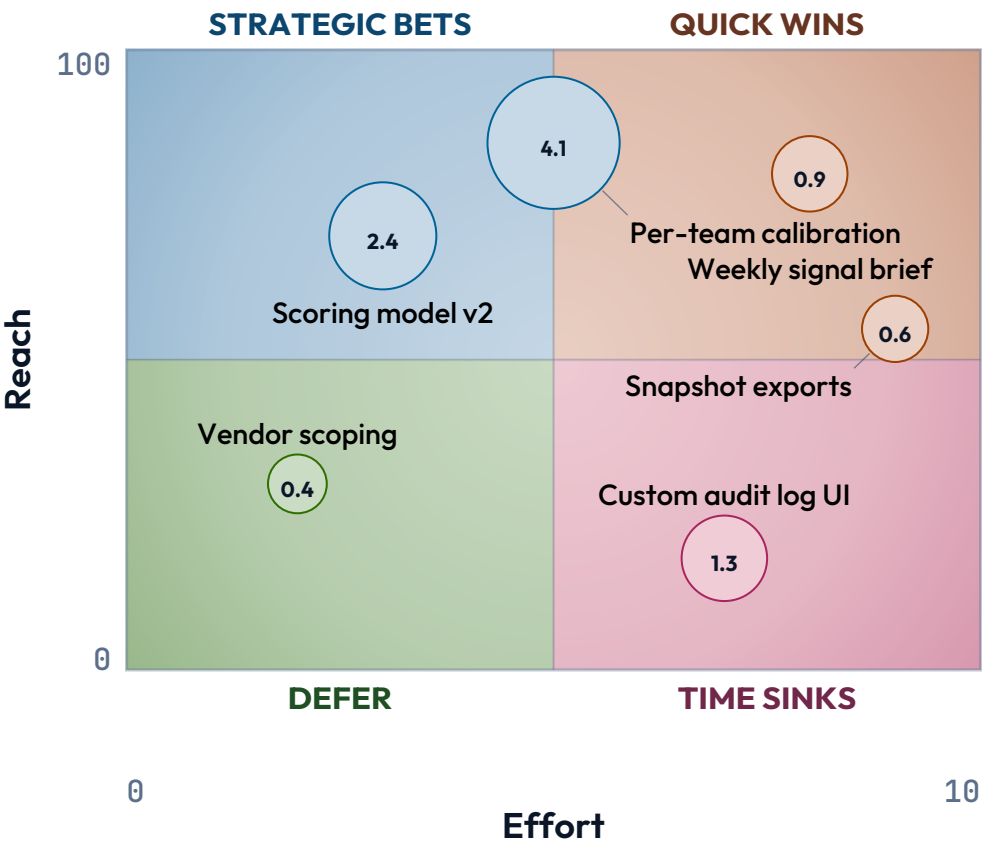

trail shows where each point moved from.

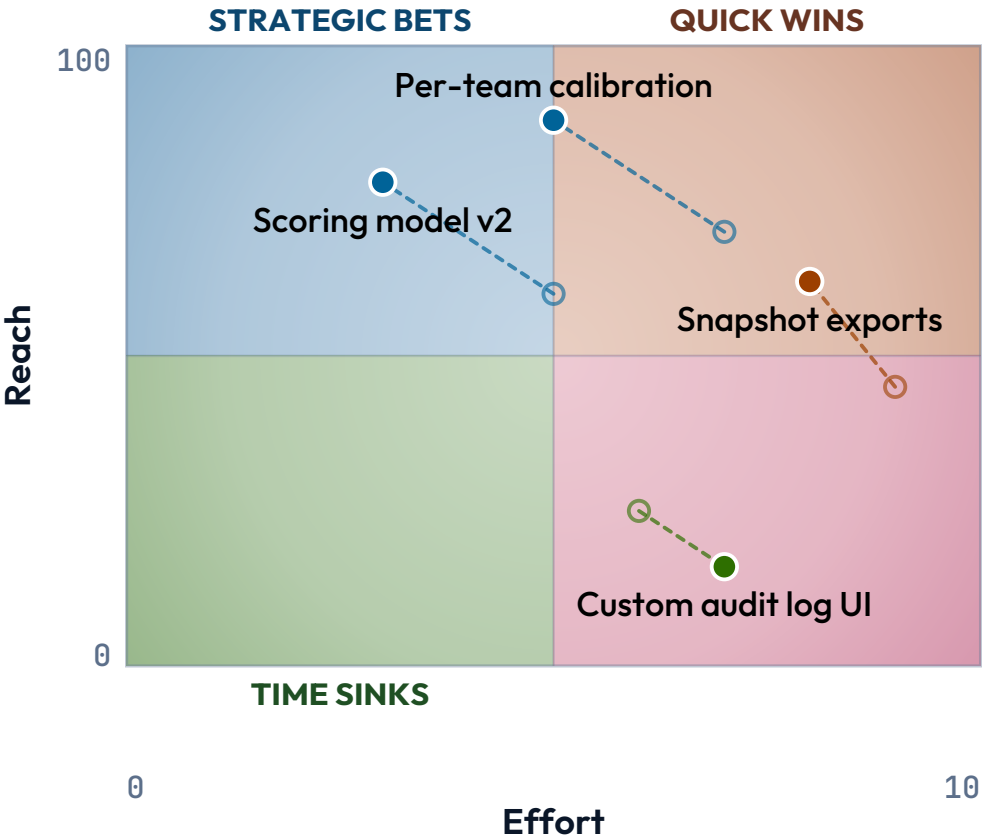


cohort colors the points by group.




Strategic Bets	2
Quick Wins	2
Defer	2
Time Sinks	2


threshold draws the lines that matter.

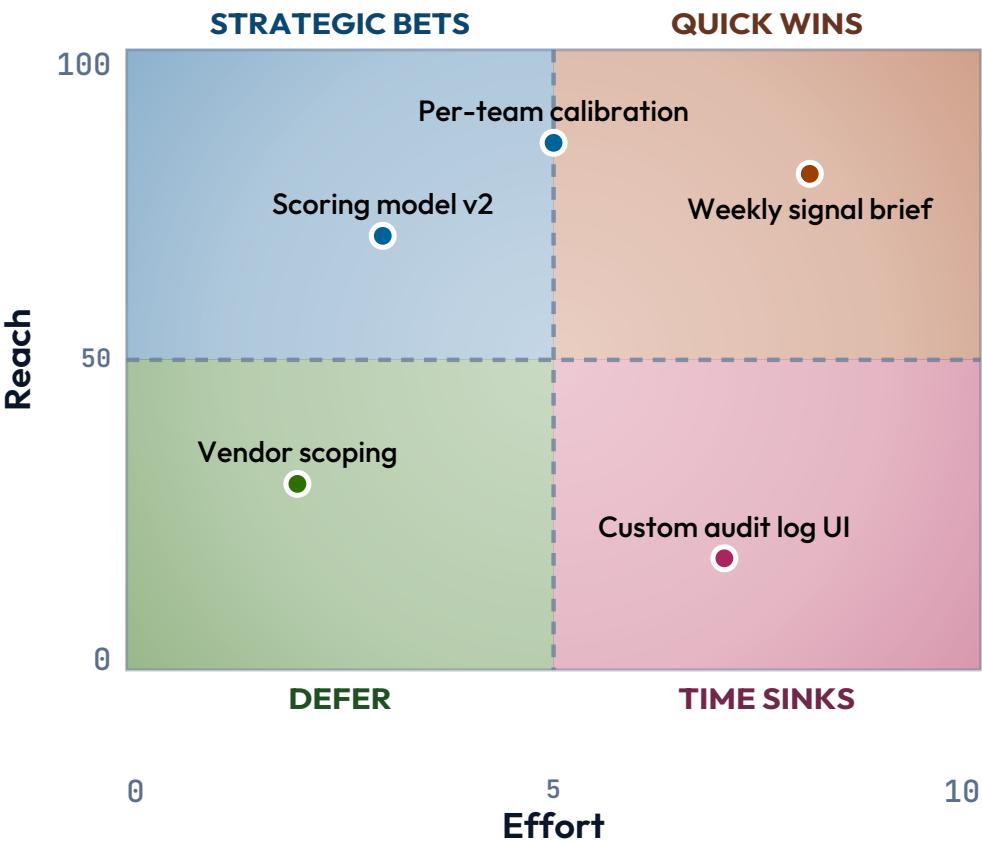


magic names all four quadrants.

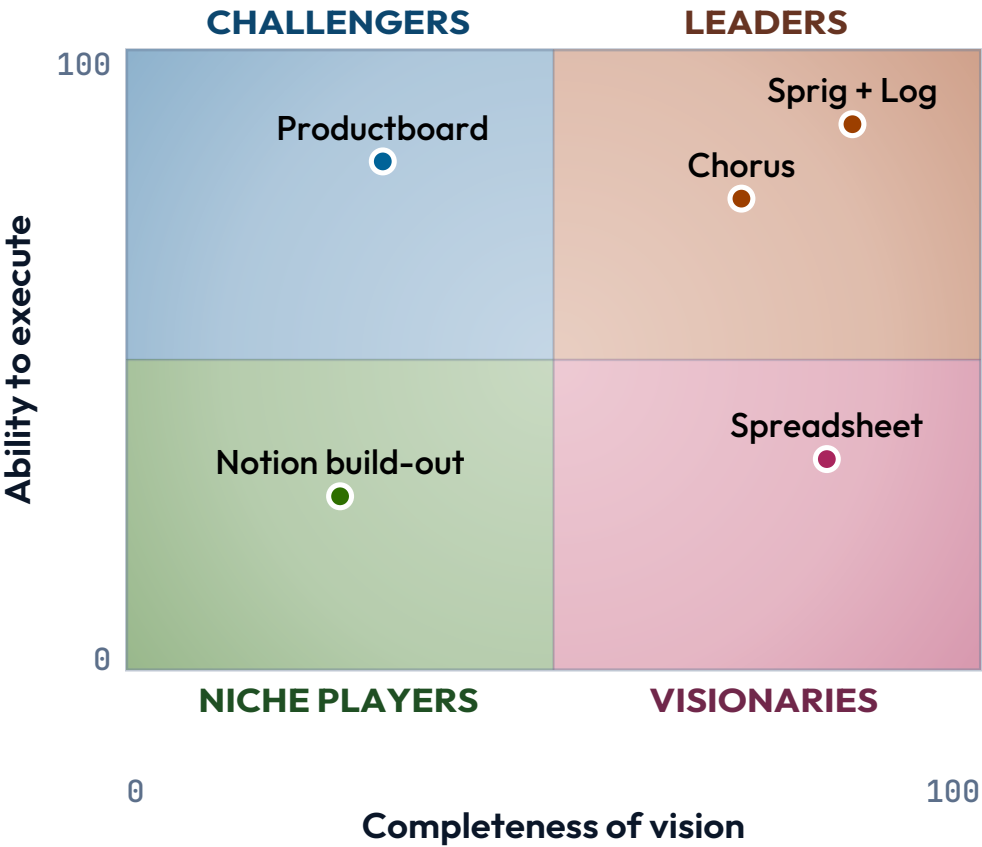

minimal strips the chart to its points.

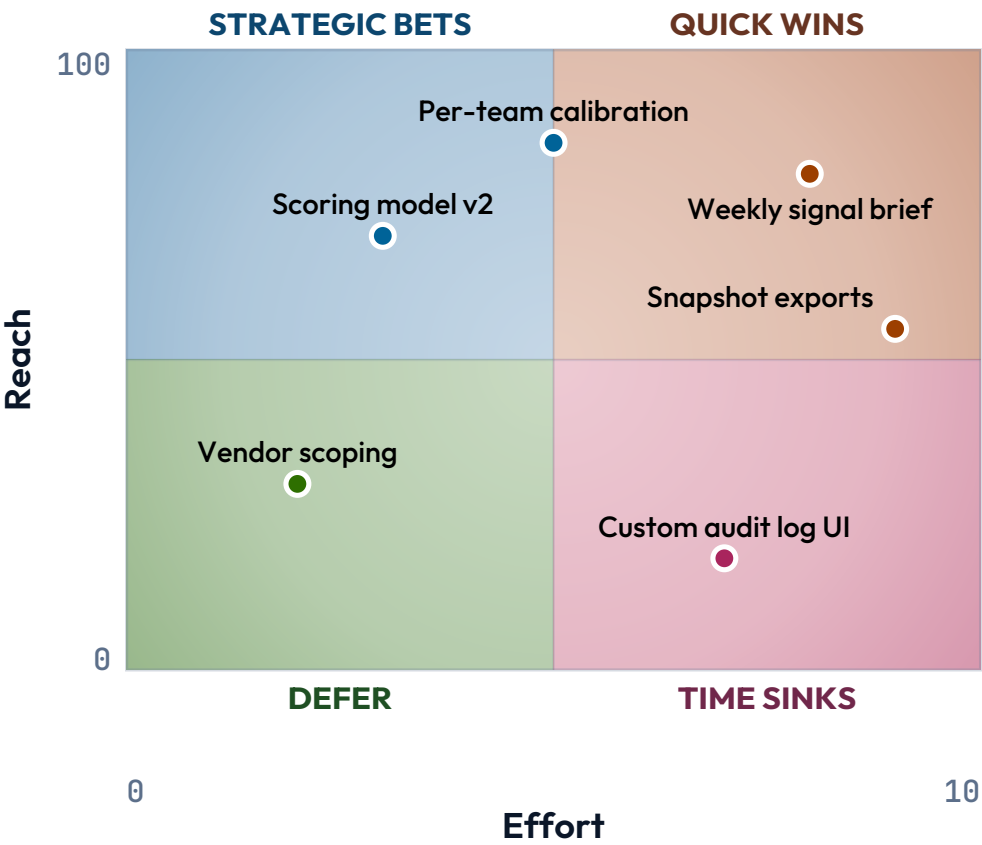

Stress test — fourteen initiatives, dense labels, one owner.

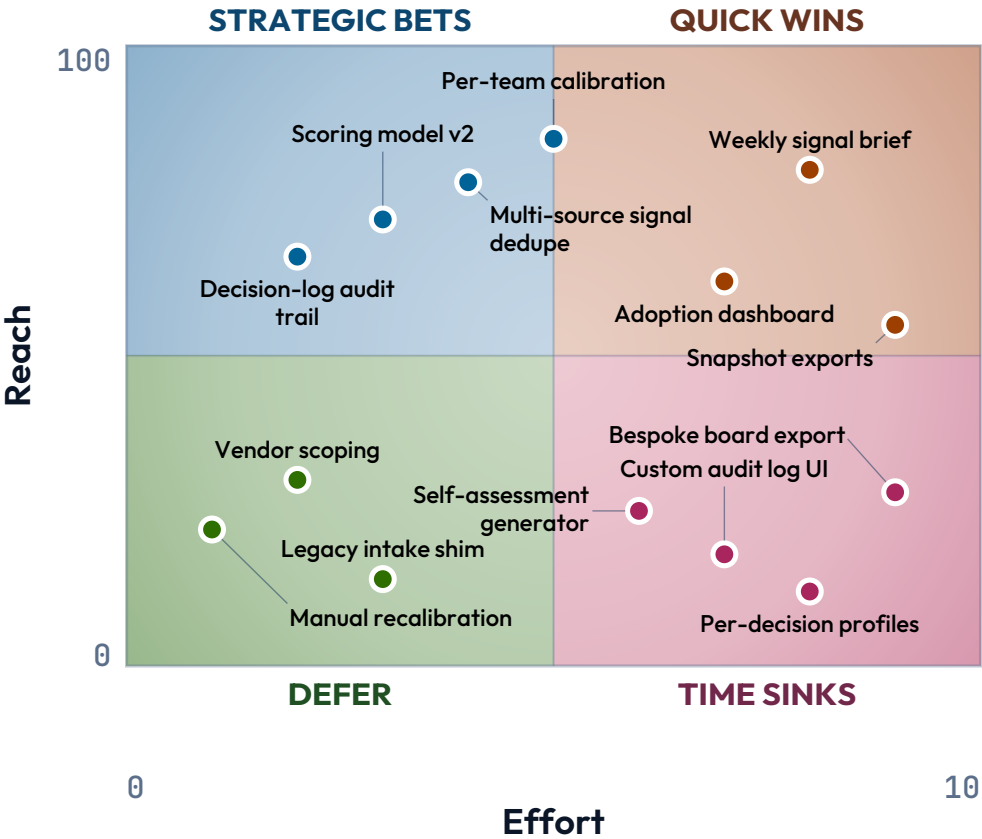


The quadrant scatters items on two axes.

Effort in analyst-weeks; reach as the percent of teams that would adopt it, optimistically.




The quadrant scatters items on two axes.

Effort in analyst-weeks; reach as the percent of teams that would adopt it, optimistically.

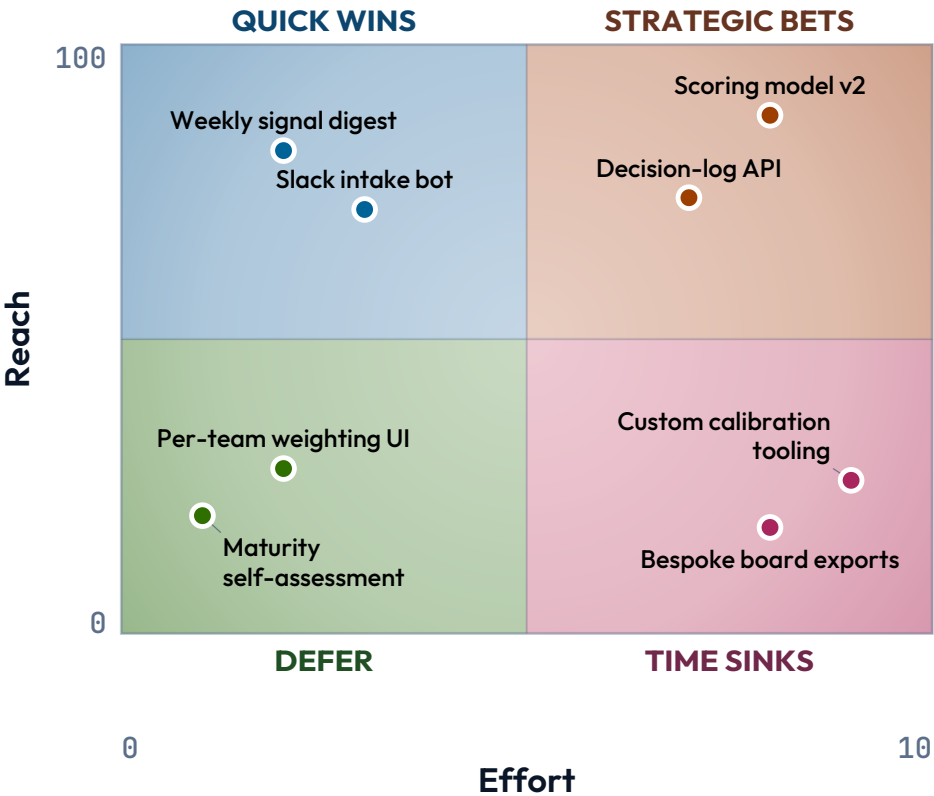

The quadrant scatters items on two axes.

Effort in analyst-weeks; reach as the percent of teams that would adopt it, optimistically.

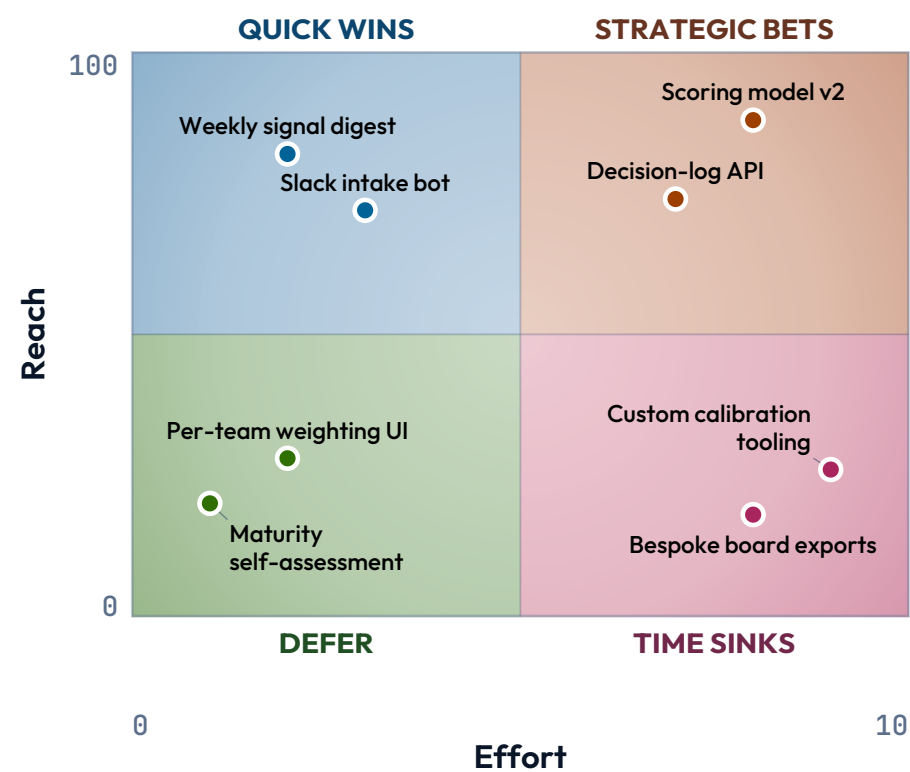

When NOT to reach for quadrant.

Static categorical 2×2

If the quadrants are fixed labels (Important × Urgent, Build × Buy × Partner × Defer) and items are placed by category not coordinate, use `matrix-2x2`. `quadrant` is data-driven; `matrix-2x2` is conceptual.

Single axis matters

If one axis is decorative and only the other carries meaning, you have a ranking, not a scatter. Use `progress` for percent-complete or `kpi` for ranked metrics with status.

When NOT to reach for quadrant.

Coordinates without an audience-shared scale

If `{8, 80}` requires a footnote to interpret, the slide doesn't pay off. Either give each axis its domain in the axis list — the `[{Effort, 0..10}, {Reach, 0..100}]` line above every slide here — or normalize to a familiar scale before authoring.

RELATED COMPONENTS

See also.

`matrix-2x2` — the 2×2 is categorical, not coordinate-based

`radar` — items rated across more than two criteria

`progress` — percent-complete on a single axis

`piechart` — part-to-whole, not bivariate position

`verdict-grid` — comparing options against shared categorical criteria