


PROGRESSION · TIMELINE · STRUCTURE

# journey


Native user-journey chart — sections of tasks, each tagged with actor(s) and a 1-5 mood.

Renders as section bars, task chips, plumb lines, and mood faces.


# The journey scores each stage of the path.

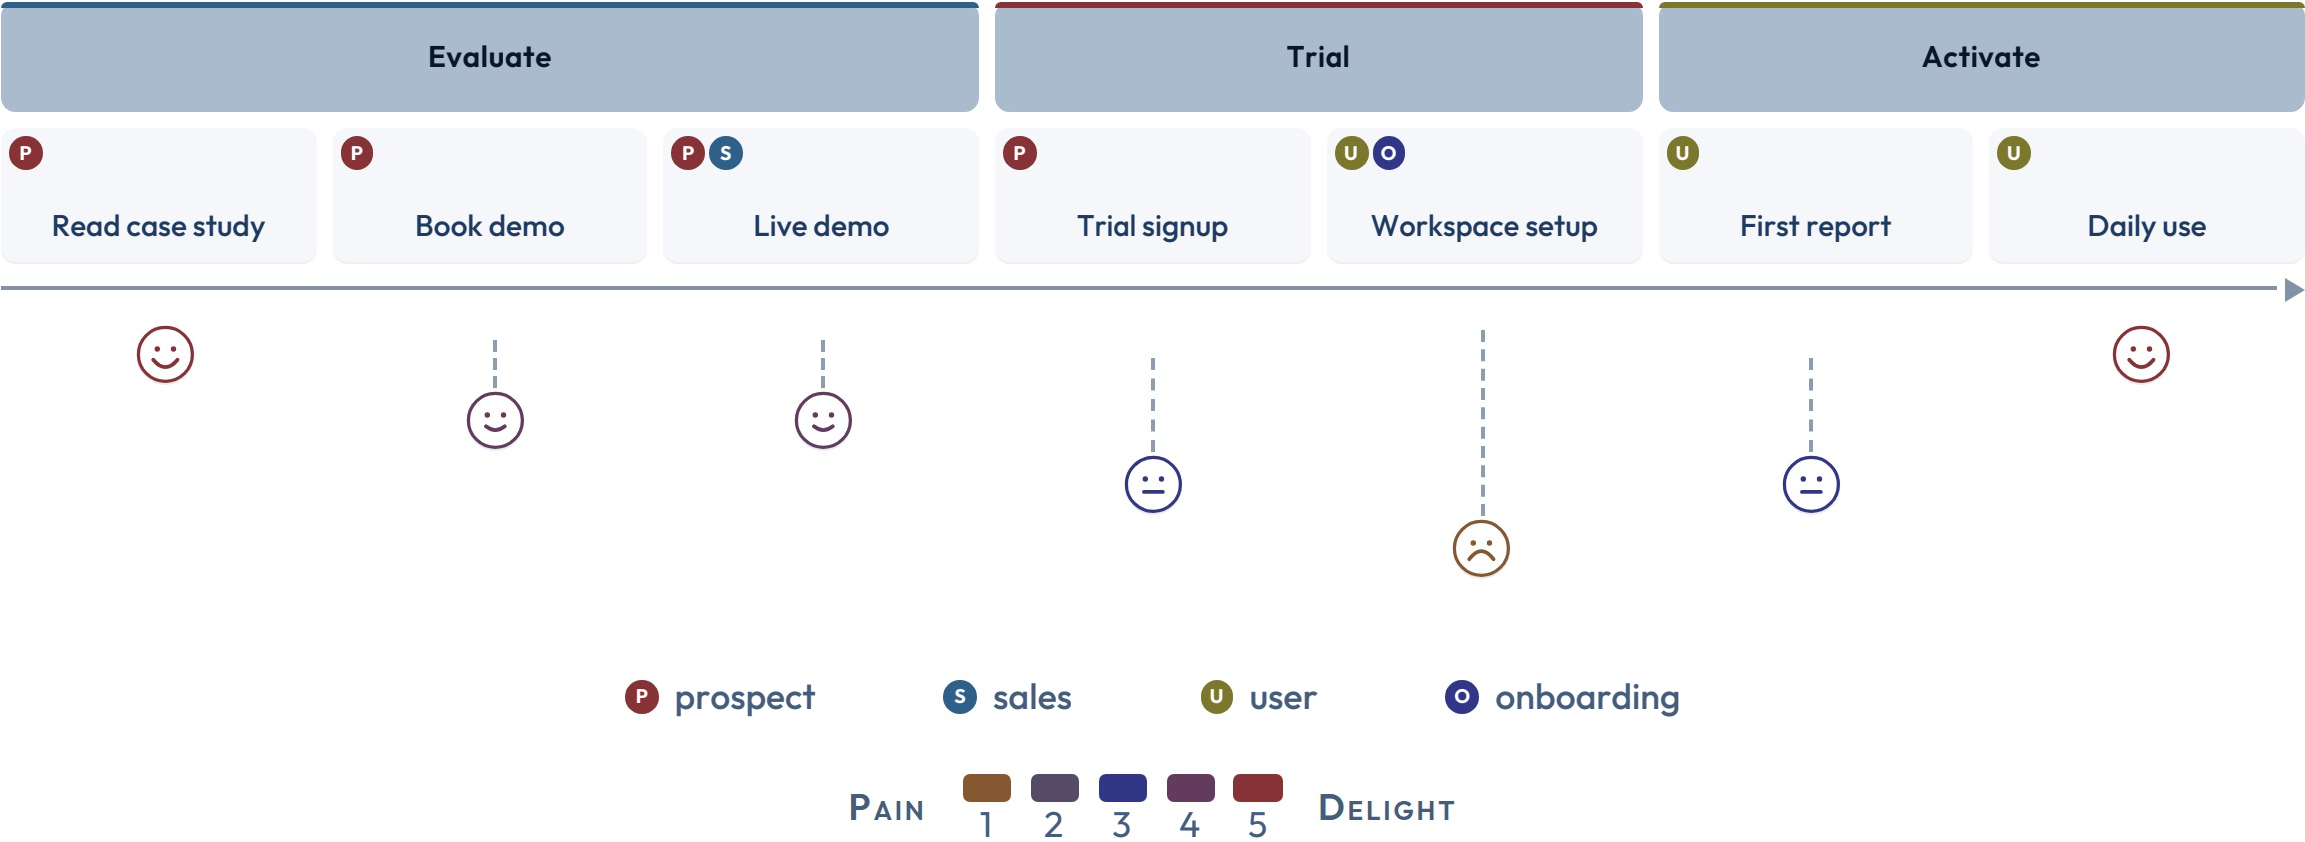


# heatmap shades the stages by score.

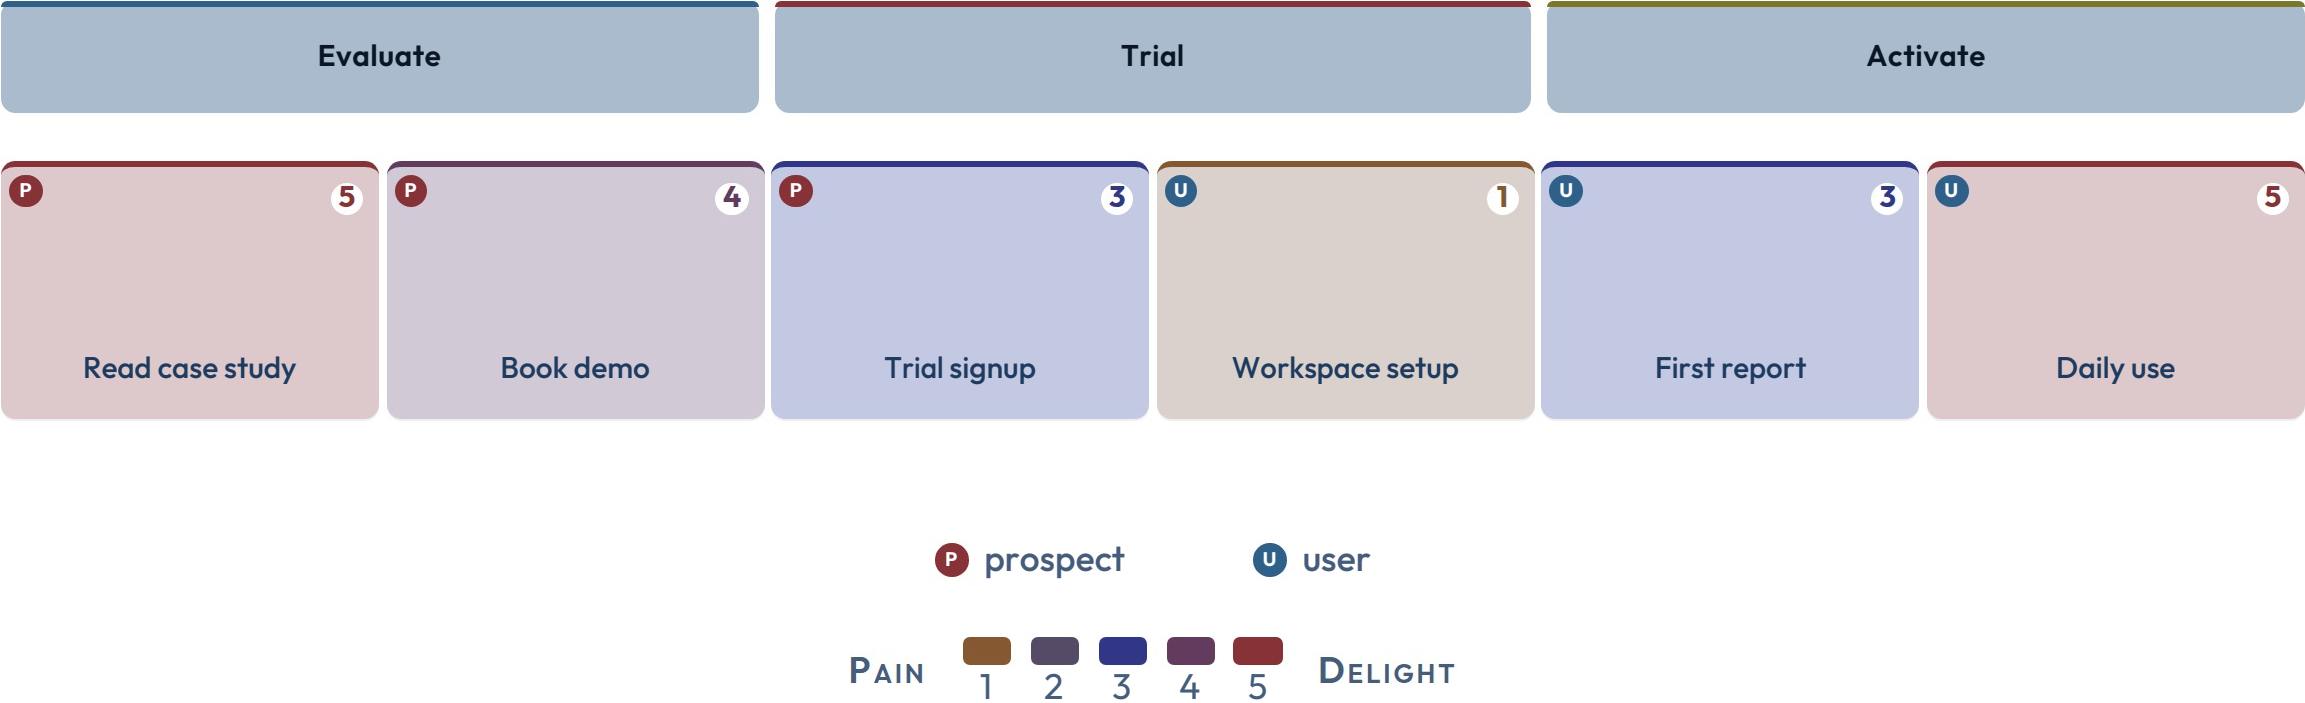


# curve draws the sentiment line.

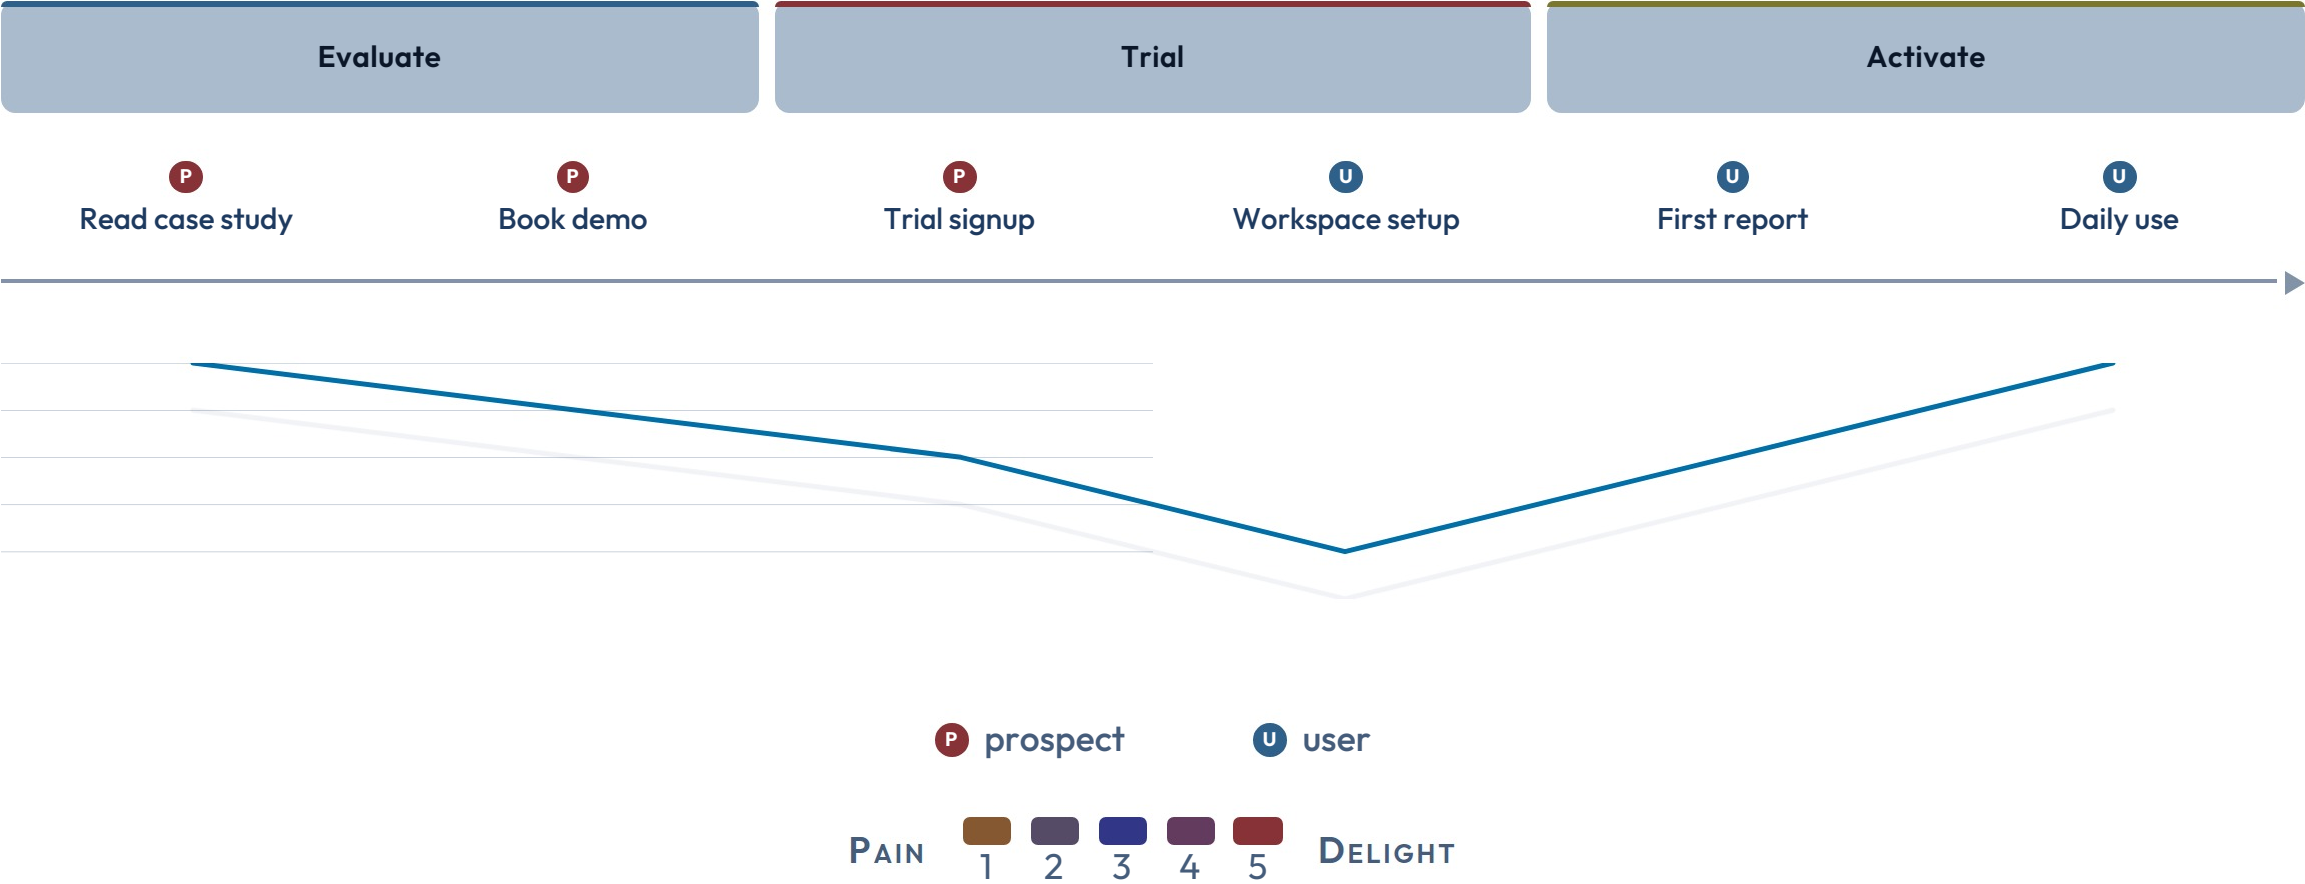


# swimlane splits the journey by actor.

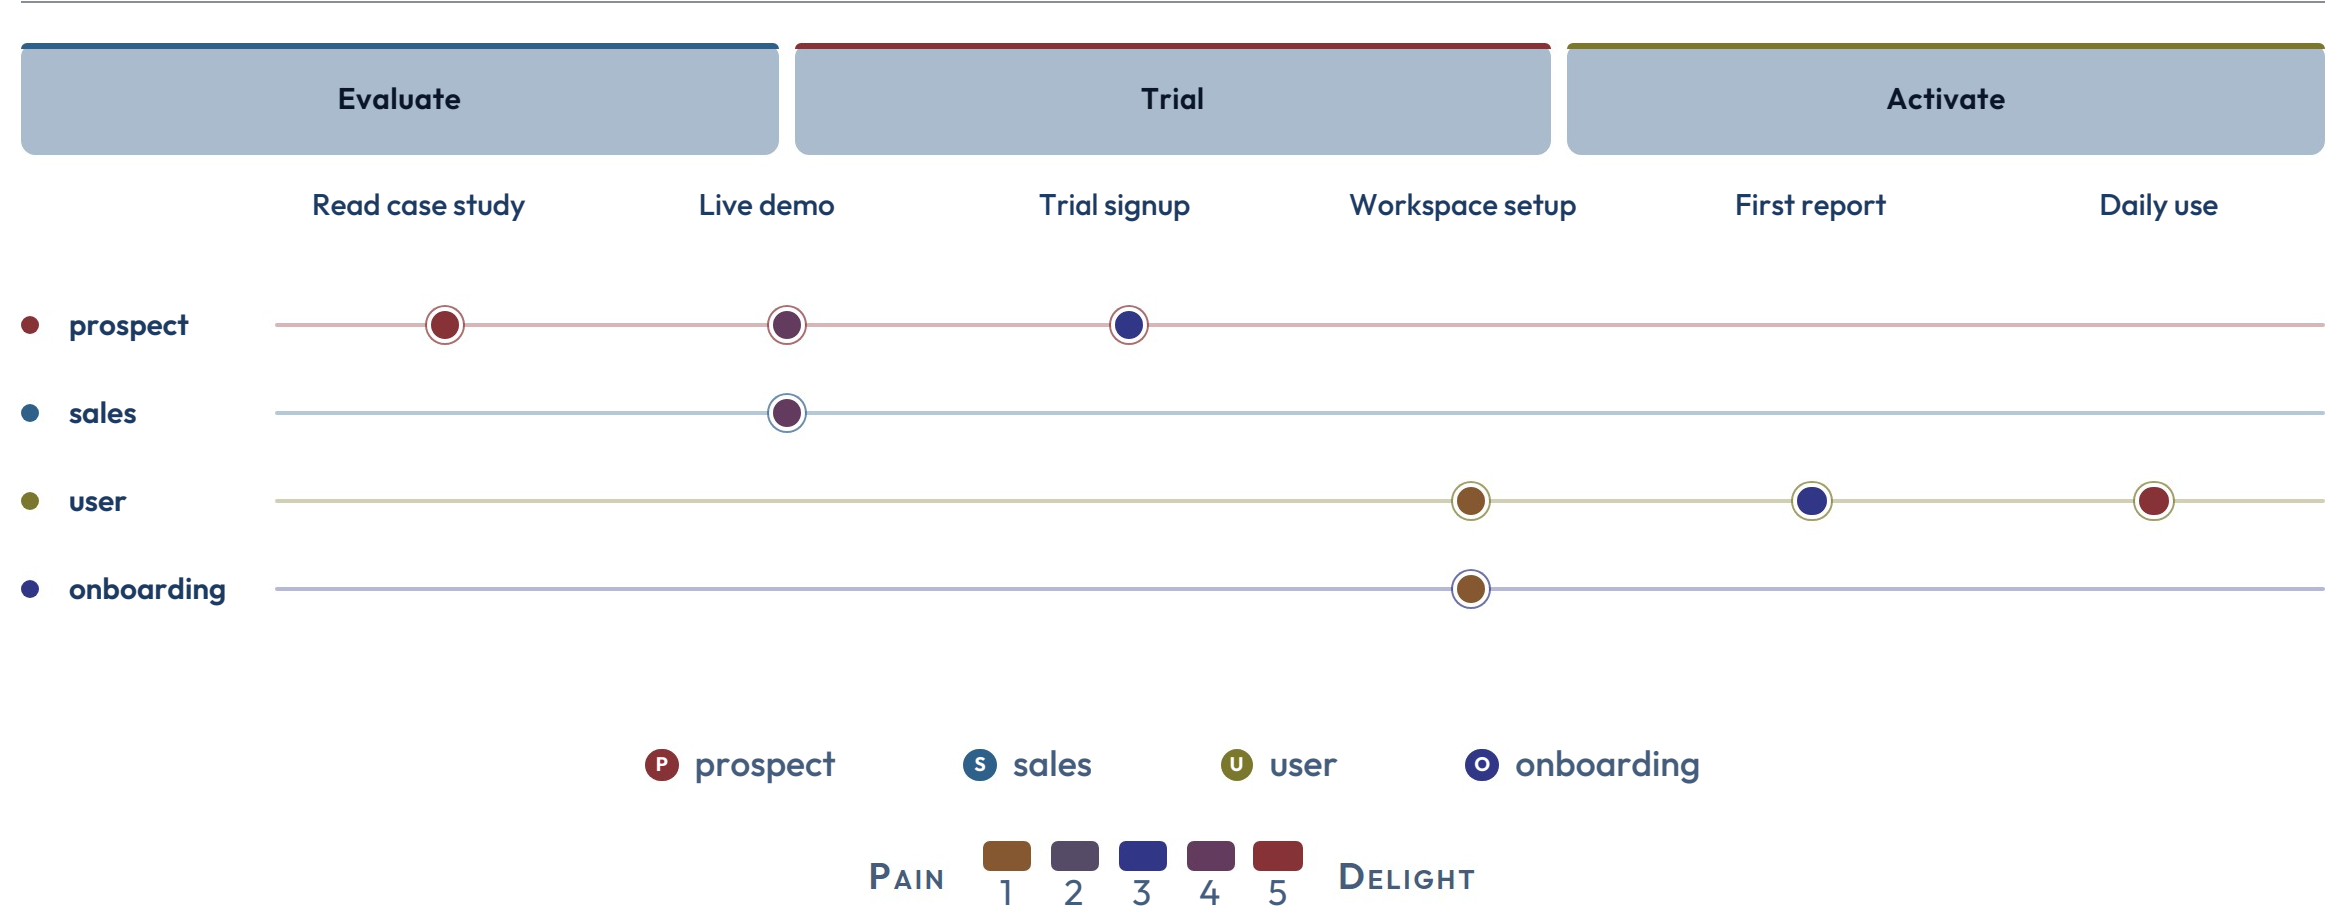


# weighted sizes the stages by importance.

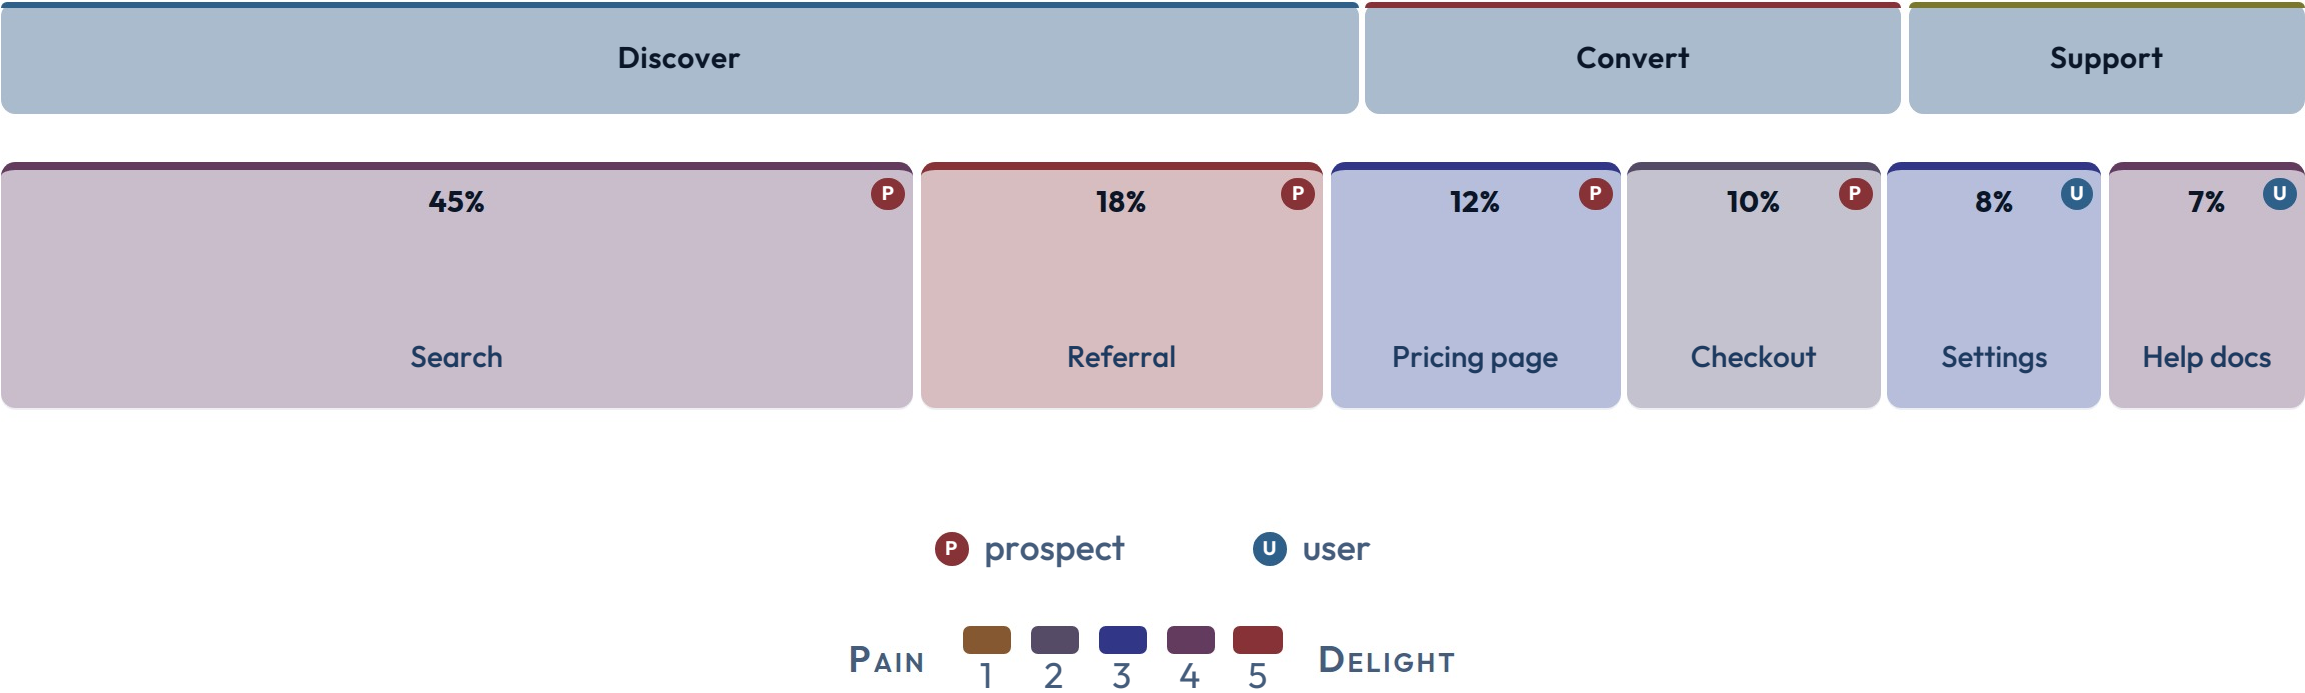


# Five stages of twelve tasks is the ceiling.

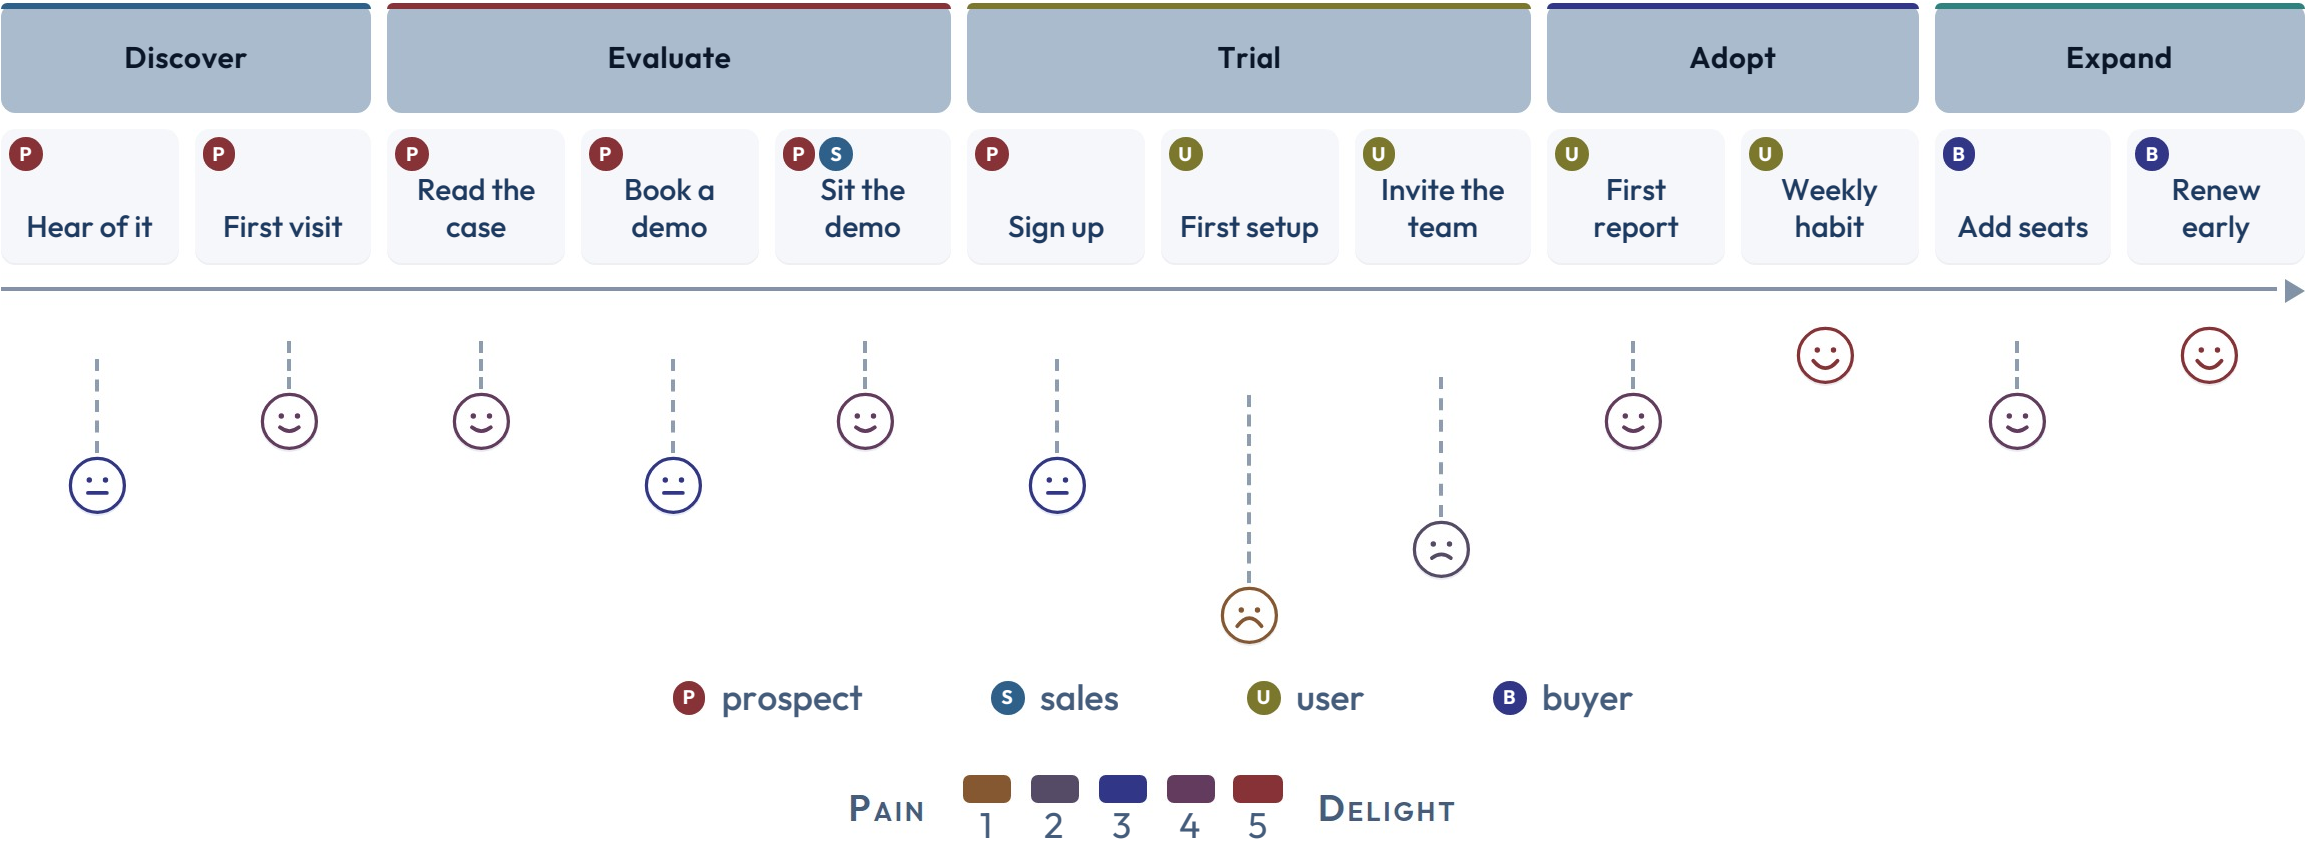


# The journey scores each stage of the path.

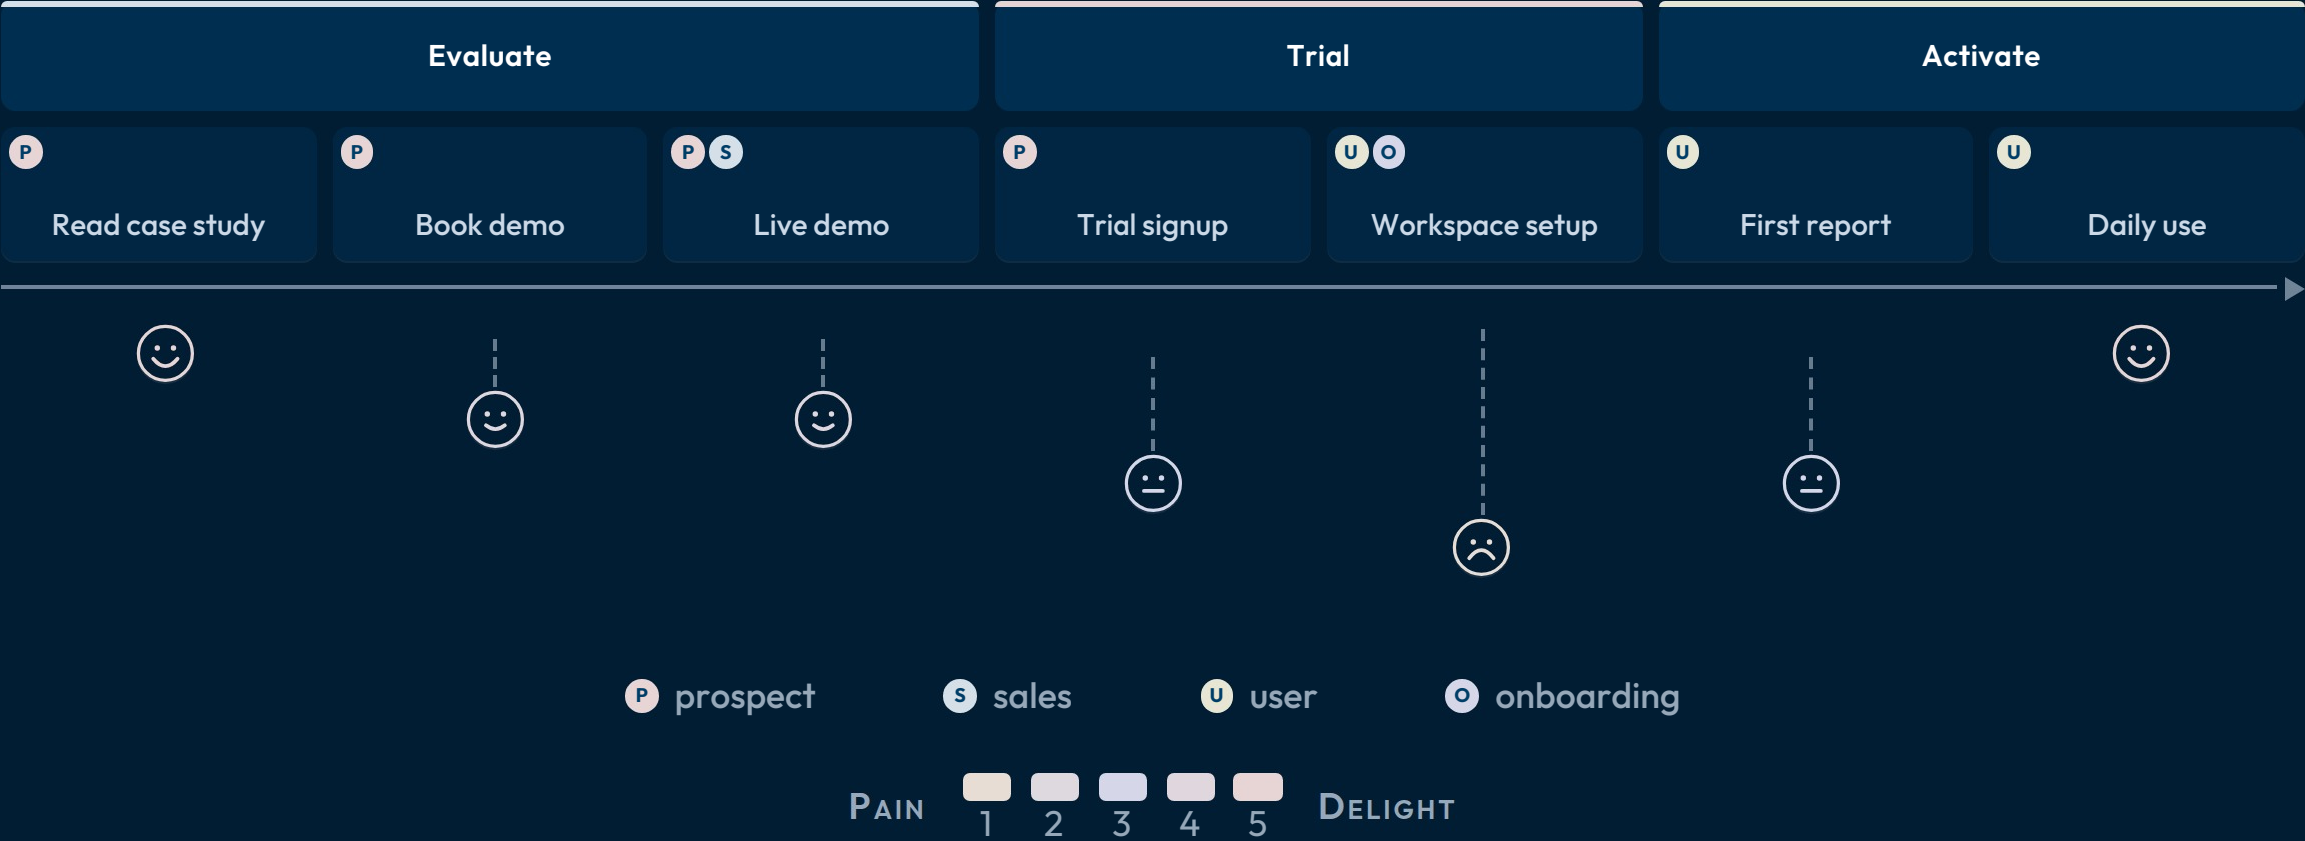

# The journey scores each stage of the path.

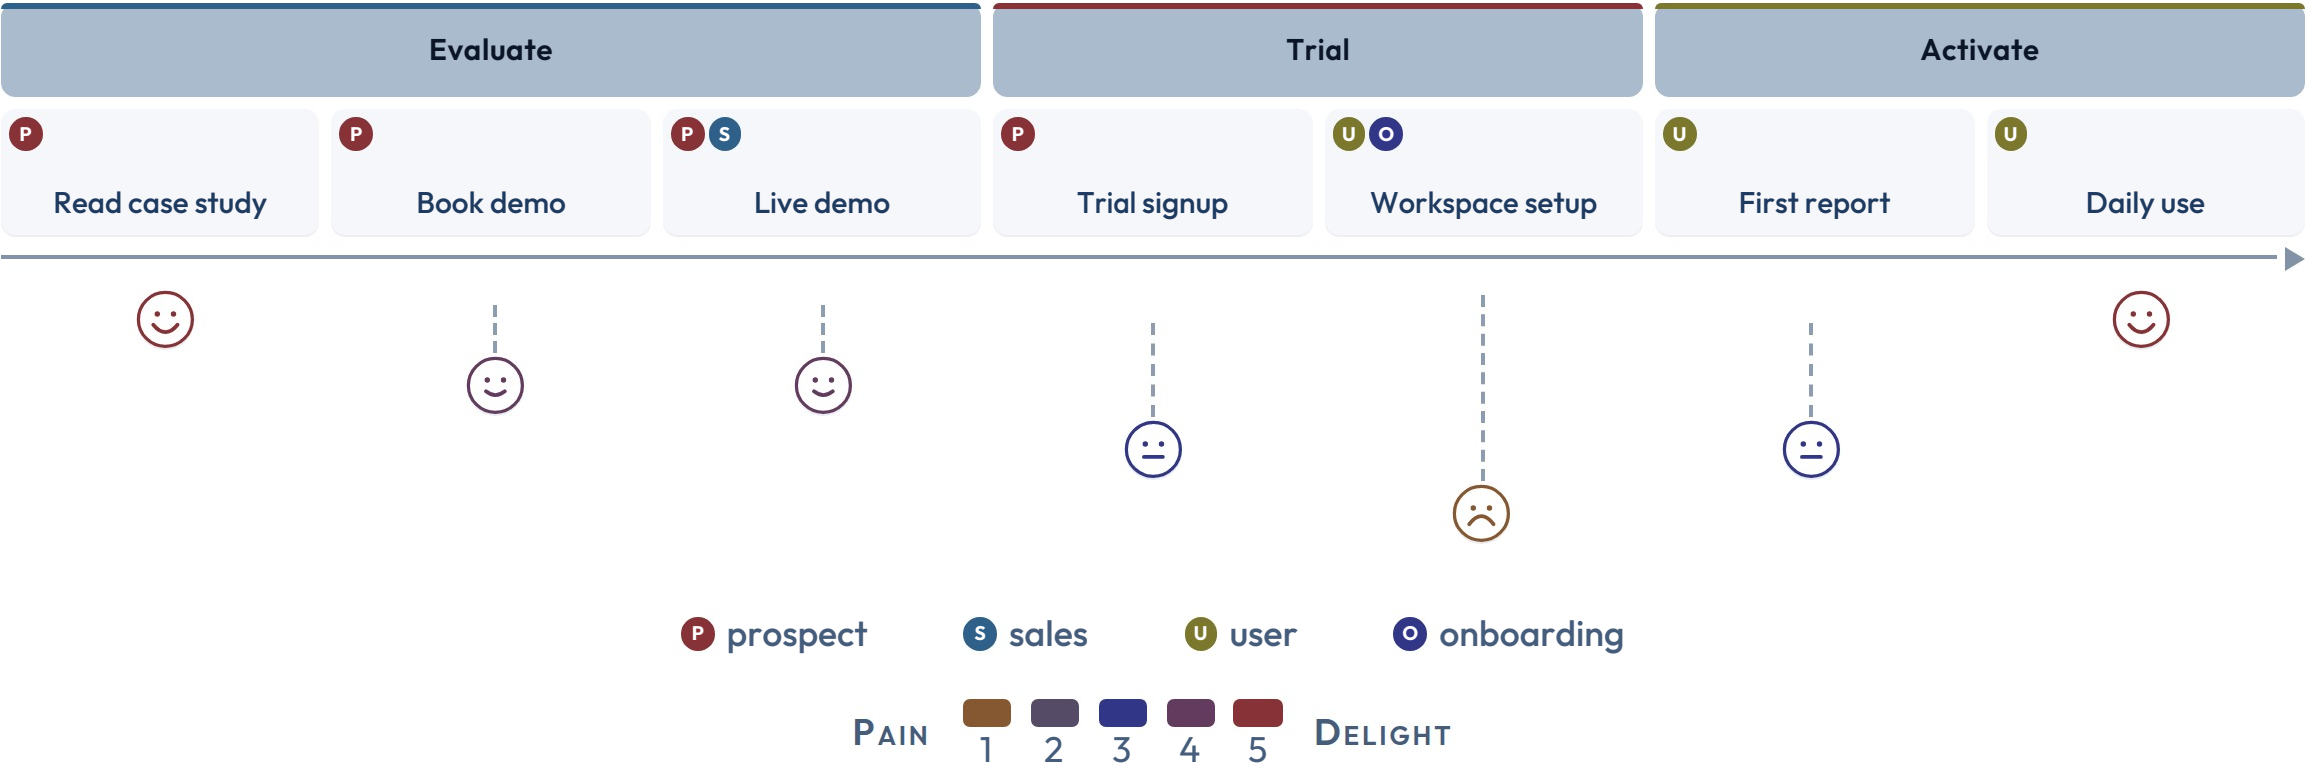

# The journey scores each stage of the path.

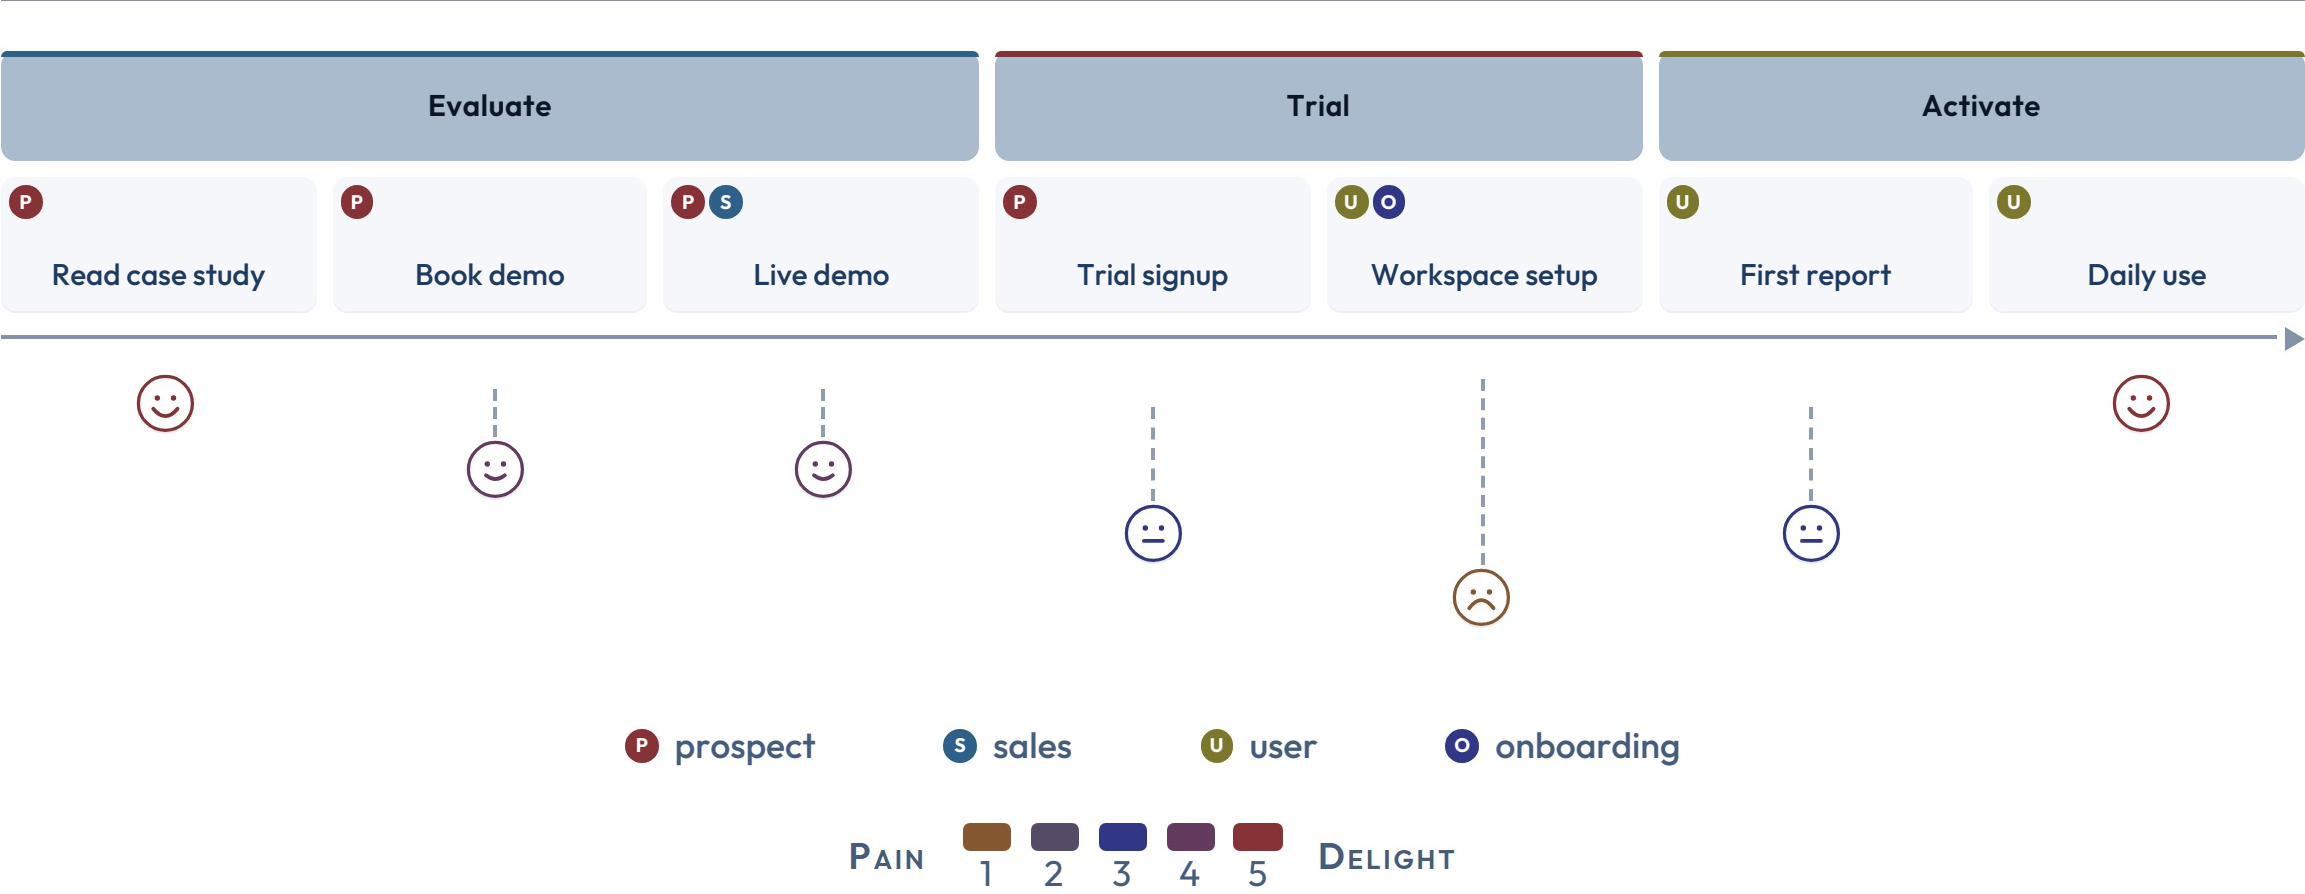

# When NOT to reach for journey.

## Process without affect

If the mood scores are all the same or arbitrary, the chart is doing less work than `timeline` or `list-steps`. Reserve journey for sequences where the affect changes meaningfully.

## More than ten tasks

Past ten tasks the chips compress and the labels become unreadable. Group into fewer sections, or split the journey at a natural break.

## Volume tokens without weighted

The `+N` volume token is meaningful only under the `weighted` variant. On the other four it is parsed but invisible — strip it from the markdown or commit to weighted.

RELATED COMPONENTS

# See also.

`list-steps` — process needs descriptive body per step, no chart

`gantt` — schedule of overlapping tasks across lanes

`kanban` — current status by stage rather than sequence over time