

FUNNEL • MAP • QUADRANT • SPEAKER-NOTES CHANNEL

# Per-mark detail, across the chart family.

The pie's authored-detail pattern now generalizes. A funnel stage, a map region, or a quadrant item can each carry an indented sub-list. On screen it reveals on hover/tap; in the exported PDF it rides the slide's **speaker note** — the chart pixels stay byte-identical.


# One source, two surfaces.

---

The sublist under a mark powers **both** the present-mode reveal popover **and** the static-PDF speaker note. One shared substrate (`mark-detail.js`) tags each mark with `data-mark`, emits an inert `<template class="chart-detail">`, and folds the same detail into the slide note. Open this PDF's note annotations to read each mark's detail.


# Where deals leak out of the funnel.

*The bands show the drop-off; the notes carry the why.*

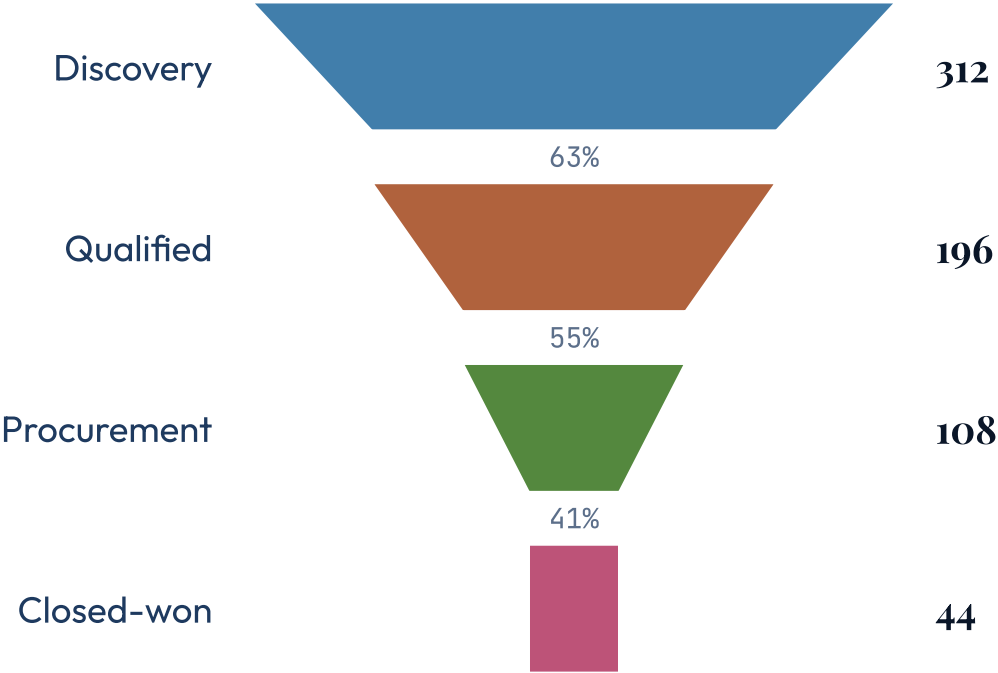

# Where the program runs.


*Hover a region on screen; read the note in the PDF.*

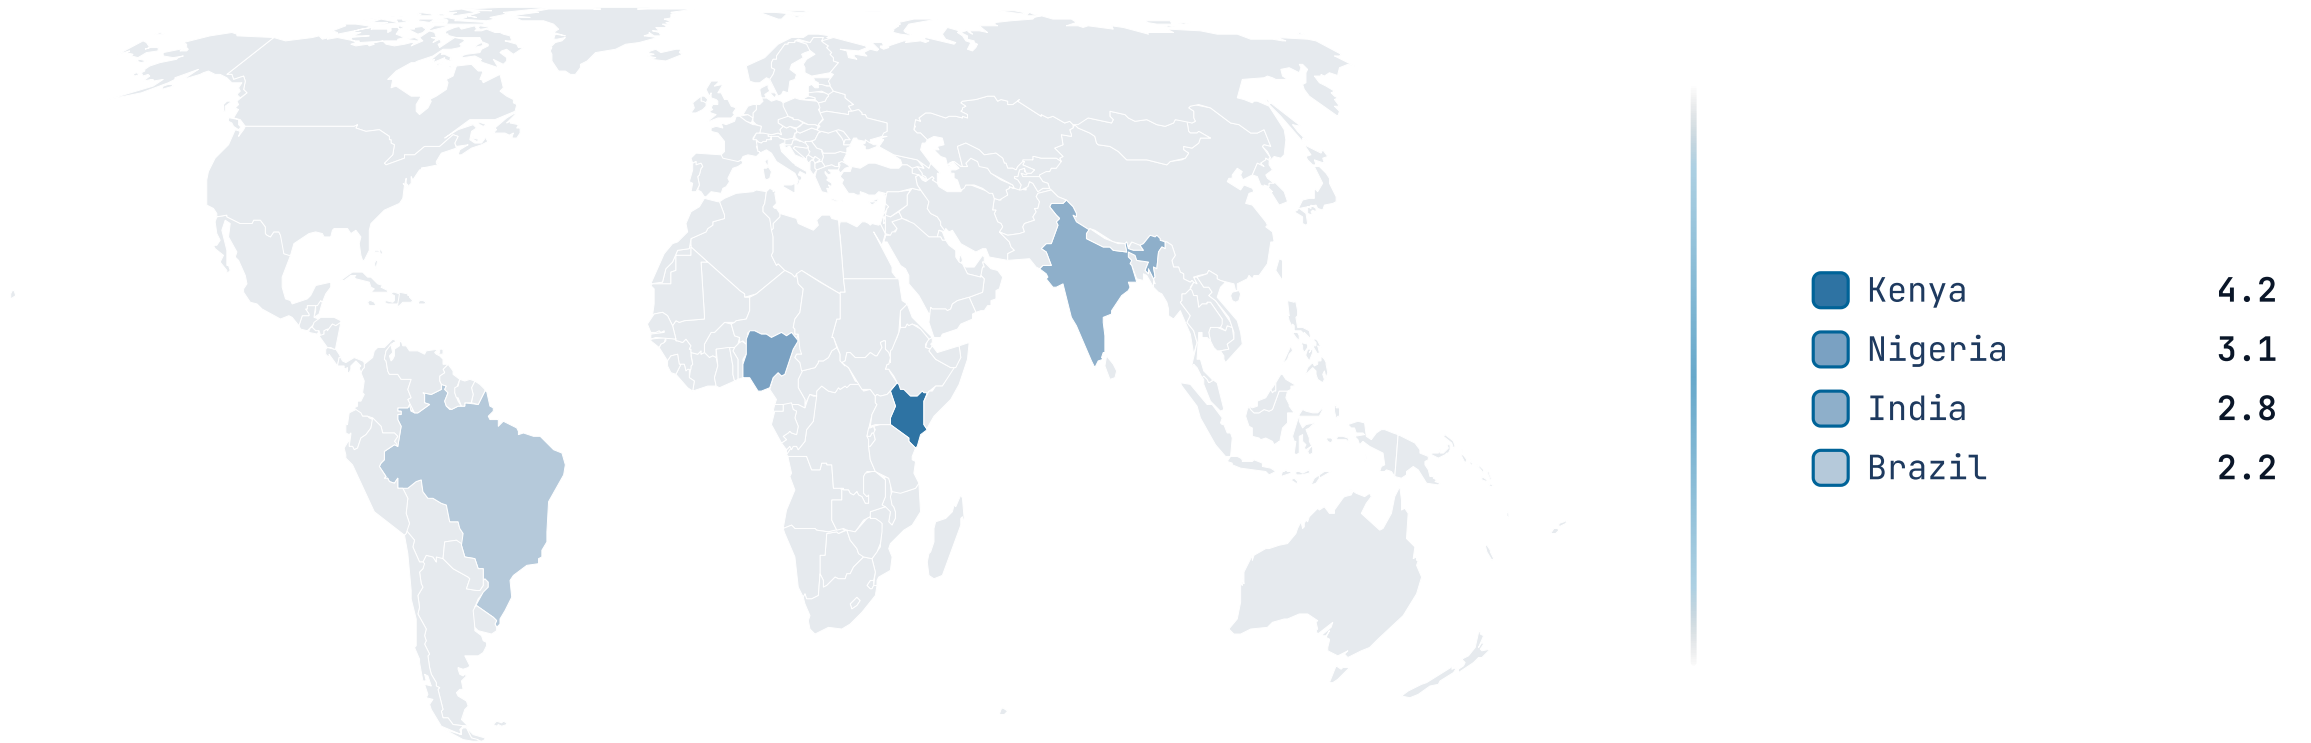

EFFORT 0-10 → REACH 0-100

# Where to put the next dollar.


*Each dot carries its own rationale in the note.*

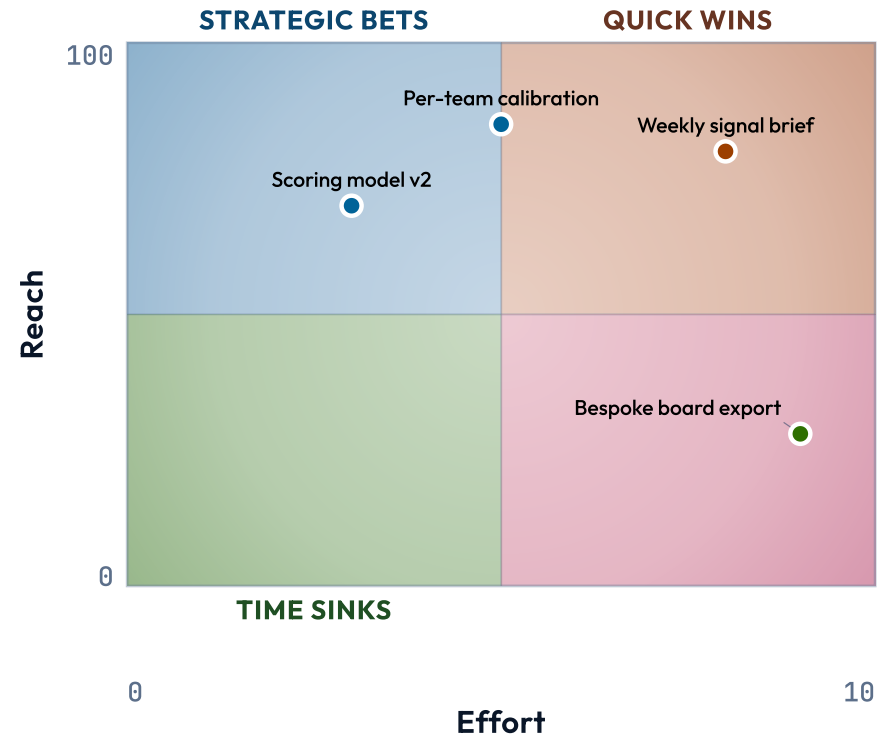

CAPABILITY • 0-100

# Where the team is strong, and where it isn't.

*Radar reveals **per-axis** — each dimension carries its own note.*

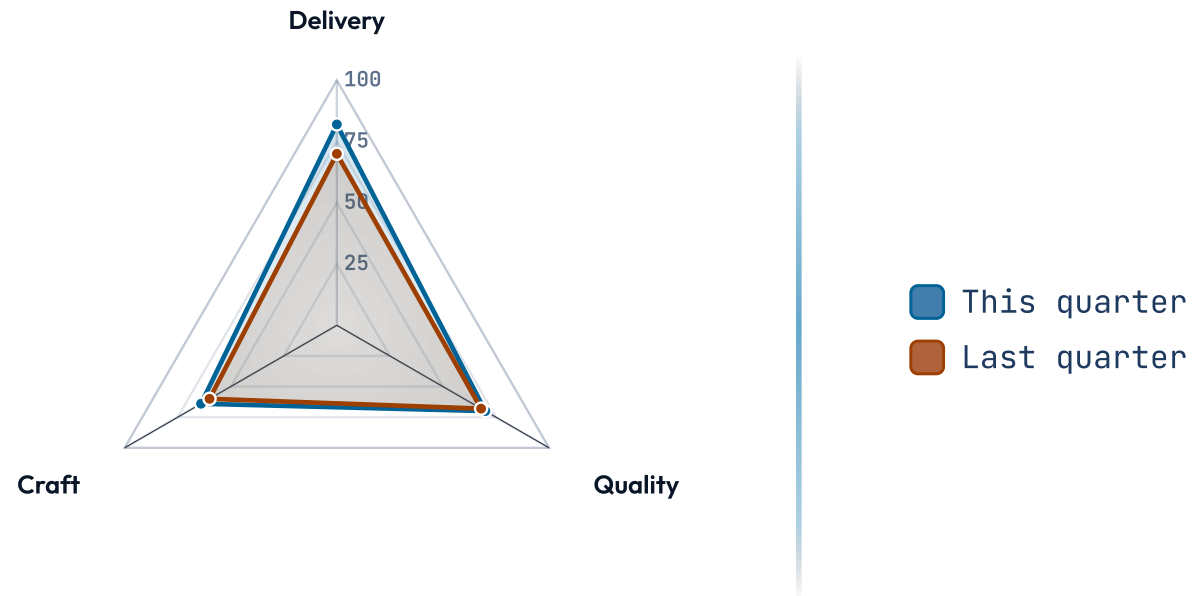


ONBOARDING • 1,000 SIGNUPS

# A plain funnel is unchanged.

*No sublists here — so this chart emits **no note** and exports exactly as a plain funnel always has, byte-for-byte.*

---

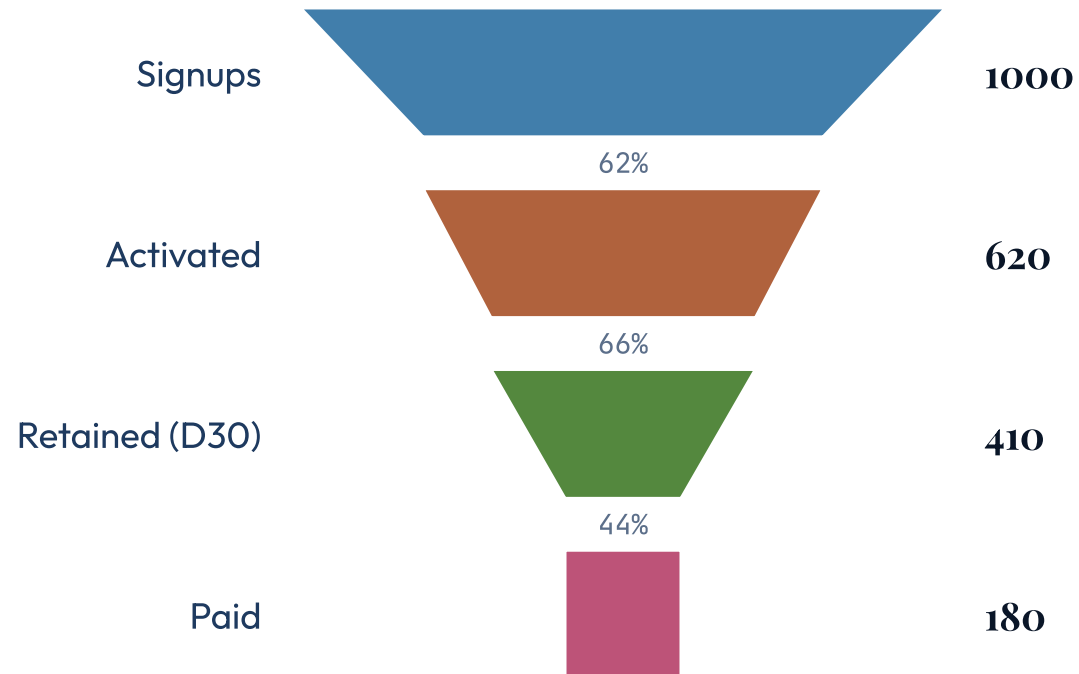

OPEN THE ANNOTATIONS

# Read the notes.

The detail never crowds the boardroom slide — it waits in the speaker-notes channel for the reader who wants it, and on screen it lifts to life on hover.