


MERMAID XYCHART-BETA NARRATION

# Read-aloud that reads the bars.

*The first tier-2 Mermaid type. An xychart's meaning is its authored values on named axes — so read-aloud names the chart, states the scale the author set, and reads each series' value against its x category, exactly as the chart plots them (design 2026-07-15 §18).*

01 · A VALUE ON EVERY CATEGORY

Each bar reads against its label.

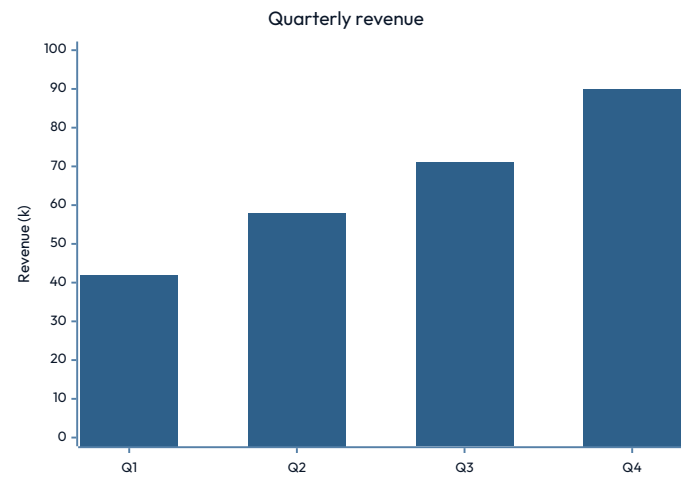


KEY INSIGHT

The reading names the chart, states the scale the author set, then walks each value against its category: "A bar chart, Quarterly revenue. The y-axis, Revenue, runs zero to one hundred. The bar series: Q1, forty-two; Q2, fifty-eight; Q3, seventy-one; Q4, ninety."

## 02 • BARS AND LINES, EACH NAMED

## A titled series speaks its own name.

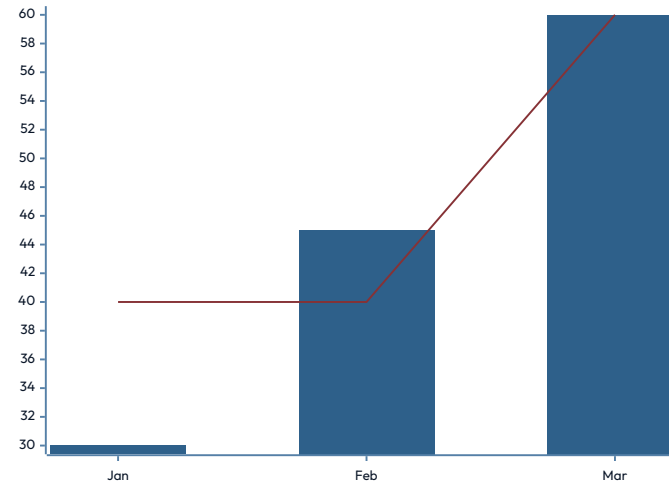


### KEY INSIGHT

When a series carries a title, the reading uses it — "The Actual series...", "The Target series..." — so a listener can tell the plotted bars from the goal line by name, not by guessing which came first. Both are read against the same months.

03 • THE SCALE THE AUTHOR SET

Axes read by role, never by direction.

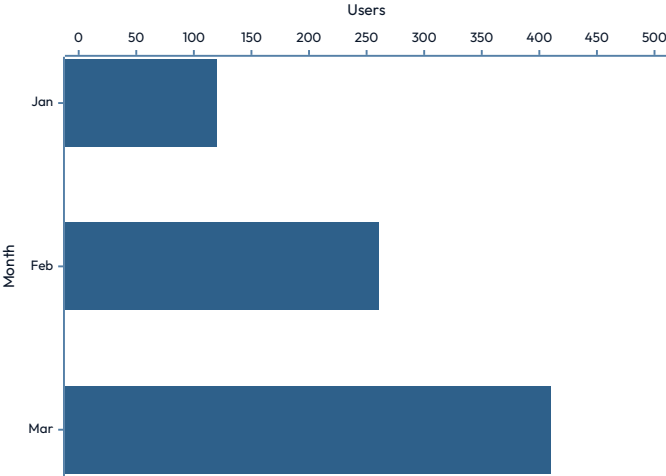


KEY INSIGHT

A `horizontal` chart swaps the bars visually, so the reading never says "horizontal" or "vertical" — those flip. It names each axis by its fixed role: "The x-axis is Month. The y-axis, Users, runs zero to five hundred." The values still pair to their months, whichever way the bars point.

## 04 • WHEN IT'S A LOT

## A long line becomes its shape.

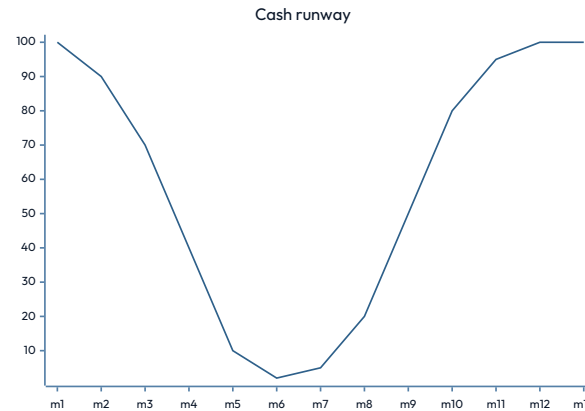


### KEY INSIGHT

Thirteen values read one after another would drown a listener — and a single "peaks at one hundred" would hide the crash to two that is the whole story. So past a dozen points the reading gives the *shape*: "A line chart, Cash runway, summarizing thirteen points. The line series starts at one hundred, ends at one hundred, with a high of one hundred at m1, m12, and m13 and a low of two at m6." The trough is never lost.

## 05 • A NUMERIC AXIS, STILL ANCHORED


## Values on a range get "point" anchors.

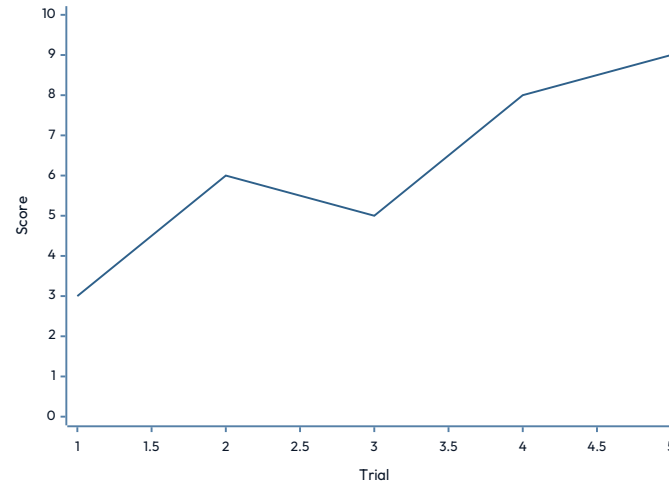**KEY INSIGHT**

When the x-axis is a numeric range rather than a list of labels, each value would otherwise read as a bare number with nothing to hold onto. So the reading anchors every one to its position: "The line series: point one, three; point two, six; point three, five; point four, eight; point five, nine."

06 · HONEST BAIL

A chart it can't read faithfully, it doesn't guess.

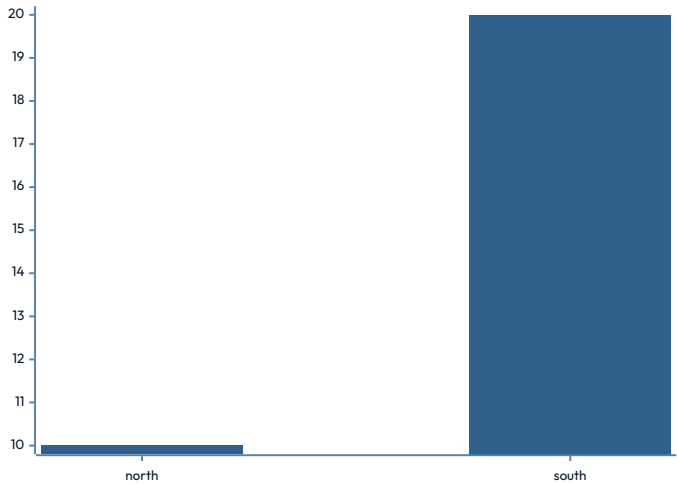

KEY INSIGHT

A small, well-formed chart reads in full — "The bar series: north, ten; south, twenty." But when the source is one Mermaid itself won't draw — an empty axis, a malformed range, a stray comma — the slide falls back to its heading rather than narrate a chart that never rendered. No value is ever read against the wrong label.

# The bars are spoken now.

*xychart-beta · chart kind + axes + per-series values ·  
categorical or numeric · read-aloud + exported captions*