
EVIDENCE · CANVAS · SERIES

scatter


An XY plot with real units on both axes — one dot per entity, showing how two measures relate.

The tools we pay most for are the ones nobody adopts.

Cost is the renewal we signed; adoption is the share of teams with a weekly active user.

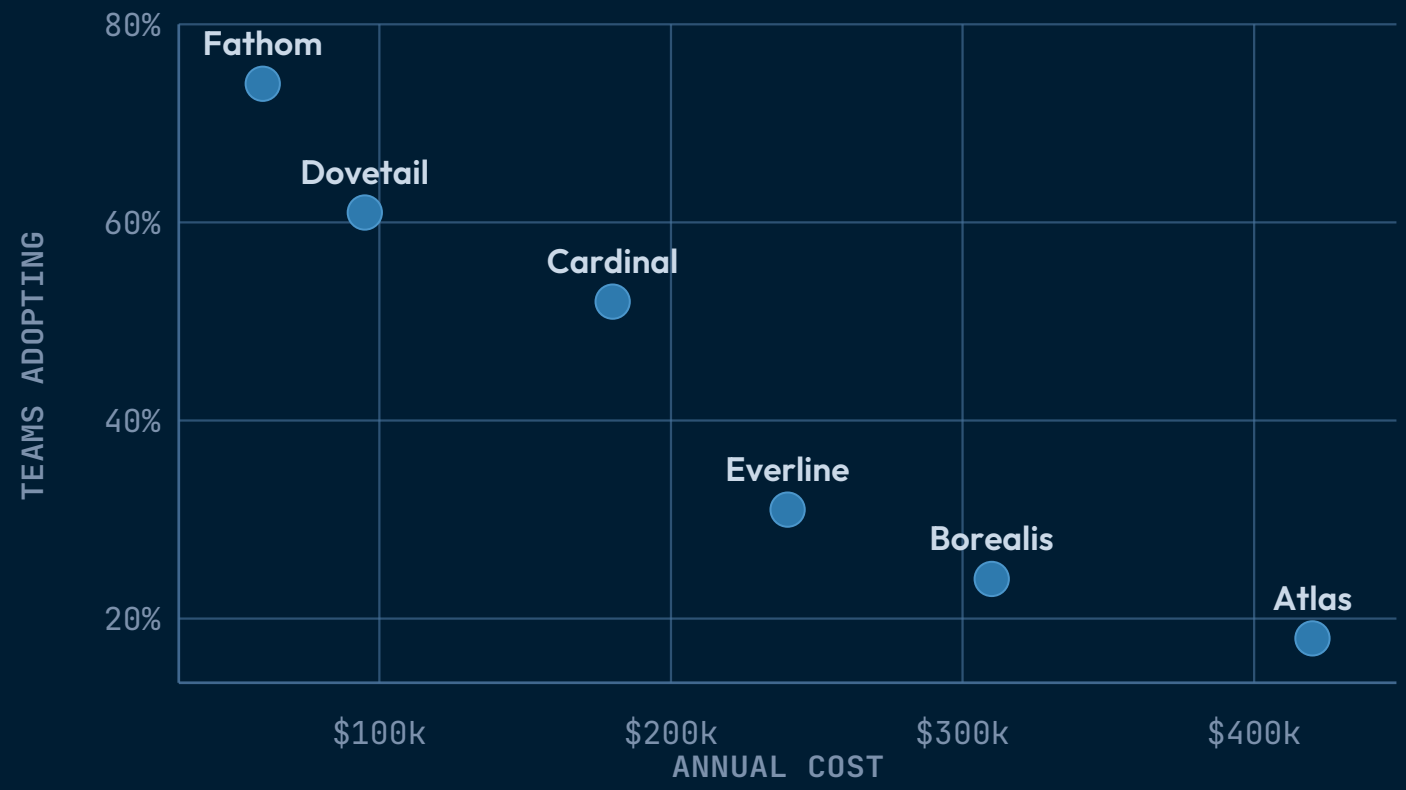


bubble sizes each dot by a third measure.

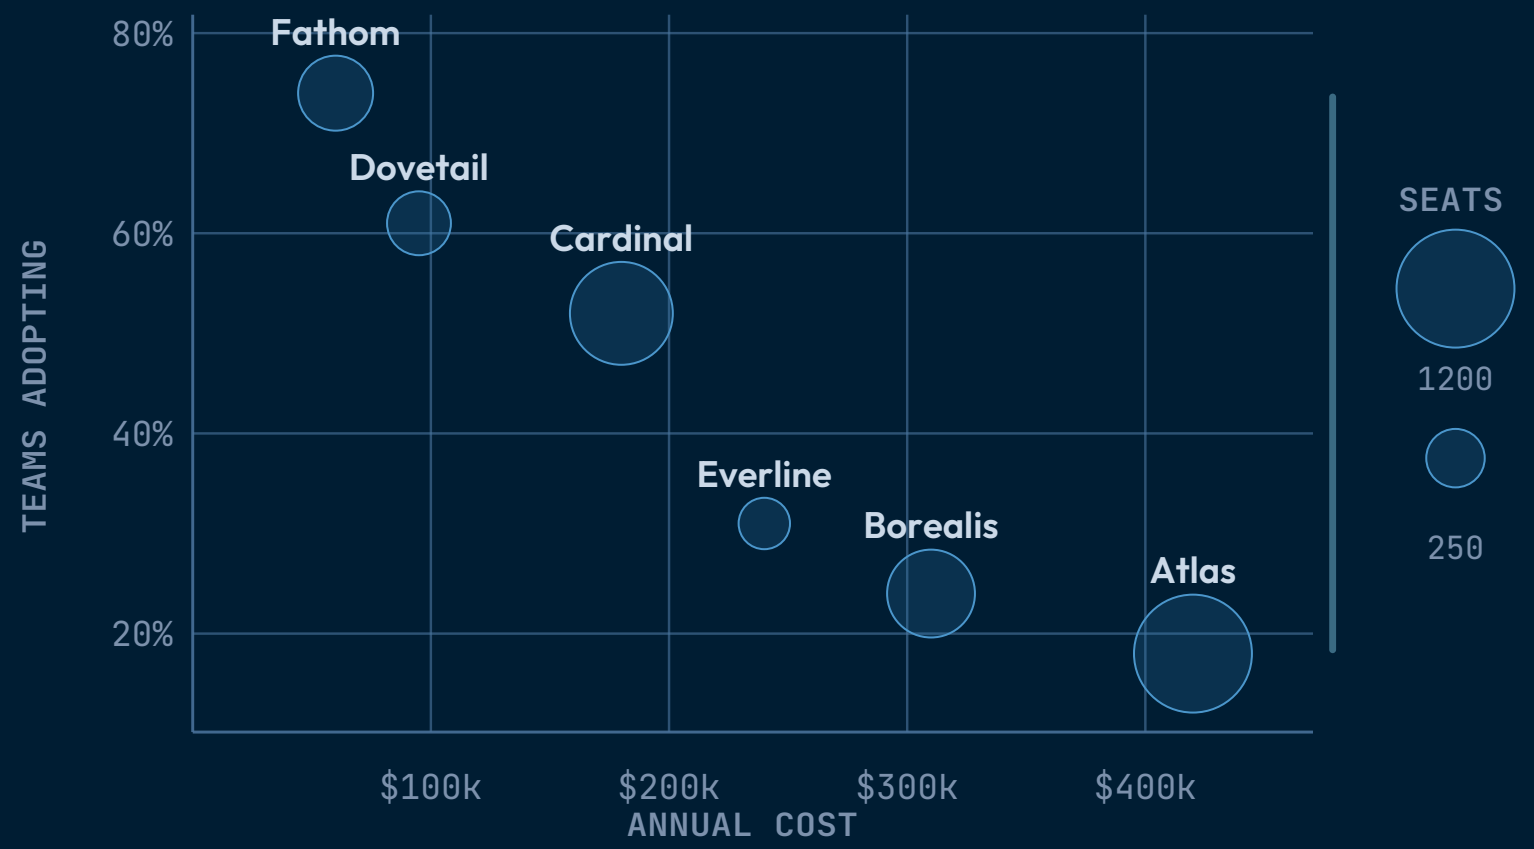


bubble · scatter bubble — A third measure sizes each dot by area.

trend draws the least-squares line through the cloud.

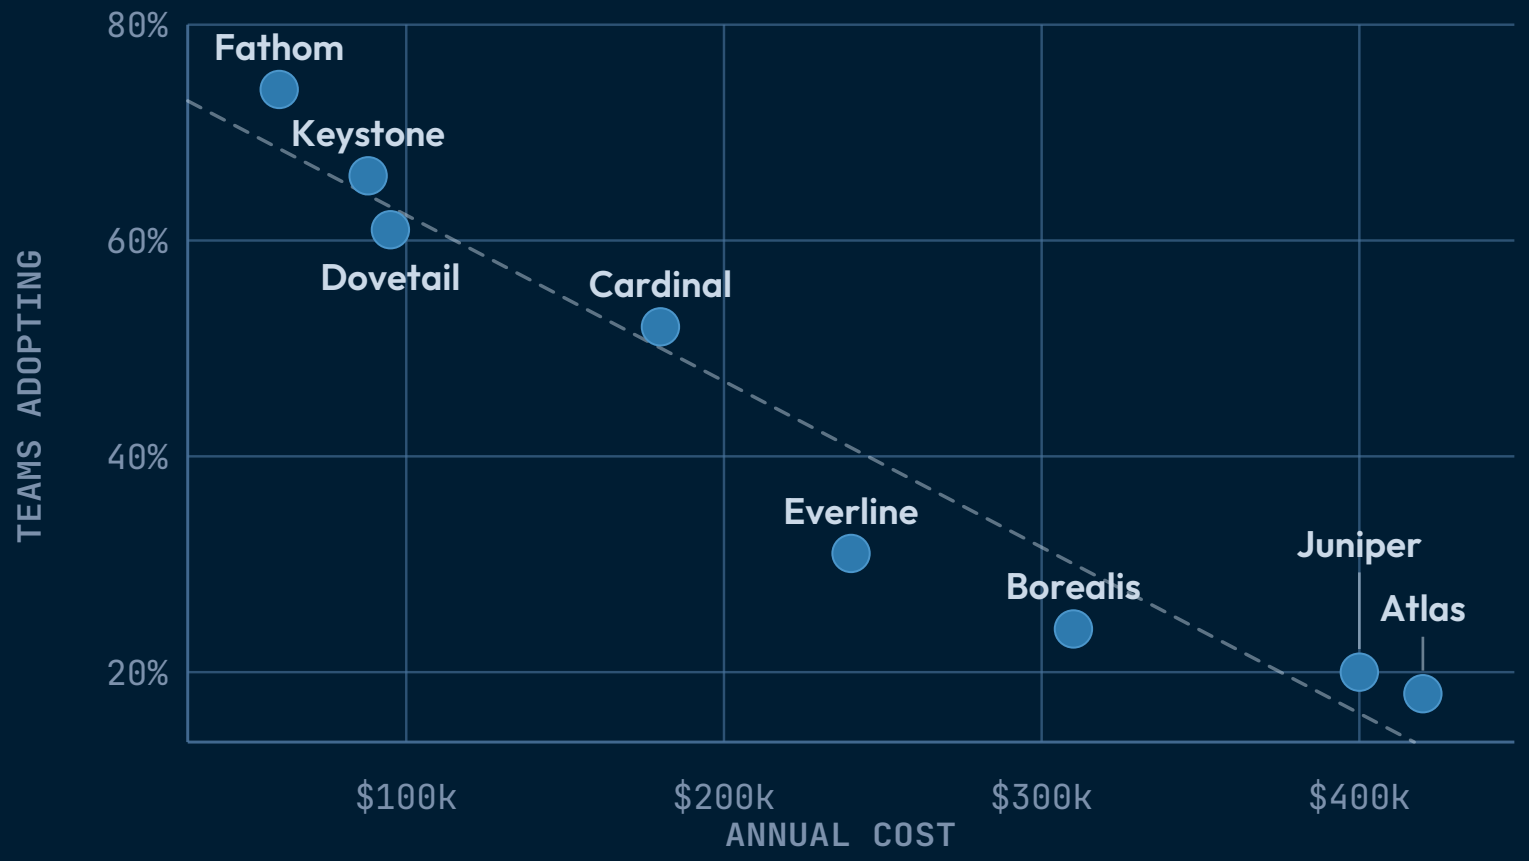


Stress test — twelve tools and a cluster the eye cannot separate.

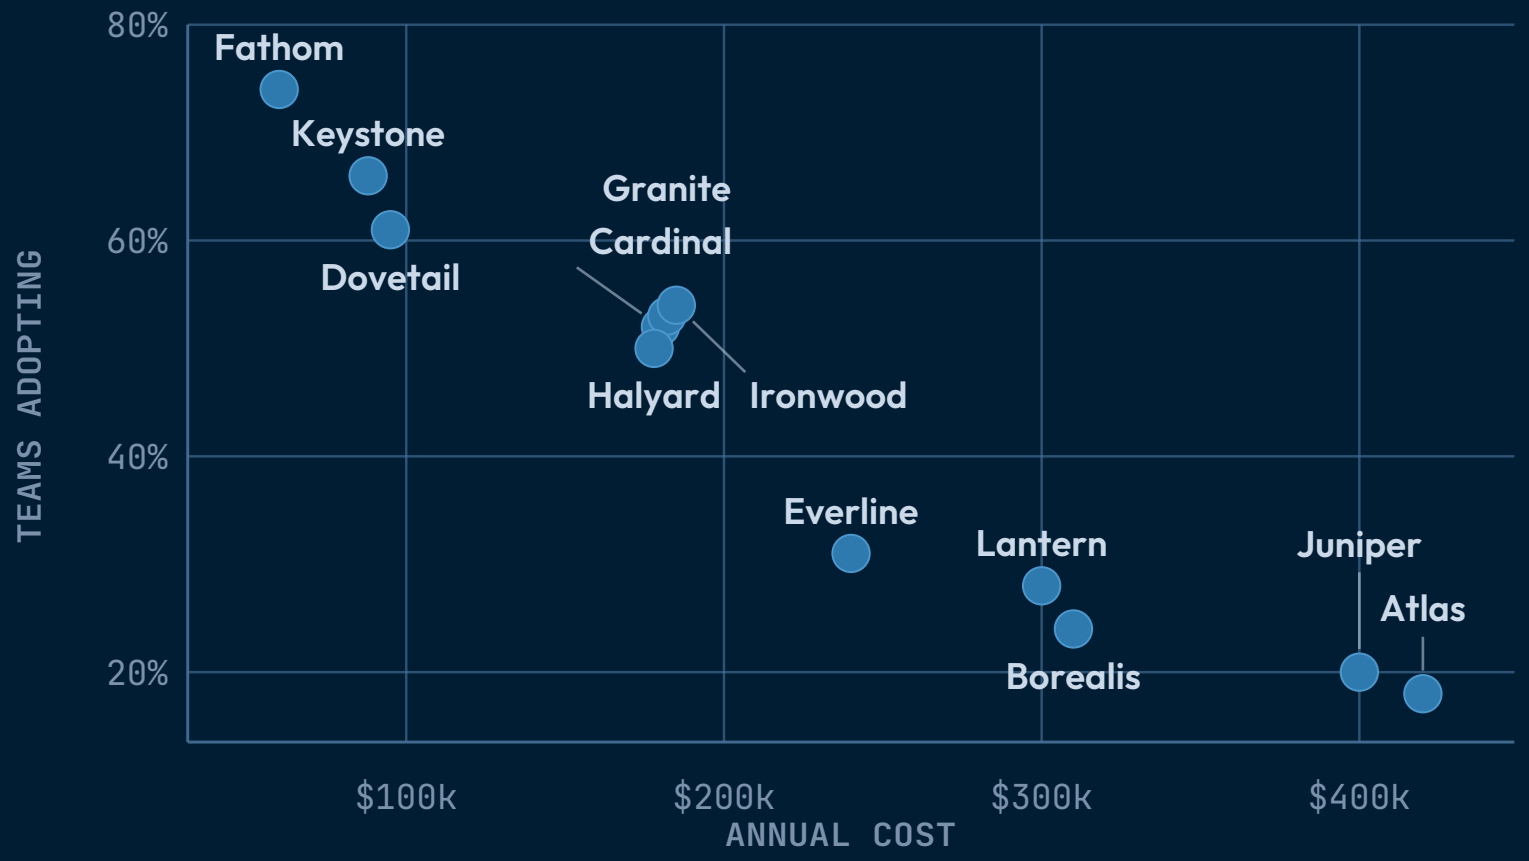


The tools we pay most for are the ones nobody adopts.

Cost is the renewal we signed; adoption is the share of teams with a weekly active user.

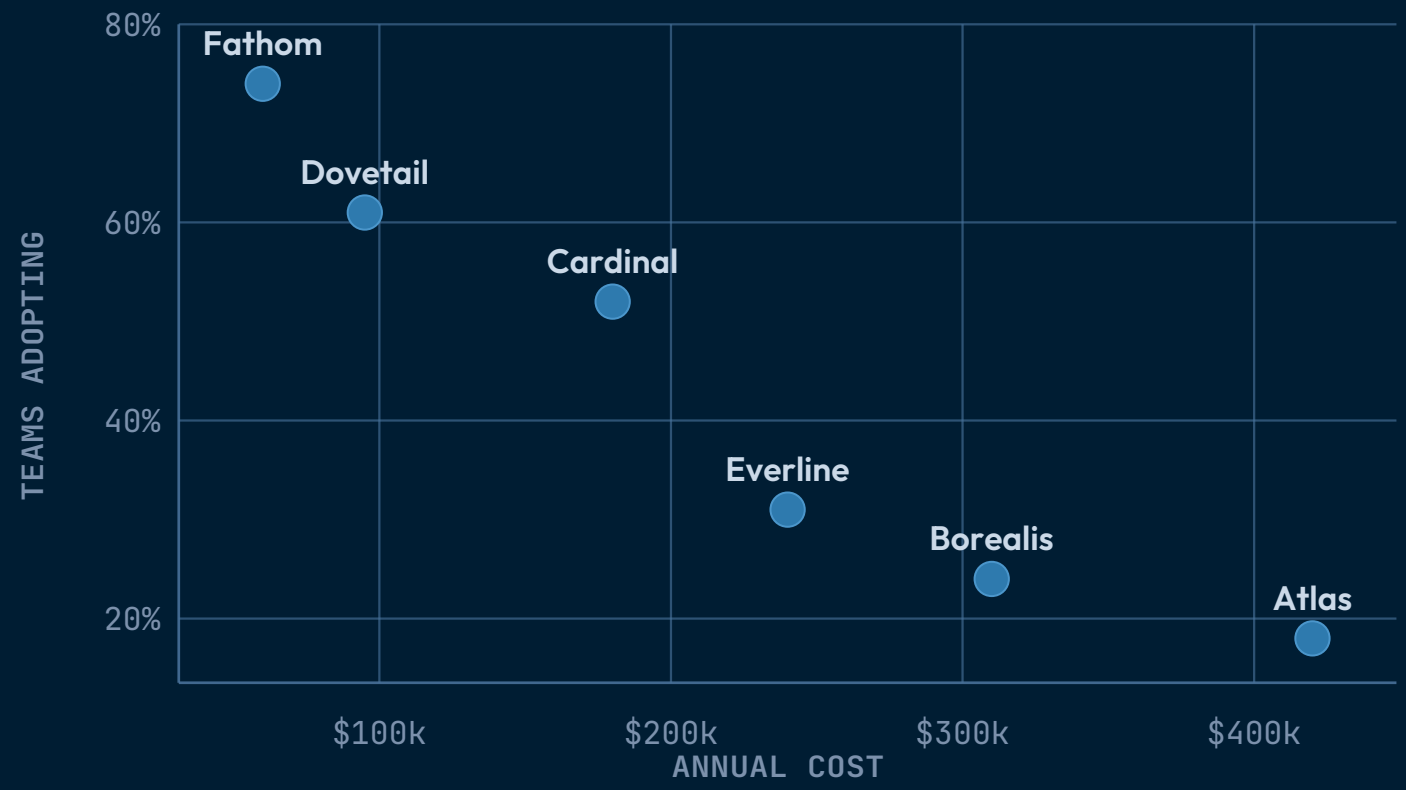


The tools we pay most for are the ones nobody adopts.

Cost is the renewal we signed; adoption is the share of teams with a weekly active user.

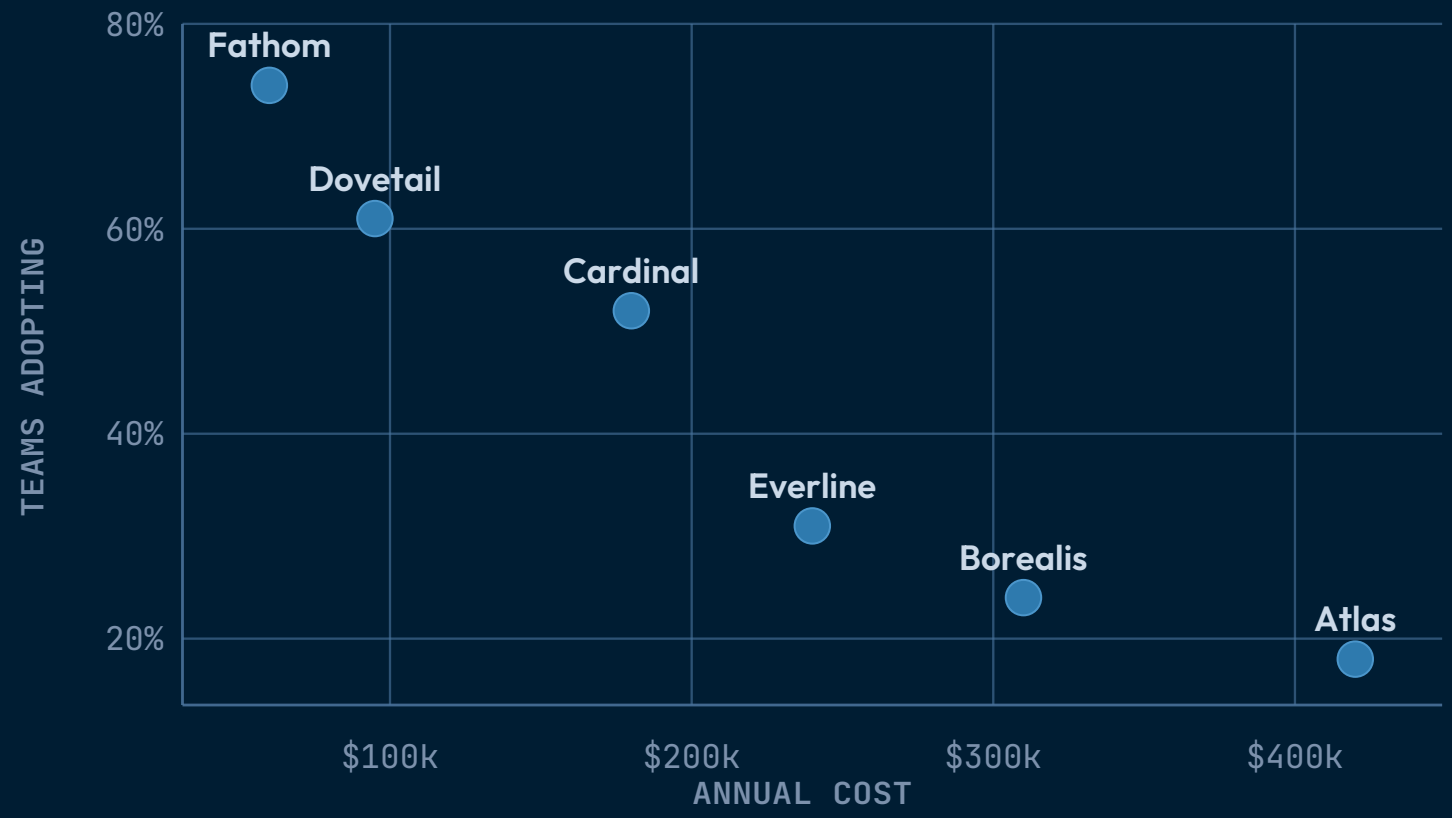

The tools we pay most for are the ones nobody adopts.

Cost is the renewal we signed; adoption is the share of teams with a weekly active user.

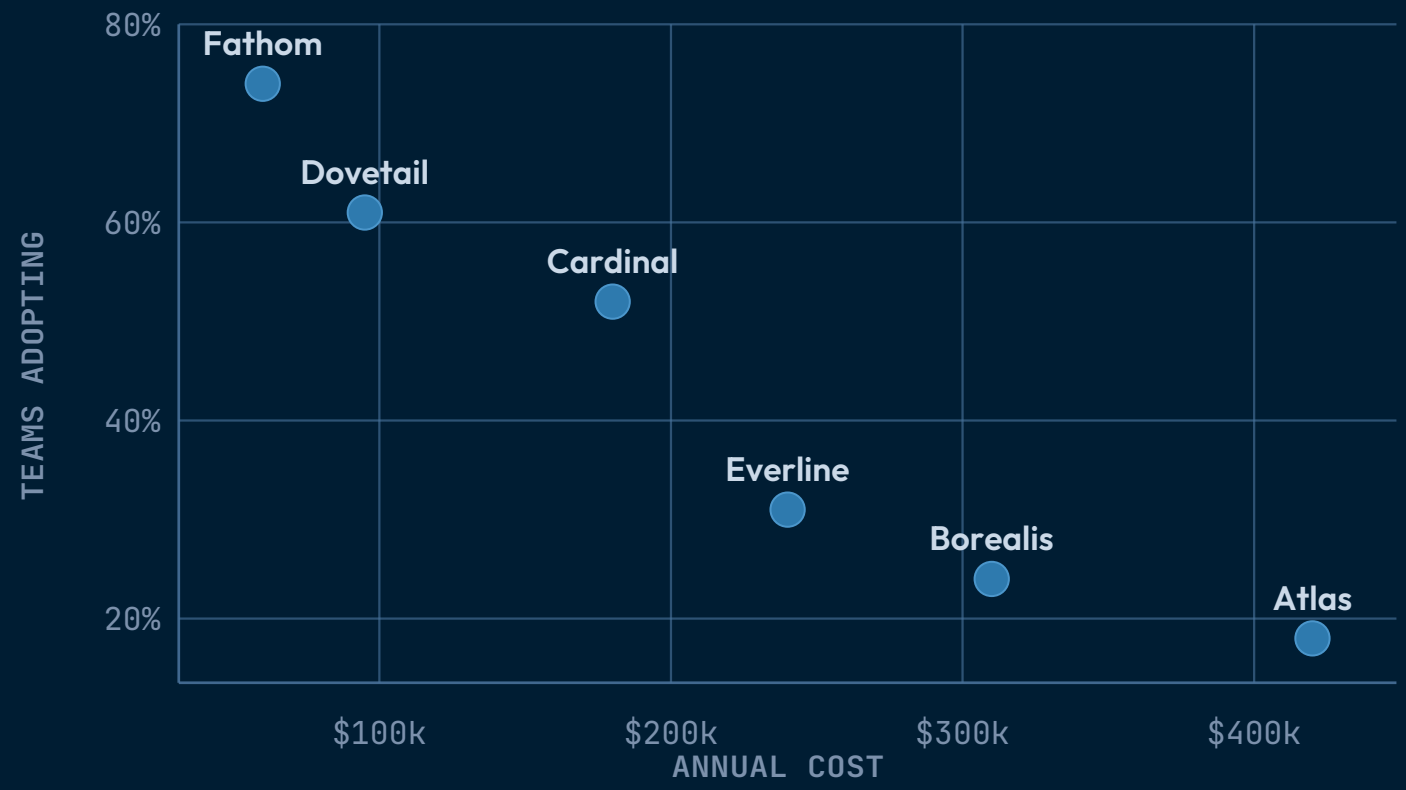

When NOT to reach for scatter.

A unitless 2x2 score

If the axes are unitless 1-to-10 judgments and the read is which of four named zones an item lands in, use `quadrant`.

A trend line over a handful of points

`scatter trend` refuses a least-squares line under five points. Even at eight it says 'these move together', not 'this predicts'.

When NOT to reach for scatter.

Points closer together than the eye can separate

Four tools within four points are four dots inside one dot's width: the ring keeps the overlap visible, but the names travel.

Time on the x axis

A series measured at successive dates is a line, not a cloud — the reader needs the connection between points. Use `line`.

RELATED COMPONENTS

See also.

`quadrant` — the axes are unitless scores and the read is which of four named zones

`matrix-2x2` — items are placed by category, not by coordinate

`radar` — each entity is rated on more than two measures

`progress` — one measure per entity, compared as lengths

`list-tabular` — the exact numbers matter more than the shape of the relationship