

Tint a state machine without leaving the palette.

`:::token` names a theme token, never a color — so a tinted deck still re-themes.


The channel

`:::token` after a state's pills, or
after a transition's inline code.

UNTINTED

The default reads as one system.

Every edge takes the engine's connector color.

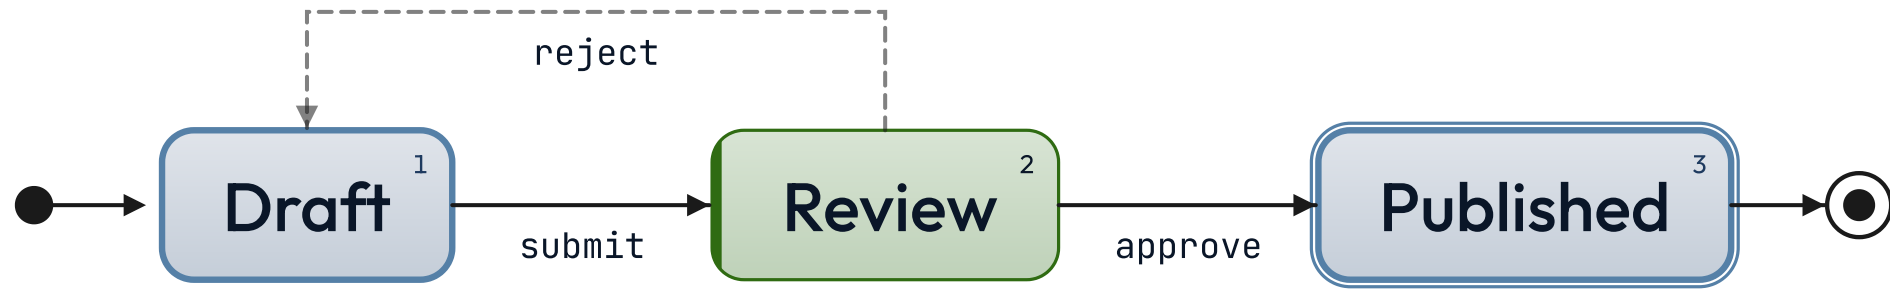


The baseline the next slide tints – same machine, no

on-track

TINTED TRANSITIONS

Color carries the outcome.

The happy path reads green, the rejection red.

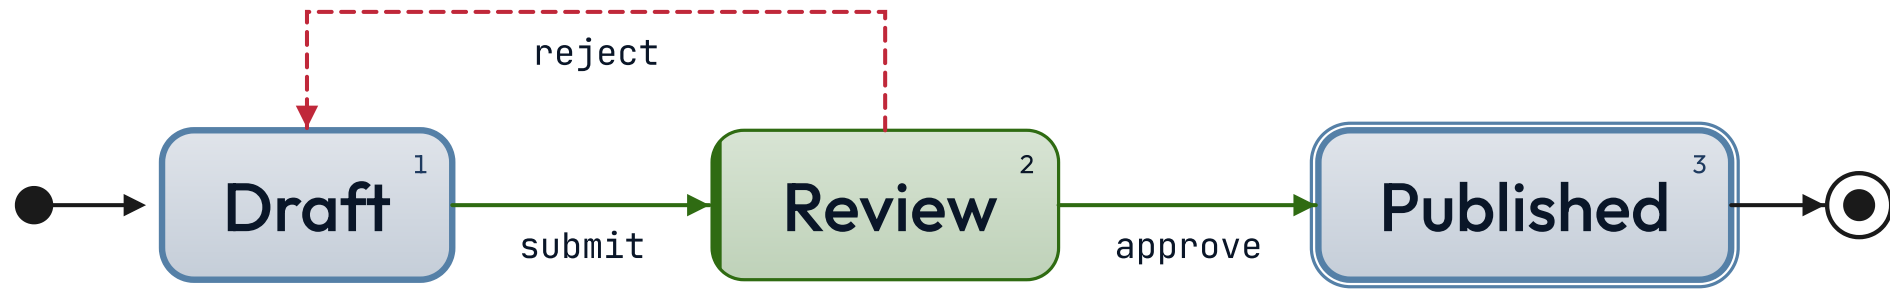


Same machine – one token each on the edges that carry meaning.

 on-track

TINTED STATES

A node takes a tint too.

Terminal states carry their outcome in the tile.

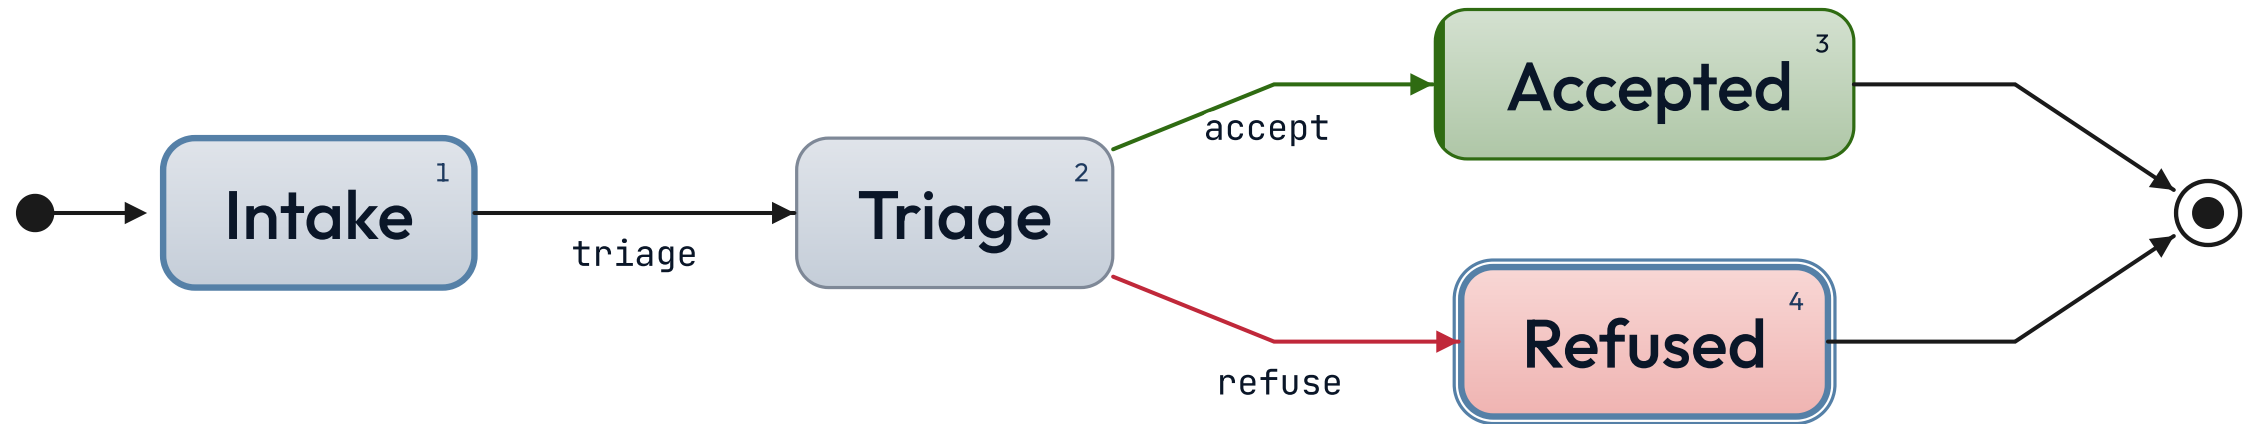

A tint names the paint outright; where a state also has a status, the tint wins.

☒ done

LABEL BACKGROUNDS

The second slot sets the label ground.

`:::edge-token/label-bg-token` — the edge, then the ground its label sits on.




For when an edge crosses a busy area and its label must knock out more of it.

DEGRADING

An unresolvable name changes nothing.

Existence is not checked at build time.

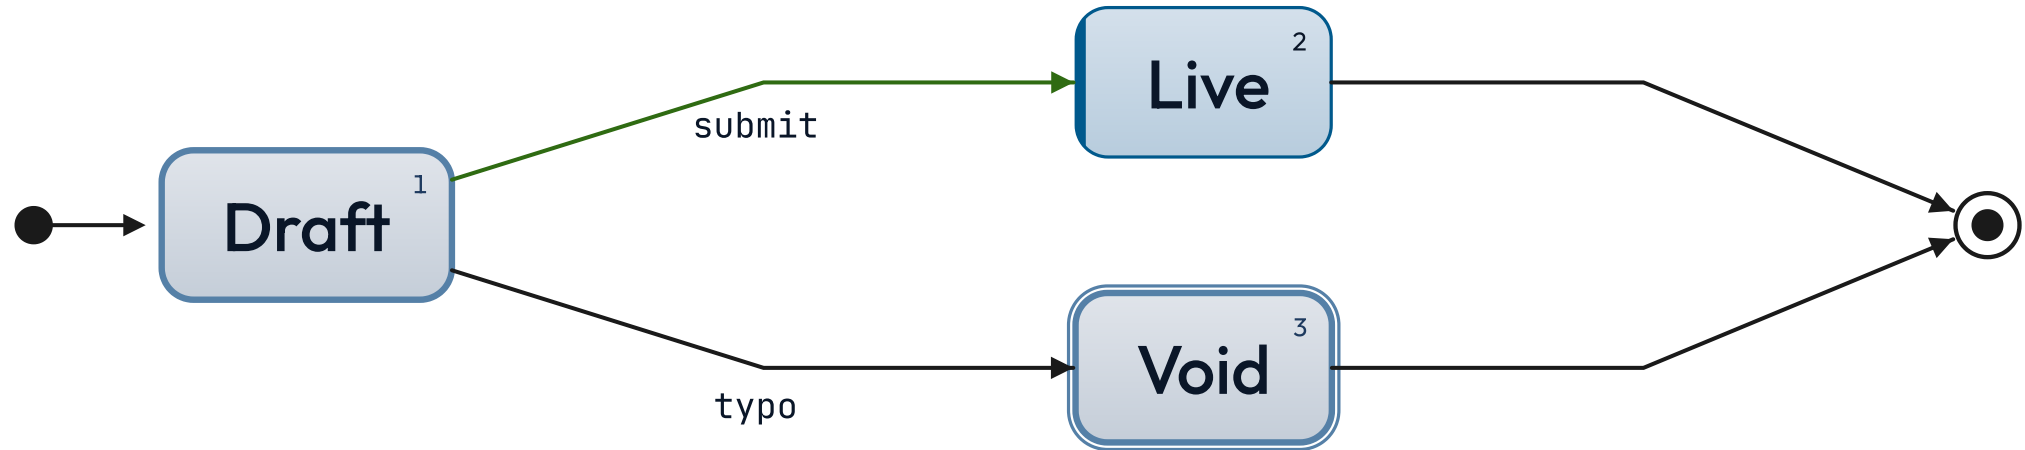

`typo` names no real token, so that edge keeps its inherited paint.

☐ live