


COMPARISON · MATRIX · STRUCTURE

matrix-grid

Two ordered axes as an $N \times M$ chart-family grid — each cell marks a position (filled / reachable / not applicable), colored by its row's category from the theme's chart palette.


Your level is a cell, not a rung.

Your title is the diagonal — the same verb at a wider reach is a different level.

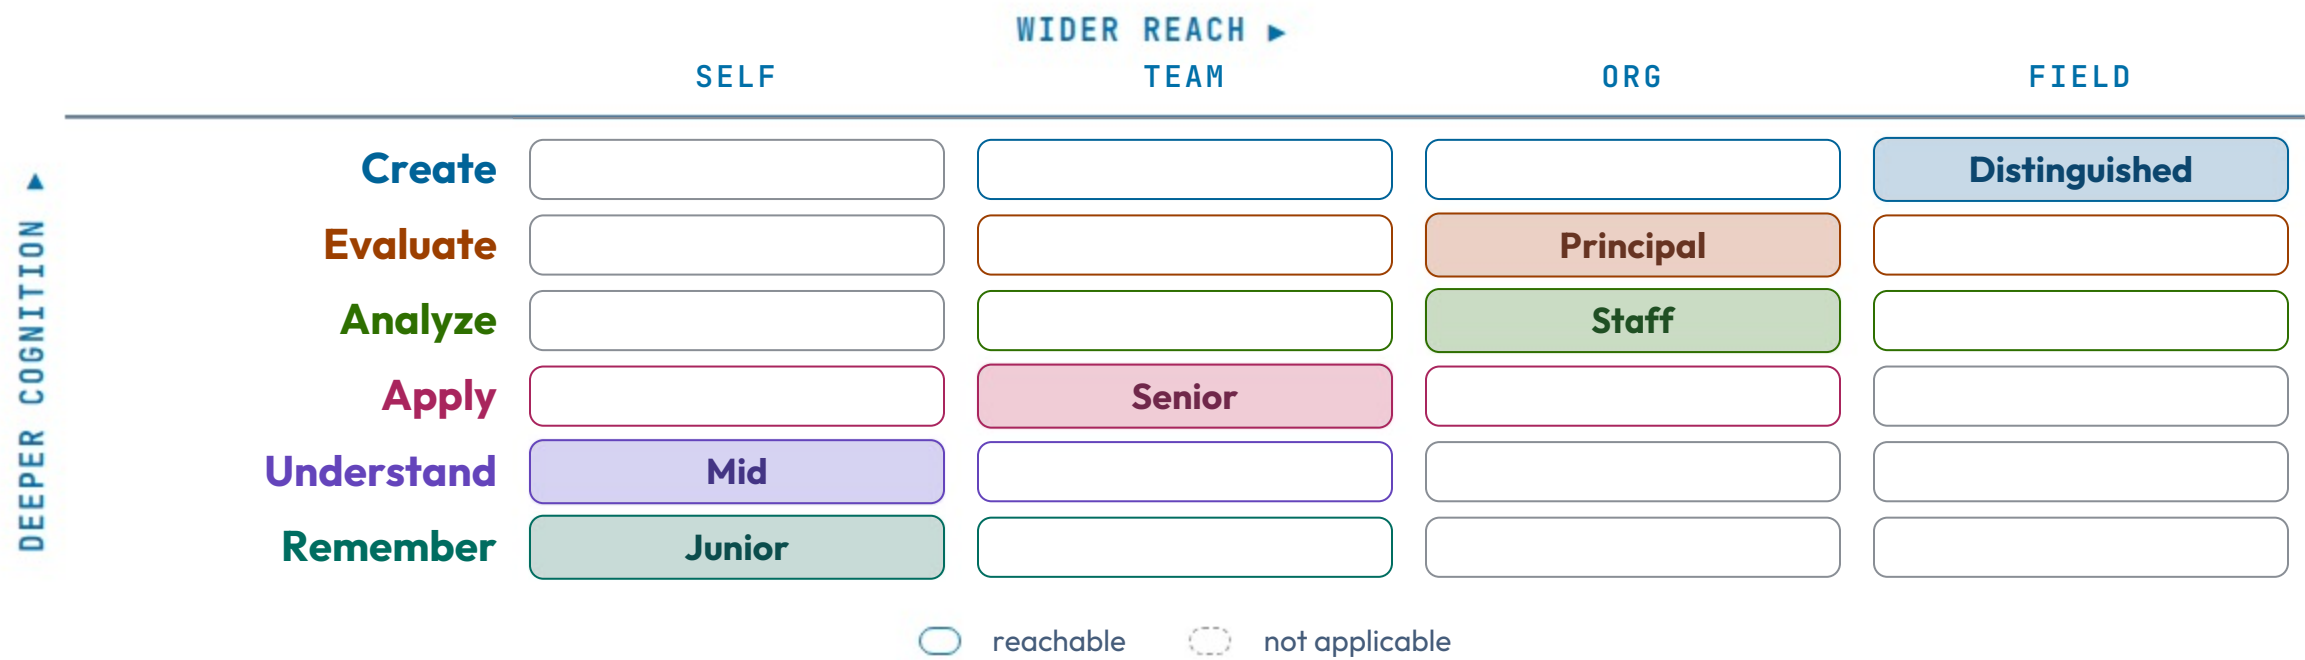


Illustrative — placements vary by company.

Six categories by five columns is the grid's practical ceiling.

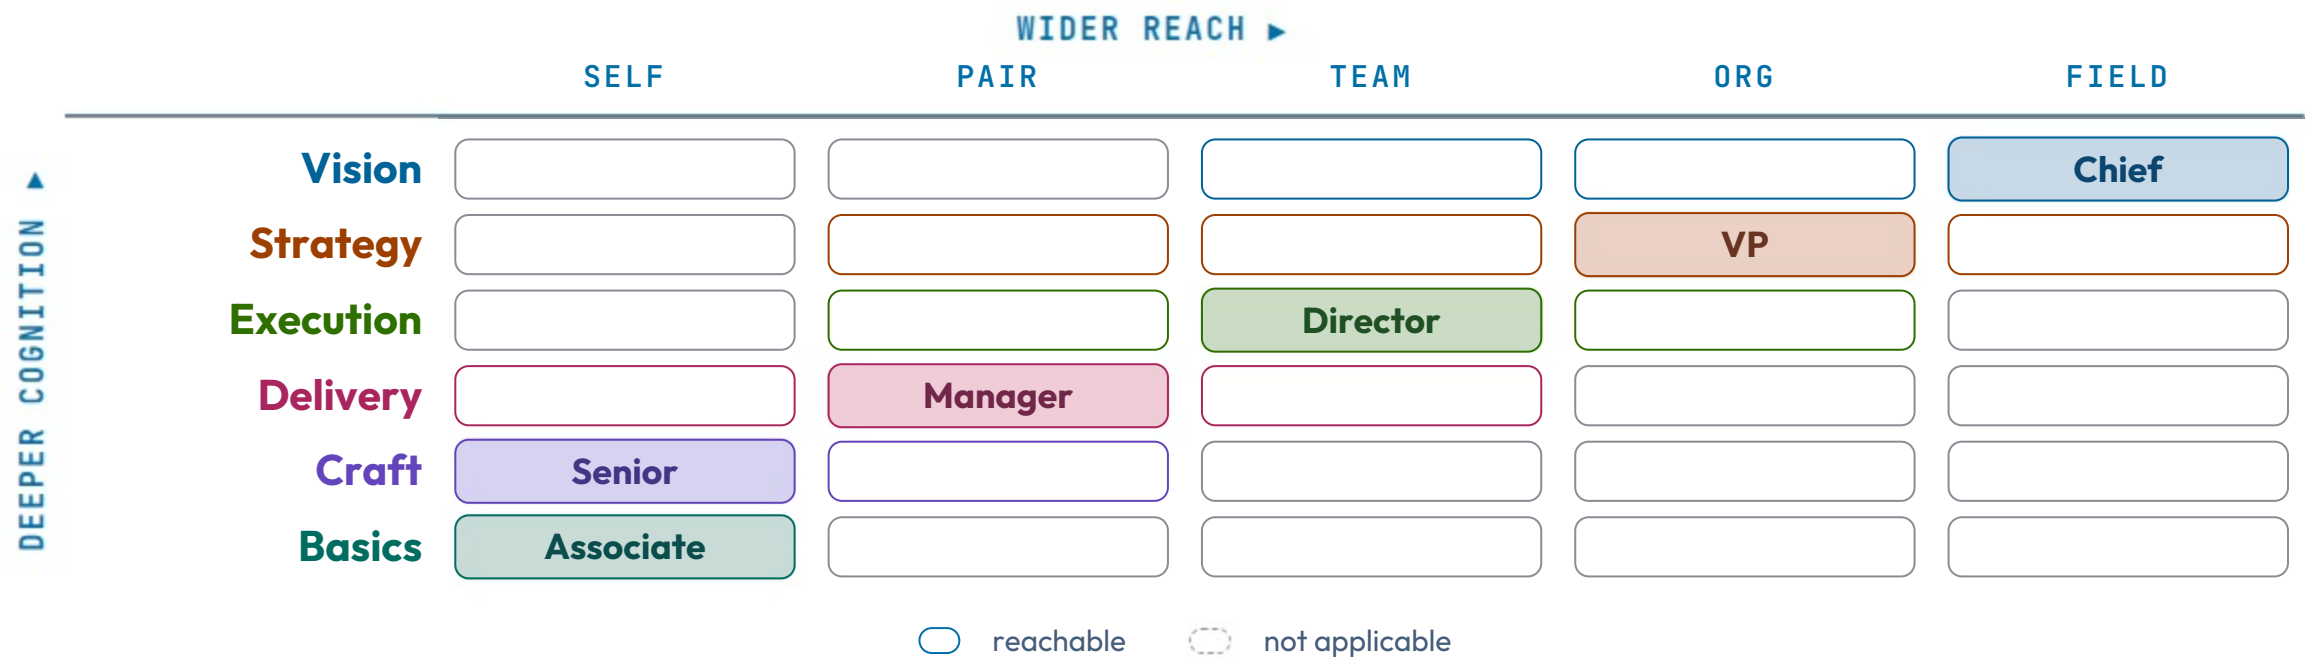

Your level is a cell, not a rung.


Your title is the diagonal — the same verb at a wider reach is a different level.

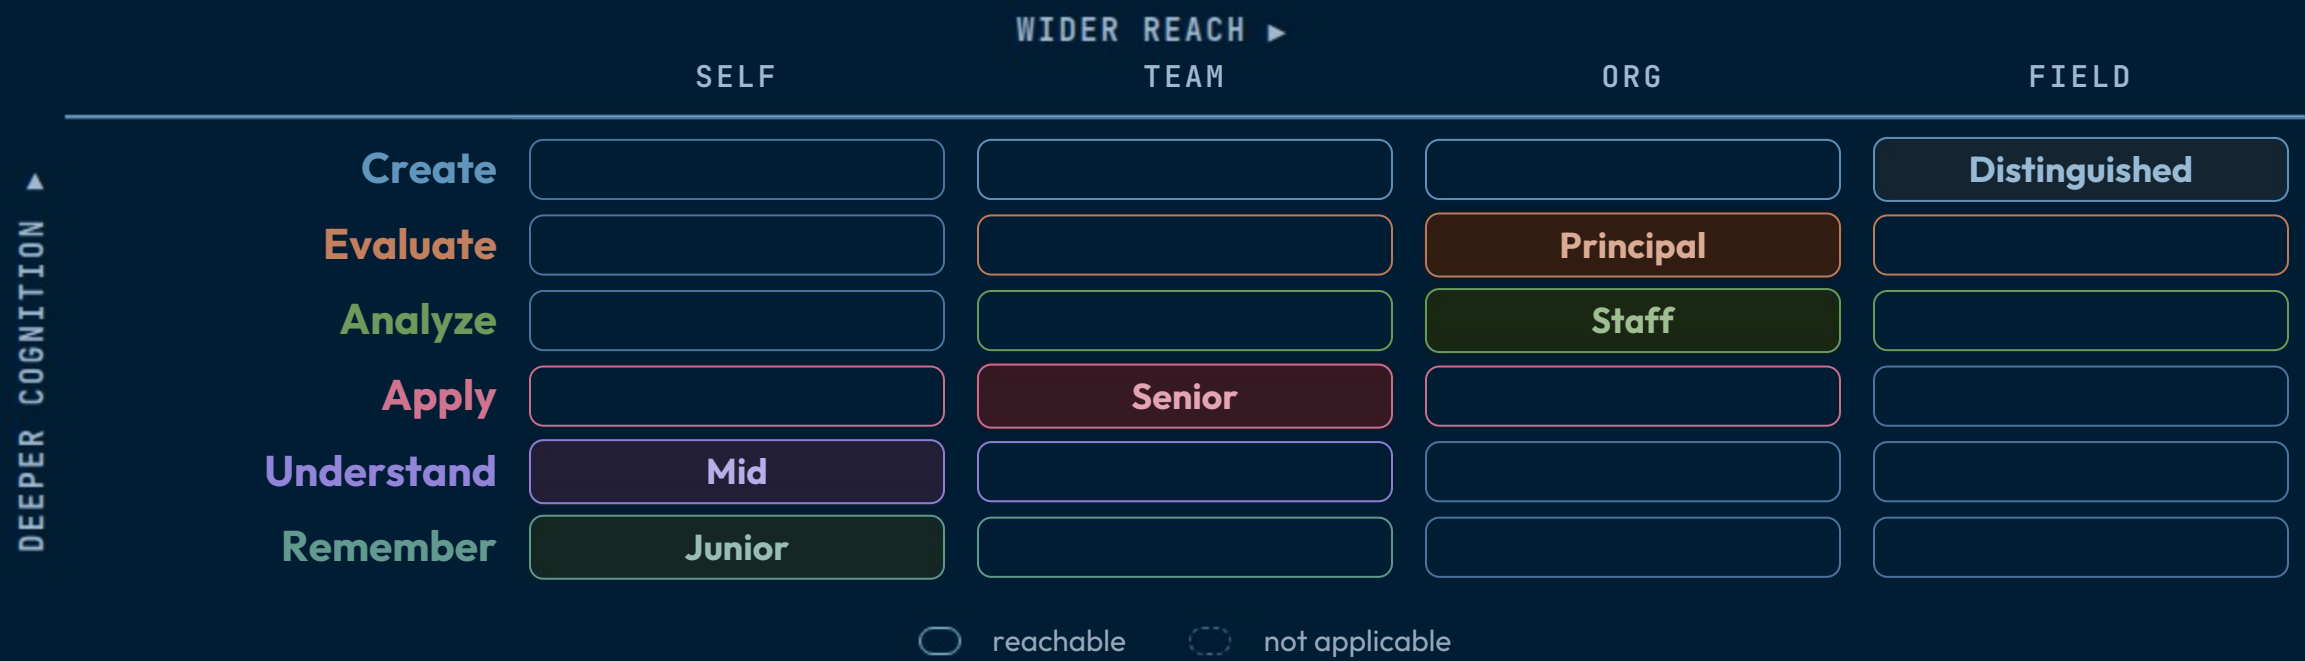

Illustrative — placements vary by company.

Your level is a cell, not a rung.


Your title is the diagonal — the same verb at a wider reach is a different level.

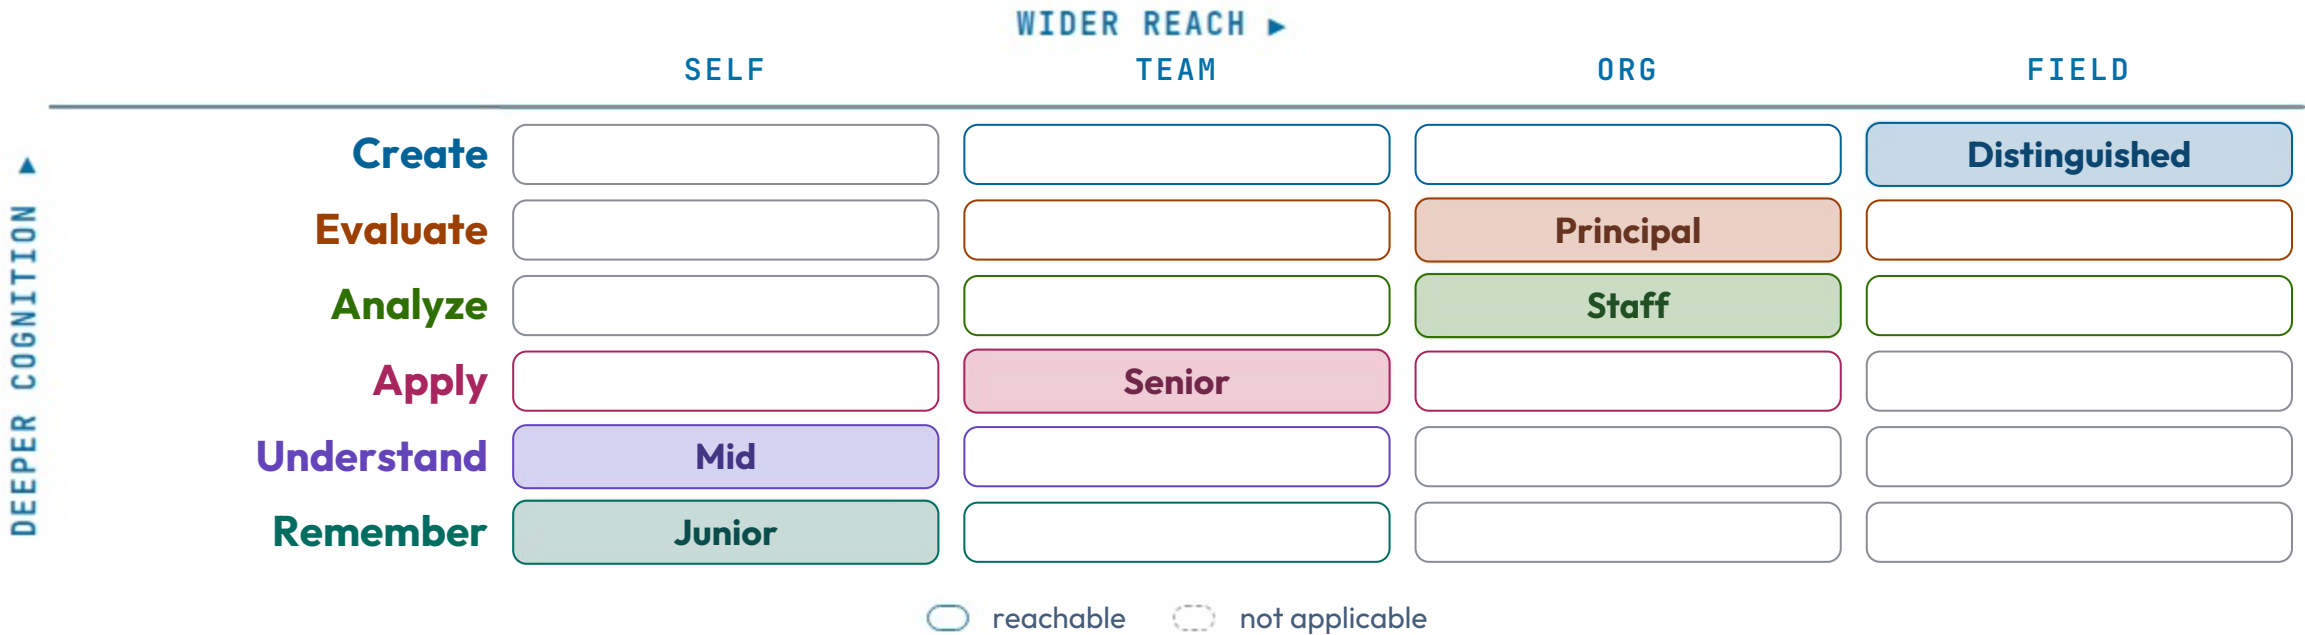

Illustrative — placements vary by company.

Your level is a cell, not a rung.

Your title is the diagonal — the same verb at a wider reach is a different level.

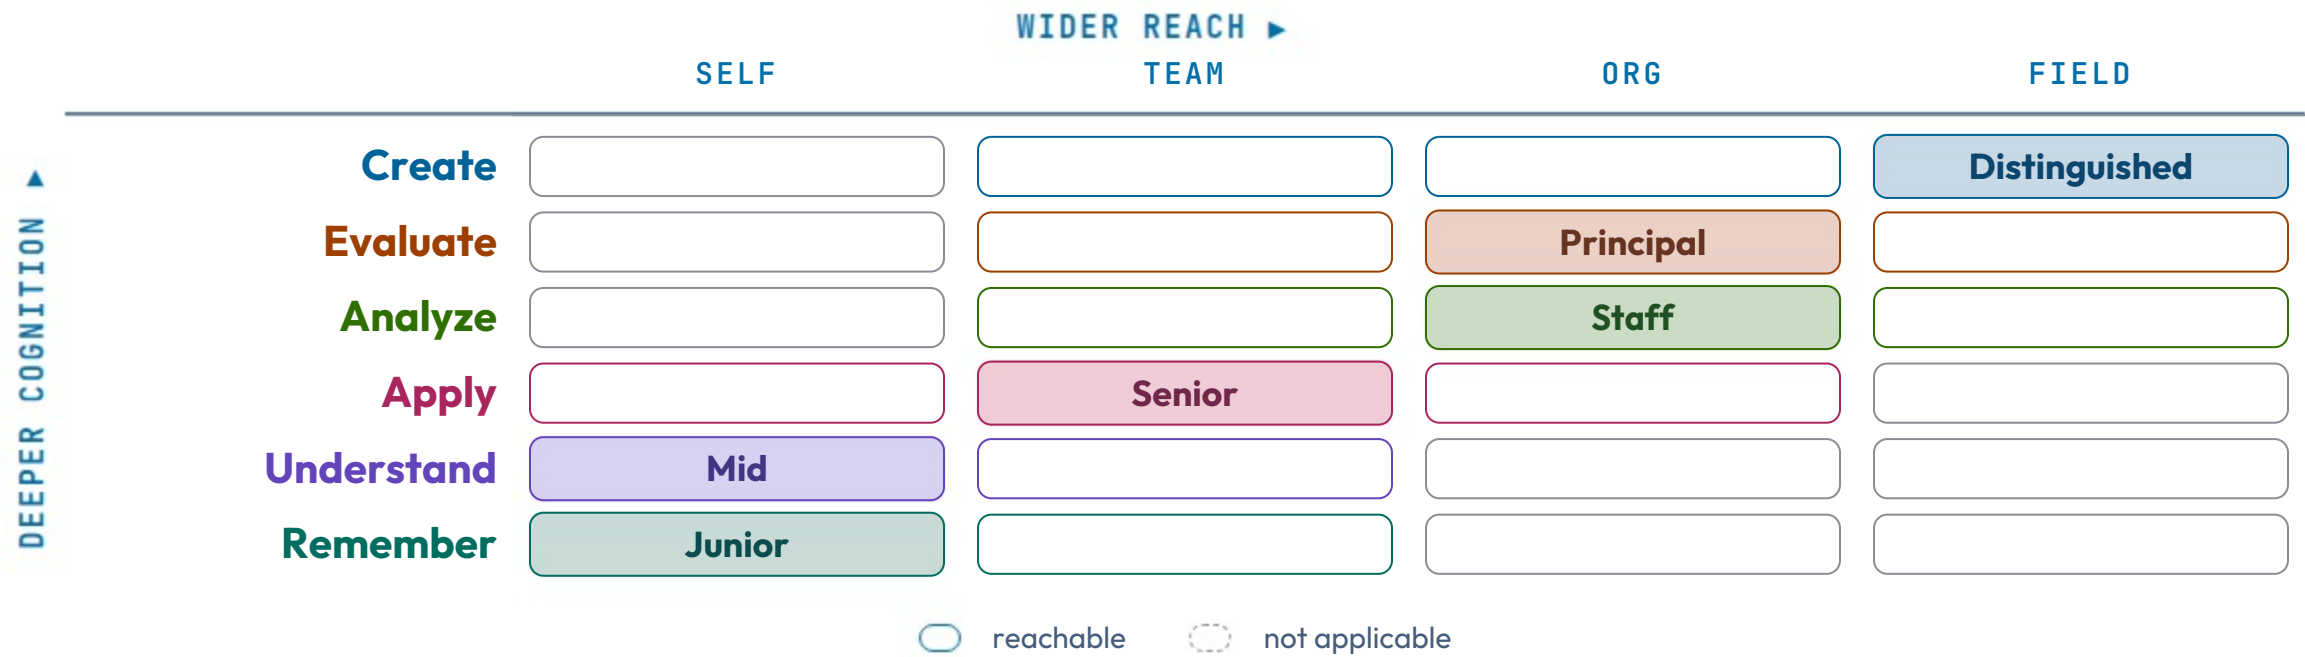

Illustrative — placements vary by company.

When NOT to reach for matrix-grid.

Pass/fail or delivery status

If cells mean shipped/at-risk/blocked, use `obligation-matrix` or `roadmap` — their semantic state palette (pass/warn/fail) is built for exactly that read, and matrix-grid's categorical row colors would mislead.

More than one filled cell per row

Each row names one position — one `[x]`. Multiple filled cells in a row breaks the "this is where you are" read; use `[-]` for the cells the row can still reach.

Unordered axes

The grid earns its shape when both axes have a real order (shallow to deep, narrow to wide). Two free categorical labels belong in `matrix-2x2`.

RELATED COMPONENTS

See also.

`obligation-matrix` — rows × columns of pass/partial/exempt status, not a single position

`roadmap` — phases × workstreams delivery status

`matrix-2x2` — two free axes, four cells, qualitative placement

`verdict-grid` — options scored against shared criteria, one card per option