


PROGRESSION · TIMELINE · STRUCTURE

journey


Native user-journey chart — sections of tasks, each tagged with actor(s) and a 1-5 mood.

Renders as section bars, task chips, plumb lines, and mood faces.


The journey scores each stage of the path.

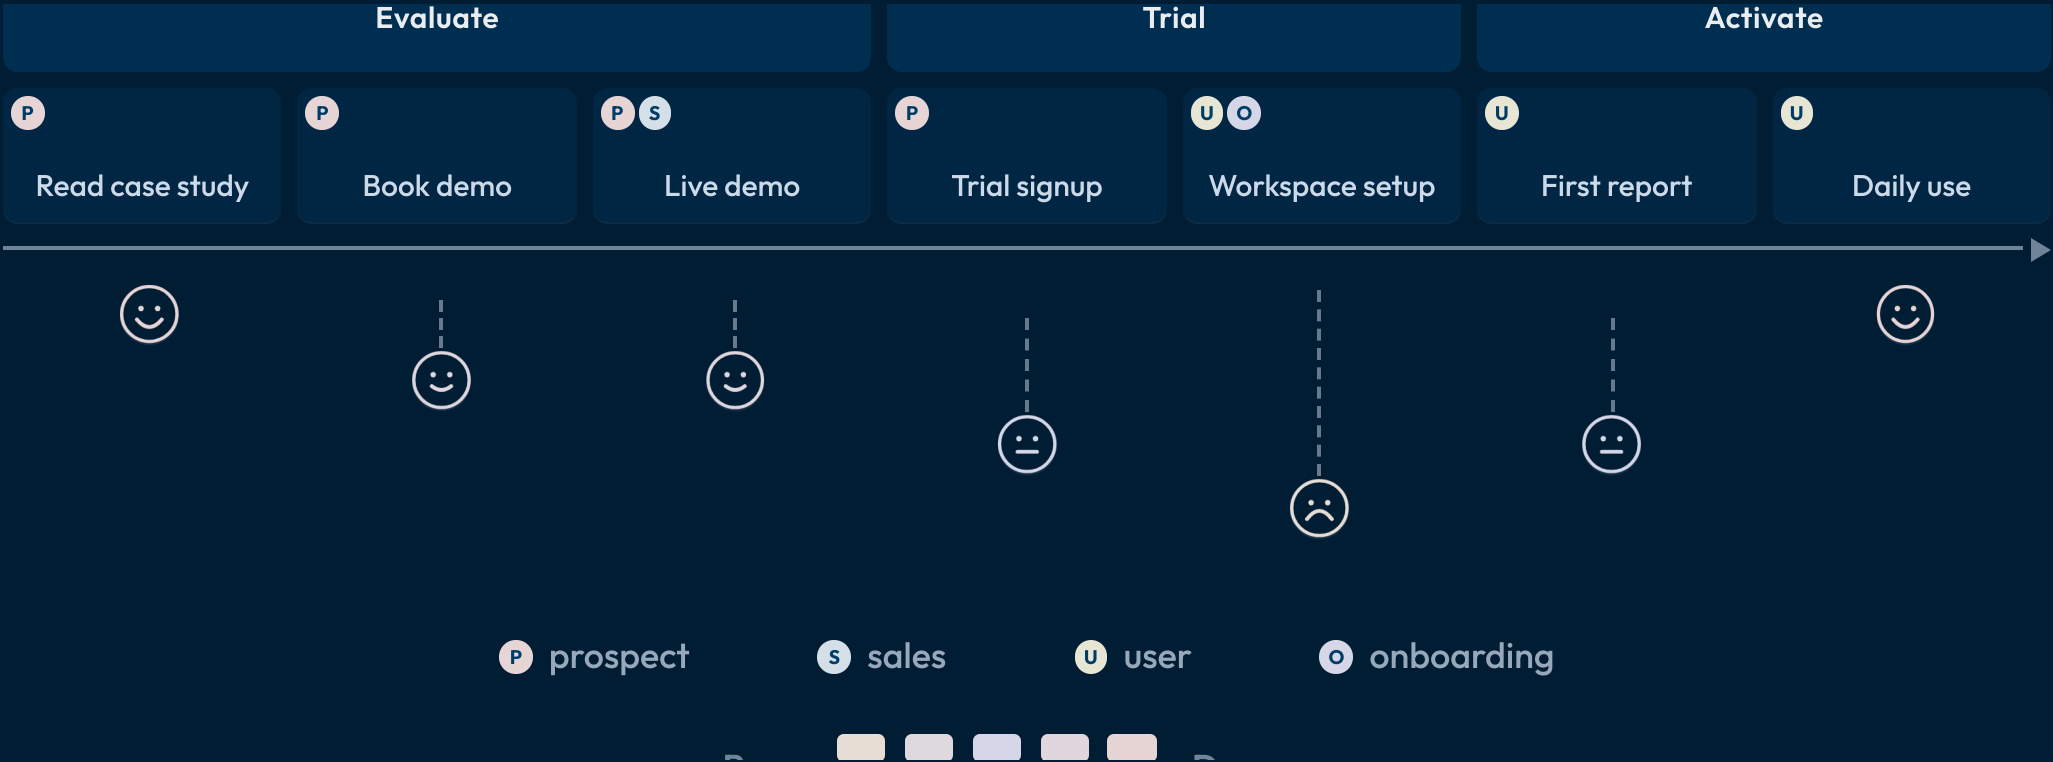


heatmap shades the stages by score.

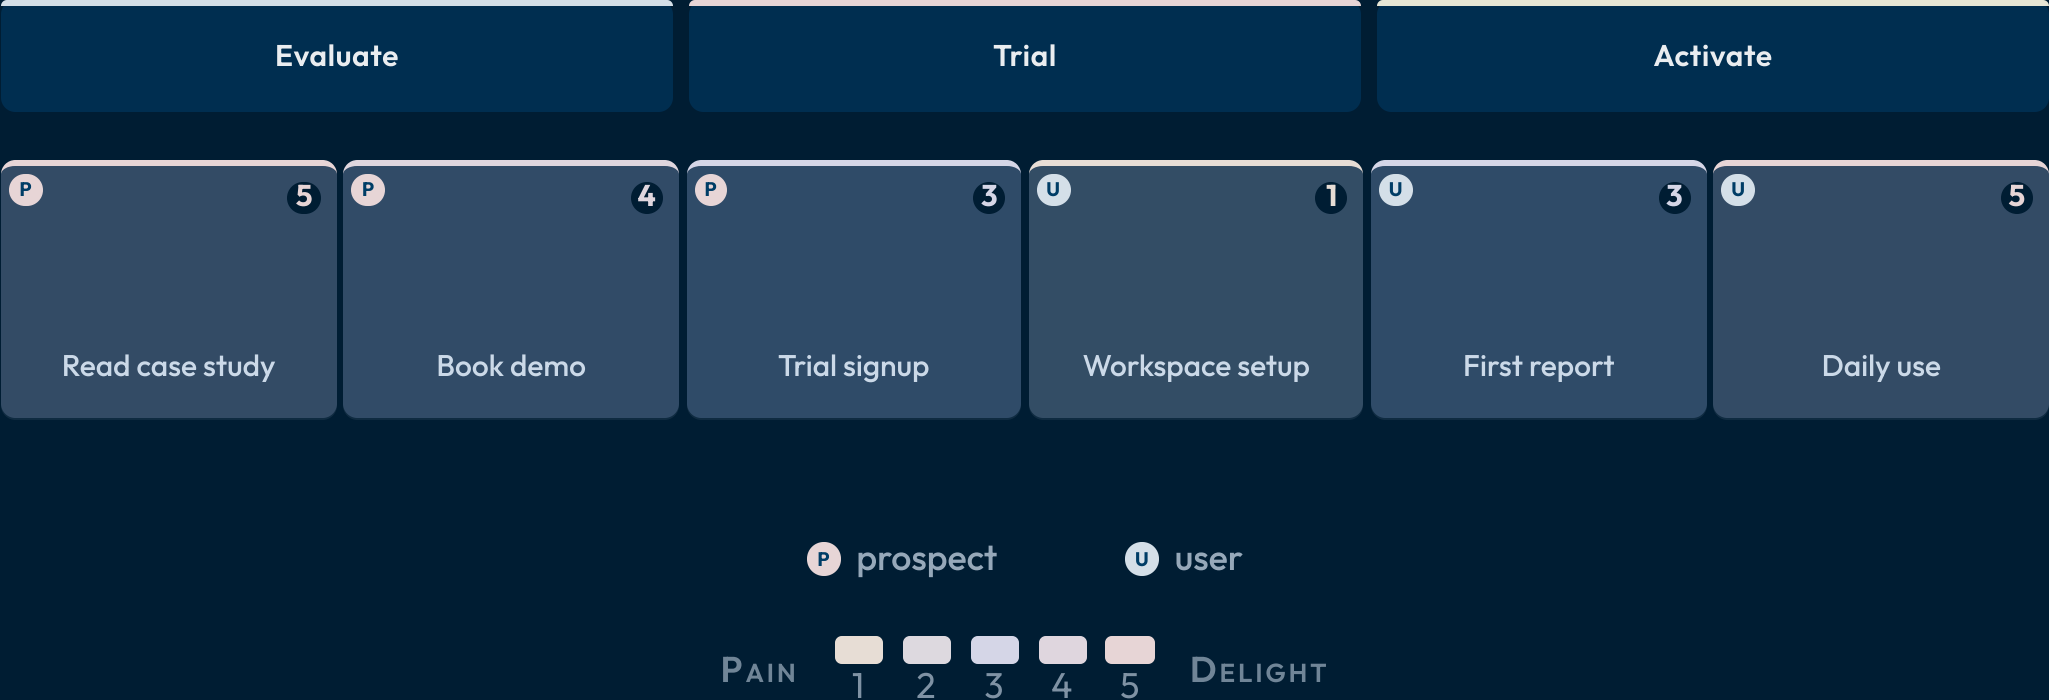


curve draws the sentiment line.

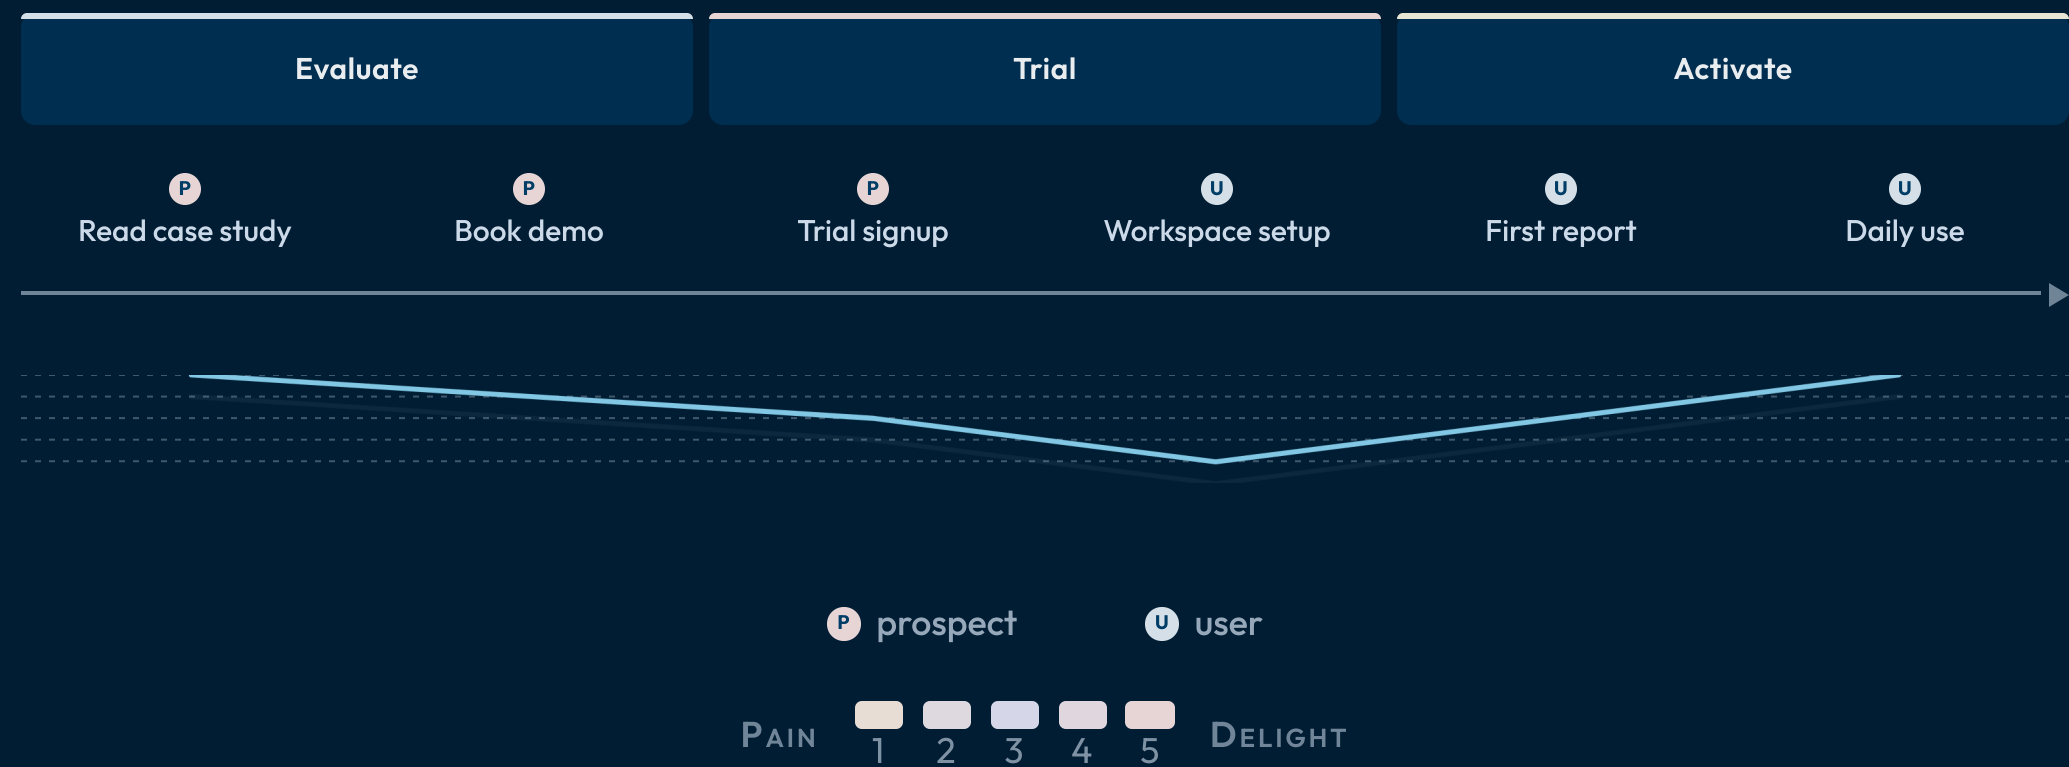


swimlane splits the journey by actor.

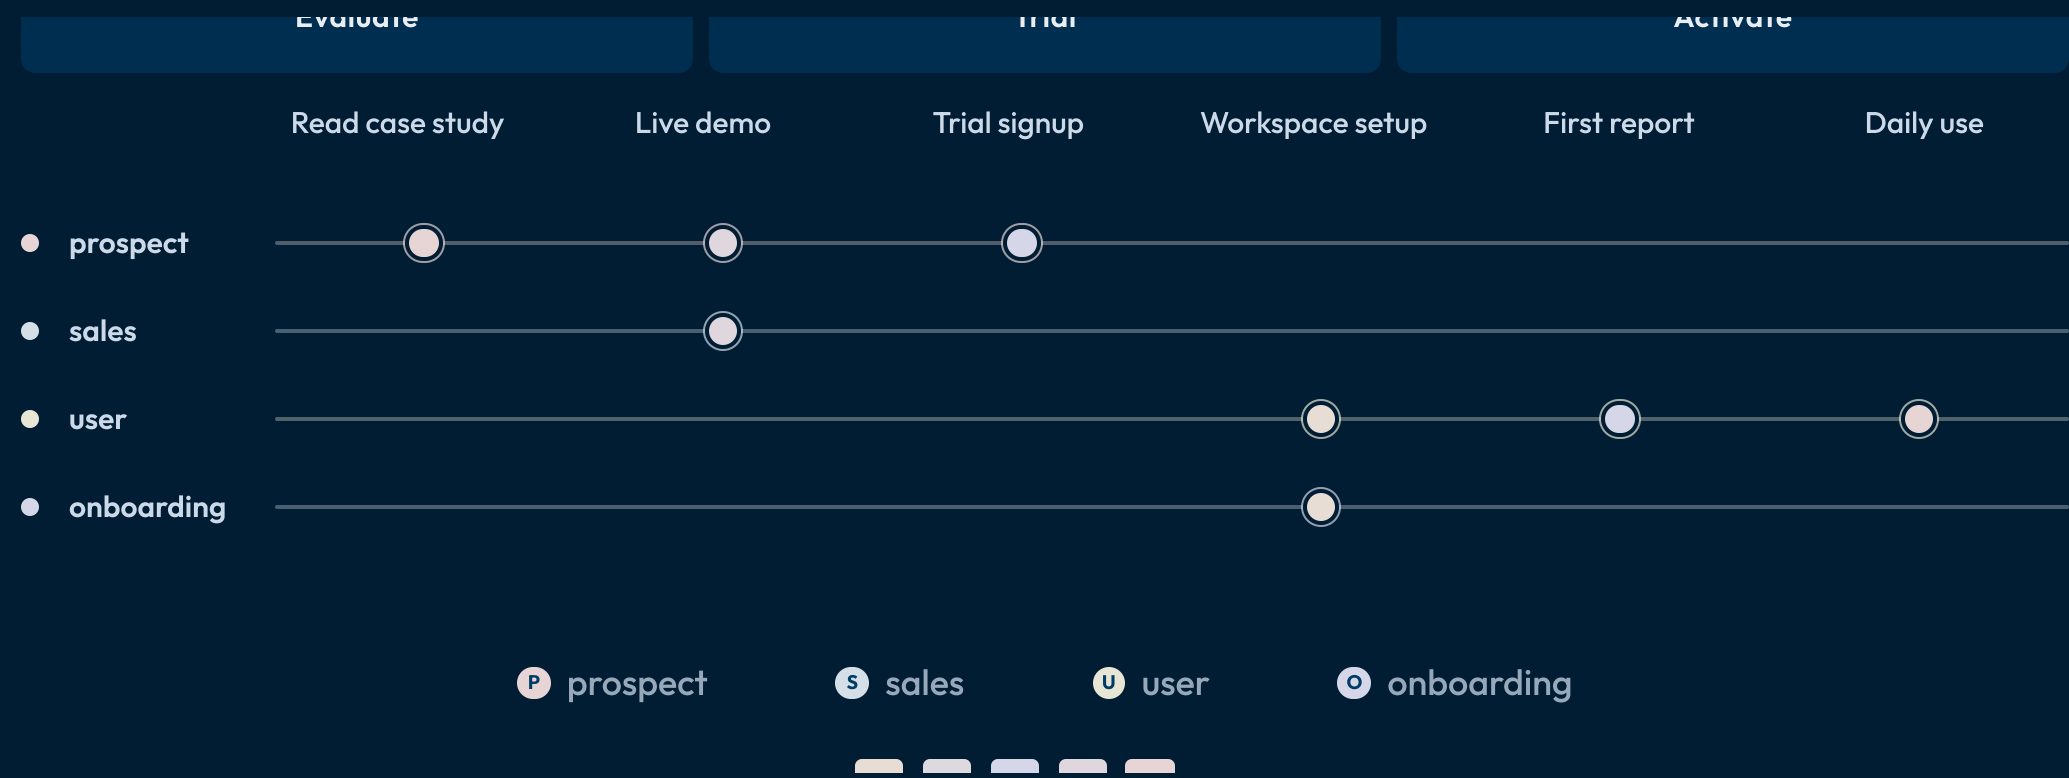


weighted sizes the stages by importance.

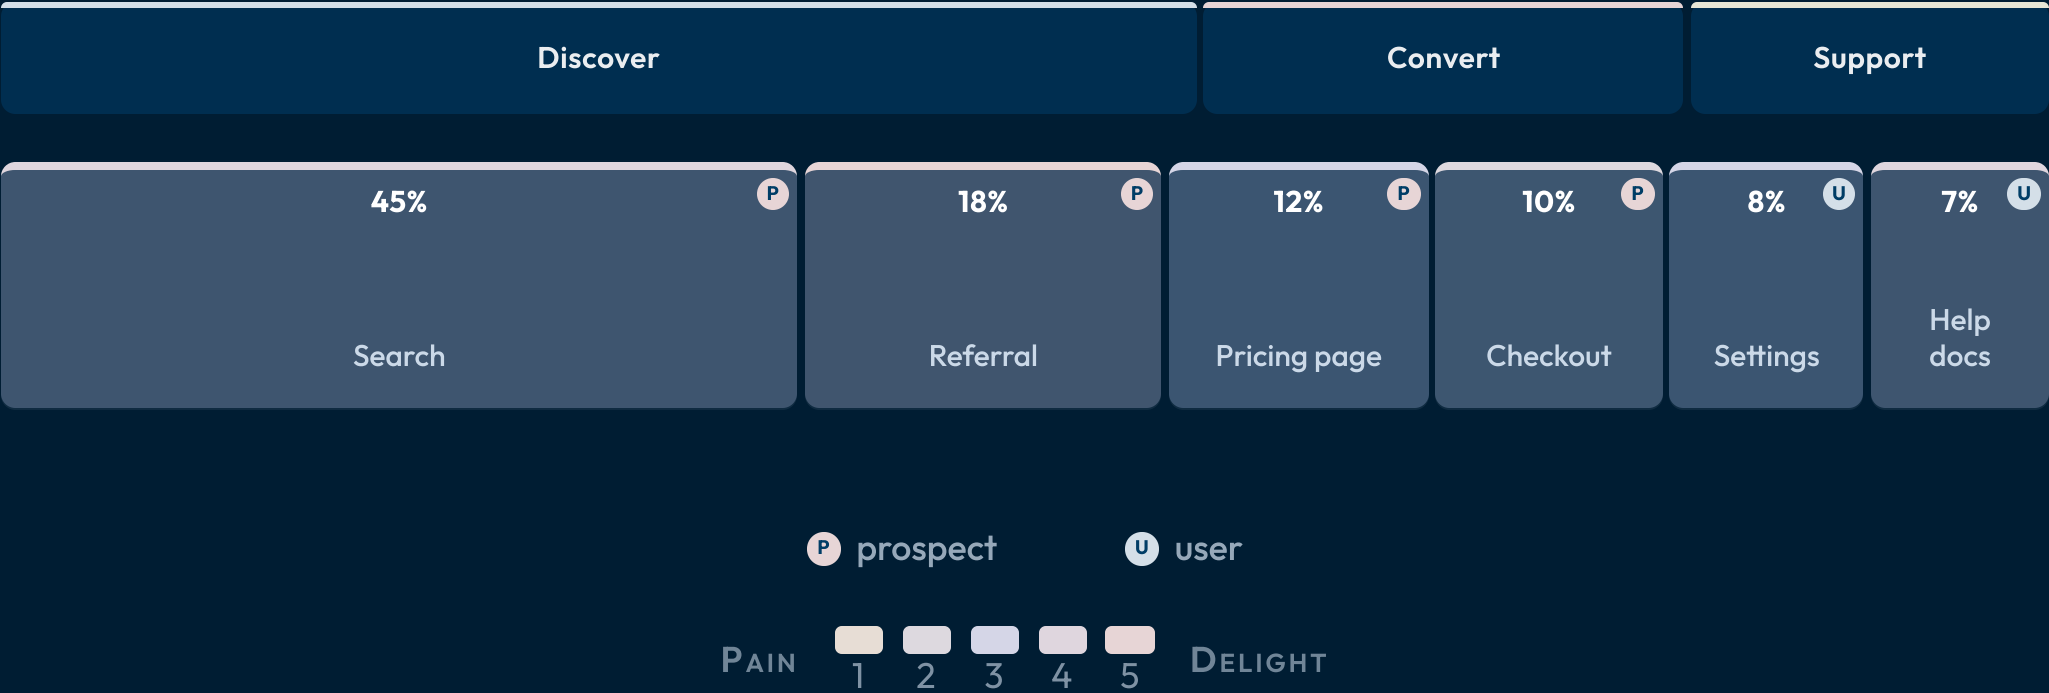


Five stages of twelve tasks is the ceiling.

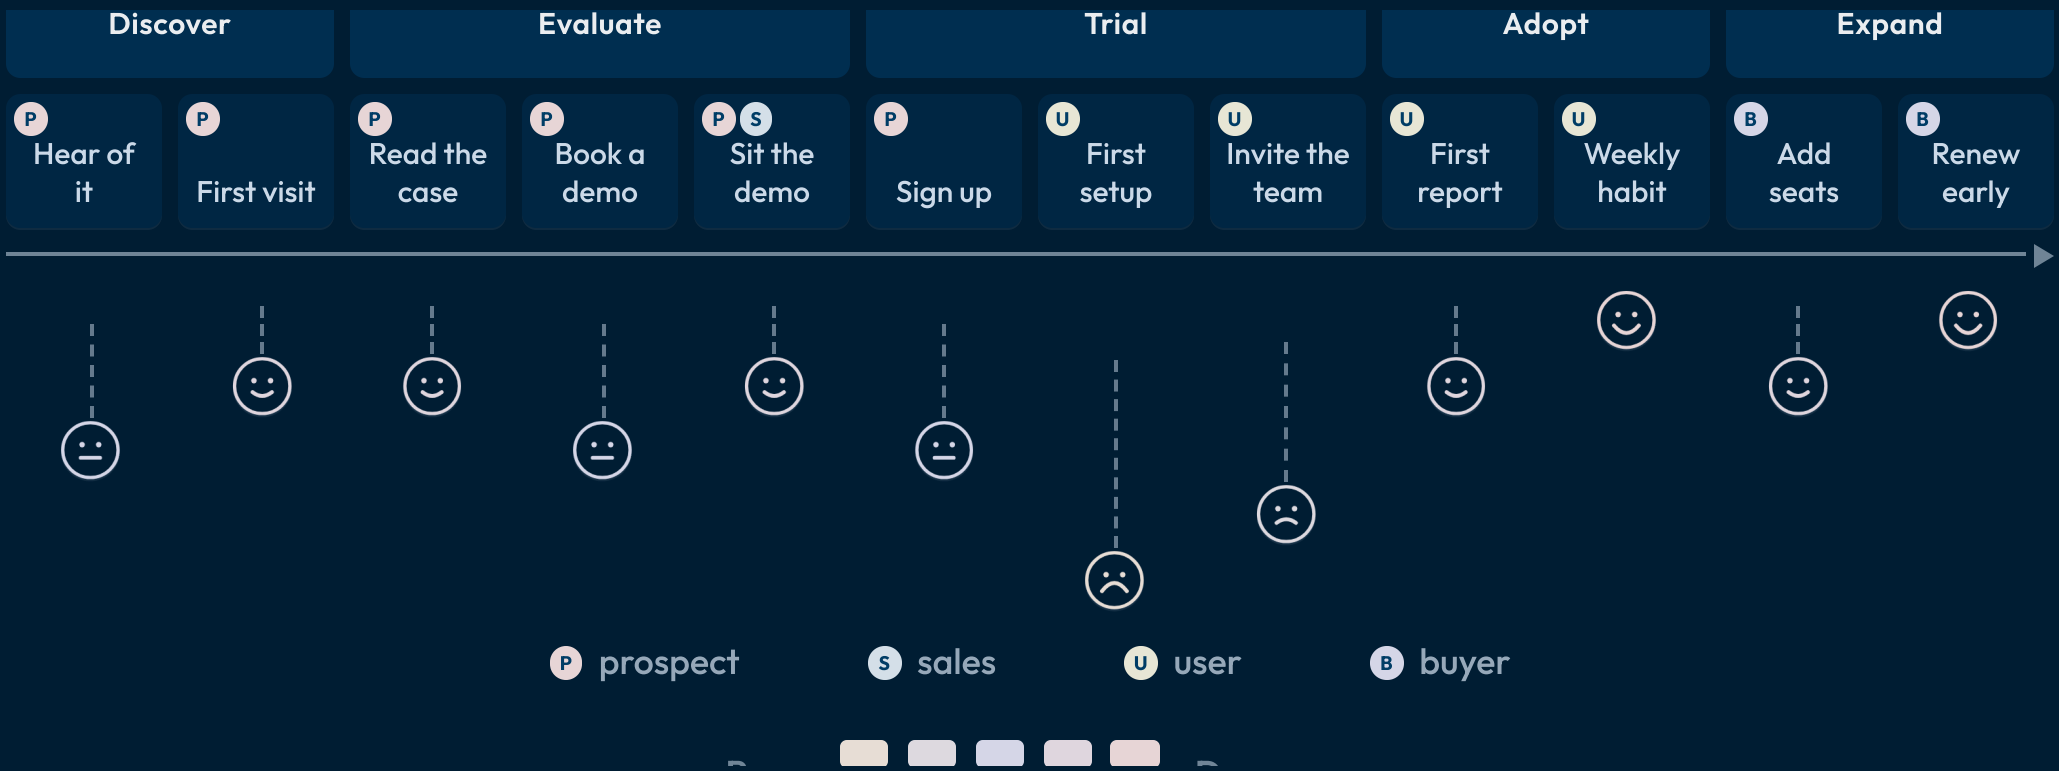


The journey scores each stage of the path.

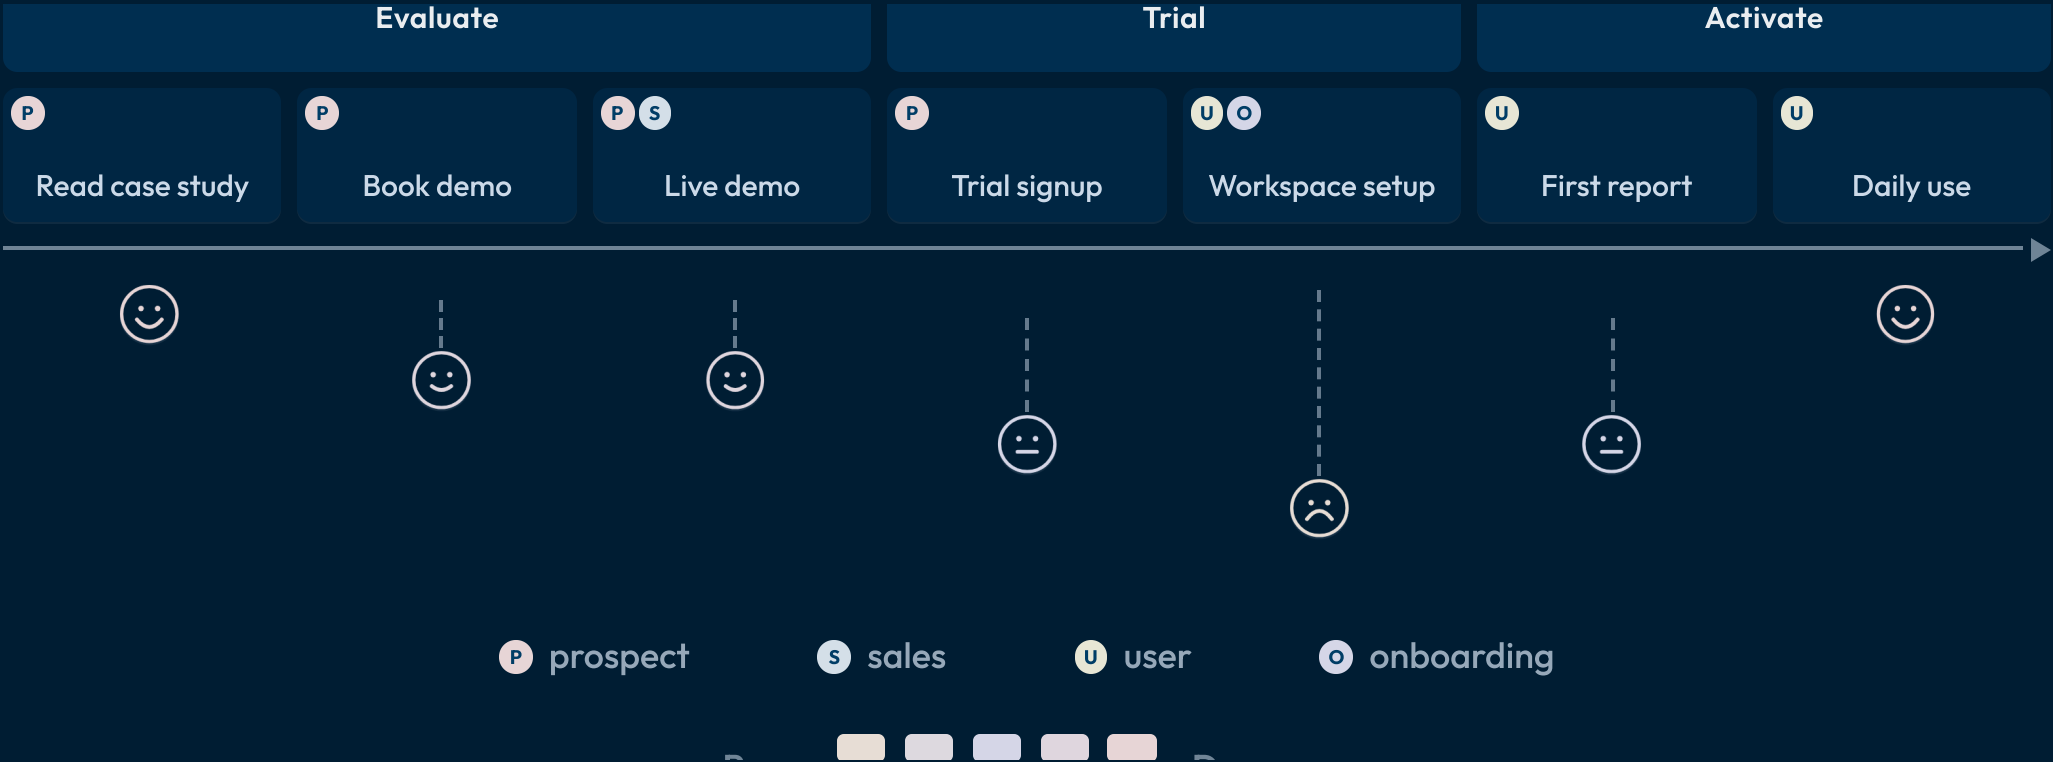

The journey scores each stage of the path.

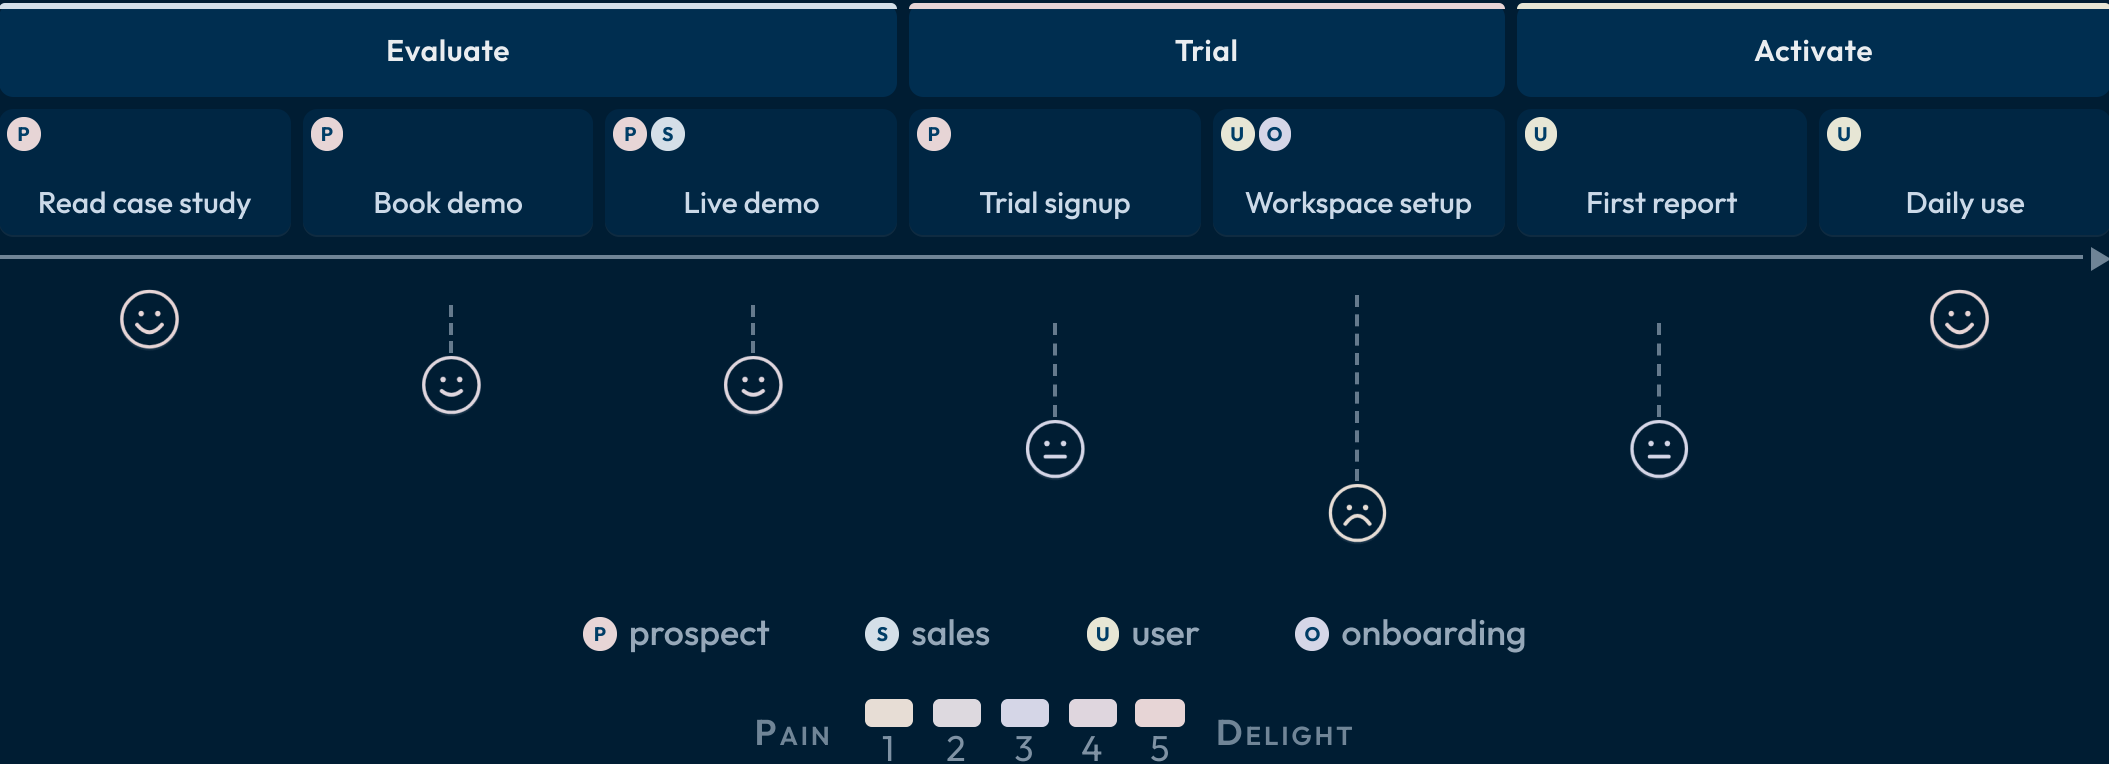

The journey scores each stage of the path.

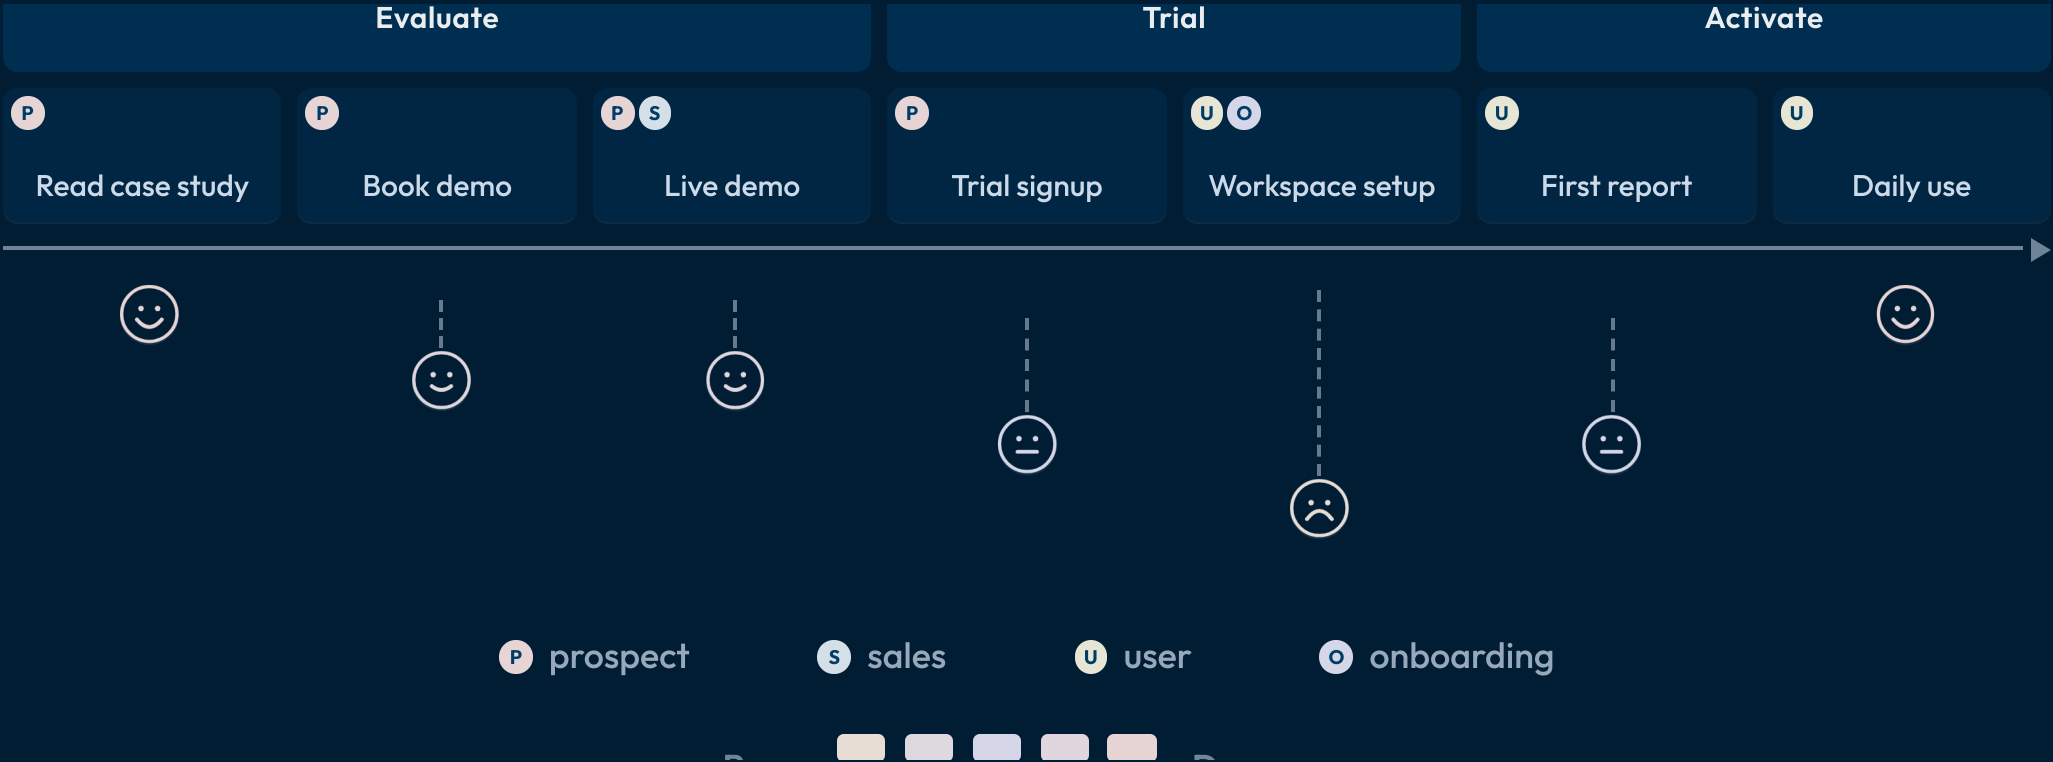

When NOT to reach for journey.

Process without affect

If the mood scores are all the same or arbitrary, the chart is doing less work than `timeline` or `list-steps`. Reserve journey for sequences where the affect changes meaningfully.

More than ten tasks

Past ten tasks the chips compress and the labels become unreadable. Group into fewer sections, or split the journey at a natural break.

Volume tokens without weighted

The `+N` volume token is meaningful only under the `weighted` variant. On the other four it is parsed but invisible — strip it from the markdown or commit to weighted.

RELATED COMPONENTS

See also.

`list-steps` — process needs descriptive body per step, no
chart

`gantt` — schedule of overlapping tasks across lanes

`kanban` — current status by stage rather than sequence over
time