


EVIDENCE • SCATTER • SERIES

radar

Native radar / spider chart — items rated across multiple axes.


SCALE · 0-10

The radar maps strengths around the compass.

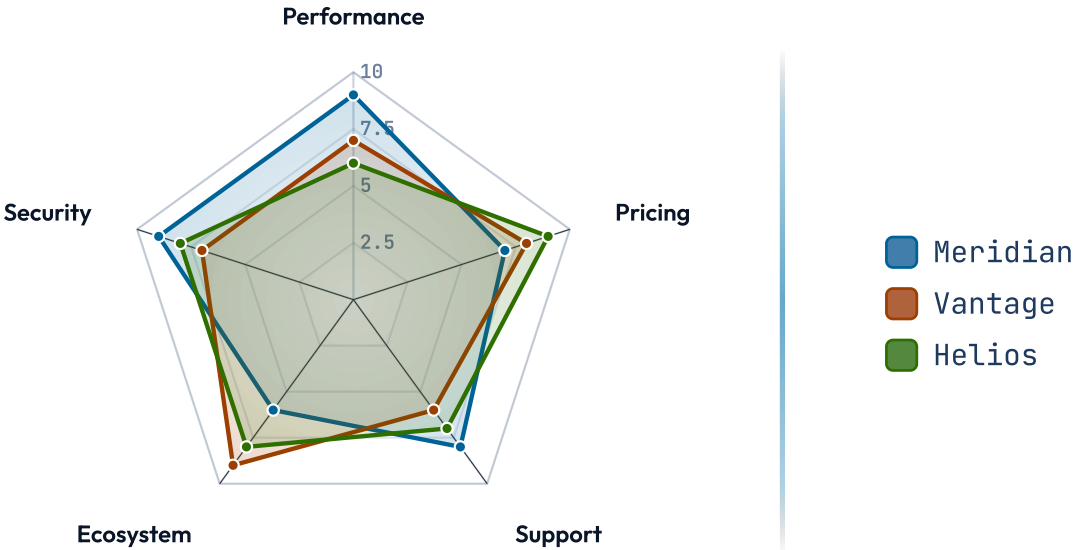

SCALE · 0-100

target draws the bar the shape must clear.

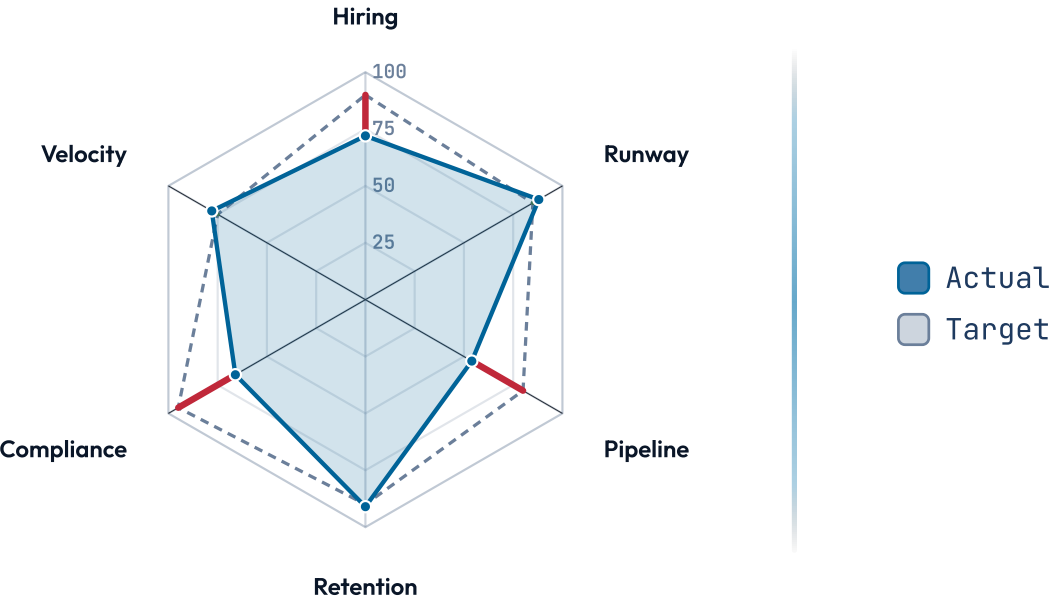


SCALE · 0-10

delta shades the gap between two shapes.




SCALE · 0-10

benchmark overlays the reference shape.

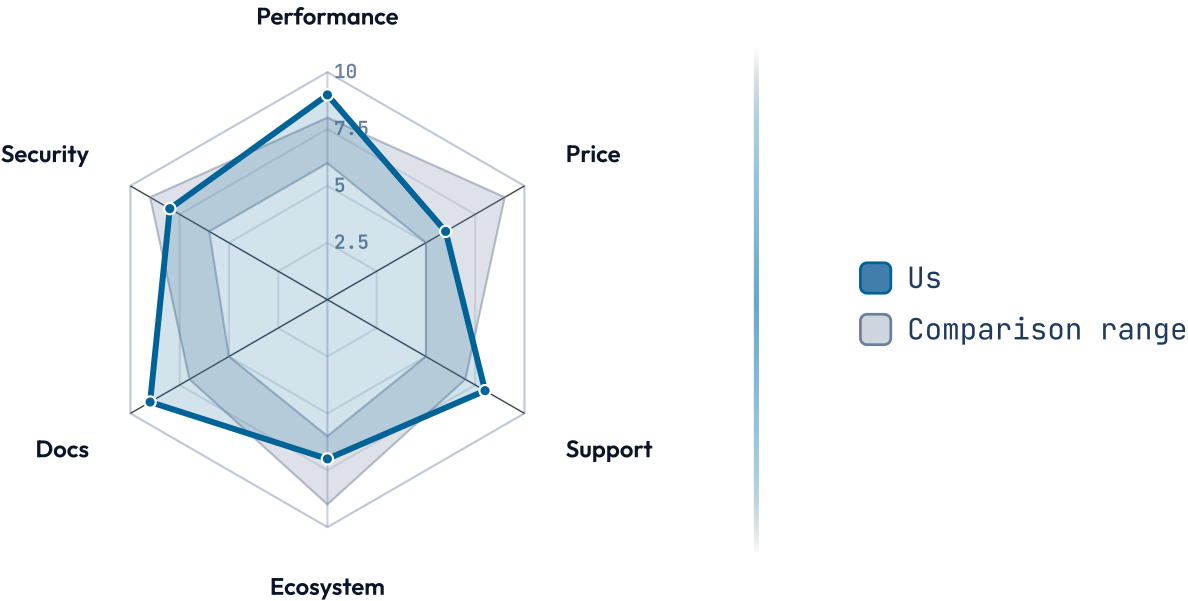


SCALE · 0-5

quadrant shades the compass quarters.

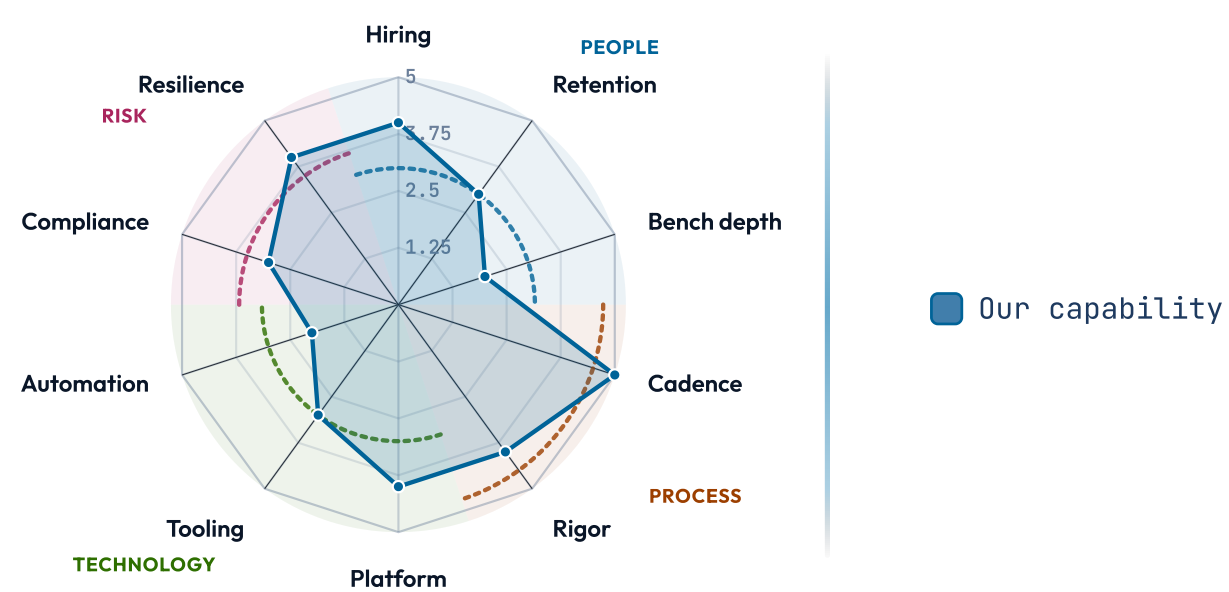


SCALE · 0-10


small-multiples deals one radar per option.




Atlas



Beacon



Cinder



Drift


SCALE · 0-10

minimal strips the rings to the shape.




SCALE · 0-10

Stress test — eight criteria, three vendors.

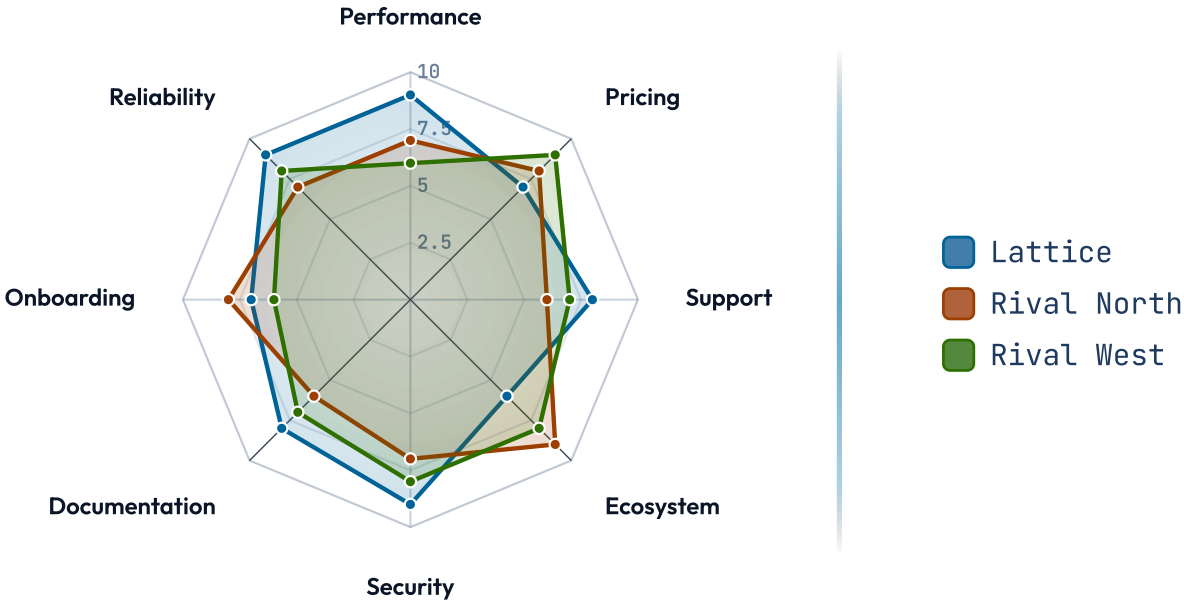


SCALE · 0-10

The radar maps strengths around the compass.

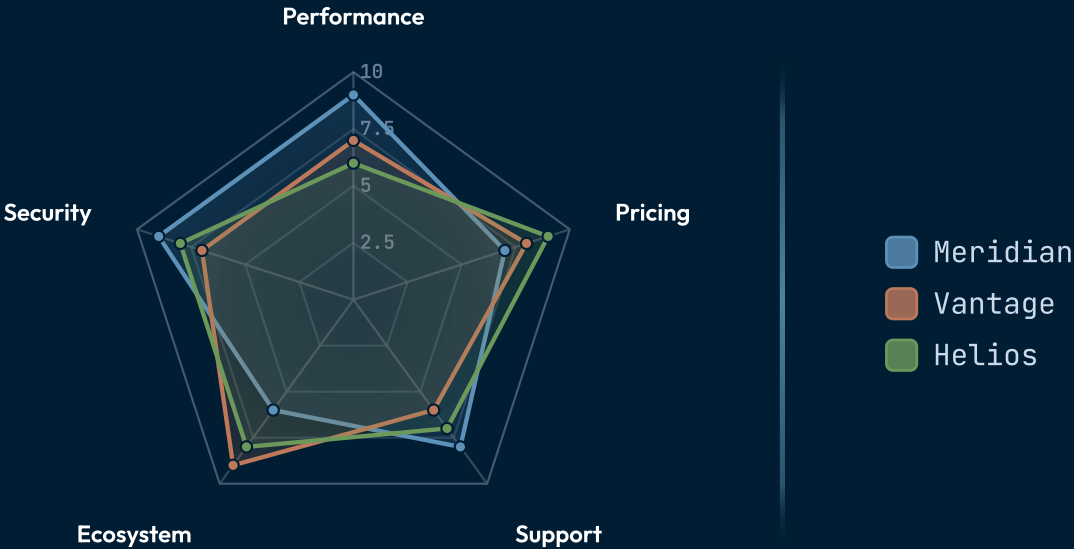


SCALE · 0-10

The radar maps strengths around the compass.

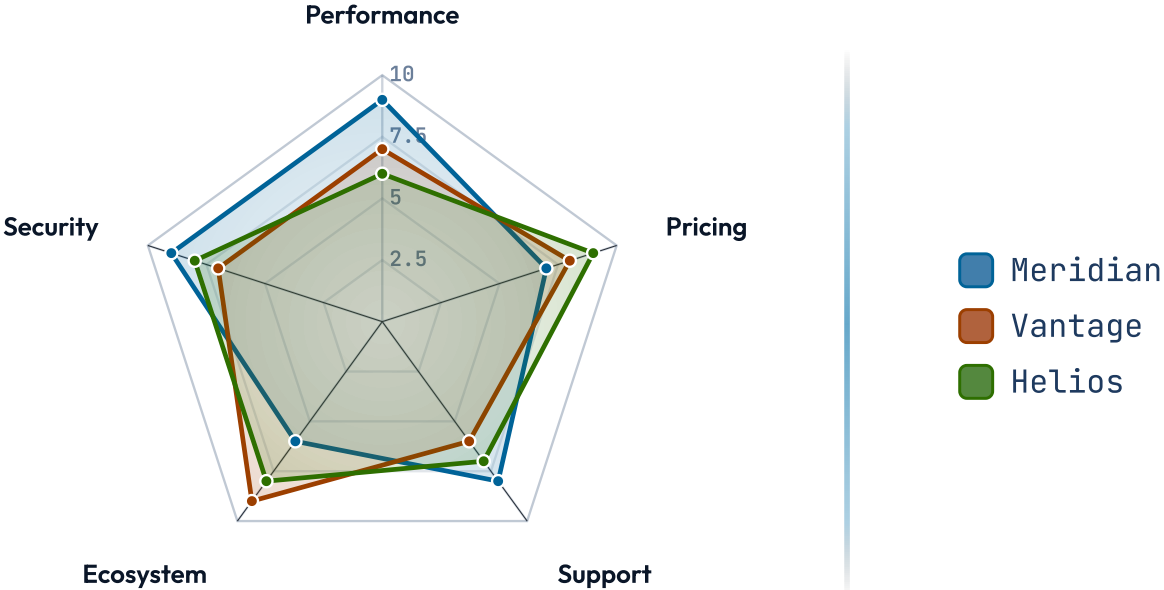

SCALE · 0-10

The radar maps strengths around the compass.

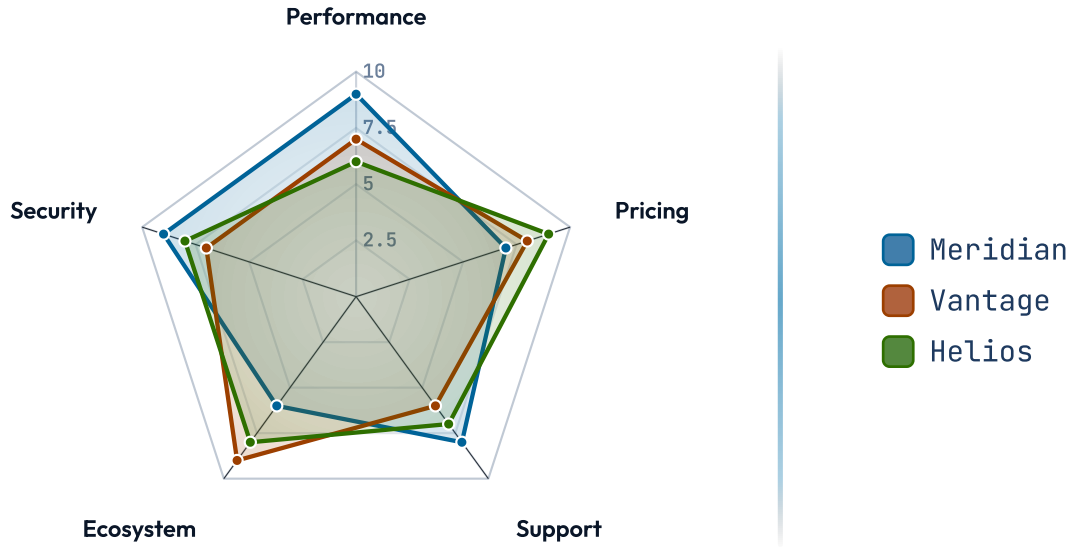

When NOT to reach for radar.

More than four series

Five overlapping polygons become a tangle of edges. Trim to the two or three options the audience is actually choosing between; the rest belong in an appendix table.

Three or fewer axes

Three axes makes a triangle — barely a shape. Below four criteria, the spider collapses and the slide should be a `cards-grid` or `verdict-grid` instead.

Mixed scales across axes

If one axis is 0–10 and another is 0–10,000, the larger axis dominates the polygon and the comparison is misleading. Normalise everything to a shared scale first.

RELATED COMPONENTS

See also.

`quadrant` — two axes are enough — the other six dimensions drop out

`verdict-grid` — the criteria are categorical (pass/fail), not graded

`kpi` — the comparison is one option's metrics, not multi-option

`compare-table` — a precise tabular comparison reads better than a shape

`piechart` — the question is part-to-whole, not multi-criterion