


EVIDENCE · CANVAS · SERIES


stacked-bar

Bars split into parts, so one chart carries both the total for each category and the mix inside it.


Each bar is a total; the bands inside it are the mix.

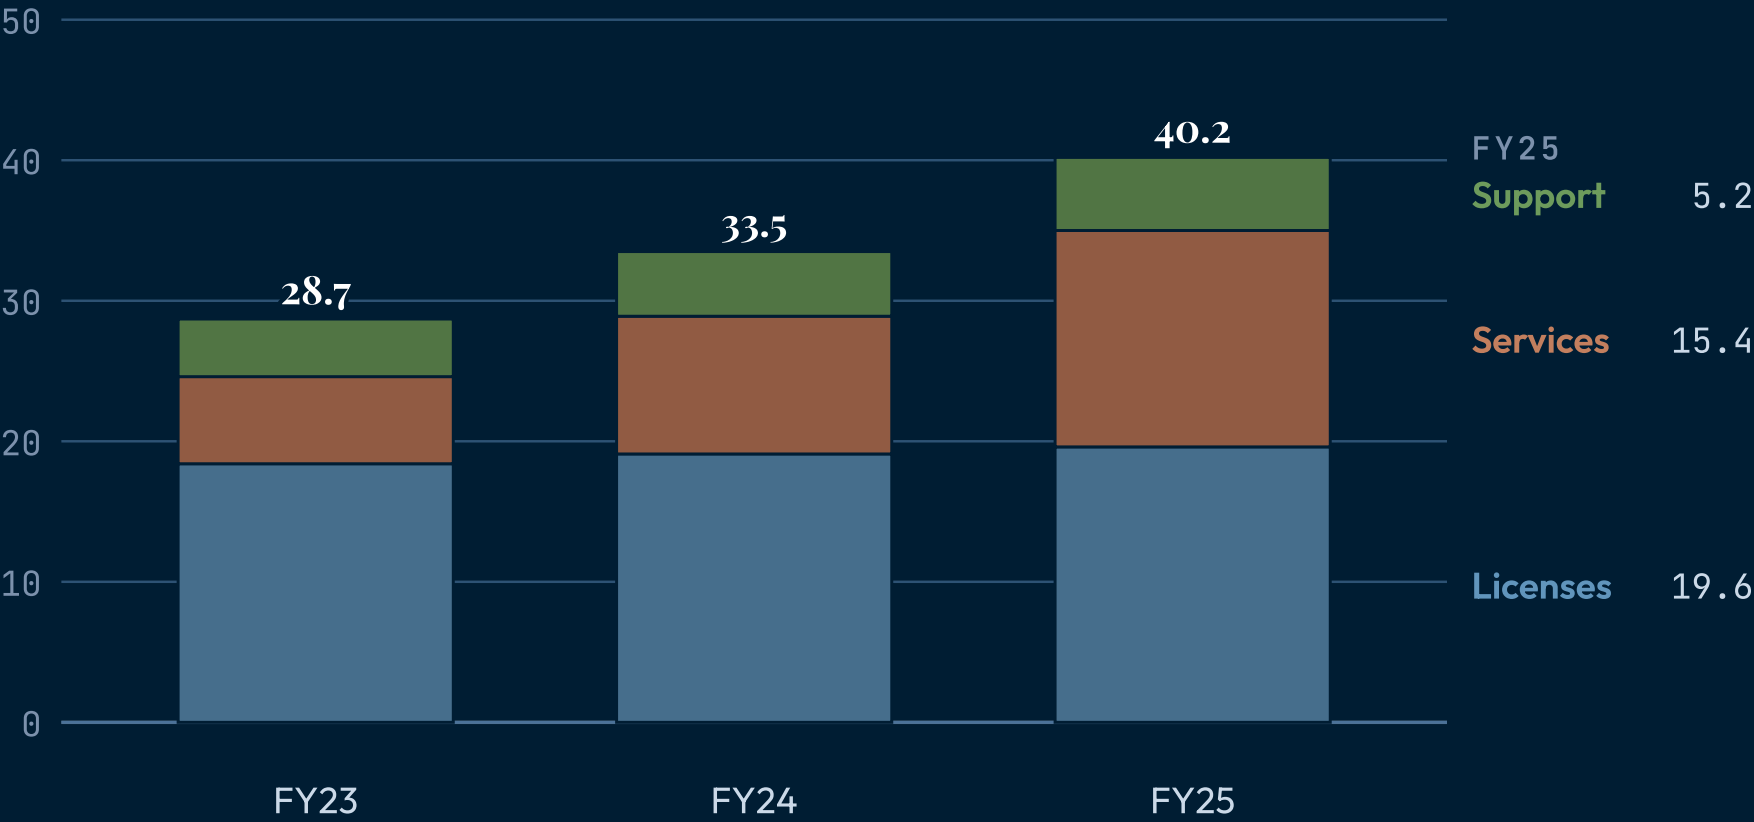


share normalizes every bar, so only the mix is compared.

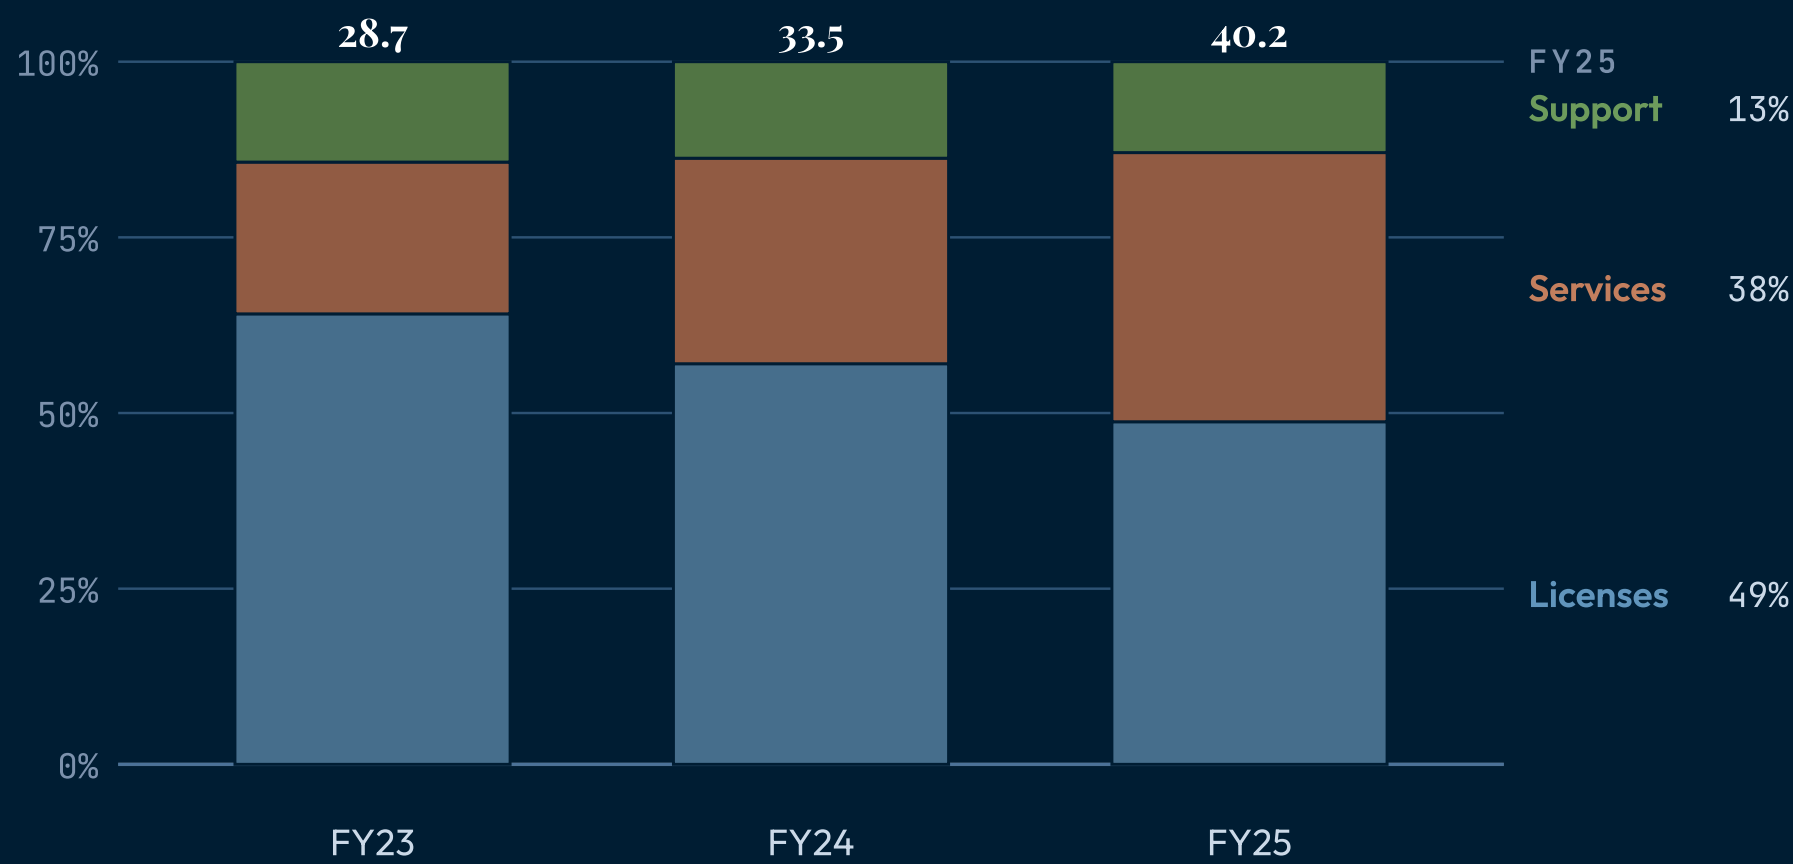


row turns the stack on its side for long category names.

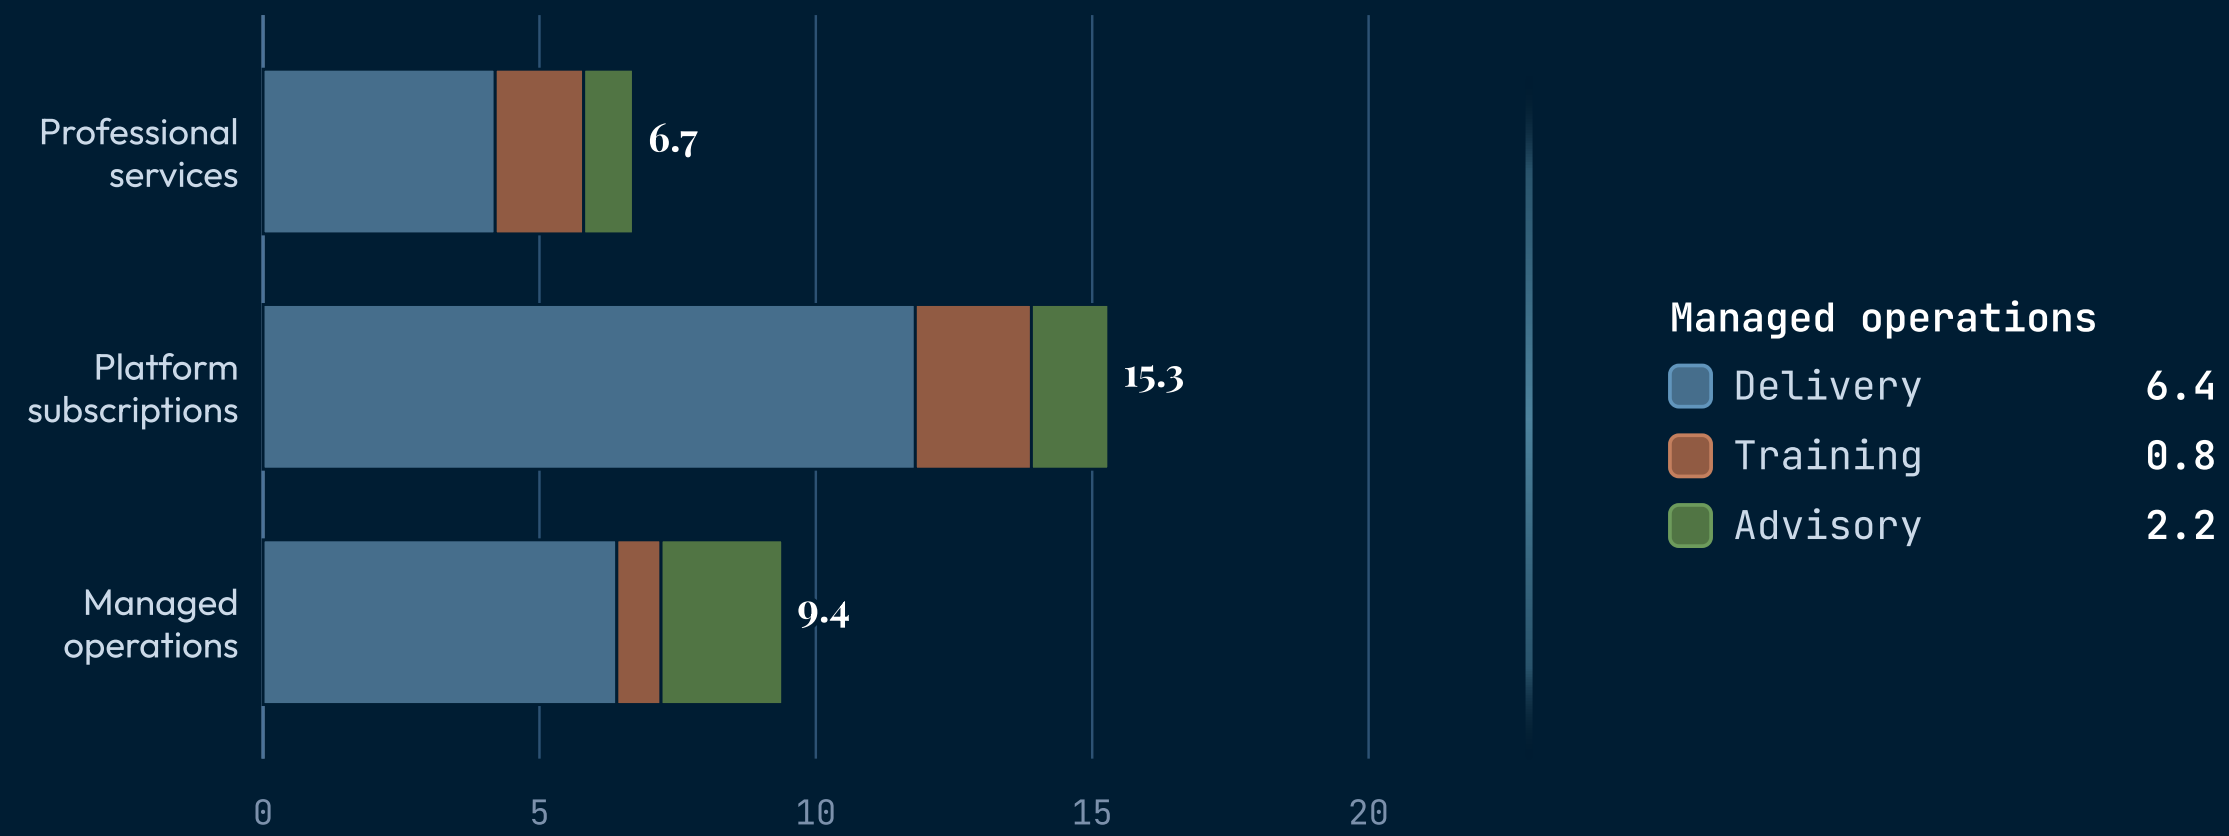


Six parts, six periods, one sliver that should have been folded in.

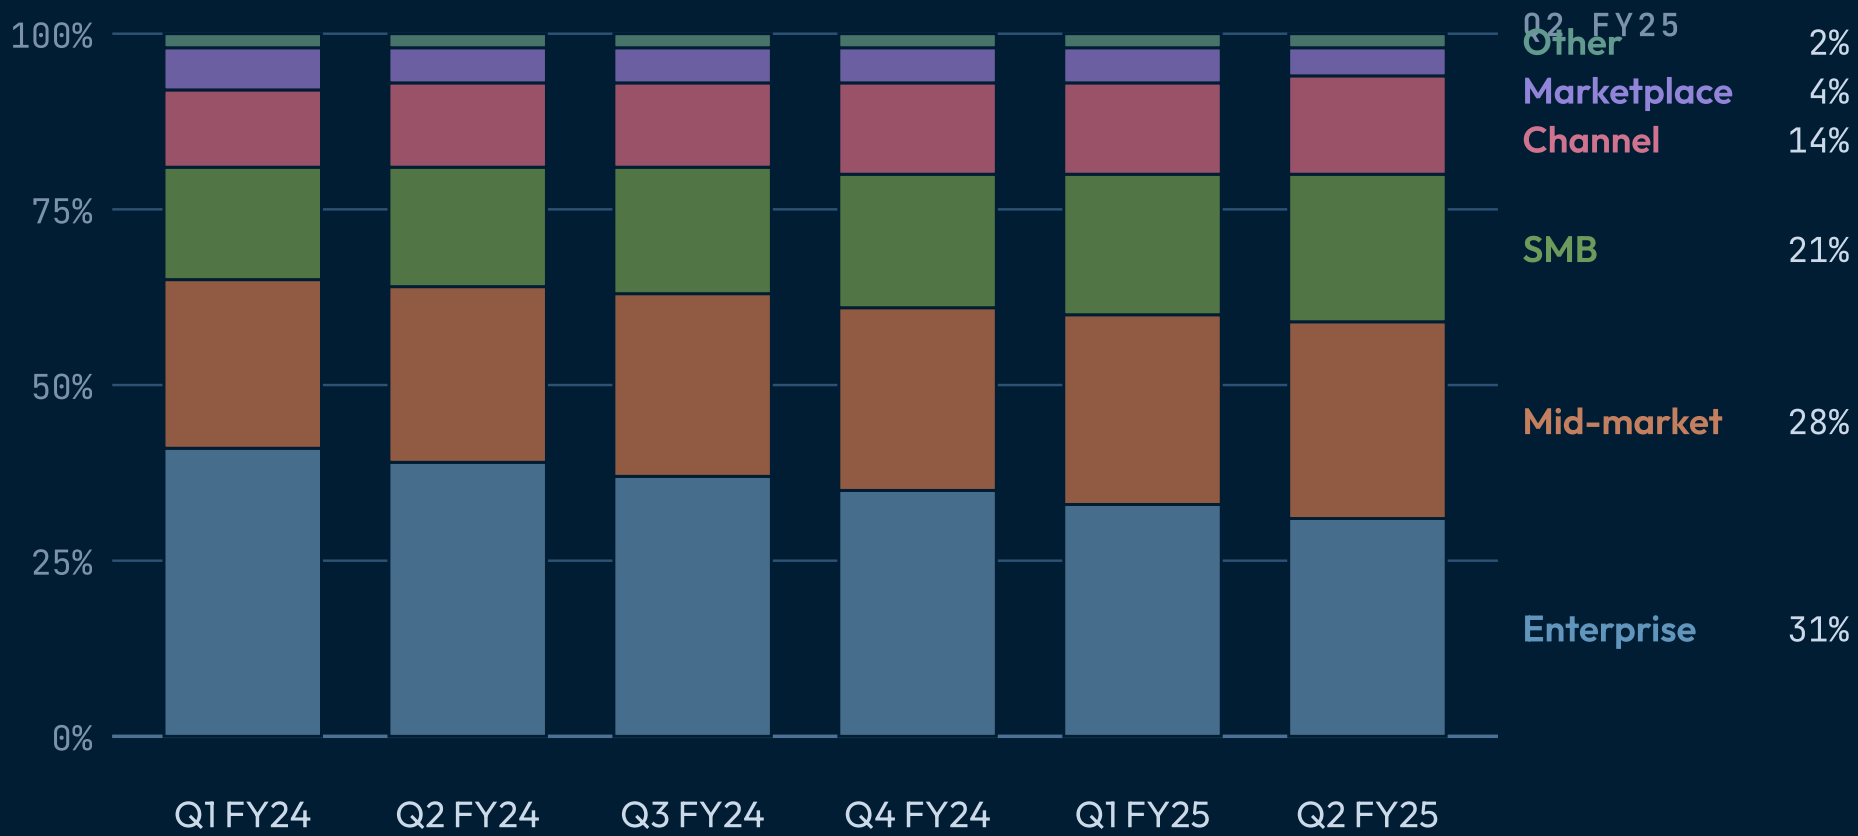


Each bar is a total; the bands inside it are the mix.

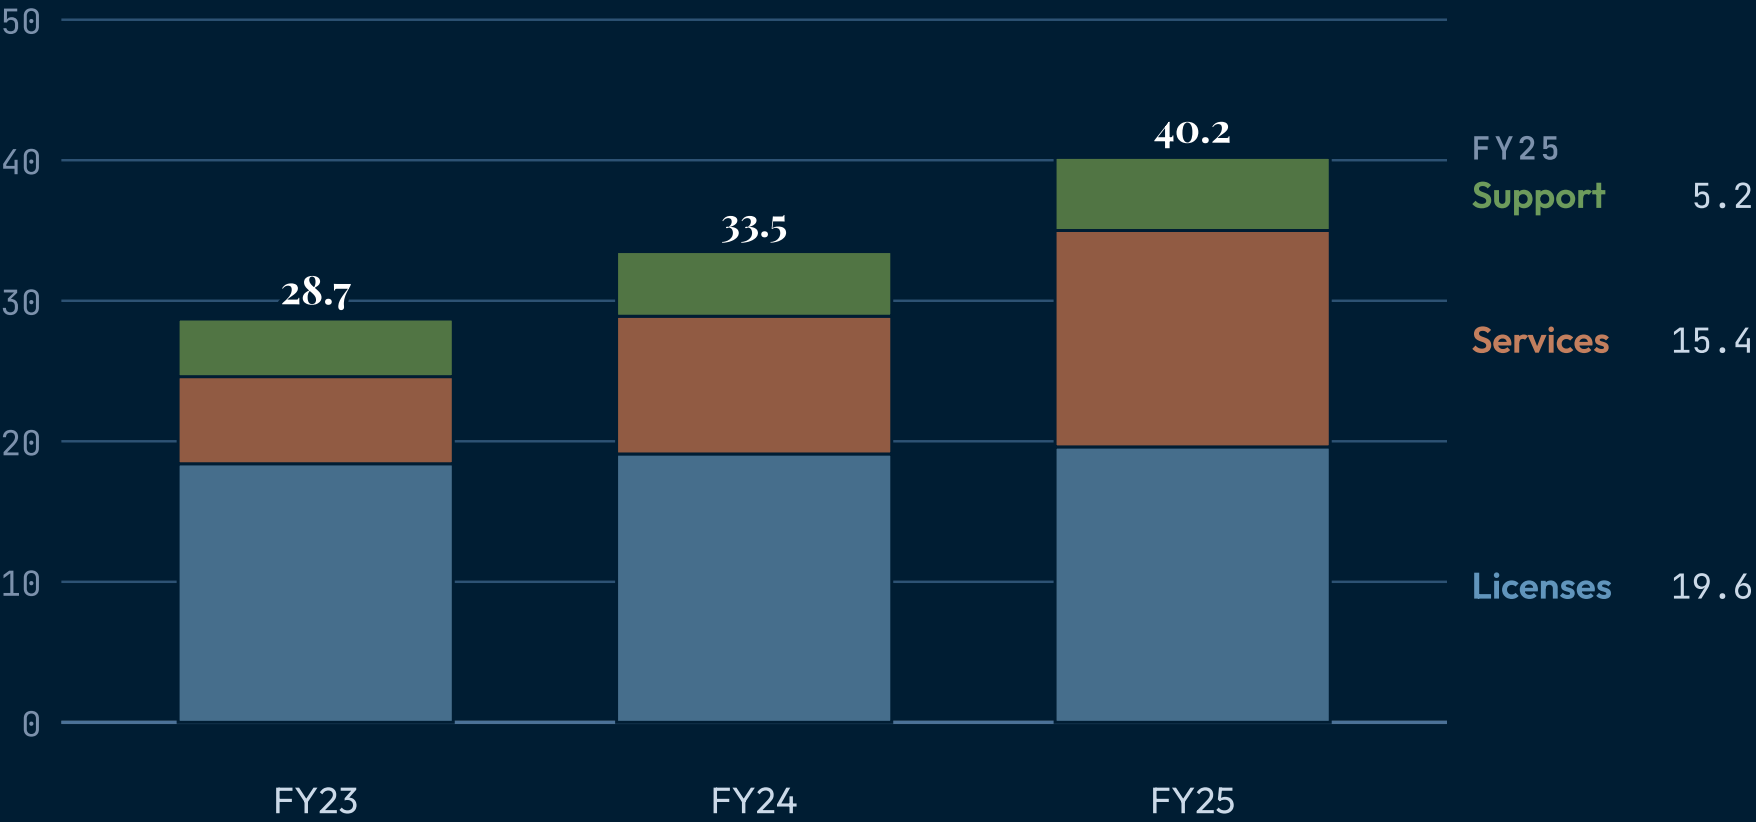

Each bar is a total; the bands inside it are the mix.

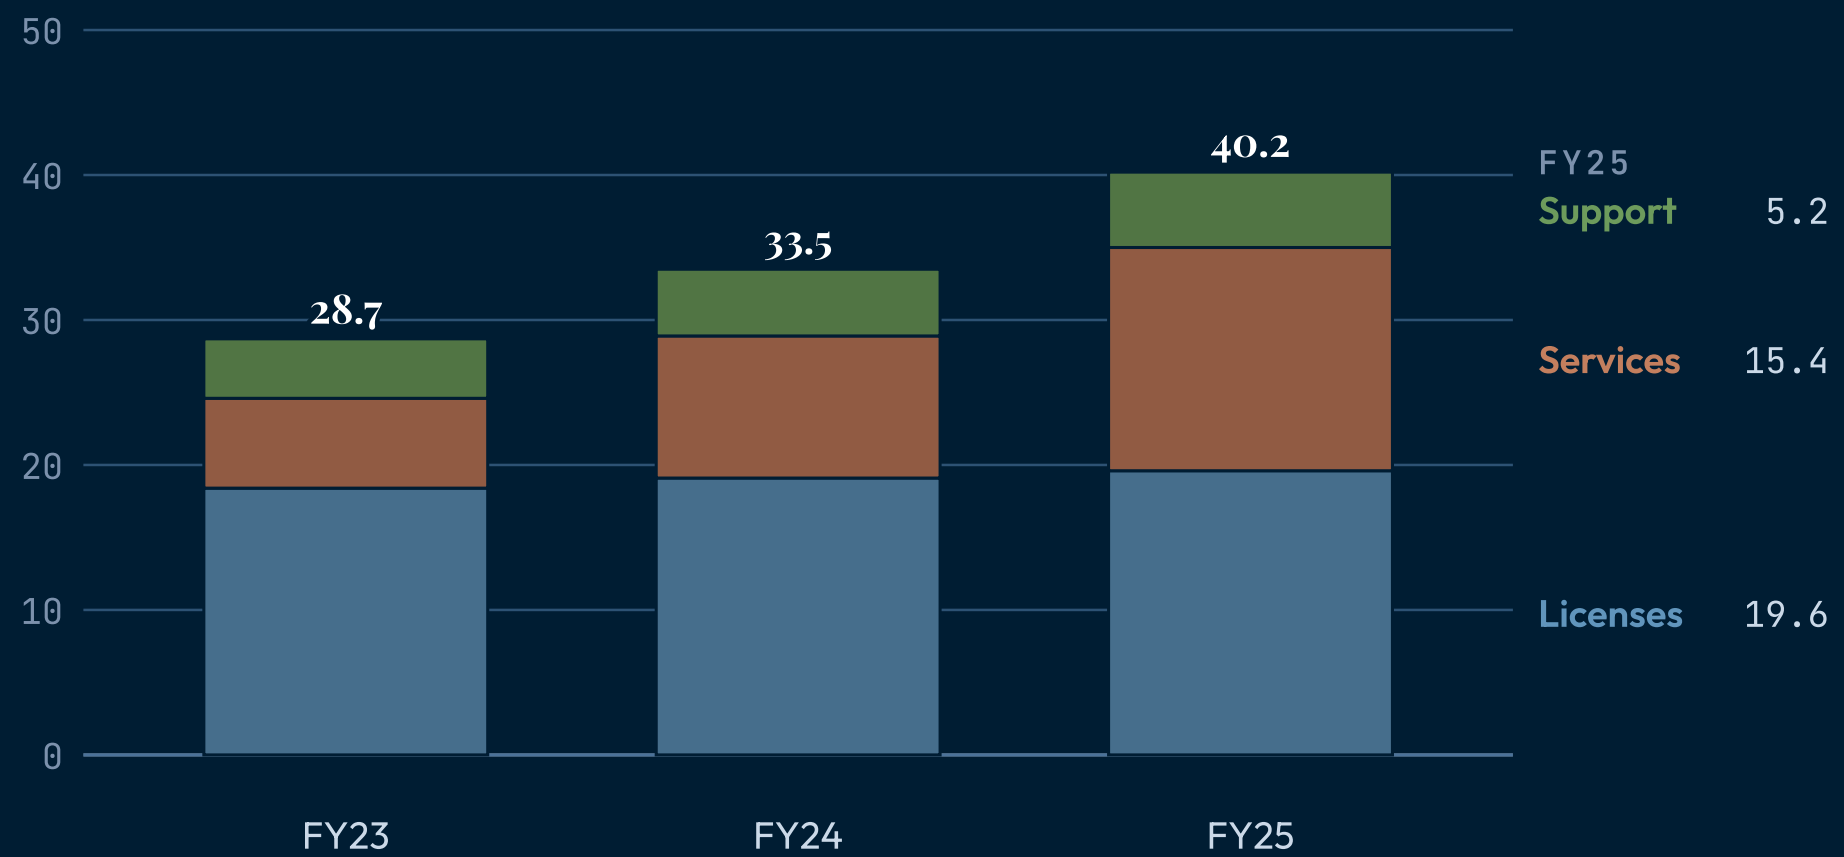

Each bar is a total; the bands inside it are the mix.

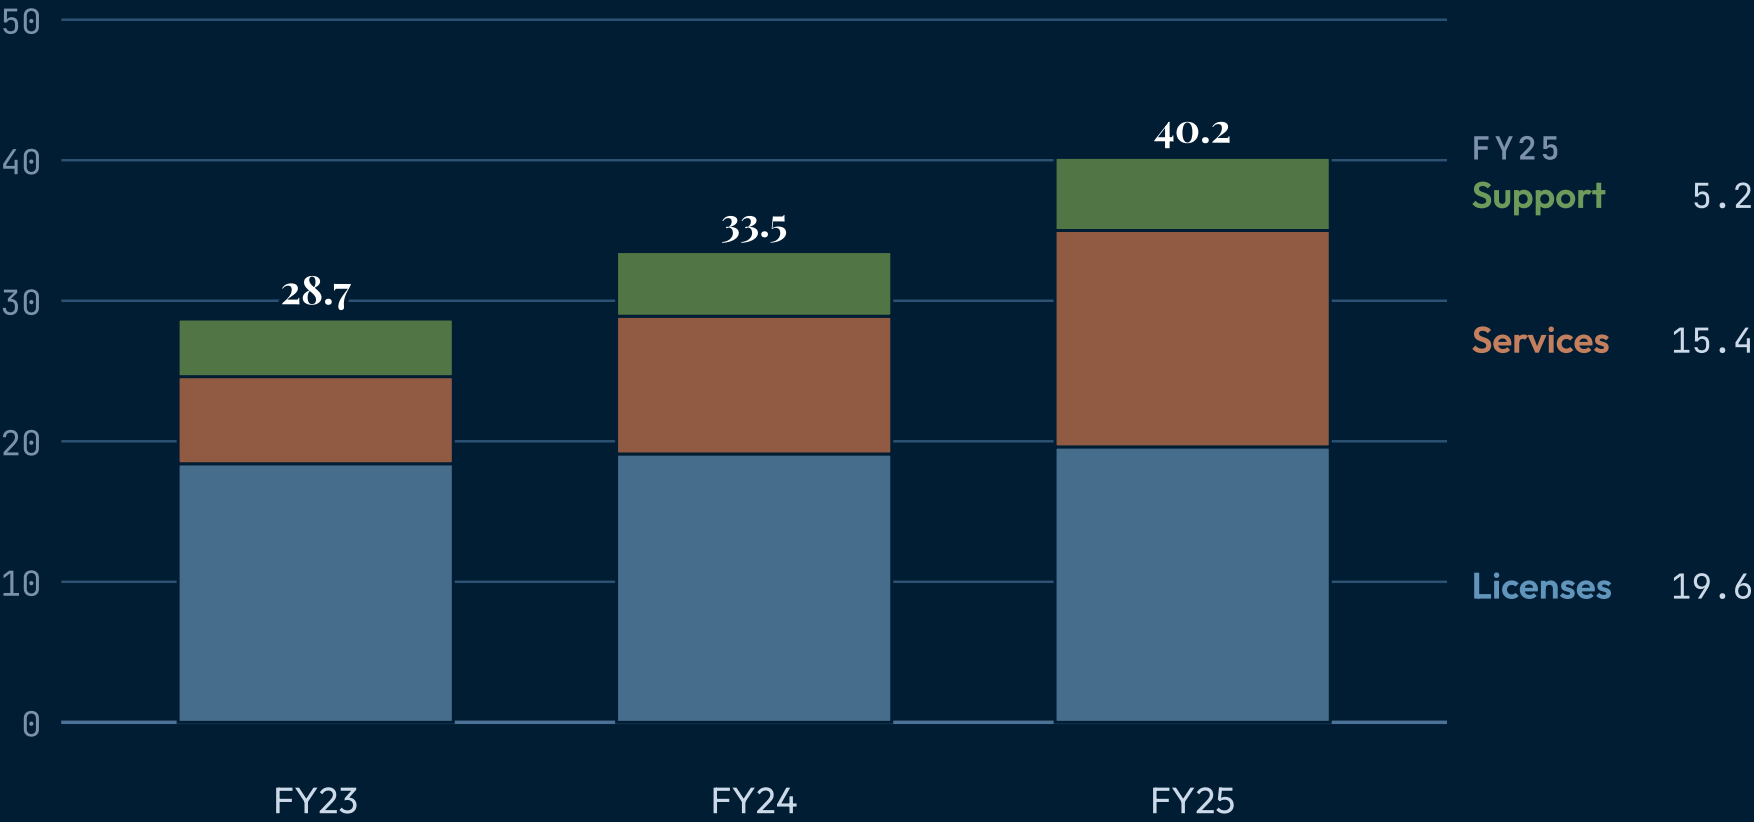

When NOT to reach for stacked-bar.

Tracking a part that is not at the bottom

Only the bottom segment shares a baseline across bars. Every segment above it floats on the ones below, so a reader cannot see whether ‘Services’ grew — they can only see where its band sits. If ONE part is the story, put it at the bottom of the stack, or use `line` to plot it

Parts that are not parts

Stacking independent metrics — revenue, headcount, NPS — produces a bar whose height means nothing. The parts must sum to something a reader would name. Use `bar` for independent magnitudes.

A long tail of slivers

A 2 % part is about one unit of bar height: too thin to see, impossible to label, and it pushes everything above it around. Consolidate the tail into one ‘Other’ part before authoring, or drop to the four parts that carry the claim.

One category

A single stacked bar is a pie chart drawn as a column, and a pie reads proportions better. Use `piechart` for one total; this chart earns its shape from the comparison ACROSS bars.

RELATED COMPONENTS

See also.

`piechart` — one total to decompose, with no comparison across categories

`progress` — independent attainment bars with no parts and no shared value axis

`funnel` — the stages are a narrowing pipeline, not parts of a total

`matrix-grid` — the cells are qualitative judgments rather than values that sum