


ANIMA · IN-PLACE CHART MOTION · MODEL-FREE

Animate the chart you already drew.


Add `chart-anima` to a slide or deck and a rendered funnel comes to life on the live Studio, Playground, and Present surfaces — the bands build in top-to-bottom, the labels follow, and the worst drop-off emphasizes. No AI in the loop; the motion is derived from the chart's own marks. The exported PDF is byte-identical — it shows the finished chart still.

One class. Per slide, or per deck.


Where the pipeline leaks.

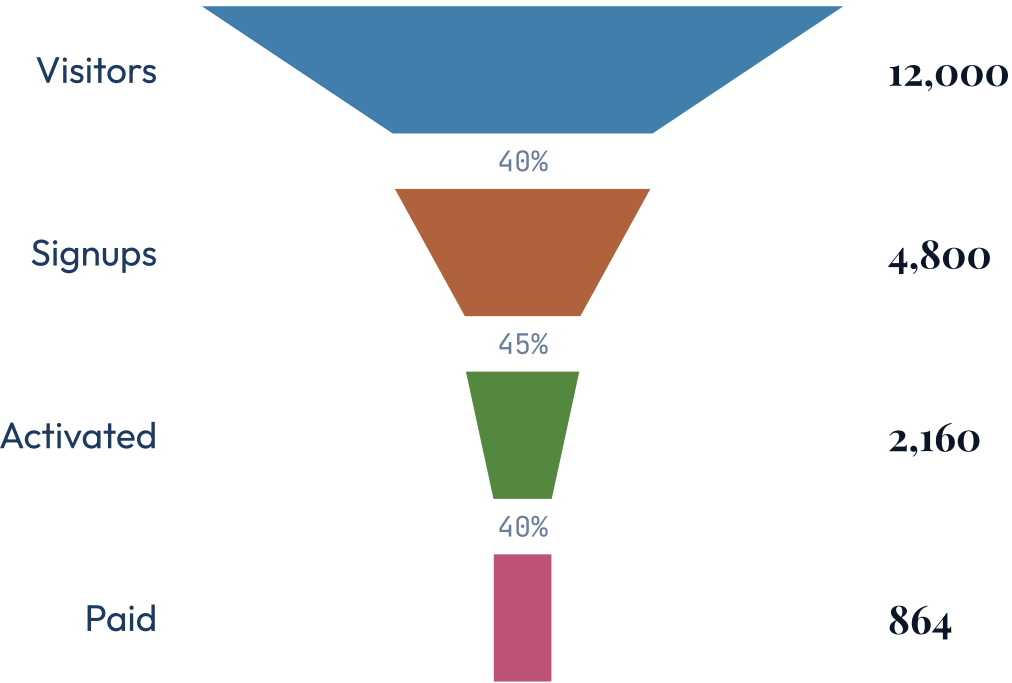

Hiring pipeline — the offer stage is the leak.

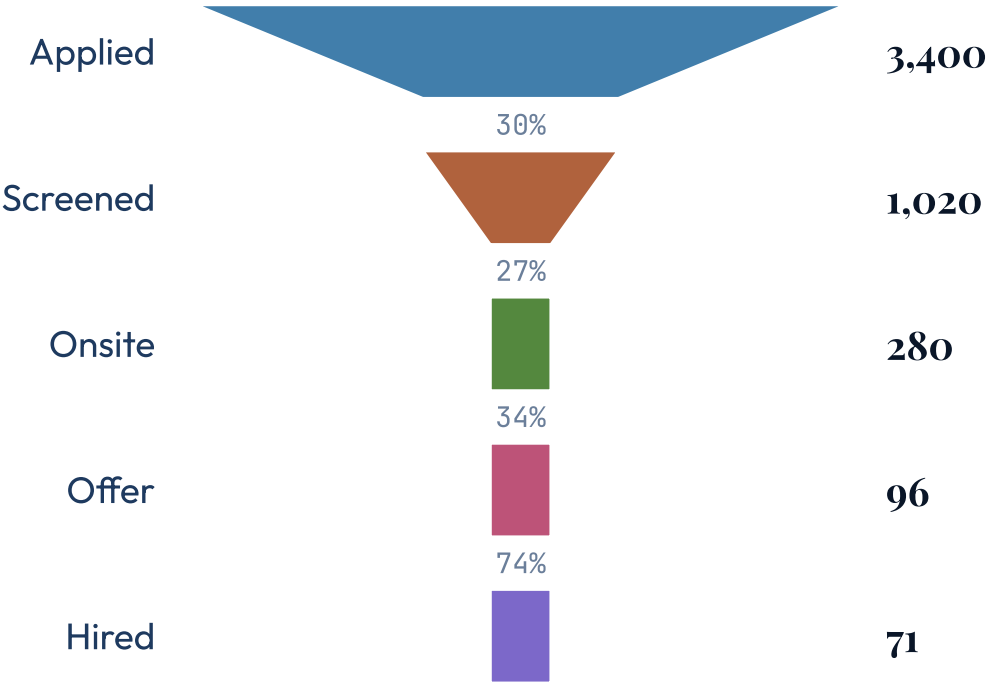

Revenue by segment.

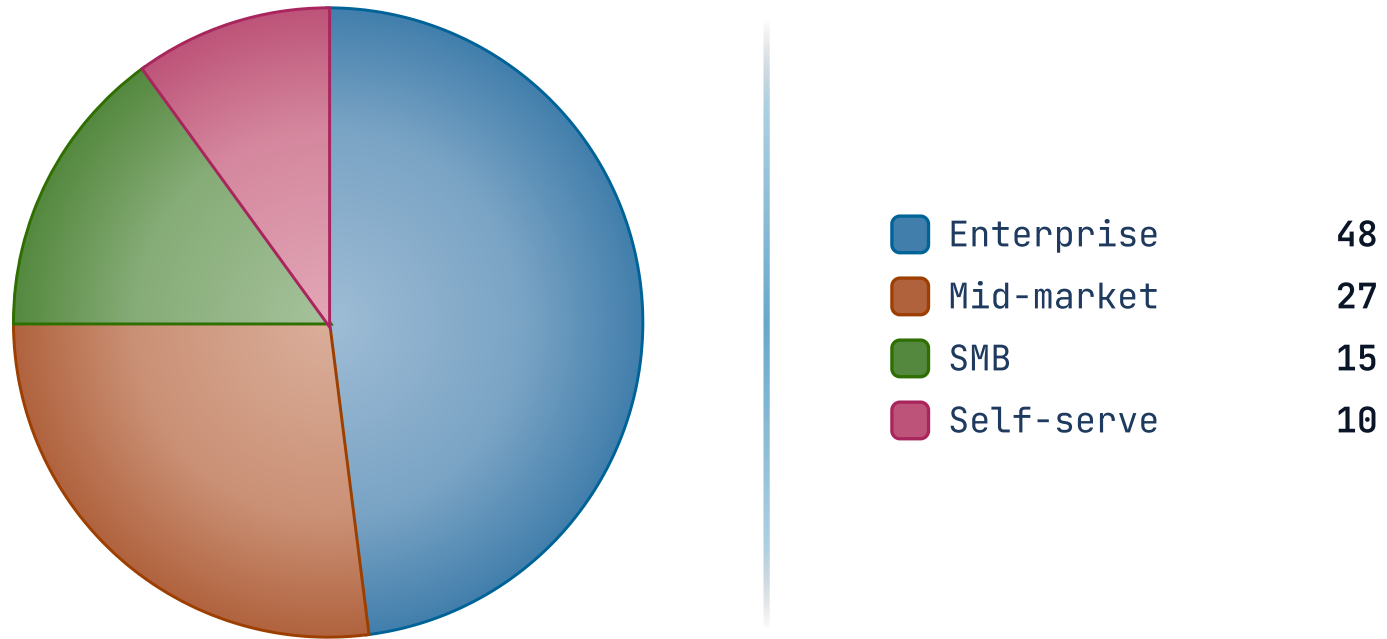


Set it once for the whole deck.

Put `class: chart-anima` in the frontmatter and every animatable chart slide (funnel, pie, ...) animates — no per-slide marker needed. A single chart slide can still opt out by overriding its own `_class`.

- **Preview-only.** Motion plays on the live surfaces; the PDF / PPTX / HTML export always shows the finished chart still. A deck without `chart-anima` is unchanged.
- **Playback + accessibility, for free.** An animated chart gets the same corner control as an Anima scene —  pause ·  play ·  replay — honors the viewer's reduced-motion setting (it drops to the safe, legible build), and pauses off-screen.

The same funnel, NOT opted in — static everywhere.

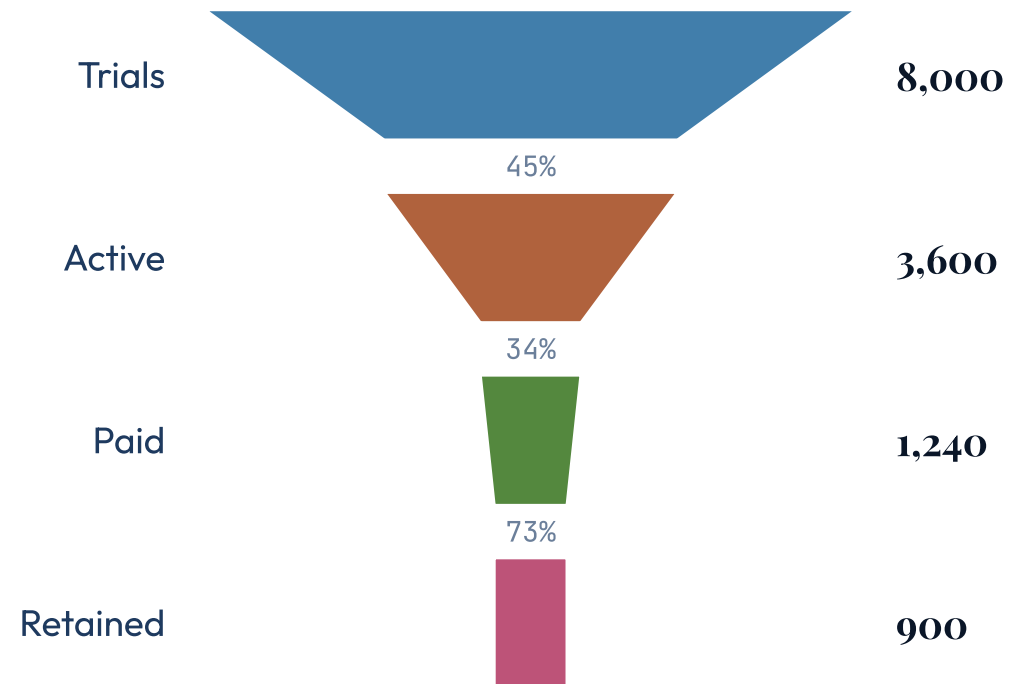

What makes it authoritative, not guesswork.

- **The renderer declares the role.** Each mark carries a native `data-anima-role` — `bar`, `label` — so Anima choreographs by the *role* the chart states, not by inferring from a class name.
- **The ingest owns the ids.** The renderer emits no per-mark id (a fixed one wouldn't be unique across two funnels); Anima mints the addressable ids when it reads the chart at view time.
- **One host, two sources.** An in-place chart runs through the exact same player as a baked Anima scene — one animation lifecycle, not a fork.