

FUNNEL • MAP • QUADRANT • SPEAKER-NOTES CHANNEL

Per-mark detail, across the chart family.


The pie's authored-detail pattern now generalizes. A funnel stage, a map region, or a quadrant item can each carry an indented sub-list. On screen it reveals on hover/tap; in the exported PDF it rides the slide's **speaker note** — the chart pixels stay byte-identical.

One source, two surfaces.

The sublist under a mark powers **both** the present-mode reveal popover **and** the static-PDF speaker note. One shared substrate (`mark-detail.js`) tags each mark with `data-mark`, emits an inert `<template class="chart-detail">`, and folds the same detail into the slide note. Open this PDF's note annotations to read each mark's detail.


Where deals leak out of the funnel.

The bands show the drop-off; the notes carry the why.

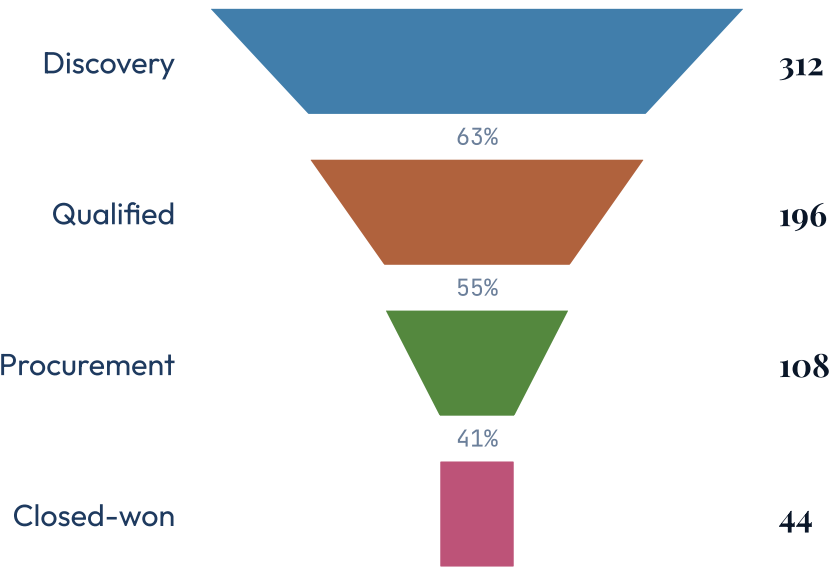

Where the program runs.

Hover a region on screen; read the note in the PDF.

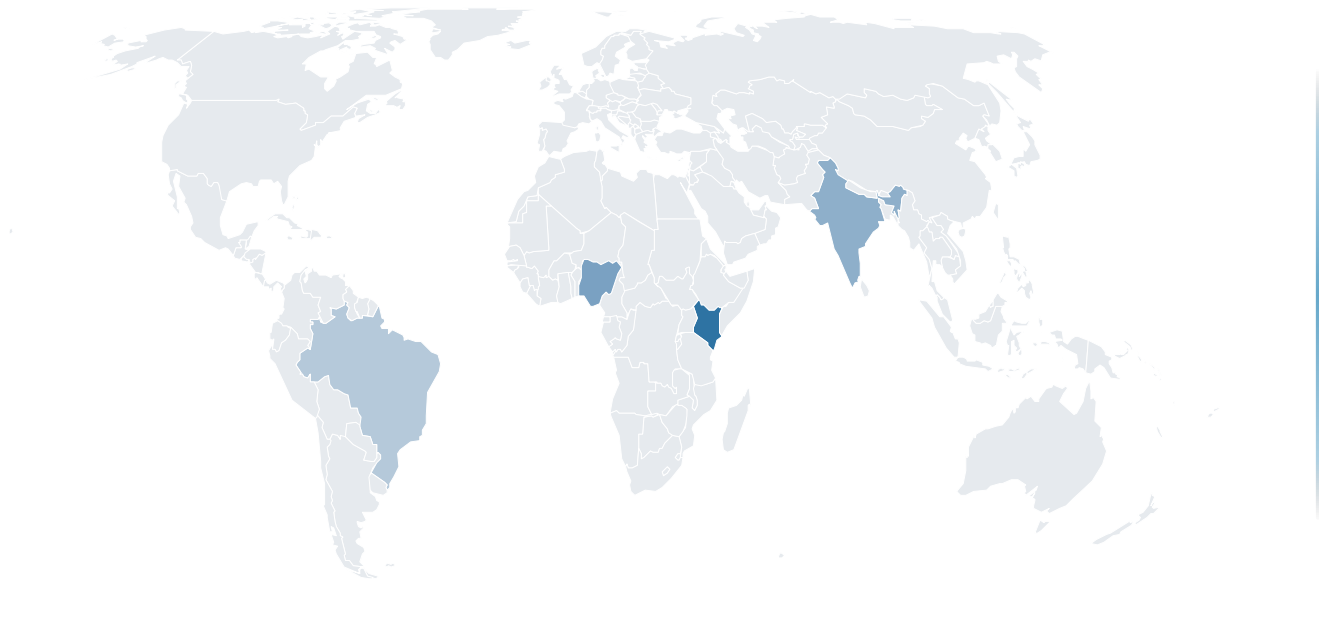


Kenya	4.2
Nigeria	3.1
India	2.8
Brazil	2.2

EFFORT 0-10 → REACH 0-100

Where to put the next dollar.


Each dot carries its own rationale in the note.

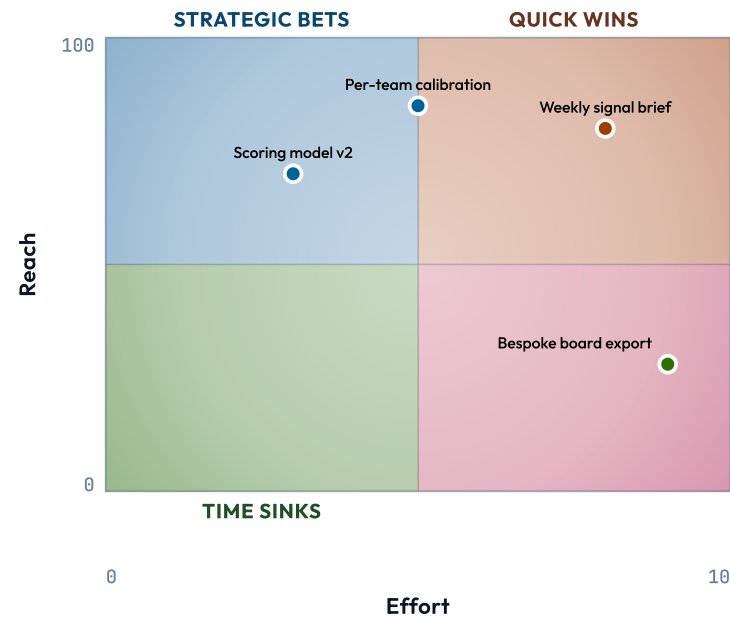

CAPABILITY • 0-100

Where the team is strong, and where it isn't.


*Radar reveals **per-axis** — each dimension carries its own note.*

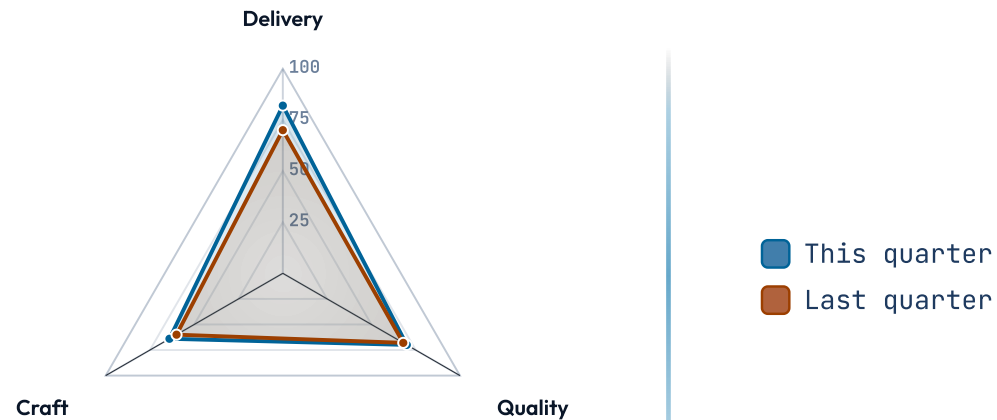

ONBOARDING • 1,000 SIGNUPS

A plain funnel is unchanged.

*No sublists here — so this chart emits **no note** and exports exactly as a plain funnel always has, byte-for-byte.*

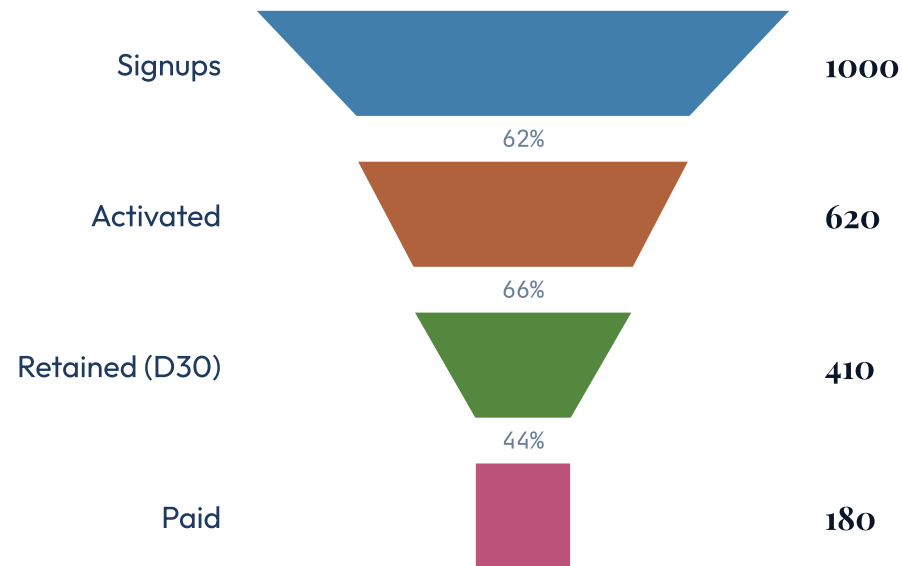

OPEN THE ANNOTATIONS

Read the notes.

The detail never crowds the boardroom slide — it waits in the speaker-notes channel for the reader who wants it, and on screen it lifts to life on hover.