

STATEMENT · PANEL · STRUCTURE

contact

An identity card that encodes a vCard: name, title and contact lines beside a QR that saves the presenter to a phone.


Ada Slide

— ONE SCAN SAVES THE SPEAKER •
SLIDEWRIGHT

hello@slidewright.dev

+1-555-0142

slidewright.dev

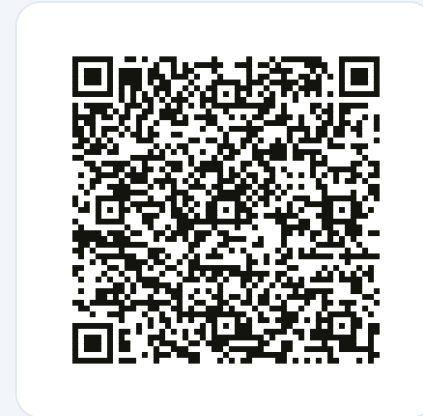

THE QR ENCODES THIS CARD AS A
VCARD

Ada Slide

— ONE SCAN SAVES THE SPEAKER ·
SLIDEWRIGHT

hello@slidewright.dev

+1-555-0142

slidewright.dev



THE QR ENCODES THIS CARD AS A
VCARD


Ada Slide

— ONE SCAN SAVES THE SPEAKER •
SLIDEWRIGHT

hello@slidewright.dev

+1-555-0142

slidewright.dev

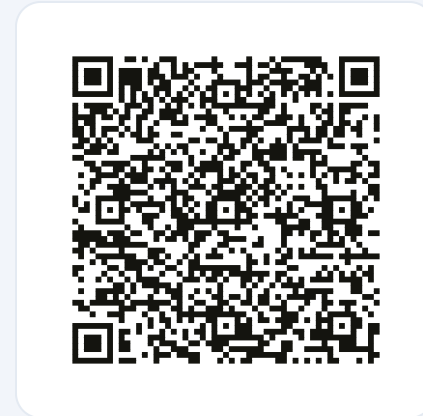

THE QR ENCODES THIS CARD AS A
VCARD

When NOT to reach for contact.

Not a team roster

One card is one person. For a set of people use an inventory layout; a contact card is a single identity.

Don't bold the field values

The value leads and the key trails as a small tag — name last, never first. Writing the key first, bolded, breaks the transform's postfix read.

RELATED COMPONENTS

See also.

`wifi` — the card is a network to join rather than a person