

AUTO-SPLIT • STRUCTURE DECIDES THE CUT

One thing per slide

A slide holding six things becomes six slides. The markup says how many, so every machine cuts the same deck the same way.

What changed

What changed

The trigger is **structure**, not a measured overflow — no render decides the page count

→ continues

What changed (cont.)

A page carries **one** structural element; nothing packs to an authoring budget

→ continues

What changed (cont.)

Every run opens on a **cover** and closes on the section's **note and key insight**

→ continues

What changed (cont.)

Each page **names the next one**,
so an atomized run still reads as
one thing

→ next: the key insight

What changed

KEY INSIGHT

A deck is authored once. What it becomes should not depend on which machine renders it.

What a split page owes the reader

The one thing it holds, set
at full size...



What a split page owes the reader

01 **The one thing it holds, set
at full size — not shrunk
to share**

→ next: A heading that says
which run it belongs...

What a split page owes the reader (cont.)

02 A heading that says
which run it belongs to

→ next: A pointer to what comes next

What a split page owes the reader (cont.)

03 A pointer to what comes next

→ next: A way back to the whole – the k-of-N rail...

What a split page owes the reader (cont.)

04 A way back to the whole — the k-of-N rail in the footer band

→ next: An ending that says what the run meant

What a split page owes the reader (cont.)

05 An ending that says what the run meant

→ next: the note

What a split page owes the reader

★ *list-criteria could not split at all before this change.*

How the cut was decided, over time

Opt-in per deck

An author who never heard of the flag got a clipped slide

Default-on for portrait

Right direction, wrong altitude — the directive was the thing to remove


Measured fit

The page count became a property of the renderer

Structure

Knowable from the markup, so the linter and the export agree

Reading a split run

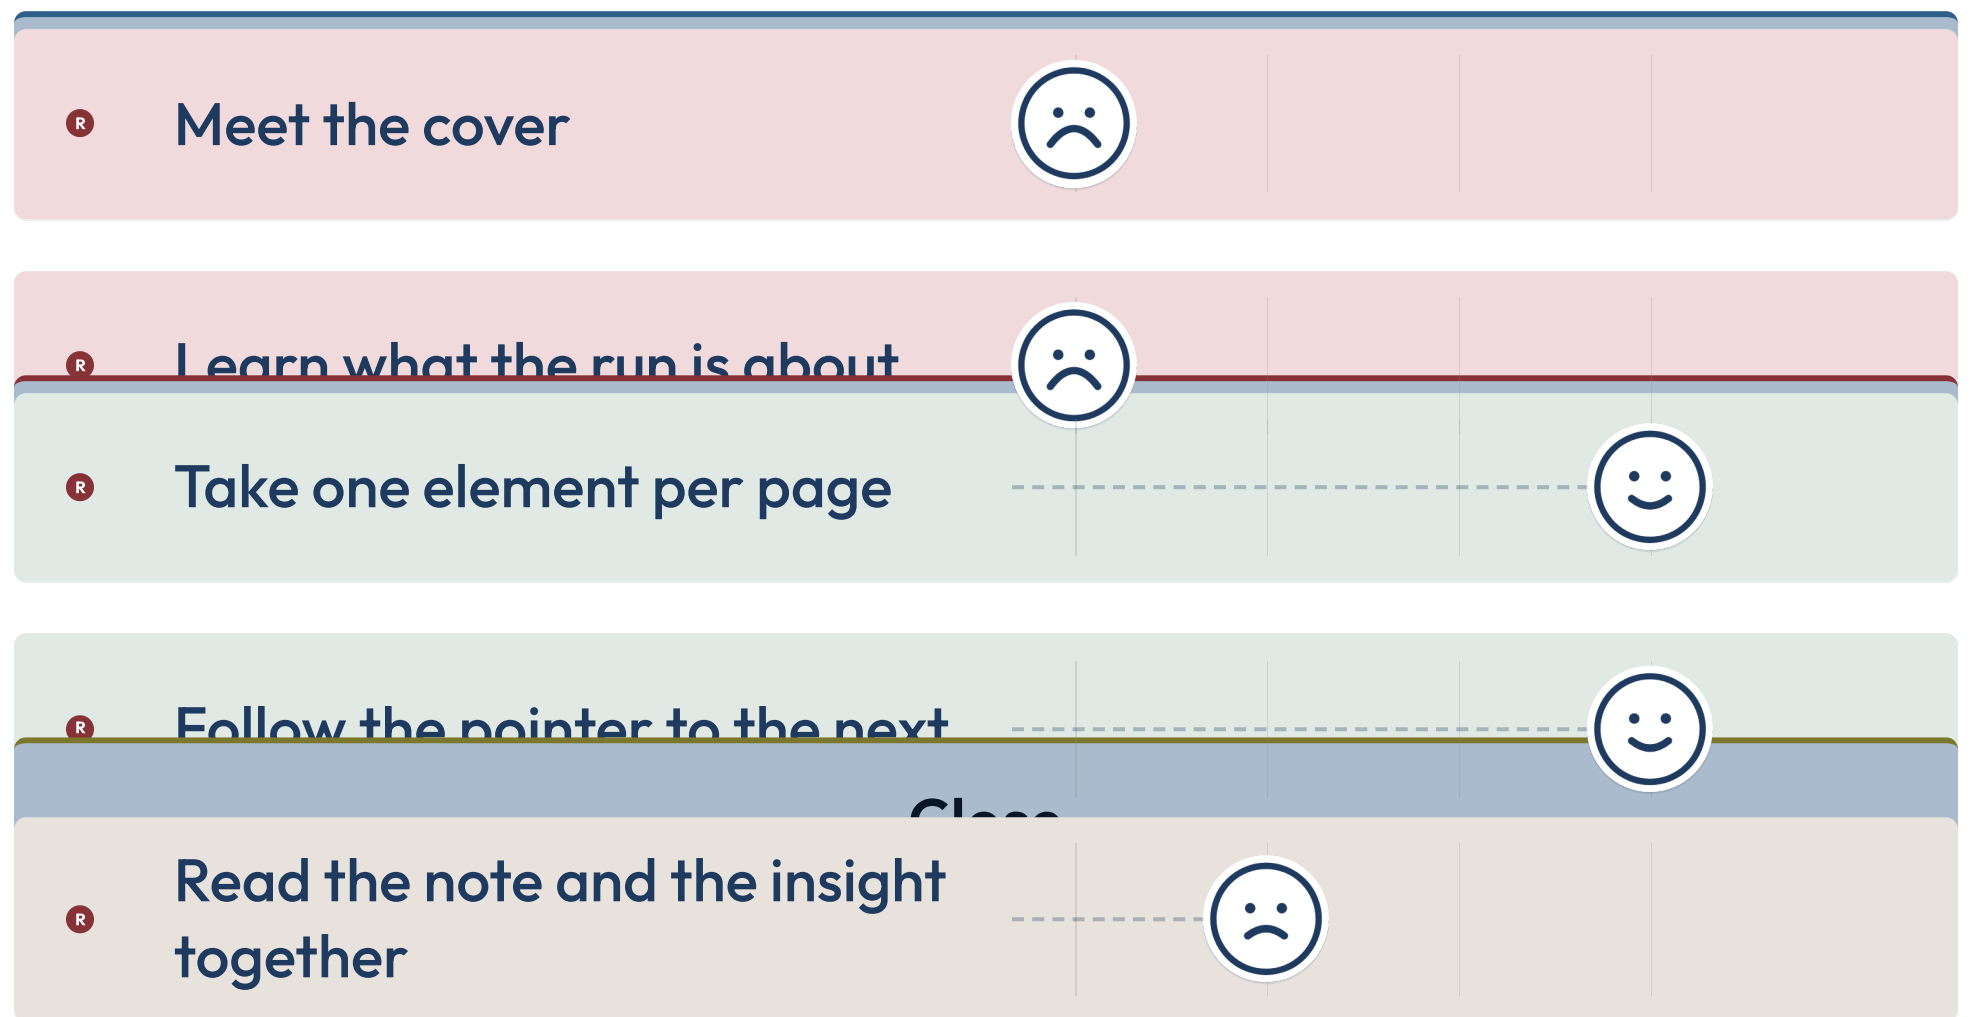

reader

PAIN 1 2 3 4 5 DELIGHT

A chart splits when the splitter can reach its seam. These stages are independent, so the seam is

real – but journey rewrites the authored list into its own board, leaving nothing to cut.

Enrollment across the catalog

Enrolled →

Enrollment across the catalog

Enrolled — 30 of 61 components split, two of which could not before

→ next: Whole

Enrollment across the catalog (cont.)

Whole — the other 31 ring on overflow, each for a reason recorded in the kernel

→ next: Packed

Enrollment across the catalog (cont.)

Packed — none, at any count,
on any component

→ next: Pointed

Enrollment across the catalog (cont.)

Pointed — every run carries a forward pointer; four components did before

→ next: the note

Enrollment across the catalog

*A bold lead is a name: it becomes the next page's pointer. ****31**** would point at "31".*

More slides, one thing each

Structure decides, not the renderer