

Tint a state machine without leaving the palette.

`:::token` names a theme token, never a color — so a tinted deck still re-themes.


The channel

`:::token` after a state's pills, or
after a transition's inline code.

UNTINTED

The default reads as one system.

Every edge takes the engine's connector color.

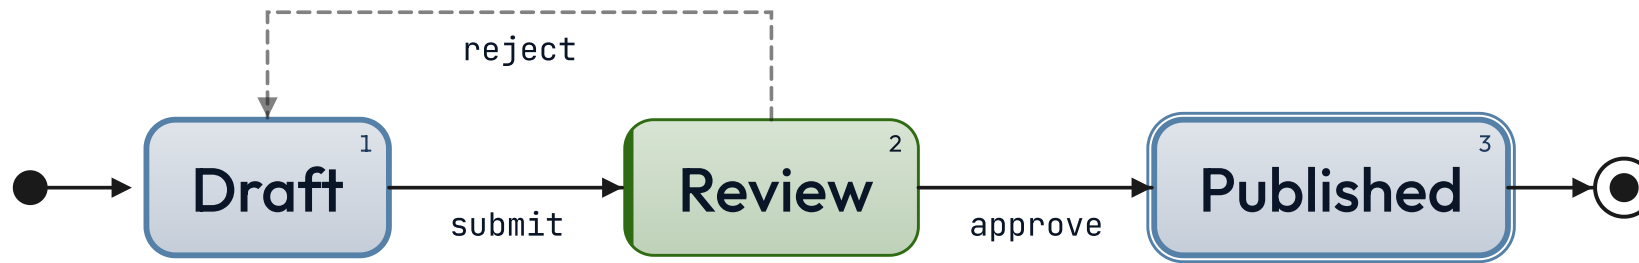

The baseline the next slide tints – same machine, no

:::


.

 on-track

TINTED TRANSITIONS

Color carries the outcome.

The happy path reads green, the rejection red.

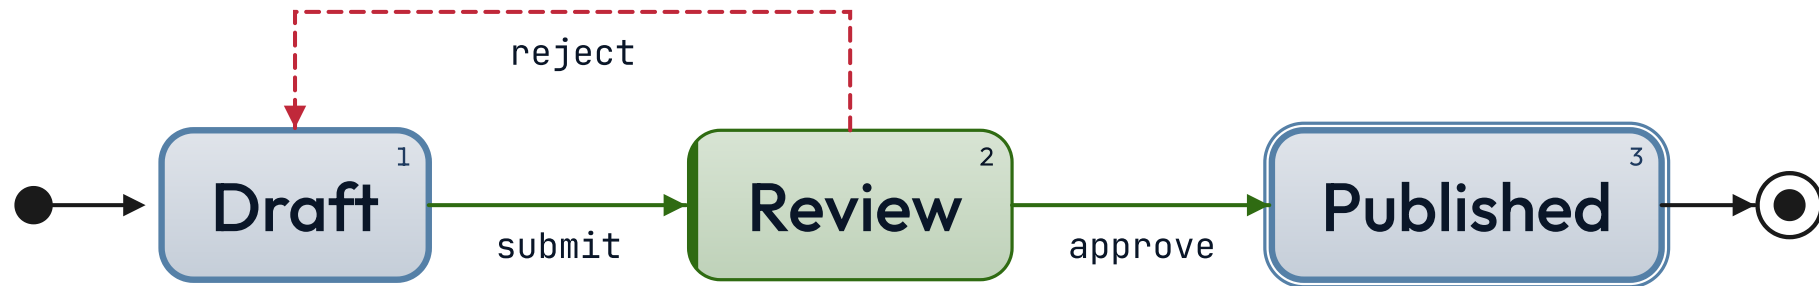


Same machine – one token each on the edges that carry meaning.

 on-track

TINTED STATES

A node takes a tint too.

Terminal states carry their outcome in the tile.

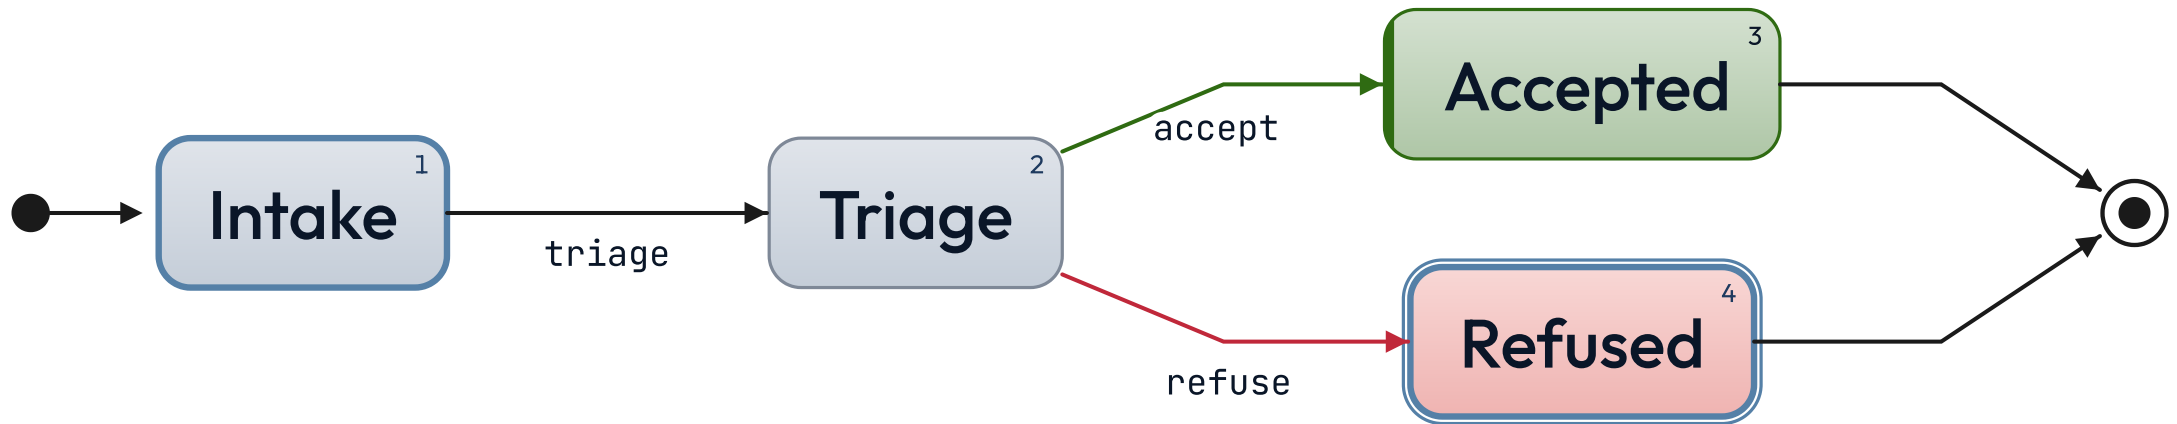

A tint names the paint outright; where a state also has a status, the tint wins.

☒ done

LABEL BACKGROUNDS

The second slot sets the label ground.

:::edge-token/label-bg-token — the edge, then the ground its label sits on.




For when an edge crosses a busy area and its label must knock out more of it.

DEGRADING

An unresolvable name changes nothing.

Existence is not checked at build time.

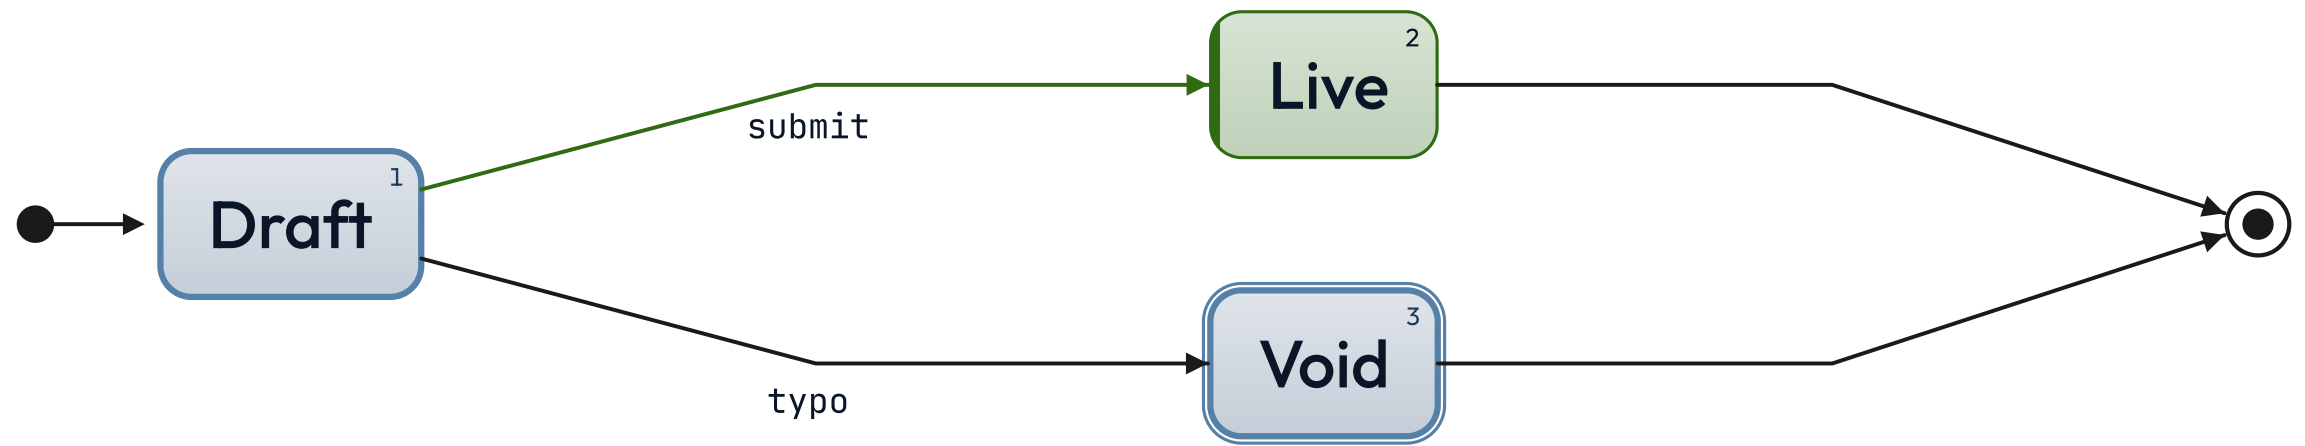

TYP0

names no real token, so that edge keeps its inherited paint.

 live