


Laura Rubio Gallardo



Development and Git Mastery

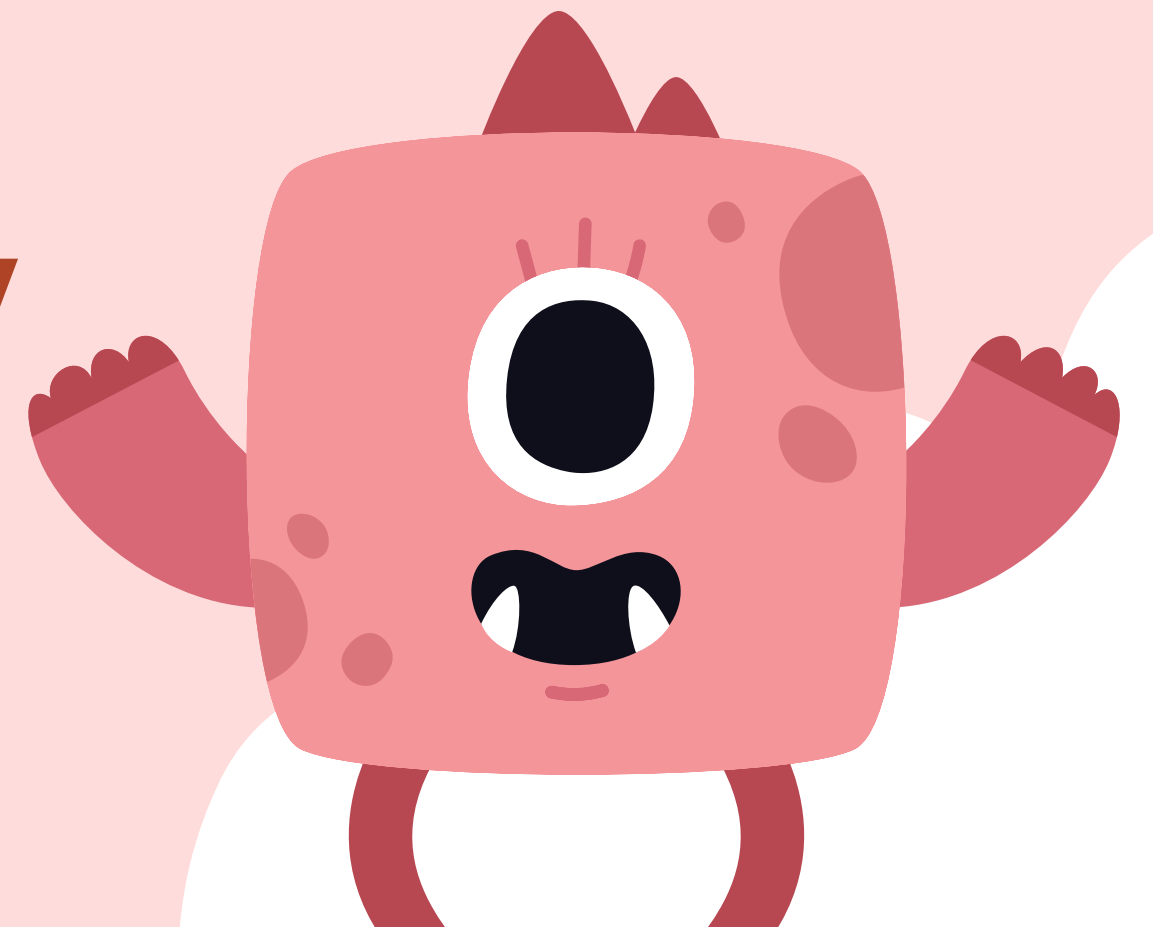

Module 20



Introduccion





This project, Monster Maker, is an interactive web application built with HTML, CSS, and JavaScript, utilizing AI as a programming assistant. The primary technical challenge is to demonstrate professional-level mastery of version control by exclusively using the command-line interface (Git CLI). To achieve this, the presentation documents a real, step-by-step workflow: from local initialization (`git init`), branch creation and merging, to remote synchronization and the final public deployment on GitHub Pages.



TERMINAL



Prior to initiating version control, workspace preparation was required. This was achieved by launching the integrated terminal within Visual Studio Code, accessed through the top menu under **Terminal > New Terminal..**

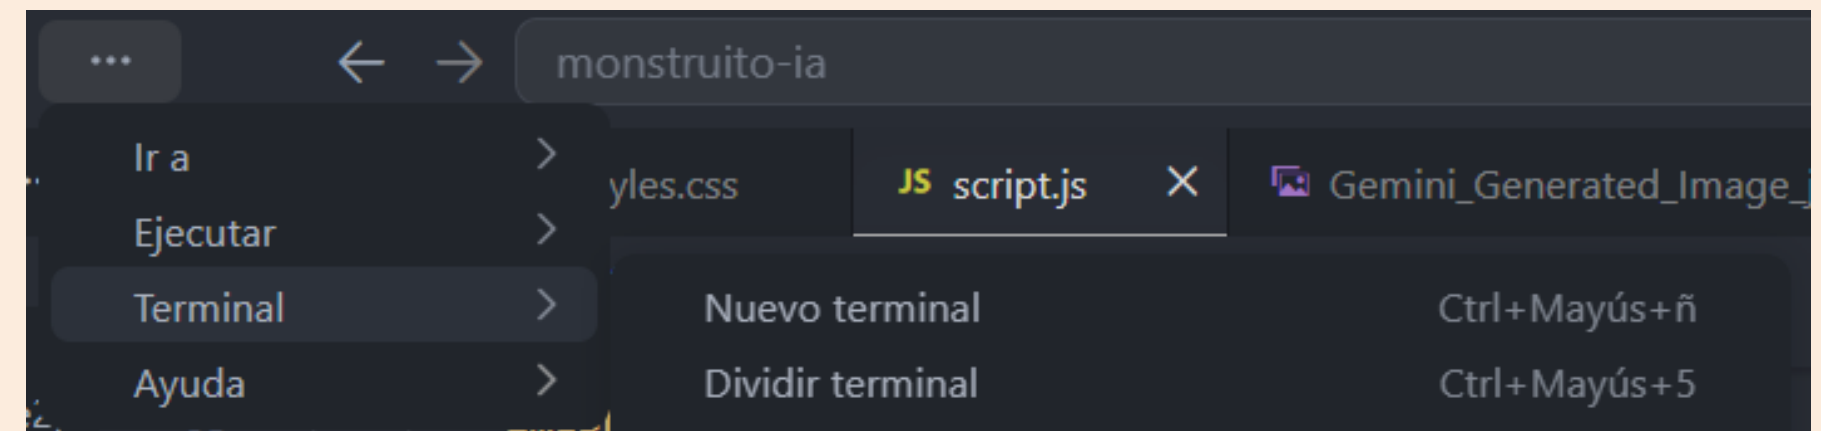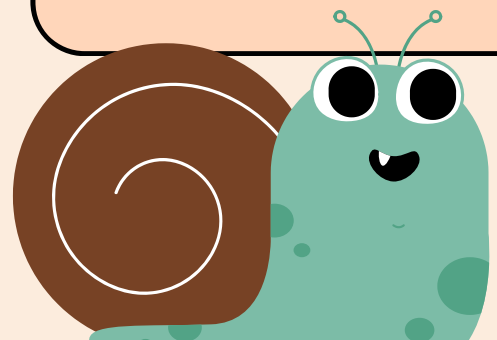


```
52 imgBrazoIzq.classList.add('brazos-largos');  
53 imgBrazoDer.classList.add('brazos-largos');  
54 imgBrazoIzq.classList.remove('oculto');  
55 imgBrazoDer.classList.remove('oculto');
```

PROBLEMAS SALIDA CONSOLA DE DEPURACIÓN TERMINAL PUERTOS

```
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> git init  
Initialized empty Git repository in C:/Users/dipte/OneDrive/Escritorio/monstruito-ia/.git/  
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> |
```

 git init 


Subsequently, the git init command was executed to establish the version control system within the active directory. This action generates a hidden repository (.git) responsible for managing the project's historical data, serving as a mandatory prerequisite for tracking file modifications.

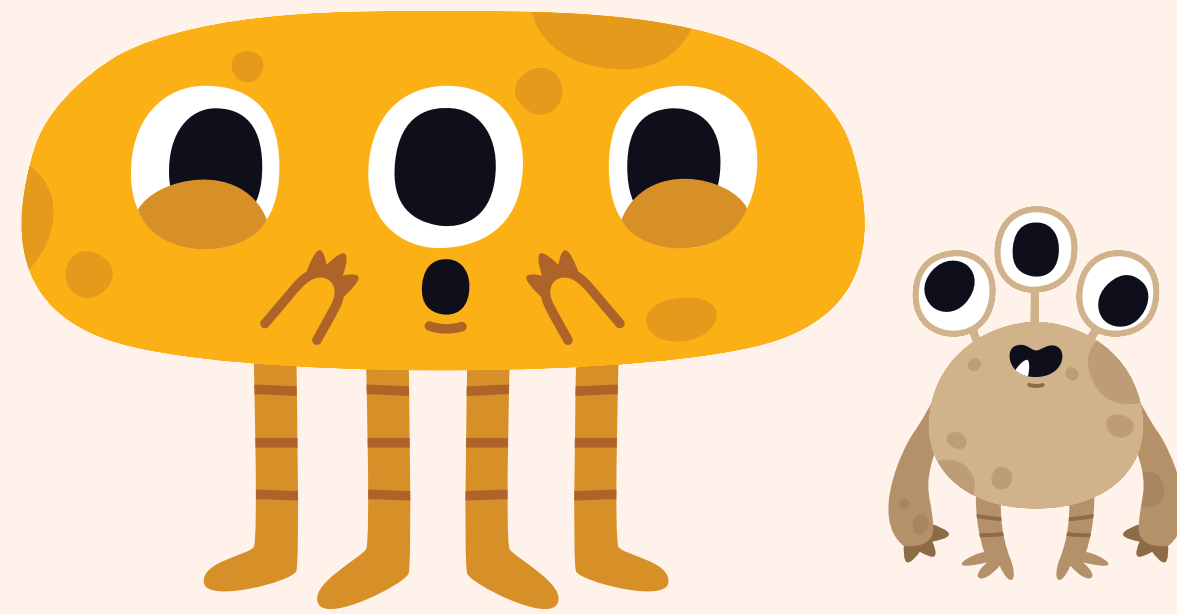



git status

Having established the foundational project files (index.html, styles.css, script.js, and the images directory), I proceeded to commit the initial state via a sequence of three commands. The first was **git status**, executed to identify the new files recognized by the version control system.

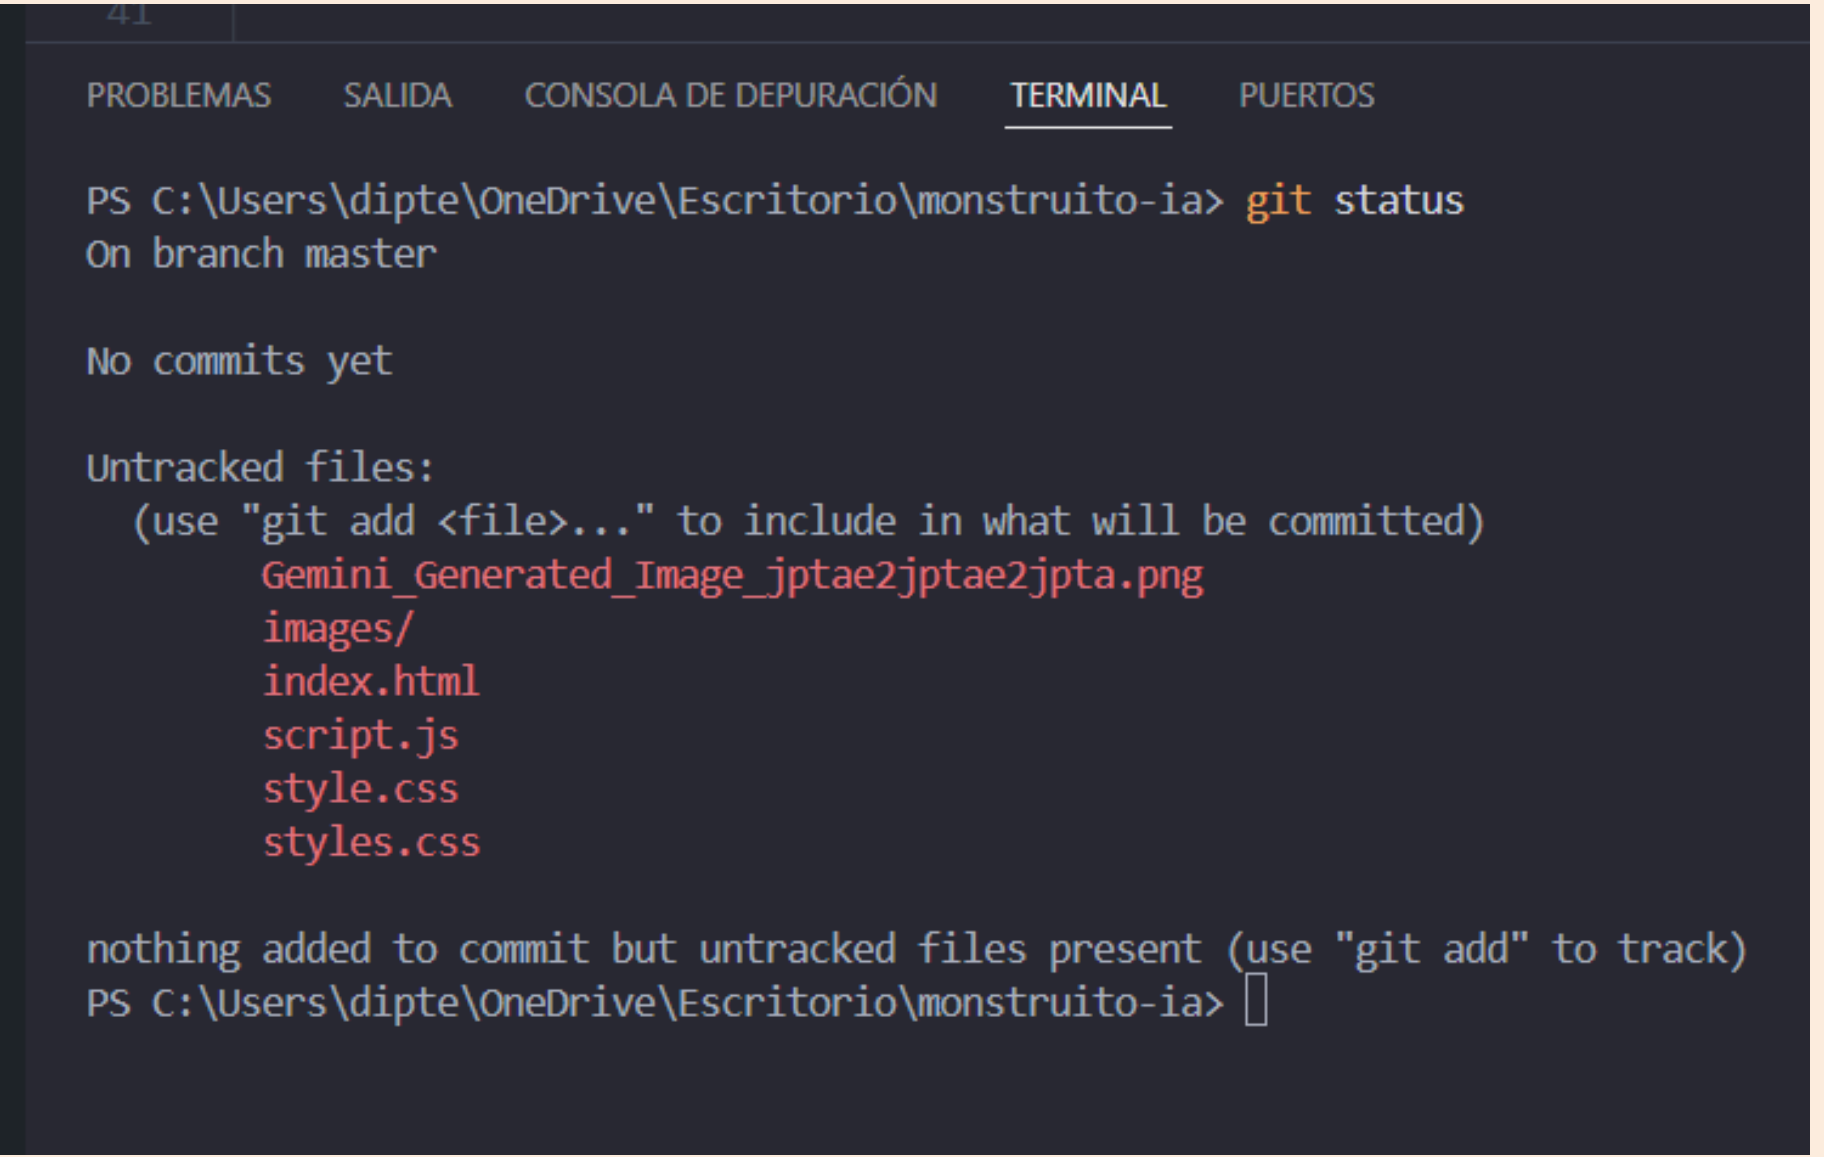

```
41
PROBLEMAS  SALIDA  CONSOLA DE DEPURACIÓN  TERMINAL  PUERTOS

PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    Gemini_Generated_Image_jptae2jptae2jpta.png
    images/
    index.html
    script.js
    style.css
    styles.css

nothing added to commit but untracked files present (use "git add" to track)
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> 
```




```
nothing added to commit but untracked files present (use "git add" to track)
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> git add .
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> |
```



git add .

Next, I executed the **git add .** command to move all of these newly created files into the staging area. This is a crucial step because it tells Git exactly which modifications or additions have been approved and are ready to be included in the upcoming commit

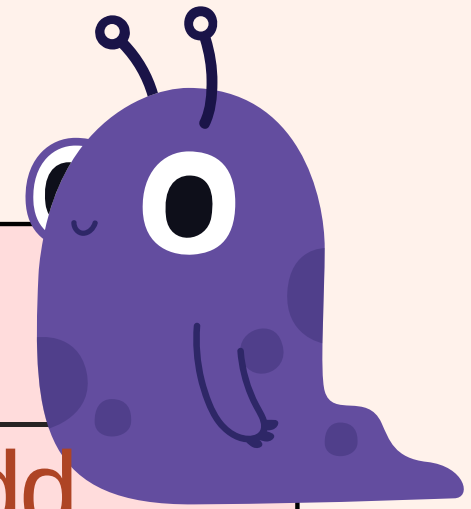



git commit -



Finally, it was time to make it official by running a commit. I used the **-m** flag to add a clear message—'Initial commit'—so that the purpose of this update is instantly recognizable in the future. Ultimately, this command takes a permanent snapshot of the files, giving us a safe fallback point as the project moves forward.




```
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> git commit -m "First Commit: first code"
[master (root-commit) 2a9087c] First Commit: first code
16 files changed, 377 insertions(+)
create mode 100644 Gemini_Generated_Image_jptae2jptae2jpta.png
create mode 100644 images/alas.png
create mode 100644 images/brazosFuertesDerecho.png
create mode 100644 images/brazosFuertesIzquierdo.png
create mode 100644 images/brazosLargos.png
create mode 100644 images/brazosLargosDerecho.png
create mode 100644 images/brazosLargosIzquierdo.png
create mode 100644 images/cola.png
create mode 100644 images/cuernos.png
create mode 100644 images/mounstruo.png
create mode 100644 images/piernasGarra.png
create mode 100644 images/piernasOso.png
create mode 100644 index.html
create mode 100644 script.js
create mode 100644 style.css
create mode 100644 styles.css
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia>
```

```
create mode 100644 styles.css
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> git branch feature-update
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> git checkout feature-update
Switched to branch 'feature-update'
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> |
```



git branch



During the development phase, the decision was made to integrate a new functionality into the creator. To prevent any modifications to the already stable primary code, a distinct environment was first generated via the `git branch feature-update` command. Subsequently, I transitioned to this branch by `executing` `git checkout feature-update`.


```
Switched to branch 'feature-update'
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> git add .
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> git commit -m "Add new funtion"
[feature-update e85e7bf] Add new funtion
3 files changed, 45 insertions(+), 1 deletion(-)
```




new commit ×


While isolated in this development branch, I authored the necessary code modifications to realize the planned enhancement. Upon verifying its proper execution, I replicated the version control workflow. The updated files were staged using `git add .` and subsequently finalized in the local history via a new `git commit`, accompanied by a detailed explanatory note.



```
3 files changed, 45 insertions(+), 1 deletion(-)
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> git checkout main
error: pathspec 'main' did not match any file(s) known to git
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> git branch
* feature-update
  master
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> git checkout master
Switched to branch 'master'

Switched to branch 'master'
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> git merge feature-update
Updating 2a9087c..e85e7bf
Fast-forward
 index.html | 9 ++++++--
 script.js  | 11 ++++++++
 styles.css | 26 ++++++
 3 files changed, 45 insertions(+), 1 deletion(-)
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia>
```

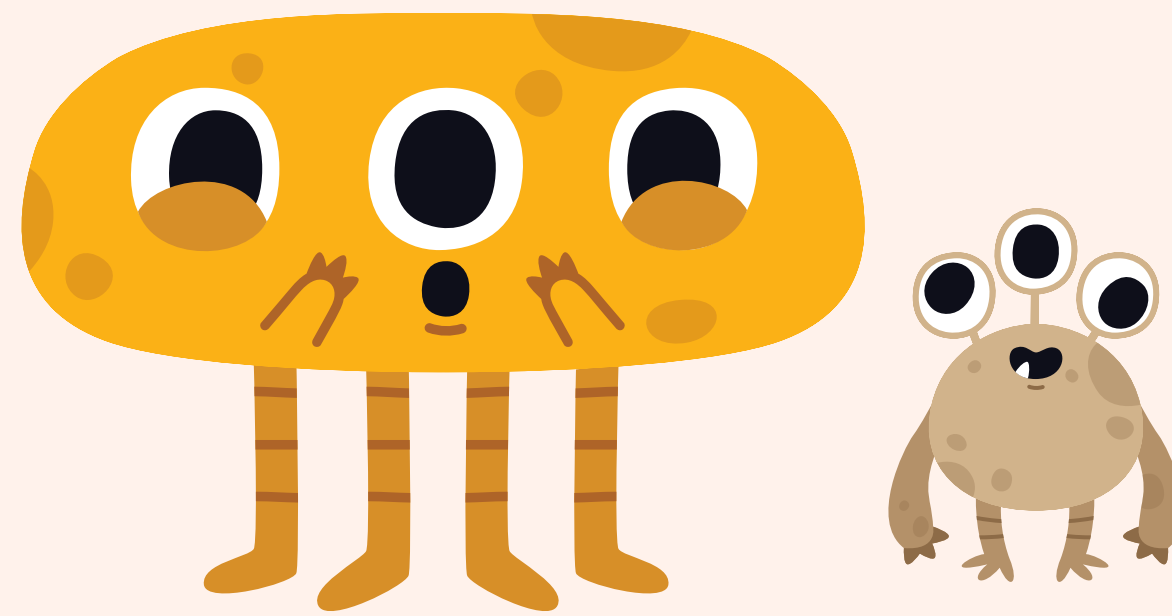




git checkout

After confirming the feature branch was stable, it was time to integrate it. I switched back to the main branch using `git checkout main` (formerly master) and executed `git merge feature-update`. Merging safely pulls the completed work from the secondary branch into the main codebase, officially updating the project.

```
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> git branch -m master main
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia> git remote add origin https://github.com/LauraRubioG/Entorno_Modulo20.git
PS C:\Users\dipte\OneDrive\Escritorio\monstruito-ia>
```



git remote



Next, I connected the local repo to the cloud by running `git remote add origin` with the provided URL. Then, I uploaded the data using `git push -u origin main`. This push command directly syncs the local files and project history to the remote GitHub server, completing the upload.



GitHub Pages


[GitHub Pages](#) is designed to host your personal, organization, or project pages from a GitHub repository.

Your site is live at https://laurarubiog.github.io/Entorno_Modulo20/

Last [deployed](#) by  [LauraRubioG](#) 3 minutes ago

 Visit site


Unpublish site

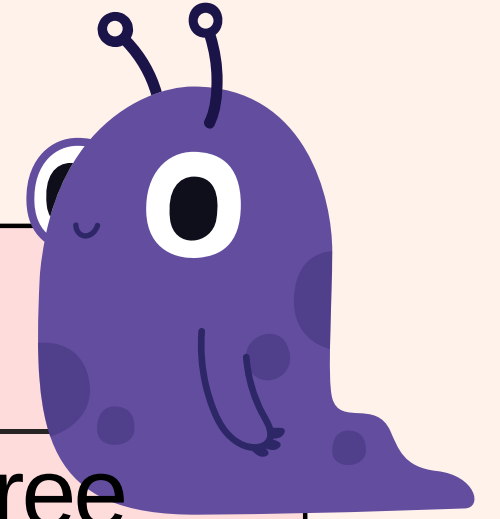

pages

Next, I configured GitHub's free deployment environment. By navigating to the 'Settings' tab and accessing the 'Pages' section, the main branch was designated as the primary code source. Once saved, GitHub Pages processes the repository files and deploys them as an operational web page, enabling external users to interact with the game via a web browser.



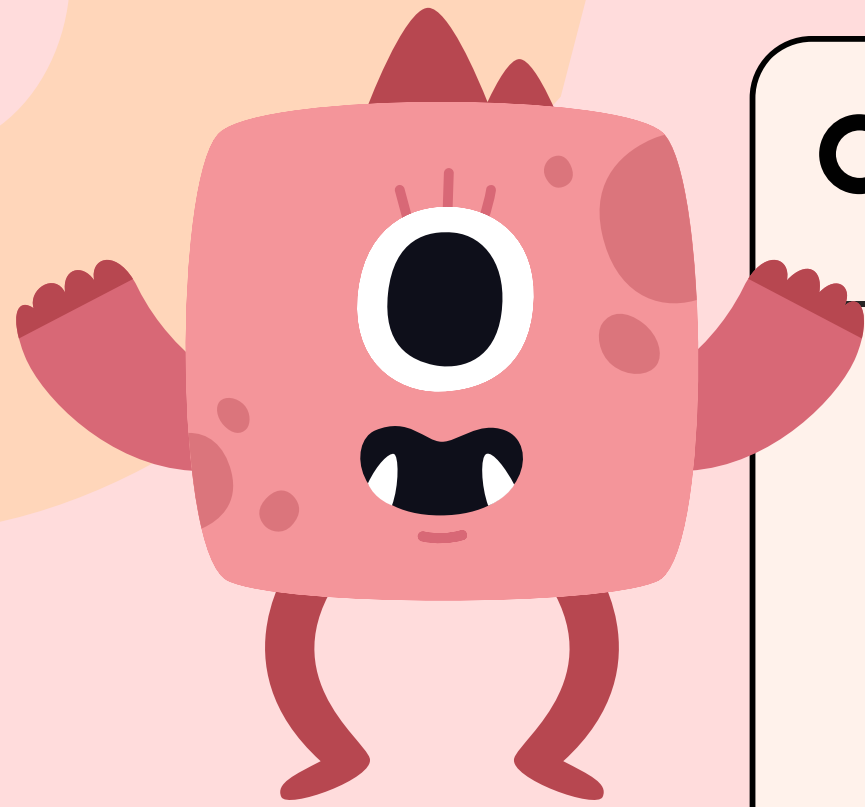

Thank You
For Playing with Us

