

| Feature | | Scenario | | | | Step | | | |
|---|----------|----------|---|---|---|------|---|---|---|
| Name | Duration | T | P | F | S | T | P | F | S |
| User access the Payment option to perform payment related actions in Cyclos | 52.193 s | 2 | 0 | 2 | 0 | 11 | 8 | 2 | 1 |

FAIL & SKIP SCENARIOS -- 3 --


| # | Feature Name | Scenario Name |
|---|---|---------------------------|
| 1 | User access the Payment option to perform payment related actions in Cyclos | User to User payment |
| 2 | | Receiving QR Code Payment |

| TAG | Scenario | | | Feature | | | | |
|--------------------|----------|---|---|---------|---|---|---|---|
| Name | T | P | F | S | T | P | F | S |
| @UserToUserPayment | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @ReceiveQRPayments | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |

FEATURES SUMMARY -- 5 --




| # | Feature Name | T | P | F | S | Duration |
|---|---|---|---|---|---|----------|
| 1 | User access the Payment option to perform payment related actions in Cyclos | 2 | 0 | 2 | 0 | 52.193 s |

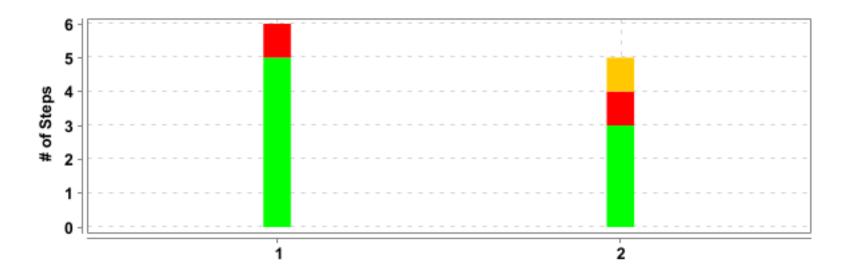


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|--|---------------------------|---|---|---|---|----------|
| 1 | User access the Payment option to perform payment related actions in * | User to User payment | 6 | 5 | 1 | 0 | 38.084 s |
| 2 | | Receiving QR Code Payment | 5 | 3 | 1 | 1 | 14.094 s |

^{*} The feature name and/or scenario name has been cropped to fit in the available space.

User access the Payment option to perform payment related actions in Cyclos

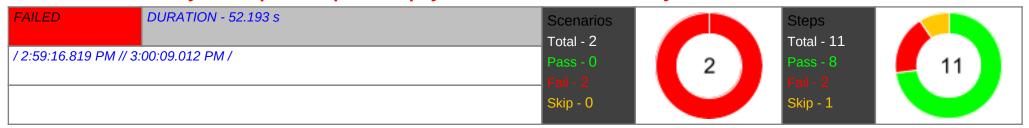

User to User payment

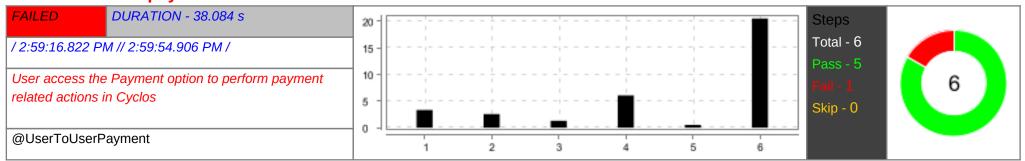


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given User launched the url | PASSED | 3.318 s |
| 2 | When User provide valid username and password | PASSED | 2.553 s |
| 3 | And User choose the Payment to user Tab | PASSED | 1.304 s |
| 4 | And User selects the ReceiverName and amount | PASSED | 6.063 s |
| 5 | And User choose the schedule as Pay now | PASSED | 0.512 s |
| 6 | Then User gets a verification message | FAILED | 20.525 s |
| | org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//span[text()='Print']"} (Session info: chrome=114.0.5735.199) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/ troubleshooting/errors#no-such-element-exception Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os. arch: 'amd64', os.version: '10.0', java.version: '17.0.8' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [c87e4884fd01e0235b04a003f6a1da44, findElement {using=xpath, value=//span[text()='Print']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f, userDataDir: C:\Users\LSETHU~\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:59821}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:59821/devtoo, se:cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: c87e4884fd01e0235b04a003f6a1da44 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |

DETAILED SECTION -- 8 --

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/java.lang.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.odec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.ElementLocation.\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) at org.openqa.selenium.support.pagefactory.DefaultElementLocation.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy37.click(Unknown Source) at com.actions.PaymentStepDefinition.user_gets_a_verification_message(PaymentsStepDefinition.java:57) at ?User gets a verification message(file:///C./Users/Isethura/eclipse-workspace/CodeRed/PilotProject_Cyclos_CodeRed/src/test/resources/Features/Payments.feature:11) | | |
| | * Not displayable characters are replaced by '?'. AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario) | PASSED | 0.166 s |
| | User to User payment | | |

Receiving QR Code Payment

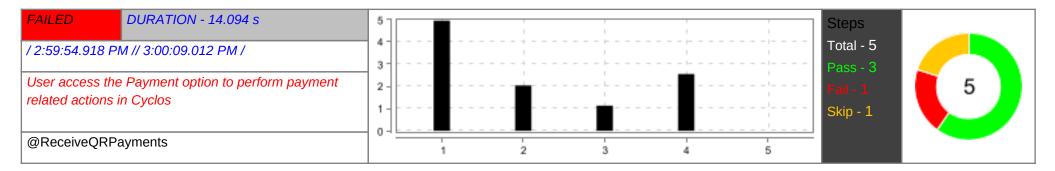

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given User launched the url | PASSED | 4.948 s |
| 2 | When User provide valid username and password | PASSED | 2.037 s |
| 3 | And User choose the Receive QR Payments Tab | PASSED | 1.127 s |
| 4 | And User provides the amount which will be converted into a QR code | FAILED | 2.552 s |
| | org.openqa.selenium.ElementNotInteractableException: element not interactable (Session info: chrome=114.0.5735.199) Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8' Driver info: org. openqa.selenium.chrome.ChromeDriver Command: [167429c2e59b7850e3b98124dfa3a291, sendKeysToElement (id=9619483A42AD49C88875EFA288103E4B_element_30, value=[Ljava.lang.CharSequence;@5a1f778] Capabilities (acceptinsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: (chromedriverVersion: 114.0.5735.90 (386bc09e8f4f, userDataDir: C:\Users\LSETHU~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:59866}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), ser.dp: ws://localhost:59866/devtoo, ser.dp\version: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: (implicit: 0, pageLoad: 300000, script: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Element: [[ChromeDriver: chrome on windows (167429c2e59b7850e3b98124dfa3a291] > xpath: //input[@class='inputField large rightAligned']] Session ID: 167429c2e59b7850e3b98124dfa3a291] at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:49) at java.base/ | | |

DETAILED SECTION -- 10 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:51) at jdk.proxy2/jdk.proxy2.\$Proxy37.sendKeys(Unknown Source) at com.actions.PaymentActions.clickQRPayment(PaymentActions.java:107) at com.stepdefinitions.PaymentsStepDefinition. user_provides_the_amount_which_will_be_converted_into_a_qr_code(PaymentsStepDefinition.java:76) at ?.User provides the amount which will be converted into a QR code(file:///C:/Users/lsethuraj/eclipse-workspace/CodeRed/PilotProject_Cyclos_CodeRed/src/test/resources/Features/Payments.feature:19) * Not displayable characters are replaced by '?'. | | |
| 5 | Then User gets the QR | SKIPPED | 0.001 s |
| | AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario) Receiving QR Code Payment The state of the sta | PASSED | 0.146 s |