

Cucumber Report

Nov 22, 2023, 9:56:47 AM

Start : Nov 22, 9:42:24.312 AM

End : Nov 22, 9:56:37.537 AM

Duration : 14 m 13.225 s

Features

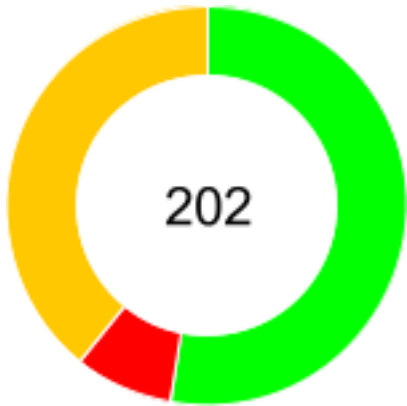
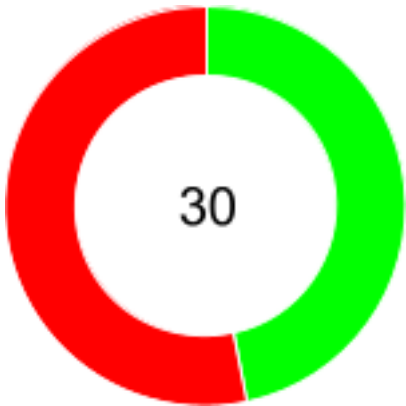
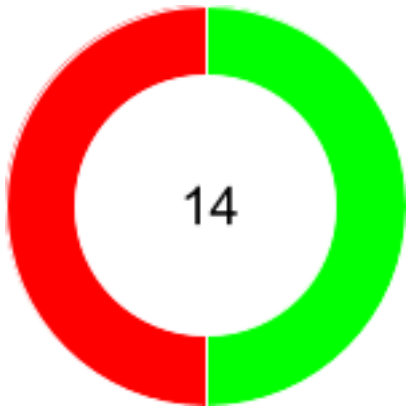
Scenarios

Steps

PASSED - 7
FAILED - 7
SKIPPED - 0

PASSED - 14
FAILED - 16
SKIPPED - 0

PASSED - 107
FAILED - 16
SKIPPED - 79



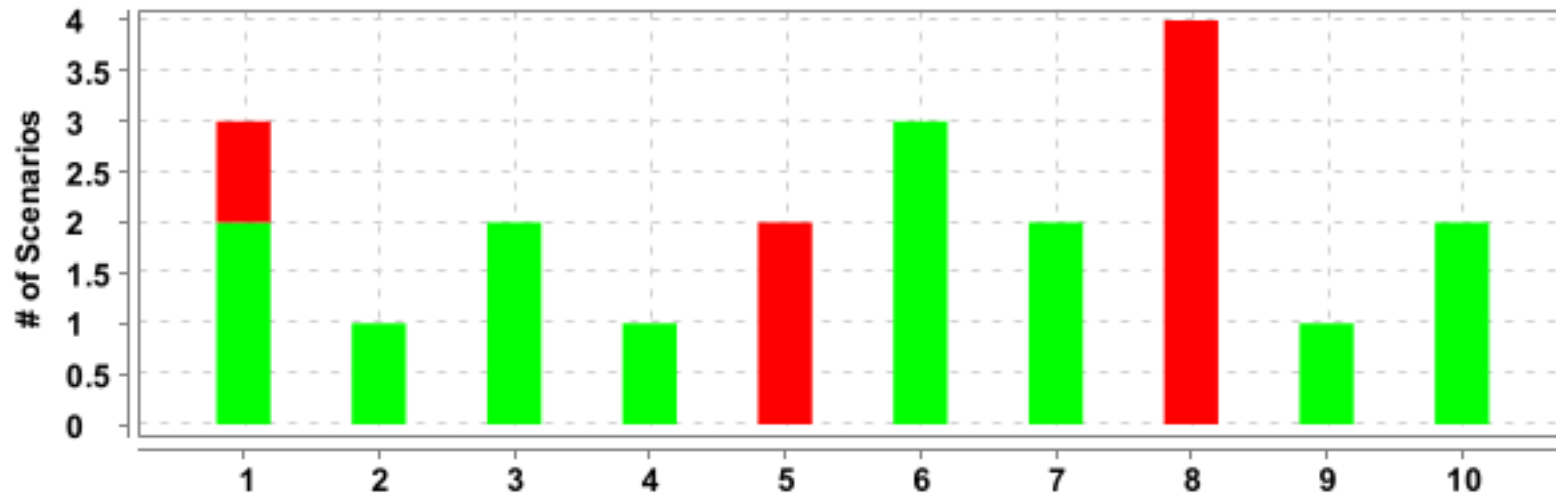
Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Account Information</u>	3 m 25.979 s	3	2	1	0	17	16	1	0
<u>To Edit Address in Demo Cyclos classic payment software Application and do functions</u>	1 m 1.983 s	1	1	0	0	9	9	0	0
<u>To Edit Phone Number in Demo Cyclos classic payment software Application and do functions</u>	57.058 s	2	2	0	0	20	20	0	0
<u>To Edit User profile in Demo Cyclos classic payment software Application and do functions</u>	22.897 s	1	1	0	0	9	9	0	0
<u>User Processing the Advertisement Interests in Marketplace feature available in Cyclos Payment Software Web Application</u>	13.927 s	2	0	2	0	15	0	2	13
<u>To Login in Demo Cyclos classic payment software Application and do functions</u>	1 m 7.171 s	3	3	0	0	14	14	0	0
<u>To Manage password in Demo Cyclos classic payment software Application and do functions</u>	47.693 s	2	2	0	0	16	16	0	0
<u>User using Search Advertisements in Marketplace tab available in Cyclos Payment Software Application</u>	32.925 s	4	0	4	0	29	0	4	25
<u>To add existing in Mycontact</u>	26.935 s	1	1	0	0	8	8	0	0
<u>User access the Payment option to perform payment related actions in Cyclos</u>	1 m 2.329 s	2	2	0	0	11	11	0	0
<u>User uploads the profile picture in Cyclos web application</u>	1 m 19.733 s	1	0	1	0	4	2	1	1

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>To Register in Demo Cyclos classic payment software Application</u>	1 m 20.357 s	1	0	1	0	9	2	1	6
<u>The user accessing the Message functionality</u>	1 m 14.269 s	5	0	5	0	28	0	5	23
<u>User Buy and print voucher</u>	19.754 s	2	0	2	0	13	0	2	11

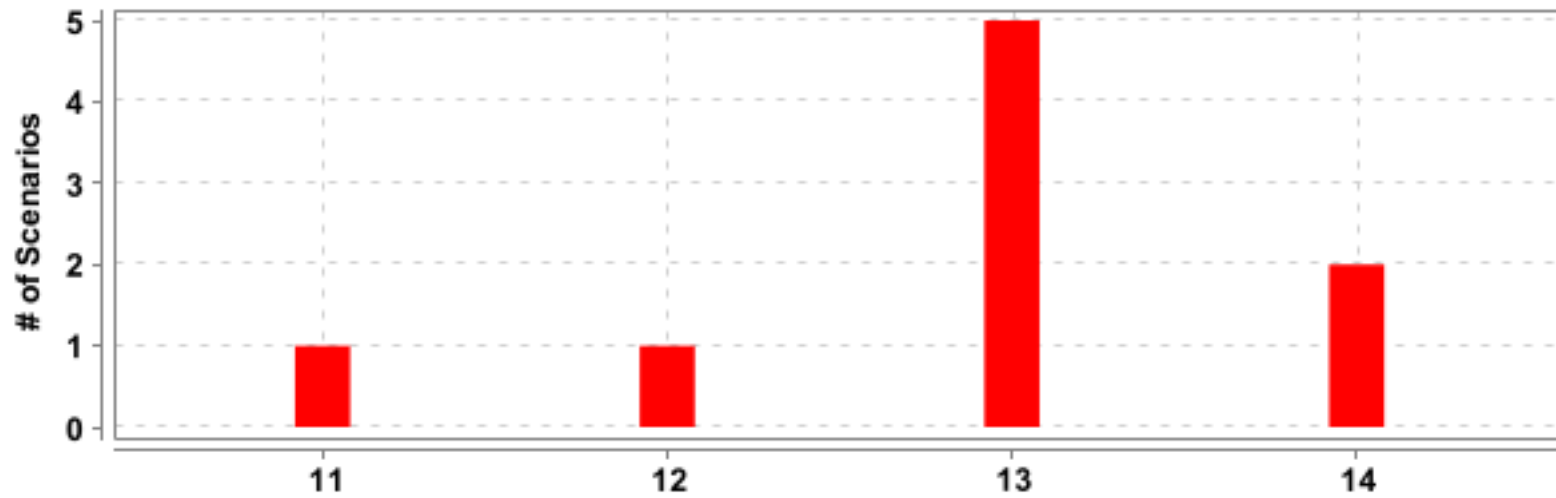
#	Feature Name	Scenario Name
1	<u>Account Information</u>	<u>View Account summary by adding payment filter as Member Payments</u>
2	<u>User Processing the Advertisement Interests in Marketplace feature available in Cyclos Payment Software Web Application</u>	<u>User uses the Advertisement Interests</u>
3		<u>User uses the Advertisement Interests</u>
4		<u>User uses Price Highest filter</u>
5	<u>User using Search Advertisements in Marketplace tab available in Cyclos Payment Software Application</u>	<u>User access Price Lowest filter</u>
6		<u>User access Price Relevance filter</u>
7		<u>User removes a product from Price Highest filter</u>
8	<u>User uploads the profile picture in Cyclos web application</u>	<u>User Uploading new profile picture</u>
9	<u>To Register in Demo Cyclos classic payment software Application</u>	<u>Register the User details</u>
10	<u>The user accessing the Message functionality</u>	<u>The user view the message history of send message</u>
11		<u>The user view the message history of inbox message</u>
12		<u>The user view the message history of Trash message</u>

#	Feature Name	Scenario Name
13	<u>The user accessing the Message functionality</u>	<u>The user send the message</u>
14		<u>The user not able to send message without required details</u>
15	<u>User Buy and print voucher</u>	<u>Buying and print vouchers</u>
16		<u>Checking My vouchers</u>

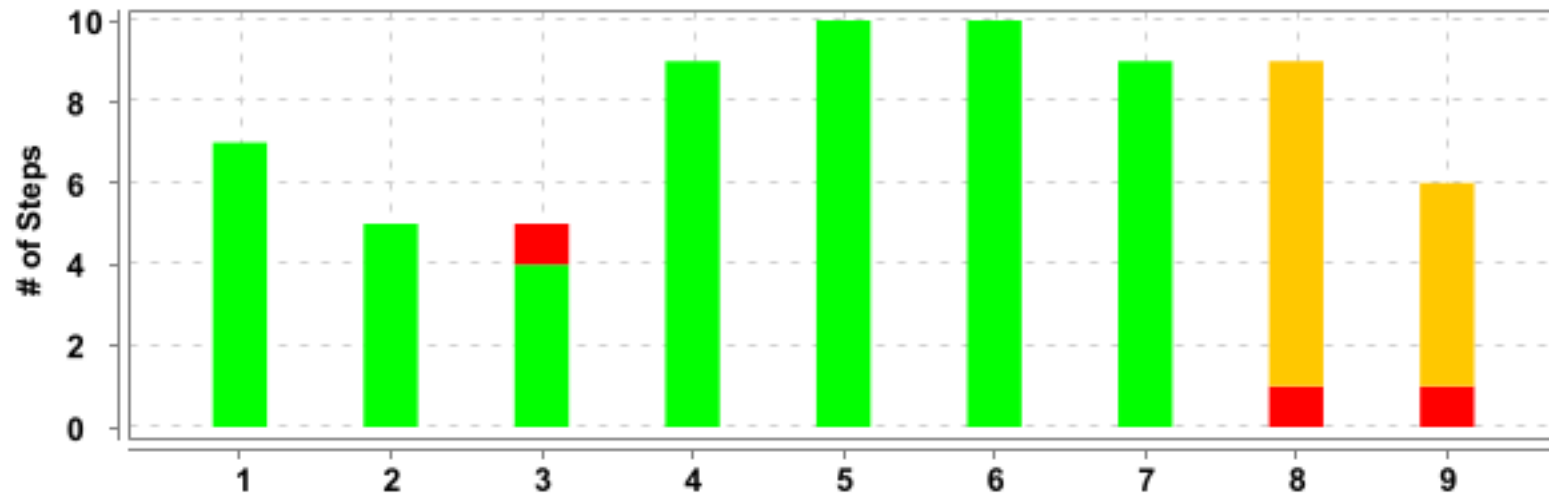
TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@AccountSummary	1	1	0	0	1	0	1	0
@SystemPayments	1	1	0	0	1	0	1	0
@MemberPayments	1	0	1	0	1	0	1	0
@MobileNumber	2	2	0	0	2	2	0	0
@LandlineNumber	1	1	0	0	1	1	0	0
@ValidCredentials	1	1	0	0	1	1	0	0
@Invalidcredentials	2	2	0	0	1	1	0	0
@ManagePassword	1	1	0	0	1	1	0	0
@MyContact	1	1	0	0	1	1	0	0
@UserToUserPayment	1	1	0	0	1	1	0	0
@ReceiveQRPayments	1	1	0	0	1	1	0	0
@SendMessage	1	0	1	0	1	0	1	0
@InBoxMessage	1	0	1	0	1	0	1	0
@TrashMessage	1	0	1	0	1	0	1	0
@MessageSendFunctionality	1	0	1	0	1	0	1	0
@MessageNotSend	1	0	1	0	1	0	1	0



#	Feature Name	T	P	F	S	Duration
1	<u>Account Information</u>	3	2	1	0	3 m 25.979 s
2	<u>To Edit Address in Demo Cyclos classic payment software Application and do functions</u>	1	1	0	0	1 m 1.983 s
3	<u>To Edit Phone Number in Demo Cyclos classic payment software Application and do functions</u>	2	2	0	0	57.058 s
4	<u>To Edit User profile in Demo Cyclos classic payment software Application and do functions</u>	1	1	0	0	22.897 s
5	<u>User Processing the Advertisement Interests in Marketplace feature available in Cyclos Payment Software Web Application</u>	2	0	2	0	13.927 s
6	<u>To Login in Demo Cyclos classic payment software Application and do functions</u>	3	3	0	0	1 m 7.171 s
7	<u>To Manage password in Demo Cyclos classic payment software Application and do functions</u>	2	2	0	0	47.693 s
8	<u>User using Search Advertisements in Marketplace tab available in Cyclos Payment Software Application</u>	4	0	4	0	32.925 s
9	<u>To add existing in Mycontact</u>	1	1	0	0	26.935 s
10	<u>User access the Payment option to perform payment related actions in Cyclos</u>	2	2	0	0	1 m 2.329 s



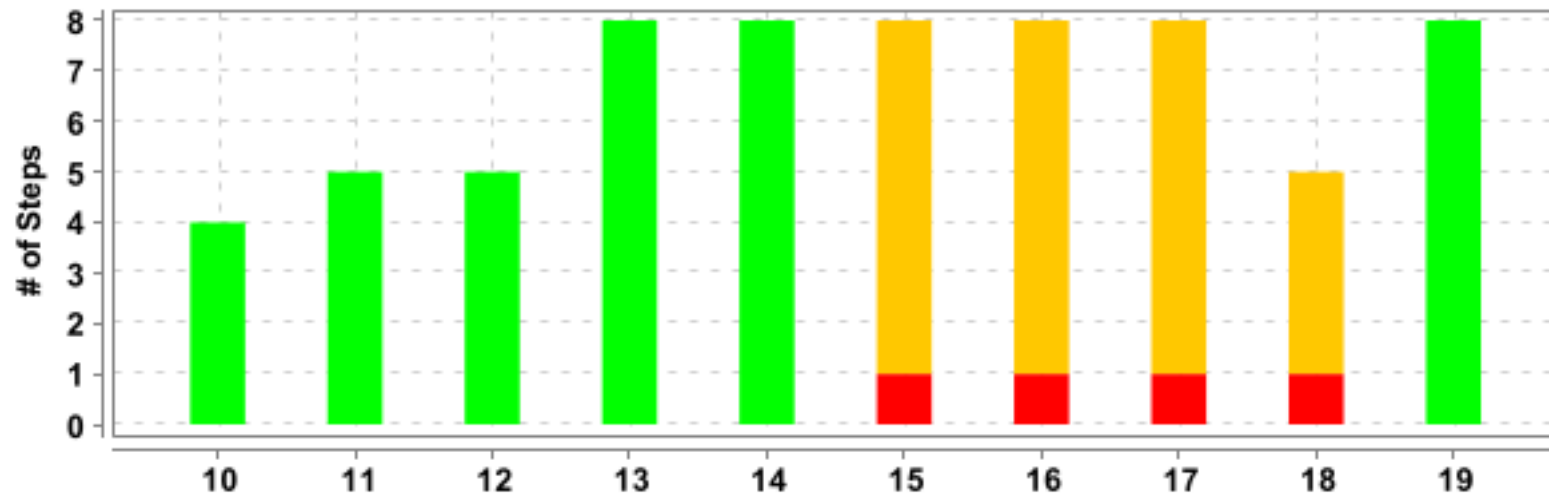
#	Feature Name	T	P	F	S	Duration
11	<u>User uploads the profile picture in Cyclos web application</u>	1	0	1	0	1 m 19.733 s
12	<u>To Register in Demo Cyclos classic payment software Application</u>	1	0	1	0	1 m 20.357 s
13	<u>The user accessing the Message functionality</u>	5	0	5	0	1 m 14.269 s
14	<u>User Buy and print voucher</u>	2	0	2	0	19.754 s



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Account Information</u>	<u>View Account summary</u>	7	7	0	0	1 m 44.394 s
2		<u>View Account summary by adding payment filter as System Payments</u>	5	5	0	0	1 m 2.017 s
3		<u>View Account summary by adding payment filter as Member Payments</u>	5	4	1	0	39.520 s
4	<u>To Edit Address in Demo Cyclos classic payment software Application and do *</u>	<u>Edit Address in profile</u>	9	9	0	0	1 m 1.980 s
5	<u>To Edit Phone Number in Demo Cyclos classic payment software Application *</u>	<u>Add Mobile Number in Phone</u>	10	10	0	0	34.095 s
6		<u>Add Landline Number in Phone</u>	10	10	0	0	22.955 s
7	<u>To Edit User profile in Demo Cyclos classic payment software Application *</u>	<u>Edit User Profile</u>	9	9	0	0	22.897 s

* The feature name and/or scenario name has been cropped to fit in the available space.

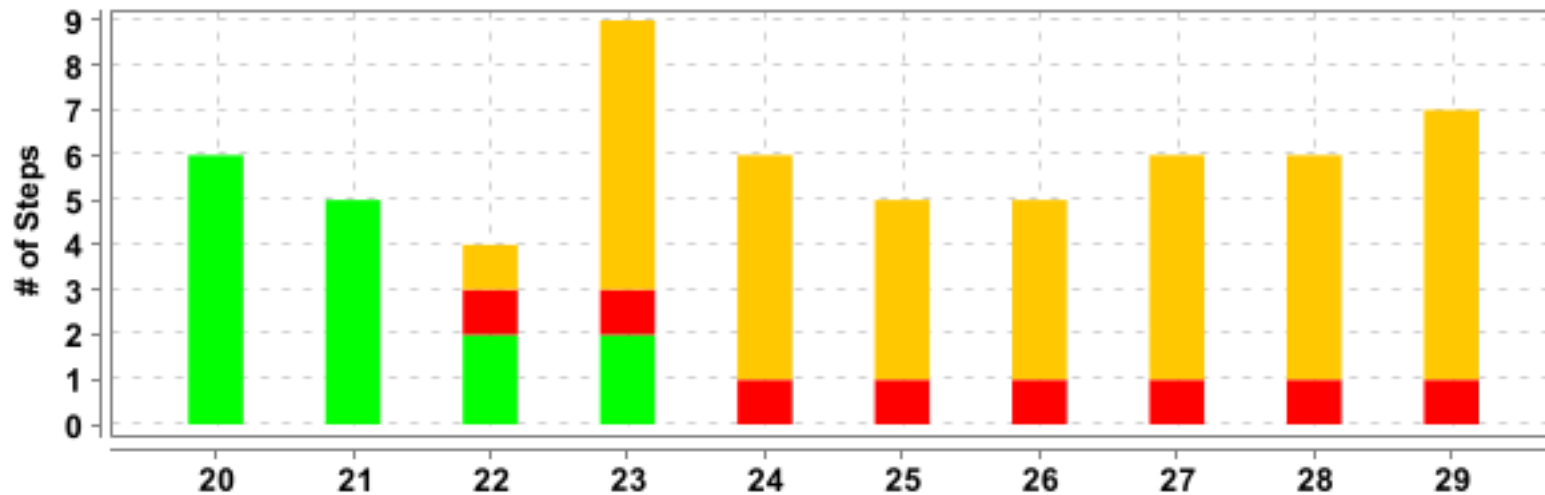
#	Feature Name	Scenario Name	T	P	F	S	Duration
8	<u>User Processing the Advertisement Interests in Marketplace feature *</u>	<u>User uses the Advertisement Interests</u>	9	0	1	8	7.438 s
9		<u>User uses the Advertisement Interests</u>	6	0	1	5	6.485 s



#	Feature Name	Scenario Name	T	P	F	S	Duration
10	<u>To Login in Demo Cyclos classic payment software Application and do *</u>	<u>Login with valid credentials</u>	4	4	0	0	29.376 s
11		<u>Login with Invalid credentials</u>	5	5	0	0	20.875 s
12		<u>Login with Invalid credentials</u>	5	5	0	0	16.910 s
13	<u>To Manage password in Demo Cyclos classic payment software Application *</u>	<u>Change password with valid input</u>	8	8	0	0	19.762 s
14		<u>Change password with Invalid input</u>	8	8	0	0	27.921 s
15	<u>User using Search Advertisements in Marketplace tab available in Cyclos *</u>	<u>User uses Price Highest filter</u>	8	0	1	7	5.741 s
16		<u>User access Price Lowest filter</u>	8	0	1	7	8.635 s
17		<u>User access Price Relevance filter</u>	8	0	1	7	8.700 s
18		<u>User removes a product from Price Highest filter</u>	5	0	1	4	9.831 s

* The feature name and/or scenario name has been cropped to fit in the available space.

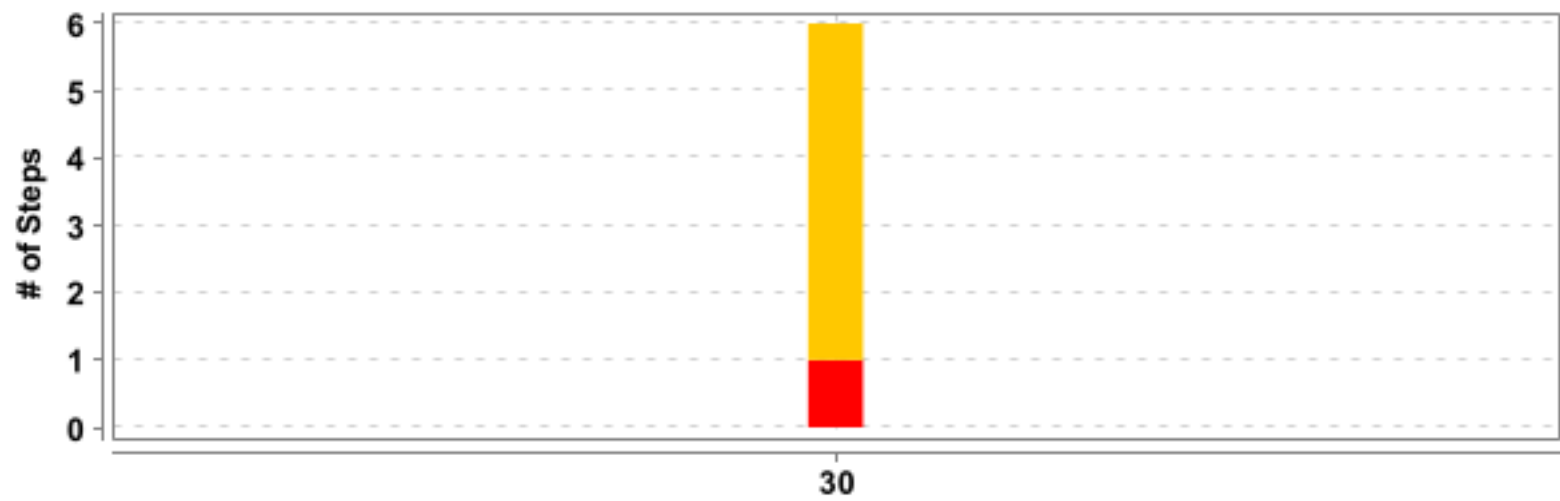
#	Feature Name	Scenario Name	T	P	F	S	Duration
19	<u>To add existing in Mycontact</u>	<u>To Manage My Contact</u>	8	8	0	0	26.935 s



#	Feature Name	Scenario Name	T	P	F	S	Duration
20	<u>User access the Payment option to perform payment related actions in *</u>	<u>User to User payment</u>	6	6	0	0	40.367 s
21		<u>Receiving QR Code Payment</u>	5	5	0	0	21.959 s
22	<u>User uploads the profile picture in Cyclos web application</u>	<u>User Uploading new profile picture</u>	4	2	1	1	1 m 19.733 s
23	<u>To Register in Demo Cyclos classic payment software Application</u>	<u>Register the User details</u>	9	2	1	6	1 m 20.357 s
24	<u>The user accessing the Message functionality</u>	<u>The user view the message history of send message</u>	6	0	1	5	22.026 s
25		<u>The user view the message history of inbox message</u>	5	0	1	4	24.985 s
26		<u>The user view the message history of Trash message</u>	5	0	1	4	10.004 s
27		<u>The user send the message</u>	6	0	1	5	9.246 s
28		<u>The user not able to send message without required details</u>	6	0	1	5	7.991 s

* The feature name and/or scenario name has been cropped to fit in the available space.

#	Feature Name	Scenario Name	T	P	F	S	Duration
29	<u>User Buy and print voucher</u>	<u>Buying and print vouchers</u>	7	0	1	6	11.177 s

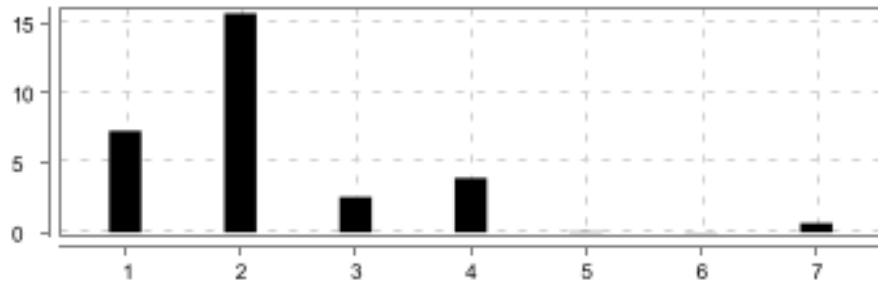



#	Feature Name	Scenario Name	T	P	F	S	Duration
30	<u>User Buy and print voucher</u>	<u>Checking My vouchers</u>	6	0	1	5	8.574 s

Account Information

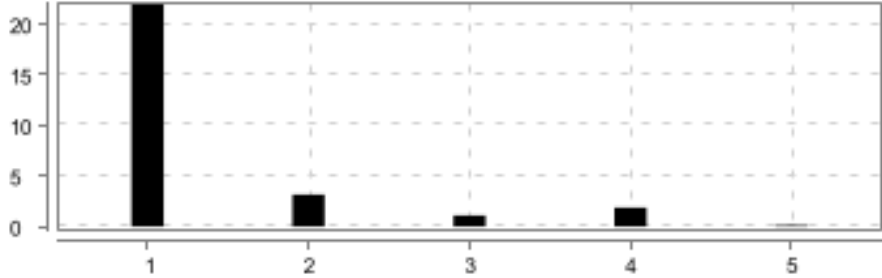

<div>FAILED</div> <div>DURATION - 3 m 25.979 s</div>		<div>Scenarios</div> <div>Total - 3</div> <div>Pass - 2</div> <div>Fail - 1</div> <div>Skip - 0</div>		<div><div></div><div>3</div></div>	<div>Steps</div> <div>Total - 17</div> <div>Pass - 16</div> <div>Fail - 1</div> <div>Skip - 0</div>		<div><div></div><div>17</div></div>
<div>/ 9:42:24.312 AM // 9:45:50.291 AM /</div>							

View Account summary

<div>PASSED</div>	<div>DURATION - 1 m 44.394 s</div>	<div></div>	<div>Steps</div> <div>Total - 7</div> <div>Pass - 7</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 9:42:24.333 AM // 9:44:08.727 AM /</div>				
<div>Account Information</div>				
<div>@AccountSummary</div>				

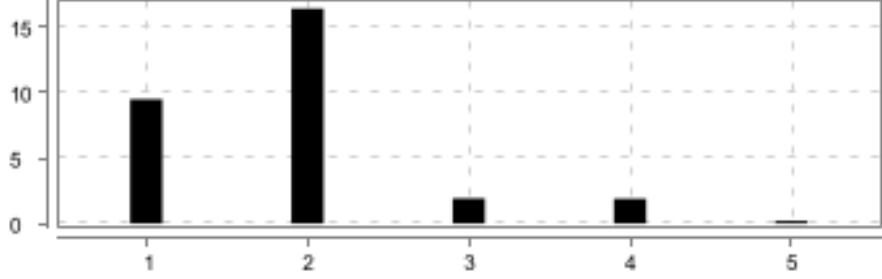

#	Step / Hook Details	Status	Duration
1	Given User launch the url	PASSED	7.278 s
2	When User provide valid username and password	PASSED	15.698 s
3	And User choose the Banking Tab	PASSED	2.523 s
4	And User view the current balance	PASSED	3.884 s
5	And User checks the negative balance	PASSED	0.042 s
6	And User checks Total received	PASSED	0.028 s
7	Then User download the payment history	PASSED	0.663 s

View Account summary by adding payment filter as System Payments


PASSED	DURATION - 1 m 2.017 s		Steps Total - 5 Pass - 5 Fail - 0 Skip - 0	
/ 9:44:08.740 AM // 9:45:10.757 AM /				
Account Information				
@SystemPayments				

#	Step / Hook Details	Status	Duration
1	Given User launch the url	PASSED	21.965 s
2	When User provide valid username and password	PASSED	3.163 s
3	And User choose the Banking Tab	PASSED	1.093 s
4	And User provide filters as System Payments and check the number of incoming payments	PASSED	1.861 s
5	Then User get the payment account details based on System filter	PASSED	0.126 s



View Account summary by adding payment filter as Member Payments

FAILED	DURATION - 39.520 s		Steps Total - 5 Pass - 4 Fail - 1 Skip - 0	
/ 9:45:10.771 AM // 9:45:50.291 AM /				
Account Information				
@MemberPayments				

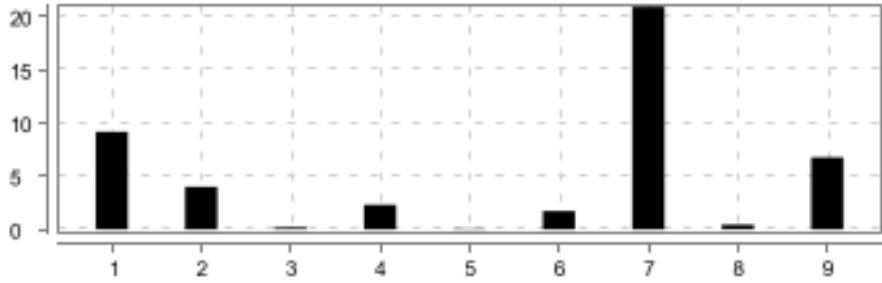

#	Step / Hook Details	Status	Duration
1	Given User launch the url	PASSED	9.508 s
2	When User provide valid username and password	PASSED	16.433 s
3	And User choose the Banking Tab	PASSED	1.920 s
4	And User provide filters as Member Payments and check the number of incoming payments	PASSED	1.883 s
5	Then User get the payment details based on Member filter	FAILED	0.194 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.JavascriptExecutor.executeScript(String, Object[])" because "com.utility.HelperClass.javascriptExe" is null at com.stepdefinitions.AccountInfoStepDefinition. user_get_the_payment_details_based_on_member_filter(AccountInfoStepDefinition.java:110)		

#	Step / Hook Details	Status	Duration
	<p>at ?.User get the payment details based on Member filter(file:///C:/Users/alakshmanan/eclipse-workspace/CodeRed/PilotProject_Cyclos_CodeRed/src/test/resources/Features/AccountInformation.feature:28)</p> <p>* Not displayable characters are replaced by '?'. </p>		
	<p>AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)</p> <p>View Account summary by adding payment filter as Member Payments</p> 	PASSED	1.702 s

To Edit Address in Demo Cyclos classic payment software Application and do functions

PASSED	DURATION - 1 m 1.983 s	Scenarios Total - 1 Pass - 1 Fail - 0 Skip - 0		Steps Total - 9 Pass - 9 Fail - 0 Skip - 0	
/ 9:45:50.410 AM // 9:46:52.393 AM /					



Edit Address in profile

PASSED	DURATION - 1 m 1.980 s		Steps Total - 9 Pass - 9 Fail - 0 Skip - 0	
/ 9:45:50.413 AM // 9:46:52.393 AM /				
To Edit Address in Demo Cyclos classic payment software Application and do functions				
@MobileNumber				

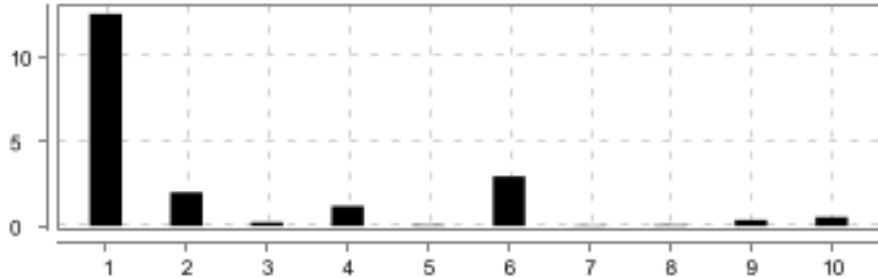

#	Step / Hook Details	Status	Duration
1	Given User is on Demo Cyclos classic Homepage	PASSED	9.185 s
2	When User click the Signin	PASSED	4.000 s
3	And User provides valid credentials LoginName and Password	PASSED	0.182 s
4	And User click Personal field	PASSED	2.324 s

#	Step / Hook Details	Status	Duration
5	And User click the Address	PASSED	0.056 s
6	And User click the new in Address	PASSED	1.739 s
7	And User enter the Name Address Zip code City State and Country using sheetname "sheet1" and rownumber 0	PASSED	20.928 s
8	And User Choose the Visibility	PASSED	0.431 s
9	Then User Click the save and user get Save Successfull Message	PASSED	6.761 s

To Edit Phone Number in Demo Cyclos classic payment software Application and do functions

PASSED	DURATION - 57.058 s	Scenarios Total - 2 Pass - 2 Fail - 0 Skip - 0		Steps Total - 20 Pass - 20 Fail - 0 Skip - 0	
/ 9:46:52.411 AM // 9:47:49.469 AM /					

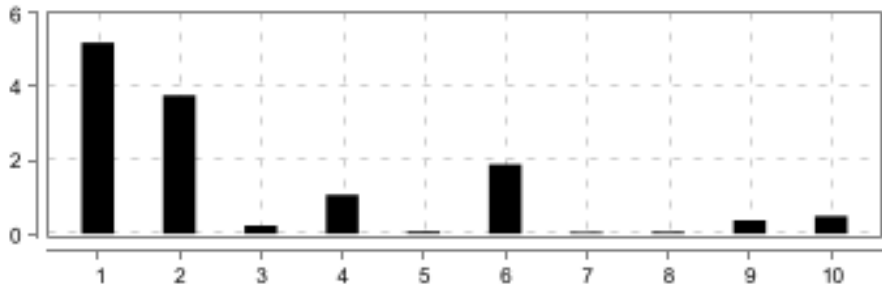

Add Mobile Number in Phone

PASSED	DURATION - 34.095 s		Steps Total - 10 Pass - 10 Fail - 0 Skip - 0	
/ 9:46:52.412 AM // 9:47:26.507 AM /				
To Edit Phone Number in Demo Cyclos classic payment software Application and do functions				
@MobileNumber				

#	Step / Hook Details	Status	Duration
1	Given User is on Demo Cyclos classic Homepage	PASSED	12.540 s
2	When User click the Signin	PASSED	1.987 s
3	And User provides valid credentials LoginName and Password	PASSED	0.210 s
4	And User click Personal field	PASSED	1.178 s
5	And User click the Phone in leftside Column	PASSED	0.062 s
6	And User click the Phone in profile	PASSED	2.926 s
7	And User click the new for Adding Mobile	PASSED	0.047 s
8	And User select the Mobile number	PASSED	0.063 s



#	Step / Hook Details	Status	Duration				
9	And User enter the Mobile Nuumber Name	PASSED	0.352 s				
	<table><tr><td>Name</td><td>MobileNumber</td></tr><tr><td>Arun</td><td>+91 9809876543</td></tr></table>			Name	MobileNumber	Arun	+91 9809876543
	Name			MobileNumber			
Arun	+91 9809876543						
10	Then User Click the save and should able to see the phone edit Message	PASSED	0.527 s				

Add Landline Number in Phone

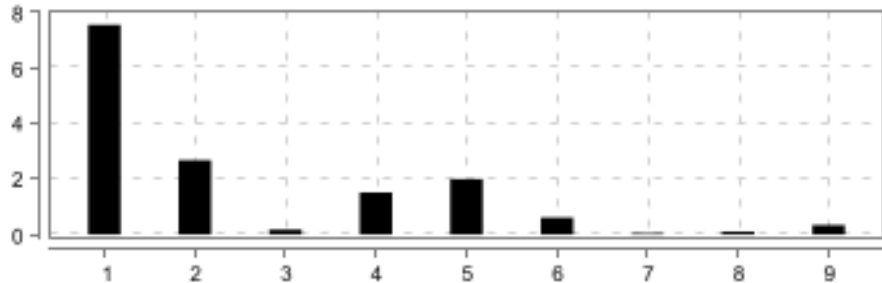

PASSED	DURATION - 22.955 s		Steps Total - 10 Pass - 10 Fail - 0 Skip - 0	
/ 9:47:26.514 AM // 9:47:49.469 AM /				
To Edit Phone Number in Demo Cyclos classic payment software Application and do functions				
@LandlineNumber				

#	Step / Hook Details	Status	Duration				
1	Given User is on Demo Cyclos classic Homepage	PASSED	5.194 s				
2	When User click the Signin	PASSED	3.766 s				
3	And User proides valid credentials LoginName and Password	PASSED	0.223 s				
4	And User click Personal field	PASSED	1.060 s				
5	And User click the Phone in leftside Column	PASSED	0.063 s				
6	And User click the Phone in profile	PASSED	1.891 s				
7	And User click the new for Adding Landline	PASSED	0.046 s				
8	And User select the Landline number	PASSED	0.058 s				
9	And User enter the Landline number Name	PASSED	0.365 s				
	<table><tr><td>Name2</td><td>Landline</td></tr><tr><td>Nirupama</td><td>(201) 555-1111</td></tr></table>			Name2	Landline	Nirupama	(201) 555-1111
Name2	Landline						
Nirupama	(201) 555-1111						
10	Then User Click the save and should able to see the LandLine phone edit Message	PASSED	0.485 s				

To Edit User profile in Demo Cyclos classic payment software Application and do functions



PASSED	DURATION - 22.897 s	Scenarios Total - 1 Pass - 1 Fail - 0 Skip - 0		Steps Total - 9 Pass - 9 Fail - 0 Skip - 0	
/ 9:47:49.475 AM // 9:48:12.372 AM /					

Edit User Profile

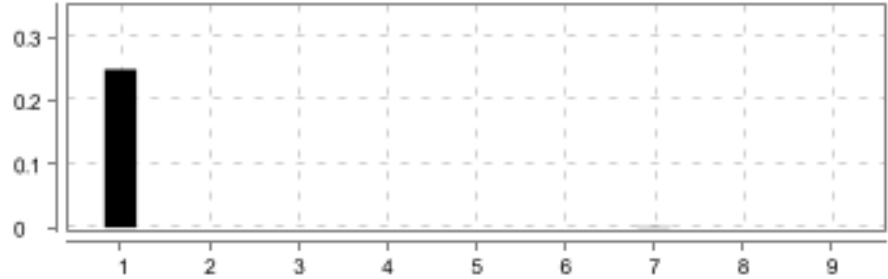

<div>PASSED</div>	<div>DURATION - 22.897 s</div>	<div></div>	<div>Steps</div> <div>Total - 9</div> <div>Pass - 9</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 9:47:49.475 AM // 9:48:12.372 AM /</div>				
<div>To Edit User profile in Demo Cyclos classic payment software Application and do functions</div>				

#	Step / Hook Details	Status	Duration
1	Given User is on Demo Cyclos classic Homepage	PASSED	7.546 s
2	When User click the Signin	PASSED	2.676 s
3	And User provides valid credentials LoginName and Password	PASSED	0.177 s
4	And User click Personal field	PASSED	1.515 s
5	And User click edit option	PASSED	1.992 s
6	And User enter Website	PASSED	0.614 s
	<div>Website</div> <div>Expleo.com</div>		
7	And User choose Gender	PASSED	0.053 s
8	And User choose Business type	PASSED	0.101 s
9	Then User click save and should be able to see edit success message	PASSED	0.345 s

User Processing the Advertisement Interests in Marketplace feature available in Cyclos Payment Software Web Application

FAILED	DURATION - 13.927 s	Scenarios Total - 2 Pass - 0 Fail - 2 Skip - 0		Steps Total - 15 Pass - 0 Fail - 2 Skip - 13	
/ 9:48:12.377 AM // 9:48:26.304 AM /					

User uses the Advertisement Interests

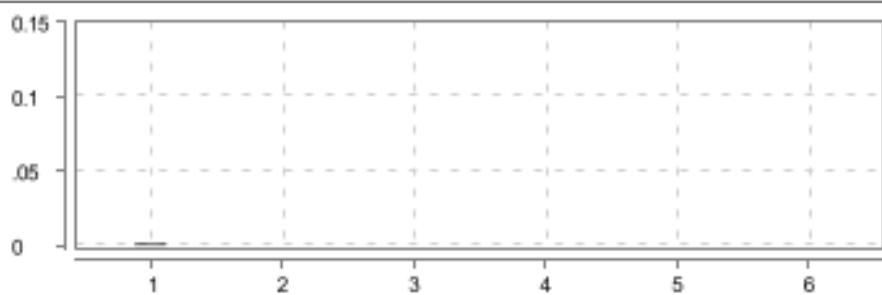

<div><div>FAILED</div><div>DURATION - 7.438 s</div></div>		<div></div>	<div>Steps</div> <div>Total - 9</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 8</div>	<div></div>
/ 9:48:12.377 AM // 9:48:19.815 AM /				
User Processing the Advertisement Interests in Marketplace feature available in Cyclos Payment *				

#	Step / Hook Details	Status	Duration
1	<p>Given User launches the url of the Cyclos Web Application</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.InterestsDefinitions at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</pre>	FAILED	0.249 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassInterests.data(UtilityClassInterests.java:27) at com.utility.UtilityClassInterests.<init>(UtilityClassInterests.java:13) at com.stepdefinitions.InterestsDefinitions.<init>(InterestsDefinitions.java:13) </pre>		

#	Step / Hook Details	Status	Duration
2	When User clicks Advertisement Interests in the left column	SKIPPED	0.000 s
3	And User clicks New interests	SKIPPED	0.000 s
4	And User provides the valid name	SKIPPED	0.000 s
5	And User clicks the category dropdown	SKIPPED	0.000 s
6	And User chooses any of the category based on interest	SKIPPED	0.000 s
7	And User saved the interest	SKIPPED	0.001 s
8	And User go back to the Advertisement interests	SKIPPED	0.000 s
9	Then User is going to print the total number of interests	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.674 s
	User uses the Advertisement Interests		

User uses the Advertisement Interests



<div>FAILED</div> <div>DURATION - 6.485 s</div>			<div>Steps</div> <div>Total - 6</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 5</div>	
/ 9:48:19.819 AM // 9:48:26.304 AM /				
User Processing the Advertisement Interests in Marketplace feature available in Cyclos Payment *				

#	Step / Hook Details	Status	Duration
1	Given User launches the url of the Cyclos Web Application	FAILED	0.001 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.InterestsDefinitions at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		

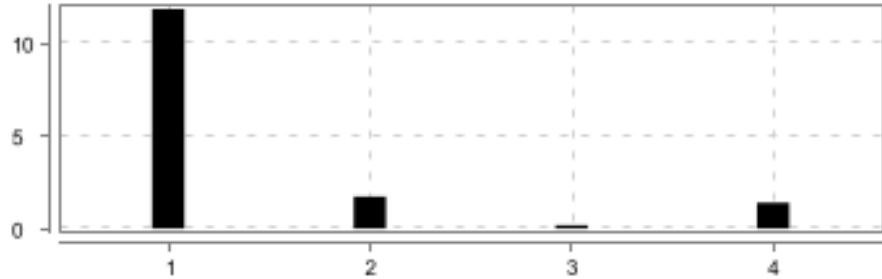

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) </pre> <p>Caused by: java.lang.reflect.InvocationTargetException</p>		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassInterests.data(UtilityClassInterests.java:27) at com.utility.UtilityClassInterests.<init>(UtilityClassInterests.java:13) at com.stepdefinitions.InterestsDefinitions.<init>(InterestsDefinitions.java:13)		
2	When User clicks Advertisement Interests in the left column	SKIPPED	0.000 s
3	And User clicks New interests	SKIPPED	0.000 s
4	And User provides the already exists name	SKIPPED	0.000 s
5	And User saved the interest with the name which is already exists	SKIPPED	0.000 s
6	Then User gets a warning message	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.736 s
	User uses the Advertisement Interests		

To Login in Demo Cyclos classic payment software Application and do functions

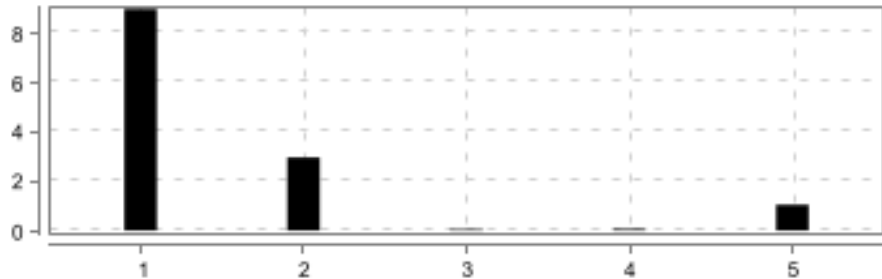

PASSED		DURATION - 1 m 7.171 s		Scenarios				Steps			
/ 9:48:26.321 AM // 9:49:33.492 AM /				Total - 3 Pass - 3 Fail - 0 Skip - 0				Total - 14 Pass - 14 Fail - 0 Skip - 0			

Login with valid credentials

<div>PASSED</div>	<div>DURATION - 29.376 s</div>	<div></div>	<div>Steps</div> <div>Total - 4</div> <div>Pass - 4</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 9:48:26.321 AM // 9:48:55.697 AM /</div>				
<div>To Login in Demo Cyclos classic payment software Application and do functions</div>				
<div>@ValidCredentials</div>				

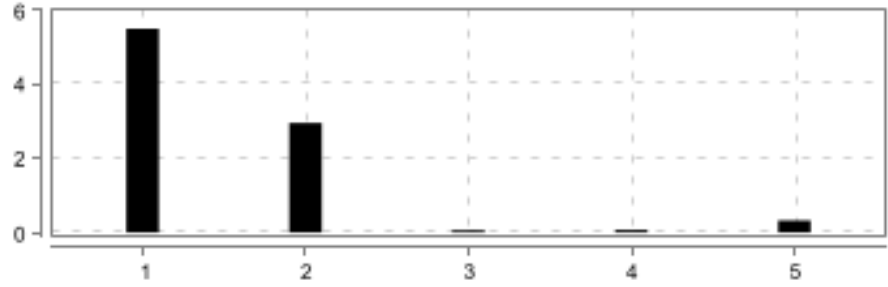

#	Step / Hook Details	Status	Duration
1	Given User is on Demo Cyclos classic Homepage	PASSED	11.834 s
2	When User click the Signin	PASSED	1.719 s
3	And User proides valid credentials LoginName and Password	PASSED	0.182 s
4	Then User should be able to login Successfully Message	PASSED	1.392 s

Login with Invalid credentials

<div>PASSED</div>	<div>DURATION - 20.875 s</div>	<div></div>	<div>Steps</div> <div>Total - 5</div> <div>Pass - 5</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
/ 9:48:55.703 AM // 9:49:16.578 AM /				
To Login in Demo Cyclos classic payment software Application and do functions				
@Invalidcredentials				

#	Step / Hook Details	Status	Duration
1	Given User is on Demo Cyclos classic Homepage	PASSED	8.959 s
2	When User click the Signin	PASSED	2.962 s
3	And User proides Invalid Sign in name "Lavanya1703"	PASSED	0.058 s
4	And User proides Invalid Sign in Password "Lavanya@170"	PASSED	0.060 s
5	Then User click submit for invalid and should be able to login Error Message	PASSED	1.039 s

Login with Invalid credentials

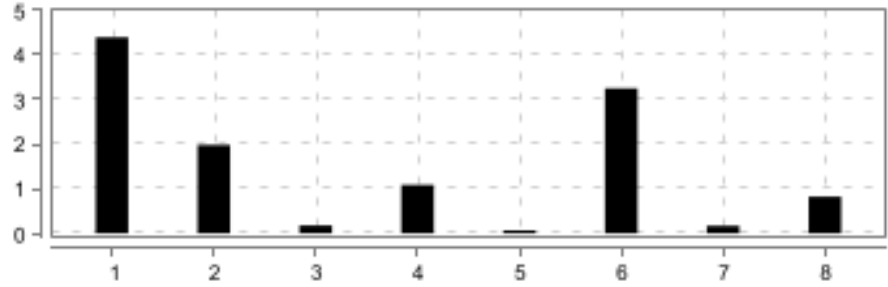

<div>PASSED</div>	<div>DURATION - 16.910 s</div>	<div></div>	<div><div>Steps</div><div>Total - 5</div><div>Pass - 5</div><div>Fail - 0</div><div>Skip - 0</div></div>	<div></div>
<div>/ 9:49:16.582 AM // 9:49:33.492 AM /</div>				
<div>To Login in Demo Cyclos classic payment software Application and do functions</div>				
<div>@Invalidcredentials</div>				

#	Step / Hook Details	Status	Duration
1	Given User is on Demo Cyclos classic Homepage	PASSED	5.498 s
2	When User click the Signin	PASSED	2.960 s
3	And User provides Invalid Sign in name "Lavanya170"	PASSED	0.058 s
4	And User provides Invalid Sign in Password "Lavanya@1703"	PASSED	0.069 s
5	Then User click submit for invalid and should be able to login Error Message	PASSED	0.323 s

To Manage password in Demo Cyclos classic payment software Application and do functions

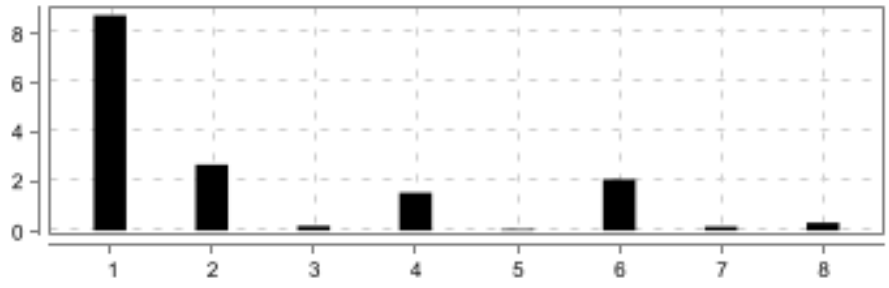

<div>PASSED</div>	<div>DURATION - 47.693 s</div>	<div>Scenarios</div> <div>Total - 2</div> <div>Pass - 2</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div><div></div><div>2</div></div>	<div>Steps</div> <div>Total - 16</div> <div>Pass - 16</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div><div></div><div>16</div></div>
<div>/ 9:49:33.499 AM // 9:50:21.192 AM /</div>					

Change password with valid input

<div>PASSED</div> <div>DURATION - 19.762 s</div>	<div></div>	<div>Steps</div> <div>Total - 8</div> <div>Pass - 8</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 9:49:33.499 AM // 9:49:53.261 AM /</div>			
<div>To Manage password in Demo Cyclos classic payment software Application and do functions</div>			
<div>@ManagePassword</div>			



#	Step / Hook Details			Status	Duration
1	Given User is on Demo Cyclos classic Homepage			PASSED	4.394 s
2	When User click the Signin			PASSED	1.981 s
3	And User provides valid credentials LoginName and Password			PASSED	0.179 s
4	And User click Personal field			PASSED	1.082 s
5	And User Click Change Password			PASSED	0.068 s
6	And User Click Change Option			PASSED	3.249 s
7	And User enter the Old password New password Confirm New password			PASSED	0.169 s
	OldPassword	NewPassword	ConfirmNewPassword		
	Lavanya@1703	Lavanya@1703	Lavanya@1703		
8	Then User Click the Confirm button and able to see Password reset message			PASSED	0.818 s

Change password with Invalid input

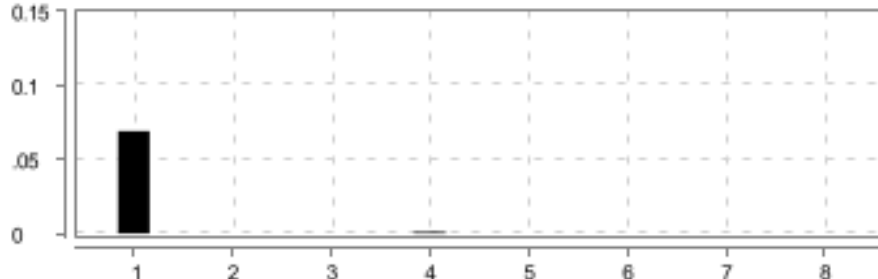

PASSED	DURATION - 27.921 s		Steps Total - 8 Pass - 8 Fail - 0 Skip - 0	
/ 9:49:53.271 AM // 9:50:21.192 AM /				
To Manage password in Demo Cyclos classic payment software Application and do functions				

#	Step / Hook Details			Status	Duration
1	Given User is on Demo Cyclos classic Homepage			PASSED	8.709 s
2	When User click the Signin			PASSED	2.669 s
3	And User provides valid credentials LoginName and Password			PASSED	0.179 s
4	And User click Personal field			PASSED	1.534 s
5	And User Click Change Password			PASSED	0.056 s
6	And User Click Change Option			PASSED	2.070 s
7	And User enter the Old password New password Confirm New password			PASSED	0.165 s
	OldPassword	NewPassword	ConfirmNewPassword		
	Lavanya@1703	Lavanya@1703	Lavanya@170		
8	Then User Click the Confirm button and able to see Password Error reset message			PASSED	0.316 s

User using Search Advertisements in Marketplace tab available in Cyclos Payment Software Application

FAILED	DURATION - 32.925 s	Scenarios Total - 4 Pass - 0 Fail - 4 Skip - 0		Steps Total - 29 Pass - 0 Fail - 4 Skip - 25	
/ 9:50:21.200 AM // 9:50:54.125 AM /					

User uses Price Highest filter

FAILED	DURATION - 5.741 s		Steps Total - 8 Pass - 0 Fail - 1 Skip - 7	
/ 9:50:21.200 AM // 9:50:26.941 AM /				
User using Search Advertisements in Marketplace tab available in Cyclos Payment Software Application				

#	Step / Hook Details	Status	Duration
1	<p>Given User launches the url of the web page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.MarketPlaceDefinitions at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)</p>	FAILED	0.069 s

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassMarketPlace.data(UtilityClassMarketPlace.java:27) </p>		

#	Step / Hook Details	Status	Duration
	at com.utility.UtilityClassMarketPlace.<init>(UtilityClassMarketPlace.java:13) at com.stepdefinitions.MarketPlaceDefinitions.<init>(MarketPlaceDefinitions.java:14)		
2	When User provide correct username and password	SKIPPED	0.000 s
3	And User goes to List ads	SKIPPED	0.000 s
4	And User applies the filter tab	SKIPPED	0.001 s
5	And User chooses price highest filter	SKIPPED	0.000 s
6	And User clicks for the product and added to favorites	SKIPPED	0.000 s
7	And User enables the checkbox (Show only favorites)	SKIPPED	0.000 s
8	Then User prints the total number of results available in favorites after added from highest filter	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.630 s
	User uses Price Highest filter		

User access Price Lowest filter

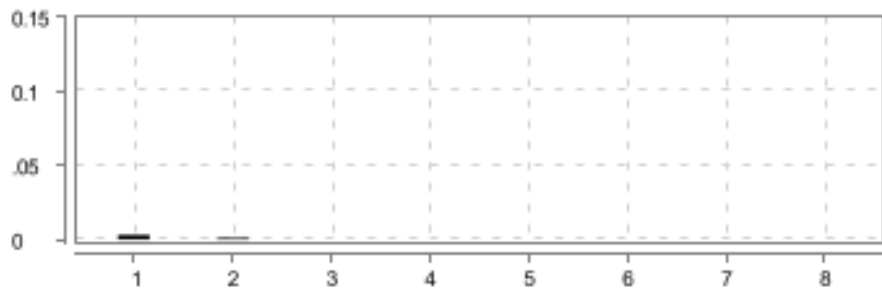

FAILED DURATION - 8.635 s / 9:50:26.945 AM // 9:50:35.580 AM / User using Search Advertisements in Marketplace tab available in Cyclos Payment Software Application		Steps Total - 8 Pass - 0 Fail - 1 Skip - 7	
--	--	--	--

#	Step / Hook Details	Status	Duration
1	Given User launches the url of the web page io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.MarketPlaceDefinitions at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		

#	Step / Hook Details	Status	Duration
	Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inputStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassMarketPlace.data(UtilityClassMarketPlace.java:27) at com.utility.UtilityClassMarketPlace.<init>(UtilityClassMarketPlace.java:13) at com.stepdefinitions.MarketPlaceDefinitions.<init>(MarketPlaceDefinitions.java:14)		
2	When User provide correct username and password	SKIPPED	0.001 s
3	And User goes to List ads	SKIPPED	0.000 s
4	And User applies the filter tab	SKIPPED	0.000 s
5	And User chooses price lowest filter	SKIPPED	0.000 s
6	And User clicks for the product and adds it to favorites	SKIPPED	0.000 s
7	And User enables the checkbox (Show only favorites)	SKIPPED	0.000 s
8	Then User prints the total number of results available in favorites after added from lowest filter	SKIPPED	0.001 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.550 s
	User access Price Lowest filter		

User access Price Relevance filter

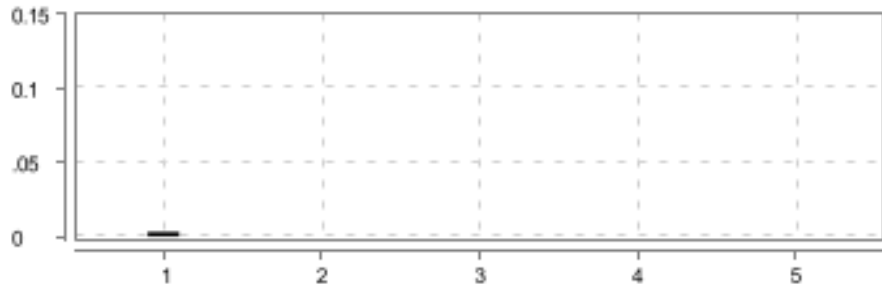

<div>FAILED</div> <div>DURATION - 8.700 s</div>			<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 7</div>	
/ 9:50:35.590 AM // 9:50:44.290 AM /				
User using Search Advertisements in Marketplace tab available in Cyclos Payment Software Application				

#	Step / Hook Details	Status	Duration
1	<p>Given User launches the url of the web page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.MarketPlaceDefinitions at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassMarketPlace.data(UtilityClassMarketPlace.java:27) at com.utility.UtilityClassMarketPlace.<init>(UtilityClassMarketPlace.java:13) at com.stepdefinitions.MarketPlaceDefinitions.<init>(MarketPlaceDefinitions.java:14)		
2	When User provide correct username and password	SKIPPED	0.001 s
3	And User goes to List ads	SKIPPED	0.000 s
4	And User applies the filter tab	SKIPPED	0.000 s
5	And User chooses relevance filter	SKIPPED	0.000 s
6	And User clicks for the product ann adds it to favorites	SKIPPED	0.000 s
7	And User enables the checkbox (Show only favorites)	SKIPPED	0.000 s
8	Then User prints the total number of results available in favorites after added from relevance filter	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	2.140 s

#	Step / Hook Details	Status	Duration
	User access Price Relevance filter		

User removes a product from Price Highest filter



FAILED	DURATION - 9.831 s		<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 9:50:44.294 AM // 9:50:54.125 AM /				
User using Search Advertisements in Marketplace tab available in Cyclos Payment Software Application				

#	Step / Hook Details	Status	Duration
1	Given User launches the url of the web page io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.MarketPlaceDefinitions at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)	FAILED	0.003 s

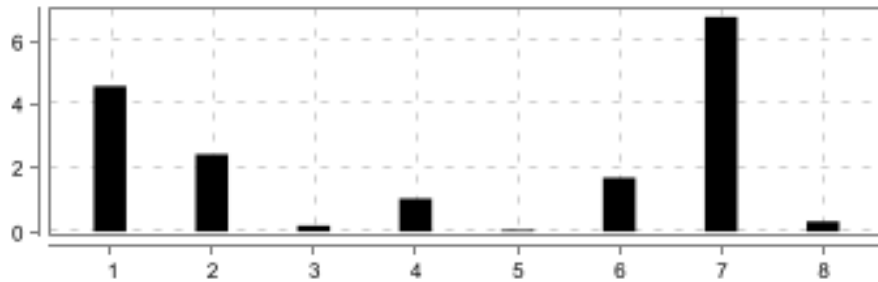

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassMarketPlace.data(UtilityClassMarketPlace.java:27) at com.utility.UtilityClassMarketPlace.<init>(UtilityClassMarketPlace.java:13) </pre>		

#	Step / Hook Details	Status	Duration
	at com.stepdefinitions.MarketPlaceDefinitions.<init>(MarketPlaceDefinitions.java:14)		
2	When User correct valid username and password	SKIPPED	0.000 s
3	And User enables the checkbox (Show only favorites)	SKIPPED	0.000 s
4	And User removes a product from list	SKIPPED	0.000 s
5	Then user prints the total number of results available in favorites after removing product	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.778 s
	User removes a product from Price Highest filter		

To add existing in Mycontact

PASSED	DURATION - 26.935 s	Scenarios Total - 1 Pass - 1 Fail - 0 Skip - 0		Steps Total - 8 Pass - 8 Fail - 0 Skip - 0	
/ 9:50:54.130 AM // 9:51:21.065 AM /					



To Manage My Contact

<div>PASSED</div> <div>DURATION - 26.935 s</div>		<div></div>	<div>Steps</div> <div>Total - 8</div> <div>Pass - 8</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 9:50:54.130 AM // 9:51:21.065 AM /</div>				
<div>To add existing in Mycontact</div>				
<div>@MyContact</div>				

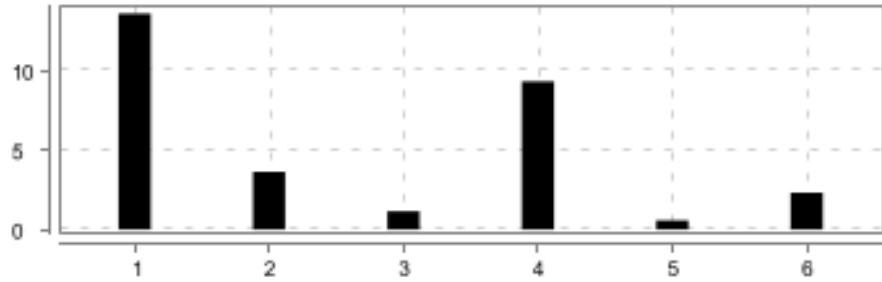

#	Step / Hook Details	Status	Duration
1	Given User is on Demo Cyclos classic Homepage	PASSED	4.576 s
2	When User click the Signin	PASSED	2.432 s

#	Step / Hook Details	Status	Duration
3	And User provides valid credentials LoginName and Password	PASSED	0.181 s
4	And User Click User option	PASSED	1.041 s
5	And User Click My Contact	PASSED	0.056 s
6	And User Click Add option	PASSED	1.689 s
7	And User enter the Name to add in My Contact list	PASSED	6.758 s
	MyContactName junio		
8	Then User Click save and able to see My Contact Added list	PASSED	0.317 s

User access the Payment option to perform payment related actions in Cyclos

PASSED	DURATION - 1 m 2.329 s	Scenarios Total - 2 Pass - 2 Fail - 0 Skip - 0		Steps Total - 11 Pass - 11 Fail - 0 Skip - 0	
/ 9:51:21.075 AM // 9:52:23.404 AM /					

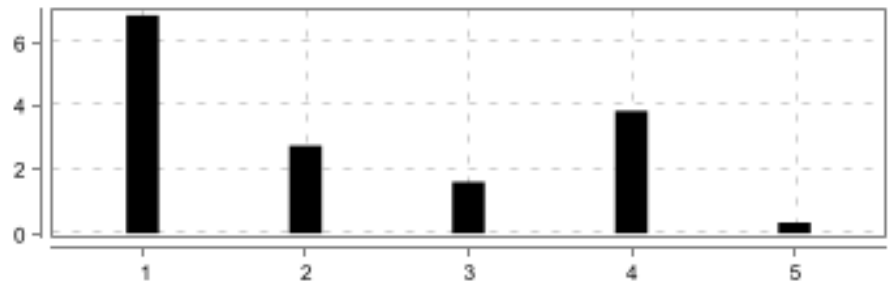

User to User payment

PASSED	DURATION - 40.367 s		Steps Total - 6 Pass - 6 Fail - 0 Skip - 0	
/ 9:51:21.075 AM // 9:52:01.442 AM /				
User access the Payment option to perform payment related actions in Cyclos				
@UserToUserPayment				

#	Step / Hook Details	Status	Duration
1	Given User launched the url	PASSED	13.593 s
2	When User provide username and password	PASSED	3.641 s
3	And User choose the Payment to user Tab	PASSED	1.156 s
4	And User selects the ReceiverName and amount	PASSED	9.324 s
5	And User choose the schedule as Pay now	PASSED	0.584 s



#	Step / Hook Details	Status	Duration
6	Then User gets a verification message	PASSED	2.319 s

Receiving QR Code Payment

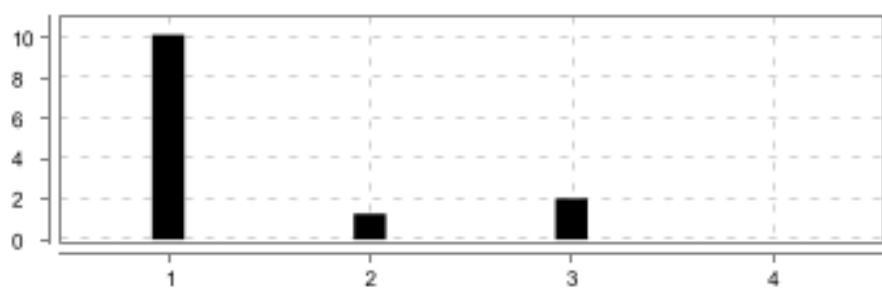

PASSED	DURATION - 21.959 s		Steps Total - 5 Pass - 5 Fail - 0 Skip - 0	
/ 9:52:01.445 AM // 9:52:23.404 AM /				
User access the Payment option to perform payment related actions in Cyclos				
@ReceiveQRPayments				

#	Step / Hook Details	Status	Duration
1	Given User launched the url	PASSED	6.833 s
2	When User provide username and password	PASSED	2.755 s
3	And User choose the Receive QR Payments Tab	PASSED	1.608 s
4	And User provides the amount which will be converted into a QR code	PASSED	3.839 s
5	Then User gets the QR	PASSED	0.338 s

User uploads the profile picture in Cyclos web application

FAILED		DURATION - 1 m 19.733 s		Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 4 Pass - 2 Fail - 1 Skip - 1			
/ 9:52:23.407 AM // 9:53:43.140 AM /									

User Uploading new profile picture



<div>FAILED</div> <div>DURATION - 1 m 19.733 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 2</div> <div>Fail - 1</div> <div>Skip - 1</div>	
/ 9:52:23.407 AM // 9:53:43.140 AM /				
User uploads the profile picture in Cyclos web application				

#	Step / Hook Details	Status	Duration
1	Given User launched the web application and login into the application	PASSED	10.131 s
2	When User goes to Personal Tab and goes to profile image option	PASSED	1.272 s
3	And User choose Upload new option and added picture from the system org.openqa.selenium.StaleElementReferenceException: stale element reference: stale element not found (Session info: MicrosoftEdge=119.0.2151.58) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#stale-element-reference-exception Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.edge.EdgeDriver Command: [9f0b2801ab7e5eff66ce2fb2e34a81ec, isElementDisplayed {id=AE51450836FC7278C09D30ECCA1CCE4A_element_31}] Capabilities {acceptInsecureCerts: false, browserName: msedge, browserVersion: 119.0.2151.58, fedcm:accounts: true, ms:edgeOptions: {debuggerAddress: localhost:50745}, msedge: {msedgedriverVersion: 119.0.2151.72 (e8225cce8e47..., userDataDir: C:\Users\ALAKSH~1\AppData\L..., networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:50745/devtoo..., se:cdpVersion: 119.0.2151.58, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Element: [[EdgeDriver: msedge on windows (9f0b2801ab7e5eff66ce2fb2e34a81ec)] -> xpath: //button[@class='actionButton']] Session ID: 9f0b2801ab7e5eff66ce2fb2e34a81ec at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:224) at org.openqa.selenium.remote.RemoteWebElement.isDisplayed(RemoteWebElement.java:283) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)	FAILED	2.030 s

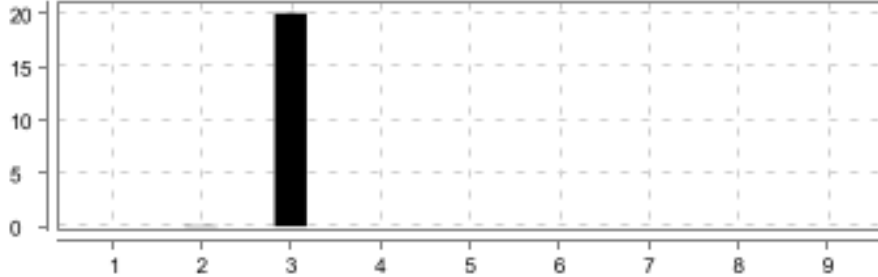

#	Step / Hook Details	Status	Duration
	<pre> at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:51) at jdk.proxy2/jdk.proxy2.\$Proxy37.isDisplayed(Unknown Source) at org.openqa.selenium.support.ui.ExpectedConditions.elementIfVisible(ExpectedConditions.java:304) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:290) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:287) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:205) at com.actions.ProfilePhotoUpdateActions.clickUploadNew(ProfilePhotoUpdateActions.java:43) at com.stepdefinitions.ProfilePhotoUpdateStepDefinition. user_choose_upload_new_option_and_added_picture_from_the_system(ProfilePhotoUpdateStepDefinition.java:37) at ?.User choose Upload new option and added picture from the system(file:///C:/Users/alakshmanan/eclipse-workspace/CodeRed/ PilotProject_Cyclos_CodeRed/src/test/resources/Features/ProfilePhotoUpdate.feature:6) * Not displayable characters are replaced by '?'. </pre>		
4	Then User checks the profile picture	SKIPPED	0.000 s
	<p>AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)</p> <pre> org.openqa.selenium.TimeoutException: timeout: Timed out receiving message from renderer: 10.000 (Session info: MicrosoftEdge=119.0.2151.58) Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.edge.EdgeDriver Command: [9f0b2801ab7e5eff66ce2fb2e34a81ec, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: msedge, browserVersion: 119.0.2151.58, fedcm:accounts: true, ms:edgeOptions: {debuggerAddress: localhost:50745}, msedge: {msedgedriverVersion: 119.0.2151.72 (e8225cce8e47..., userDataDir: C:\Users\ALAKSH~1\AppData\Local..., networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:50745/devtoo..., se:cdpVersion: 119.0.2151.58, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 9f0b2801ab7e5eff66ce2fb2e34a81ec at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) </pre>	FAILED	1 m 0.077 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at com.stepdefinitions.HookClass.tearDown(HookClass.java:18)		

To Register in Demo Cyclos classic payment software Application

FAILED	DURATION - 1 m 20.357 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 9 Pass - 2 Fail - 1 Skip - 6	
/ 9:53:43.146 AM // 9:55:03.503 AM /					

Register the User details



FAILED	DURATION - 1 m 20.357 s		Steps Total - 9 Pass - 2 Fail - 1 Skip - 6	
/ 9:53:43.146 AM // 9:55:03.503 AM /				
To Register in Demo Cyclos classic payment software Application				

#	Step / Hook Details	Status	Duration
1	Given User is on Demo Cyclos classic Homepage	PASSED	0.016 s
2	When User click the register button	PASSED	0.050 s
3	And User enter the Name org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//input[@class='inputField large']}[1]"} (Session info: MicrosoftEdge=119.0.2151.58) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.edge.EdgeDriver Command: [9f0b2801ab7e5eff66ce2fb2e34a81ec, findElement {using=xpath, value=//input[@class='inputField large']}[1]] Capabilities {acceptInsecureCerts: false, browserName: msedge, browserVersion: 119.0.2151.58, fedcm:accounts: true, ms:edgeOptions: {debuggerAddress: localhost:50745}, msedge: {msedgedriverVersion: 119.0.2151.72 (e8225cce8e47..., userDataDir: C:\Users\ALAKSH~1\AppData\L..., networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:50745/devtoo..., se:cdpVersion: 119.0.2151.58, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators:	FAILED	20.052 s

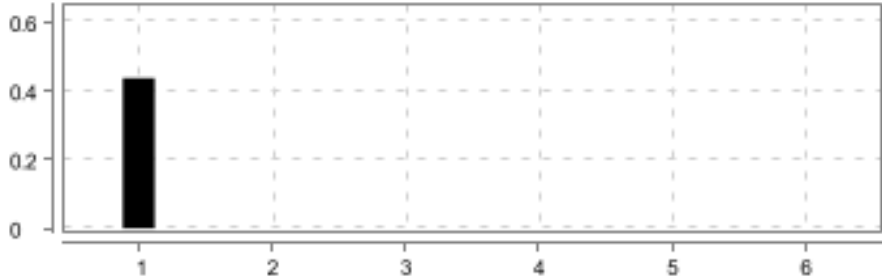

#	Step / Hook Details	Status	Duration
	<pre> true} Session ID: 9f0b2801ab7e5eff66ce2fb2e34a81ec at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy37.sendKeys(Unknown Source) at com.actions.RegisterPage_Actions.setName(RegisterPage_Actions.java:20) at com.stepdefinitions.RegisterPage_definitions.user_enter_the_name(RegisterPage_definitions.java:28) at ?.User enter the Name(file:///C:/Users/alakshmanan/eclipse-workspace/CodeRed/PilotProject_Cyclos_CodeRed/src/test/resources/Features/Register.feature:6) * Not displayable characters are replaced by '?'. </pre>		
4	And User enter the LoginName	SKIPPED	0.000 s
5	And User enter the Email	SKIPPED	0.001 s
6	And User enter the Password	SKIPPED	0.000 s
7	And User enter the confirmPassword	SKIPPED	0.000 s
8	And User click the RegistrationAgreement	SKIPPED	0.000 s
9	Then User click Submit button	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	FAILED	1 m 0.235 s
	<pre> org.openqa.selenium.TimeoutException: timeout: Timed out receiving message from renderer: 10.000 (Session info: MicrosoftEdge=119.0.2151.58) Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.edge.EdgeDriver Command: [9f0b2801ab7e5eff66ce2fb2e34a81ec, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: msedge, browserVersion: 119.0.2151.58, fedcm:accounts: true, ms:edgeOptions: {debuggerAddress: localhost:50745}, msedge: {msedgedriverVersion: 119.0.2151.72 (e8225cce8e47..., userDataDir: C:\Users\ALAKSH-1\AppData\L...}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:50745/devtoo..., se:cdpVersion: 119.0.2151.58, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, </pre>		

#	Step / Hook Details	Status	Duration
	<p>pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 9f0b2801ab7e5eff66ce2fb2e34a81ec</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325) at com.stepdefinitions.HookClass.tearDown(HookClass.java:18)</p>		


The user accessing the Message functionality

FAILED	DURATION - 1 m 14.269 s	Scenarios		Steps	
/ 9:55:03.510 AM // 9:56:17.779 AM /		Total - 5		Total - 28	
		Pass - 0		Pass - 0	
		Fail - 5		Fail - 5	
		Skip - 0		Skip - 23	

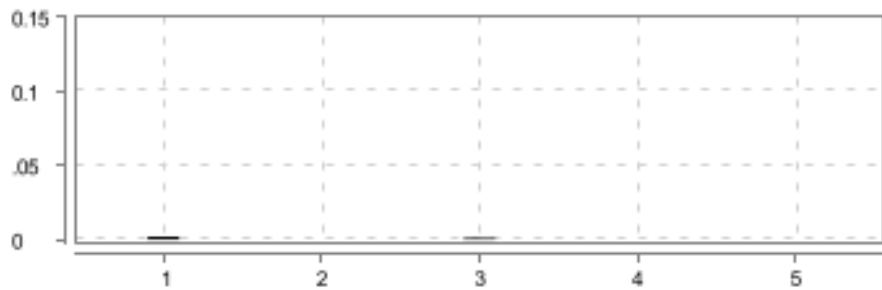

The user view the message history of send message

FAILED	DURATION - 22.026 s		Steps	
/ 9:55:03.510 AM // 9:55:25.536 AM /			Total - 6	
The user accessing the Message functionality			Pass - 0	
@SendMessage			Fail - 1	
			Skip - 5	

#	Step / Hook Details	Status	Duration
1	<p>Given Users launch the url</p> <pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.messageStepDefanition at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) </pre>	FAILED	0.437 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassMessage.data(UtilityClassMessage.java:27) at com.utility.UtilityClassMessage.<init>(UtilityClassMessage.java:14) at com.stepdefinitions.messageStepDefanition.<init>(messageStepDefanition.java:20) </pre>		
2	When Users provide valid username and password	SKIPPED	0.000 s
3	And User choose the Message Tab	SKIPPED	0.000 s
4	And User select the Sent message option	SKIPPED	0.000 s
5	And User gets the number of results in send message page	SKIPPED	0.000 s
6	Then Print the send messages	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	21.585 s
	The user view the message history of send message		
			

The user view the message history of inbox message

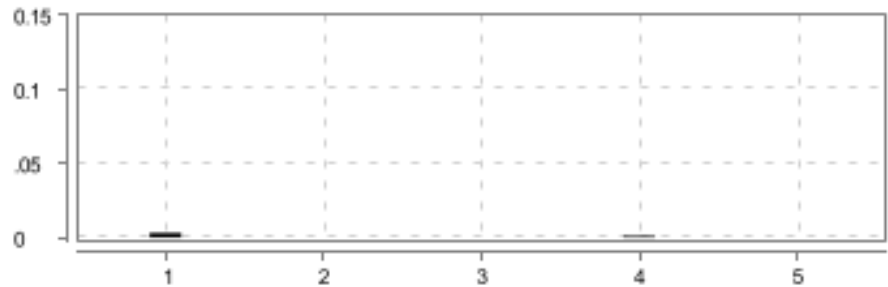

<div>FAILED</div> <div>DURATION - 24.985 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 9:55:25.539 AM // 9:55:50.524 AM /				
The user accessing the Message functionality				
@InBoxMessage				

#	Step / Hook Details	Status	Duration
1	<p>Given Users launch the url</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.messageStepDefanition at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassMessage.data(UtilityClassMessage.java:27) at com.utility.UtilityClassMessage.<init>(UtilityClassMessage.java:14) at com.stepdefinitions.messageStepDefanition.<init>(messageStepDefanition.java:20)		
2	When Users provide valid username and password	SKIPPED	0.000 s
3	And User choose the Message Tab	SKIPPED	0.001 s
4	And User choose the inbox option	SKIPPED	0.000 s
5	And User gets the number of results in inbox page.	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	1.159 s
	The user view the message history of inbox message		

#	Step / Hook Details	Status	Duration

The user view the message history of Trash message

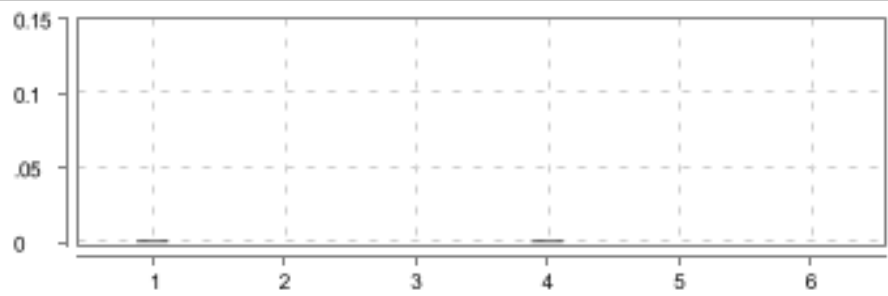

FAILED	DURATION - 10.004 s		Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
/ 9:55:50.529 AM // 9:56:00.533 AM /				
The user accessing the Message functionality				
@TrashMessage				

#	Step / Hook Details	Status	Duration
1	Given Users launch the url io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.messageStepDefanition at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassMessage.data(UtilityClassMessage.java:27) at com.utility.UtilityClassMessage.<init>(UtilityClassMessage.java:14) at com.stepdefinitions.messageStepDefanition.<init>(messageStepDefanition.java:20) </pre>		

#	Step / Hook Details	Status	Duration
2	When Users provide valid username and password	SKIPPED	0.000 s
3	And User choose the Message Tab	SKIPPED	0.000 s
4	And User choose the Trash option	SKIPPED	0.001 s
5	Then User gets the number of results in Trash pages	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	1.452 s
	The user view the message history of Trash message		

The user send the message

FAILED	DURATION - 9.246 s		Steps Total - 6 Pass - 0 Fail - 1 Skip - 5	
/ 9:56:00.537 AM // 9:56:09.783 AM /				
The user accessing the Message functionality				
@MessageSendFunctionality				

#	Step / Hook Details	Status	Duration
1	Given Users launch the url	FAILED	0.001 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.messageStepDefanition at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84)		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) </pre>		

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassMessage.data(UtilityClassMessage.java:27) at com.utility.UtilityClassMessage.<init>(UtilityClassMessage.java:14) at com.stepdefinitions.messageStepDefanition.<init>(messageStepDefanition.java:20)		
2	When Users provide valid username and password	SKIPPED	0.000 s
3	And User choose the Message Tab	SKIPPED	0.000 s
4	When User Creating new message	SKIPPED	0.001 s
5	And Enter the required details	SKIPPED	0.000 s
6	Then User receives a verification message	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.928 s
	The user send the message		

The user not able to send message without required details



FAILED DURATION - 7.991 s / 9:56:09.788 AM // 9:56:17.779 AM / The user accessing the Message functionality @MessageNotSend		Steps Total - 6 Pass - 0 Fail - 1 Skip - 5	
---	--	--	--

#	Step / Hook Details	Status	Duration
1	Given Users launch the url	FAILED	0.005 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.messageStepDefanition at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)		

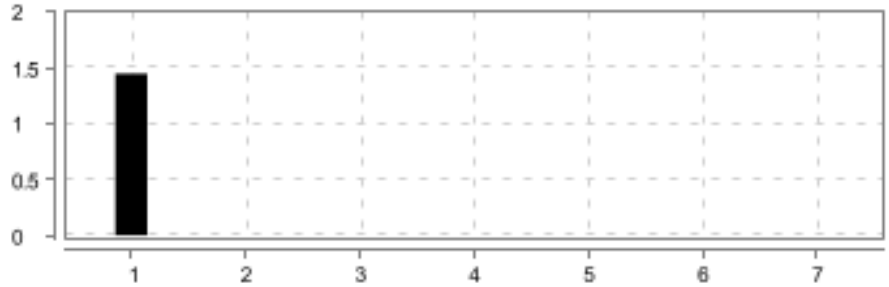

#	Step / Hook Details	Status	Duration
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)		

#	Step / Hook Details	Status	Duration
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassMessage.data(UtilityClassMessage.java:27) at com.utility.UtilityClassMessage.<init>(UtilityClassMessage.java:14) at com.stepdefinitions.messageStepDefanition.<init>(messageStepDefanition.java:20)		
2	When Users provide valid username and password	SKIPPED	0.000 s
3	And User choose the Message Tab	SKIPPED	0.000 s
4	When User Creating new message	SKIPPED	0.000 s
5	And User enter the user name and subject	SKIPPED	0.000 s
6	Then User receives verification message shows the message not able to send	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.963 s
	The user not able to send message without required details		

User Buy and print voucher

FAILED / 9:56:17.783 AM // 9:56:37.537 AM /	DURATION - 19.754 s	Scenarios Total - 2 Pass - 0 Fail - 2 Skip - 0		Steps Total - 13 Pass - 0 Fail - 2 Skip - 11	

Buying and print vouchers

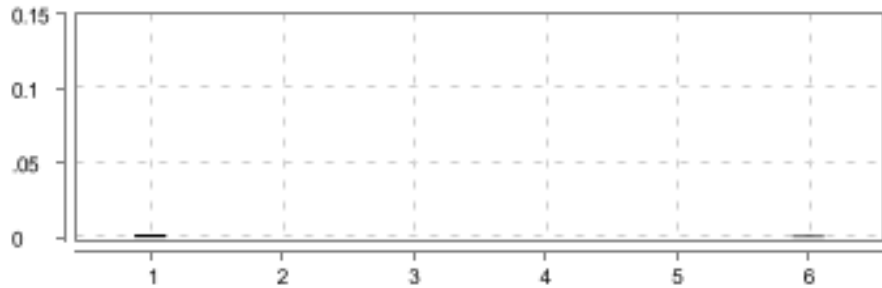

FAILED	DURATION - 11.177 s		Steps Total - 7 Pass - 0 Fail - 1 Skip - 6	
/ 9:56:17.783 AM // 9:56:28.960 AM /				
User Buy and print voucher				

#	Step / Hook Details	Status	Duration
1	<p>Given User launched url</p> <pre style="color: red;"> io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.VoucherStepdefinition at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) </pre>	FAILED	1.448 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassVoucher.data(UtilityClassVoucher.java:27) at com.utility.UtilityClassVoucher.<init>(UtilityClassVoucher.java:14) at com.stepdefinitions.VoucherStepdefinition.<init>(VoucherStepdefinition.java:16) </pre>		
2	When User provides Name and password	SKIPPED	0.000 s
3	And User choose the marketpalce tab	SKIPPED	0.000 s
4	And User selects the buy voucher	SKIPPED	0.000 s
5	And User selects the Gift voucher	SKIPPED	0.000 s
6	And User enters the amount and submit	SKIPPED	0.000 s
7	Then User print the gift voucher pdf and the submission verified.	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.855 s
	Buying and print vouchers		

Checking My vouchers

FAILED		DURATION - 8.574 s			Steps Total - 6 Pass - 0 Fail - 1 Skip - 5			
/ 9:56:28.963 AM // 9:56:37.537 AM /								
User Buy and print voucher								

#	Step / Hook Details	Status	Duration
1	Given User launched url	FAILED	0.002 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.VoucherStepdefinition at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)		

#	Step / Hook Details	Status	Duration
	<p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</p> <p>at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p> <p>at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p> <p>at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</p> <p>at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)</p> <p>at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)</p> <p>at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p> <p>at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)</p> <p>at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)</p> <p>at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)</p> <p>at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)</p> <p>at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)</p> <p>... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null</p> <p>at java.base/java.util.Objects.requireNonNull(Objects.java:235)</p> <p>at java.base/java.util.Properties.load(Properties.java:407)</p> <p>at com.utility.UtilityClassVoucher.data(UtilityClassVoucher.java:27)</p>		

#	Step / Hook Details	Status	Duration
	at com.utility.UtilityClassVoucher.<init>(UtilityClassVoucher.java:14) at com.stepdefinitions.VoucherStepdefinition.<init>(VoucherStepdefinition.java:16)		
2	When User provides Name and password	SKIPPED	0.000 s
3	And User choose the marketpalce tab	SKIPPED	0.000 s
4	And User Selects the my voucher option	SKIPPED	0.000 s
5	And User Verfied the page is successfully opened	SKIPPED	0.000 s
6	Then User download the gift voucher pdf	SKIPPED	0.001 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	1.181 s
	Checking My vouchers		