

Cucumber Report

Nov 22, 2023, 3:00:59 PM

Start : Nov 22, 3:00:36.721 PM

End : Nov 22, 3:00:57.953 PM

Duration : 21.232 s

Features

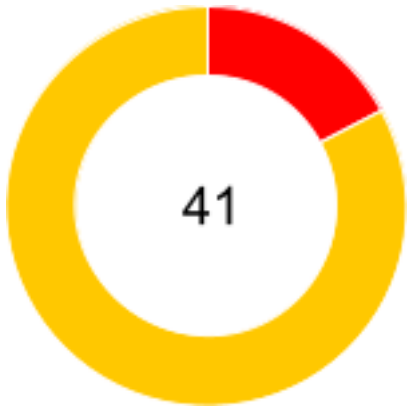
Scenarios

Steps

PASSED - 0
FAILED - 2
SKIPPED - 0

PASSED - 0
FAILED - 7
SKIPPED - 0

PASSED - 0
FAILED - 7
SKIPPED - 34



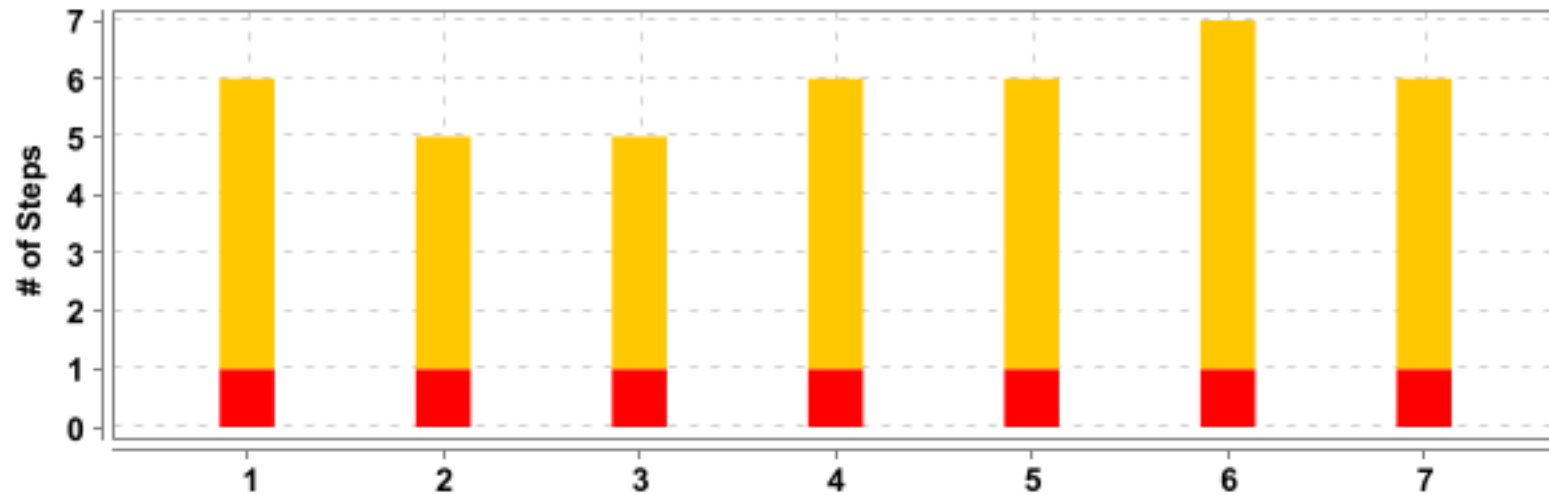
Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>The user accessing the Message functionality</u>	15.540 s	5	0	5	0	28	0	5	23
<u>User Buy and print voucher</u>	5.682 s	2	0	2	0	13	0	2	11

#	Feature Name	Scenario Name
1	<u>The user accessing the Message functionality</u>	<u>The user view the message history of send message</u>
2		<u>The user view the message history of inbox message</u>
3		<u>The user view the message history of Trash message</u>
4		<u>The user send the message</u>
5		<u>The user not able to send message without required details</u>
6	<u>User Buy and print voucher</u>	<u>Buying and print vouchers</u>
7		<u>Checking My vouchers</u>

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@SendMessage	1	0	1	0	1	0	1	0
@InBoxMessage	1	0	1	0	1	0	1	0
@TrashMessage	1	0	1	0	1	0	1	0
@MessageSendFunctionality	1	0	1	0	1	0	1	0
@MessageNotSend	1	0	1	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>The user accessing the Message functionality</u>	5	0	5	0	15.540 s
2	<u>User Buy and print voucher</u>	2	0	2	0	5.682 s

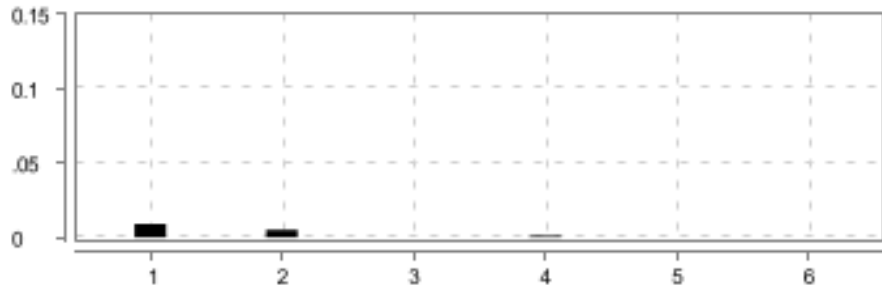



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>The user accessing the Message functionality</u>	<u>The user view the message history of send message</u>	6	0	1	5	5.564 s
2		<u>The user view the message history of inbox message</u>	5	0	1	4	3.222 s
3		<u>The user view the message history of Trash message</u>	5	0	1	4	2.123 s
4		<u>The user send the message</u>	6	0	1	5	2.197 s
5		<u>The user not able to send message without required details</u>	6	0	1	5	2.365 s
6	<u>User Buy and print voucher</u>	<u>Buying and print vouchers</u>	7	0	1	6	3.512 s
7		<u>Checking My vouchers</u>	6	0	1	5	2.164 s

The user accessing the Message functionality

FAILED	DURATION - 15.540 s	Scenarios		Steps	
/ 3:00:36.721 PM // 3:00:52.261 PM /		Total - 5		Total - 28	
		Pass - 0		Pass - 0	
		Fail - 5		Fail - 5	
		Skip - 0		Skip - 23	

The user view the message history of send message

<div>FAILED</div> <div>DURATION - 5.564 s</div>		<div></div>	<div>Steps</div> <div>Total - 6</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 5</div>	<div></div>
<div>/ 3:00:36.726 PM // 3:00:42.290 PM /</div>				
<div>The user accessing the Message functionality</div>				
<div>@SendMessage</div>				

#	Step / Hook Details	Status	Duration
1	<p>Given Users launch the url</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.messageStepDefanition at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)</p>	FAILED	0.009 s

#	Step / Hook Details	Status	Duration
	<p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</p> <p>at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p> <p>at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p> <p>at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</p> <p>at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)</p> <p>at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)</p> <p>at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p> <p>at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)</p> <p>at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)</p> <p>at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)</p> <p>at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)</p> <p>at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)</p> <p>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)</p> <p>... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null</p> <p>at java.base/java.util.Objects.requireNonNull(Objects.java:233)</p> <p>at java.base/java.util.Properties.load(Properties.java:407)</p> <p>at com.utility.UtilityClassMessage.data(UtilityClassMessage.java:27)</p>		

#	Step / Hook Details	Status	Duration
	at com.utility.UtilityClassMessage.<init>(UtilityClassMessage.java:14) at com.stepdefinitions.messageStepDefanition.<init>(messageStepDefanition.java:20)		
2	When Users provide valid username and password	SKIPPED	0.005 s
3	And User choose the Message Tab	SKIPPED	0.000 s
4	And User select the Sent message option	SKIPPED	0.001 s
5	And User gets the number of results in send message page	SKIPPED	0.000 s
6	Then Print the send messages	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	1.686 s
	The user view the message history of send message		

The user view the message history of inbox message

FAILED DURATION - 3.222 s / 3:00:42.326 PM // 3:00:45.548 PM / The user accessing the Message functionality @InBoxMessage		Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
---	--	--	--

#	Step / Hook Details	Status	Duration
1	Given Users launch the url io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.messageStepDefanition at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) </pre>		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:233) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassMessage.data(UtilityClassMessage.java:27) at com.utility.UtilityClassMessage.<init>(UtilityClassMessage.java:14) at com.stepdefinitions.messageStepDefanition.<init>(messageStepDefanition.java:20)		
2	When Users provide valid username and password	SKIPPED	0.001 s
3	And User choose the Message Tab	SKIPPED	0.000 s
4	And User choose the inbox option	SKIPPED	0.000 s
5	And User gets the number of results in inbox page.	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.461 s
	The user view the message history of inbox message		

The user view the message history of Trash message

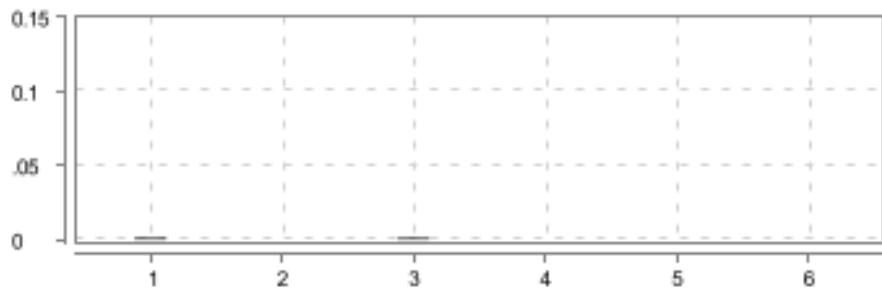

FAILED DURATION - 2.123 s / 3:00:45.559 PM // 3:00:47.682 PM / The user accessing the Message functionality @TrashMessage		Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
--	--	--	--

#	Step / Hook Details	Status	Duration
1	Given Users launch the url	FAILED	0.002 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.messageStepDefanition		

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)		

#	Step / Hook Details	Status	Duration
	<pre> at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:233) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassMessage.data(UtilityClassMessage.java:27) at com.utility.UtilityClassMessage.<init>(UtilityClassMessage.java:14) at com.stepdefinitions.messageStepDefanition.<init>(messageStepDefanition.java:20) </pre>		
2	When Users provide valid username and password	SKIPPED	0.000 s
3	And User choose the Message Tab	SKIPPED	0.000 s
4	And User choose the Trash option	SKIPPED	0.000 s
5	Then User gets the number of results in Trash pages	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.413 s
	The user view the message history of Trash message		

The user send the message

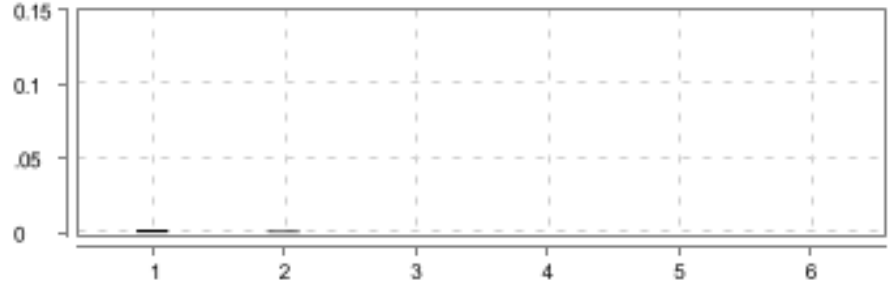

<div>FAILED</div> <div>DURATION - 2.197 s</div>			<div>Steps</div> <div>Total - 6</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 5</div>	
/ 3:00:47.692 PM // 3:00:49.889 PM /				
The user accessing the Message functionality				
@MessageSendFunctionality				

#	Step / Hook Details	Status	Duration
1	<p>Given Users launch the url</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.messageStepDefanition at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:233) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassMessage.data(UtilityClassMessage.java:27) at com.utility.UtilityClassMessage.<init>(UtilityClassMessage.java:14) at com.stepdefinitions.messageStepDefanition.<init>(messageStepDefanition.java:20)		
2	When Users provide valid username and password	SKIPPED	0.000 s
3	And User choose the Message Tab	SKIPPED	0.001 s
4	When User Creating new message	SKIPPED	0.000 s
5	And Enter the required details	SKIPPED	0.000 s
6	Then User receives a verification message	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.558 s
	The user send the message		

#	Step / Hook Details	Status	Duration

The user not able to send message without required details



<div>FAILED</div> <div>DURATION - 2.365 s</div>		<div>Steps</div> <div>Total - 6</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 5</div>	
<div>/ 3:00:49.896 PM // 3:00:52.261 PM /</div>			
<div>The user accessing the Message functionality</div>			
<div>@MessageNotSend</div>			

#	Step / Hook Details	Status	Duration
1	Given Users launch the url io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.messageStepDefanition at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)	FAILED	0.002 s

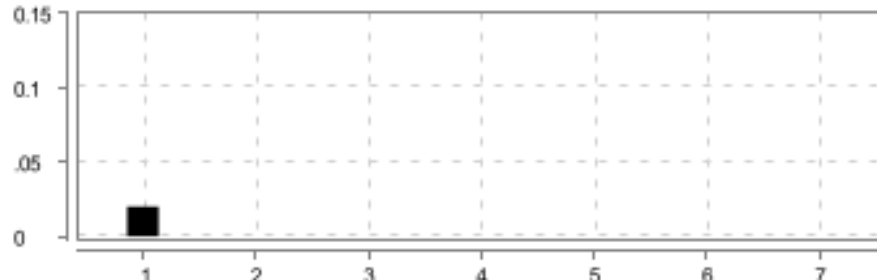

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:233) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassMessage.data(UtilityClassMessage.java:27) at com.utility.UtilityClassMessage.<init>(UtilityClassMessage.java:14) at com.stepdefinitions.messageStepDefanition.<init>(messageStepDefanition.java:20) </pre>		

#	Step / Hook Details	Status	Duration
2	When Users provide valid username and password	SKIPPED	0.001 s
3	And User choose the Message Tab	SKIPPED	0.000 s
4	When User Creating new message	SKIPPED	0.000 s
5	And User enter the user name and subject	SKIPPED	0.000 s
6	Then User receives verification message shows the message not able to send	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.481 s
	The user not able to send message without required details		

User Buy and print voucher

FAILED	DURATION - 5.682 s	Scenarios Total - 2 Pass - 0 Fail - 2 Skip - 0		Steps Total - 13 Pass - 0 Fail - 2 Skip - 11	
/ 3:00:52.271 PM // 3:00:57.953 PM /					

Buying and print vouchers

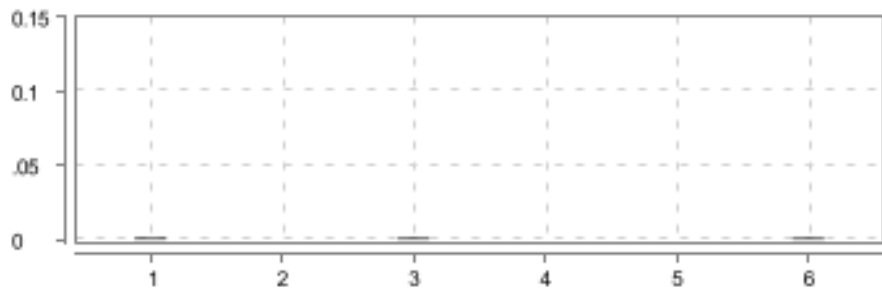

<div>FAILED</div> <div>DURATION - 3.512 s</div>			<div>Steps</div> <div>Total - 7</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 6</div>	
/ 3:00:52.271 PM // 3:00:55.783 PM /				
User Buy and print voucher				

#	Step / Hook Details	Status	Duration
1	Given User launched url	FAILED	0.020 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.VoucherStepdefinition		

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)		

#	Step / Hook Details	Status	Duration
	<pre> at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:233) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassVoucher.data(UtilityClassVoucher.java:27) at com.utility.UtilityClassVoucher.<init>(UtilityClassVoucher.java:14) at com.stepdefinitions.VoucherStepdefinition.<init>(VoucherStepdefinition.java:16) </pre>		
2	When User provides Name and password	SKIPPED	0.000 s
3	And User choose the marketpalce tab	SKIPPED	0.000 s
4	And User selects the buy voucher	SKIPPED	0.000 s
5	And User selects the Gift voucher	SKIPPED	0.000 s
6	And User enters the amount and submit	SKIPPED	0.000 s
7	Then User print the gift voucher pdf and the submission verified.	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	1.818 s
	Buying and print vouchers		

Checking My vouchers

<div>FAILED</div> <div>DURATION - 2.164 s</div>			<div>Steps</div> <div>Total - 6</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 5</div>	
/ 3:00:55.789 PM // 3:00:57.953 PM /				
User Buy and print voucher				

#	Step / Hook Details	Status	Duration
1	<p>Given User launched url</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.VoucherStepdefinition at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:233) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassVoucher.data(UtilityClassVoucher.java:27) at com.utility.UtilityClassVoucher.<init>(UtilityClassVoucher.java:14) at com.stepdefinitions.VoucherStepdefinition.<init>(VoucherStepdefinition.java:16)		
2	When User provides Name and password	SKIPPED	0.000 s
3	And User choose the marketpalce tab	SKIPPED	0.001 s
4	And User Selects the my voucher option	SKIPPED	0.000 s
5	And User Verfied the page is successfully opened	SKIPPED	0.000 s
6	Then User download the gift voucher pdf	SKIPPED	0.001 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.536 s
	Checking My vouchers		

#	Step / Hook Details	Status	Duration