Cucumber Report

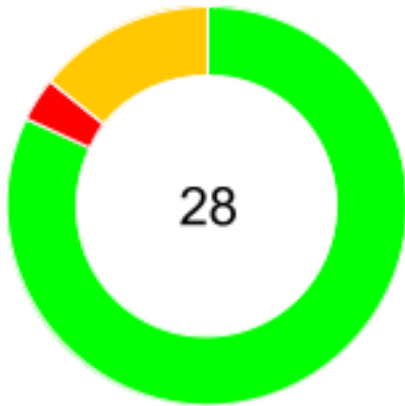| Start : Nov 22, 12:46:36.745 PM	End : Nov 22, 12:47:28.453 PM	Duration : 51.708 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 4 FAILED - 1 SKIPPED - 0	PASSED - 23 FAILED - 1 SKIPPED - 4

1

5

28

Pass % 0 %

Pass % 80 %

Pass % 82 %

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
The user accessing the Message functionality	*51.708 s*	5	4	1	0	28	23	1	4

#	*Feature Name*	*Scenario Name*
1	*The user accessing the Message functionality*	*The user not able to send message without required details*

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@SendMessage	1	1	0	0	1	0	1	0
@InBoxMessage	1	1	0	0	1	0	1	0
@TrashMessage	1	1	0	0	1	0	1	0
@MessageSendFunctionality	1	1	0	0	1	0	1	0
@MessageNotSend	1	0	1	0	1	0	1	0
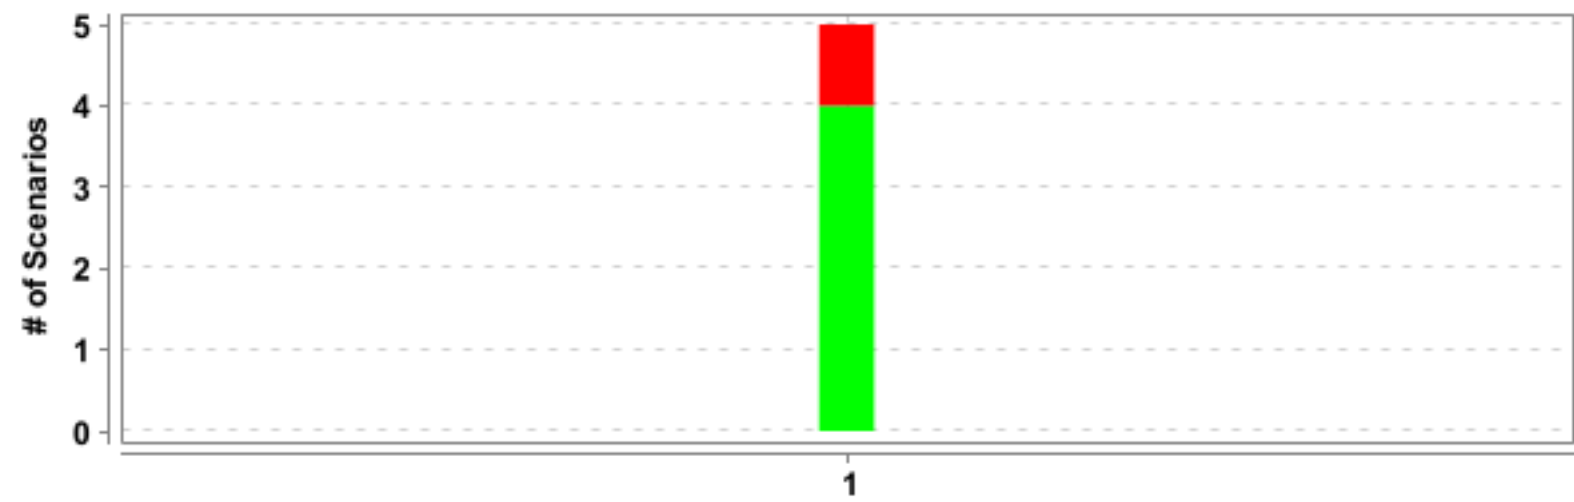
#	Feature Name	T	P	F	S	Duration
1	The user accessing the Message functionality	5	4	1	0	51.708 s
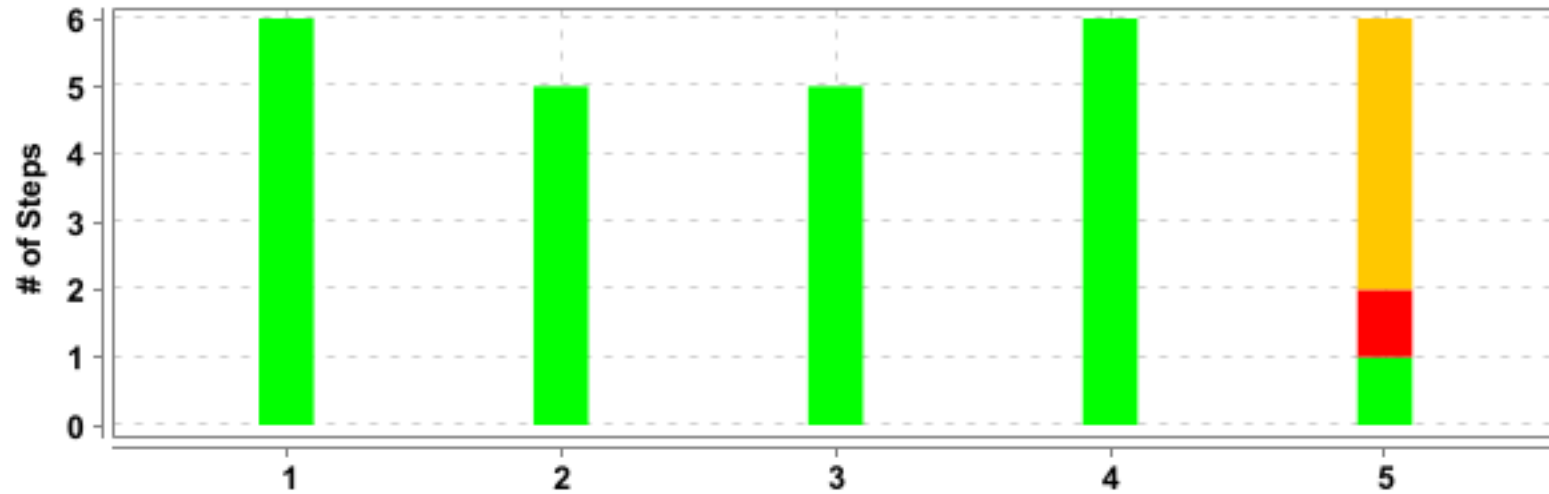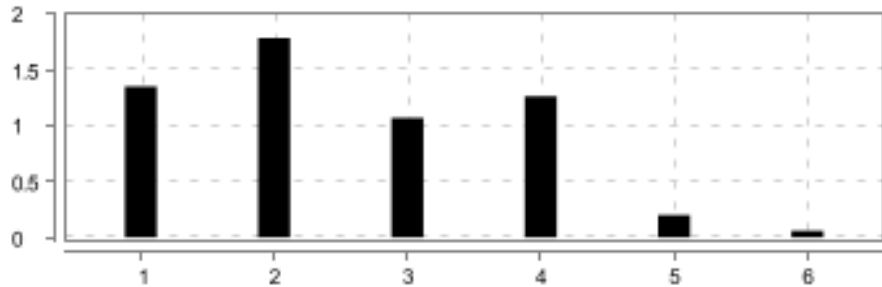
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	The user accessing the Message functionality	The user view the message history of send message	6	6	0	0	10.073 s
2		The user view the message history of inbox message	5	5	0	0	10.445 s
3		The user view the message history of Trash message	5	5	0	0	11.000 s
4		The user send the message	6	6	0	0	13.209 s
5		The user not able to send message without required details	6	1	1	4	6.945 s

The user accessing the Message functionality

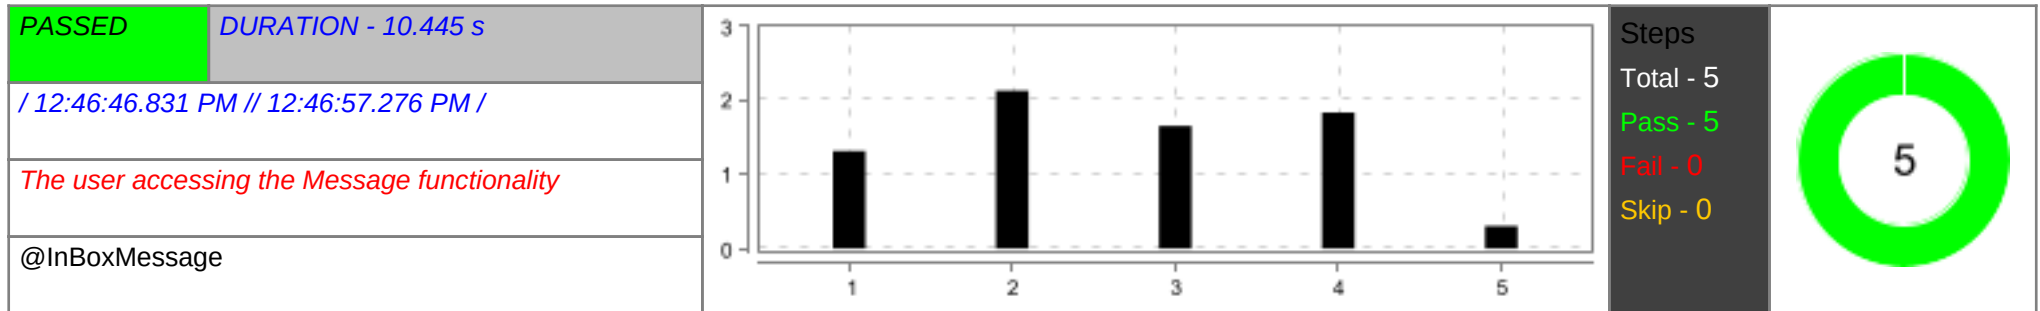| FAILED	DURATION - 51.708 s	Scenarios Total - 5 Pass - 4 Fail - 1 Skip - 0	Steps Total - 28 Pass - 23 Fail - 1 Skip - 4
/ 12:46:36.745 PM // 12:47:28.453 PM /			

The user view the message history of send message

PASSED	DURATION - 10.073 s	Steps Total - 6 Pass - 6 Fail - 0 Skip - 0
/ 12:46:36.750 PM // 12:46:46.823 PM /		
The user accessing the Message functionality		
@SendMessage		

#	Step / Hook Details	Status	Duration
1	Given Users launch the url	PASSED	1.352 s
2	When Users provide valid username and password	PASSED	1.787 s
3	And User choose the Message Tab	PASSED	1.070 s
4	And User select the Sent message option	PASSED	1.265 s
5	And User gets the number of results in send message page	PASSED	0.200 s
6	Then Print the send messages	PASSED	0.060 s

The user view the message history of inbox message

PASSED	DURATION - 10.445 s

/ 12:46:46.831 PM // 12:46:57.276 PM /

The user accessing the Message functionality

@InBoxMessage

Steps
Total - 5
Pass - 5
Fail - 0
Skip - 0

5

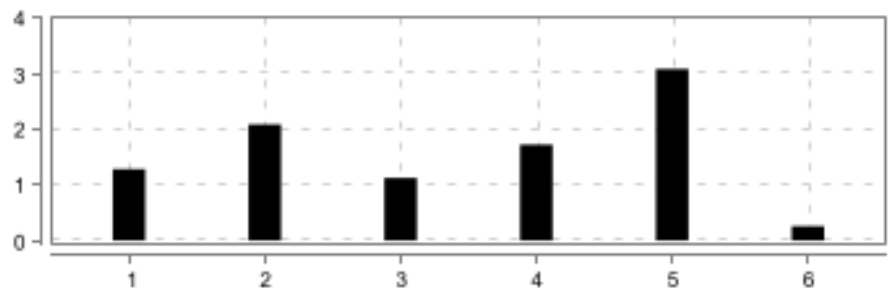| #	Step / Hook Details	Status	Duration
1	Given Users launch the url	PASSED	1.317 s
2	When Users provide valid username and password	PASSED	2.127 s
3	And User choose the Message Tab	PASSED	1.655 s
4	And User choose the inbox option	PASSED	1.833 s
5	And User gets the number of results in inbox page.	PASSED	0.305 s

The user view the message history of Trash message

PASSED	DURATION - 11.000 s

/ 12:46:57.284 PM // 12:47:08.284 PM /

The user accessing the Message functionality

@TrashMessage

Steps
Total - 5
Pass - 5
Fail - 0
Skip - 0

5
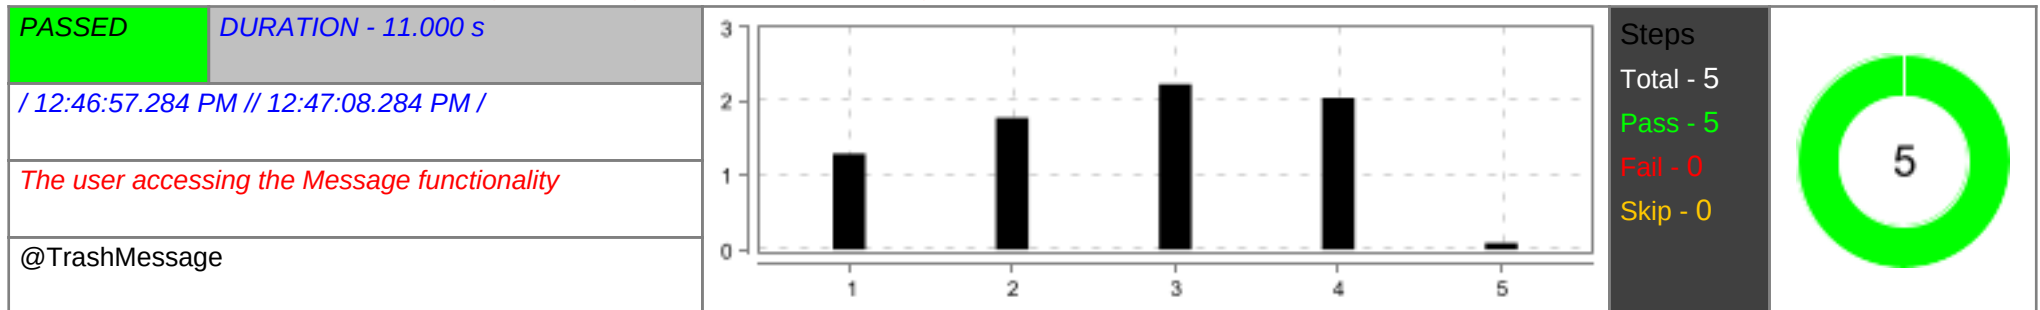
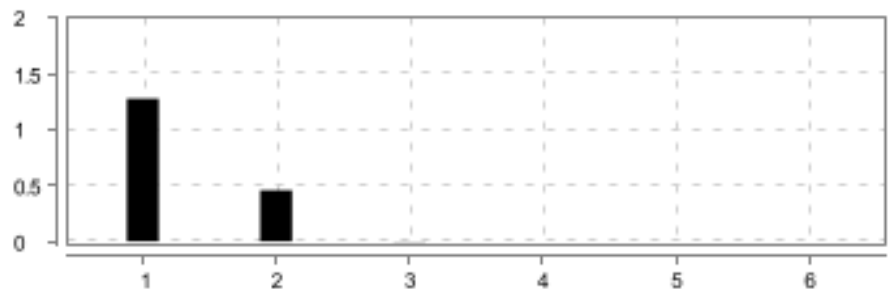| #	Step / Hook Details	Status	Duration
1	Given Users launch the url	PASSED	1.293 s
2	When Users provide valid username and password	PASSED	1.776 s
3	And User choose the Message Tab	PASSED	2.232 s
4	And User choose the Trash option	PASSED	2.046 s
5	Then User gets the number of results in Trash pages	PASSED	0.089 s

The user send the message

PASSED	DURATION - 13.209 s

/ 12:47:08.291 PM // 12:47:21.500 PM /

The user accessing the Message functionality

@MessageSendFunctionality

Steps
Total - 6
Pass - 6
Fail - 0
Skip - 0

6

#	Step / Hook Details	Status	Duration
1	Given Users launch the url	PASSED	1.282 s
2	When Users provide valid username and password	PASSED	2.086 s
3	And User choose the Message Tab	PASSED	1.124 s
4	When User Creating new message	PASSED	1.726 s
5	And Enter the required details	PASSED	3.083 s
6	Then User receives a verification message	PASSED	0.258 s

The user not able to send message without required details

FAILED	DURATION - 6.945 s

/ 12:47:21.508 PM // 12:47:28.453 PM /

The user accessing the Message functionality

@MessageNotSend

Steps
Total - 6
Pass - 1
Fail - 1
Skip - 4

6

#	Step / Hook Details	Status	Duration
1	Given Users launch the url	PASSED	1.280 s
2	When Users provide valid username and password	FAILED	0.457 s
	org.openqa.selenium.WebDriverException: target frame detached (failed to check if window was closed: disconnected: Unable to receive message from renderer) (Session info: chrome=114.0.5735.199) Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [16ba10f5b22a9bdf55c4e2e06ef349f0, findElement {using=xpath, value=//span[text()='Sign in']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\AVELAY~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:55678}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:55678/devtoo..., se:cdpVersion: 114.0.5735.199,		

#	Step / Hook Details	Status	Duration

	setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 16ba10f5b22a9bdf55c4e2e06ef349f0
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52)
	   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	   at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:165)
	   at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59)
	   at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359)
	   at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353)
	   at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68)
	   at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38)
	   at jdk.proxy2/jdk.proxy2.$Proxy37.click(Unknown Source)
	   at com.actions.MessageActions.setSignIn(MessageActions.java:35)
	   at com.stepdefinitions.messageStepDefanition.user_provide_valid_username_and_password(messageStepDefanition.java:34)
	   at ?.Users provide valid username and password(file:///C:/Users/avelayudhan/eclipse-workspace/CodeRed/PilotProject_Cyclos_CodeRed/src/test/resources/Features/message.feature:43)
	* Not displayable characters are replaced by '?'.		

3	And User choose the Message Tab	SKIPPED	0.002 s
4	When User Creating new message	SKIPPED	0.000 s
5	And User enter the user name and subject	SKIPPED	0.000 s
6	Then User receives verification message shows the message not able to send	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	FAILED	0.016 s
	org.openqa.selenium.WebDriverException: disconnected: not connected to DevTools (failed to check if window was closed: disconnected: not connected to DevTools) (Session info: chrome=114.0.5735.199) Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [16ba10f5b22a9bdf55c4e2e06ef349f0, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\AVELAY~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:55678}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:55678/devtoo..., se:cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob:		

#	Step / Hook Details	Status	Duration

	true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 16ba10f5b22a9bdf55c4e2e06ef349f0
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:675)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:679)
	  at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:325)
	  at com.stepdefinitions.HookClass.tearDown(HookClass.java:19)		