

# Cucumber Report

Nov 22, 2023, 12:57:41 PM


**Start : Nov 22, 12:50:54.982 PM**

**End : Nov 22, 12:57:39.326 PM**

**Duration : 6 m 44.344 s**


*Features*

**PASSED - 1**  
**FAILED - 13**  
**SKIPPED - 0**

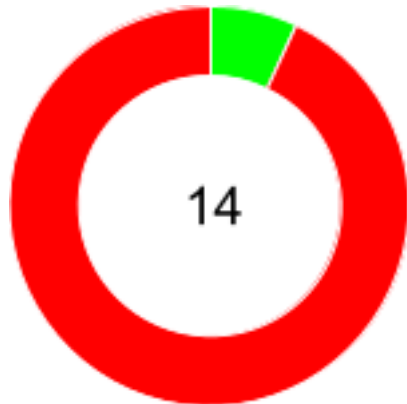


*Scenarios*

**PASSED - 8**  
**FAILED - 22**  
**SKIPPED - 0**

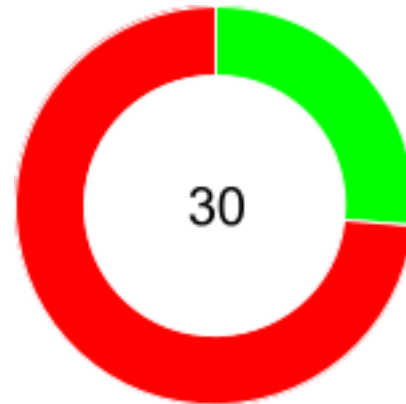

*Steps*

**PASSED - 63**  
**FAILED - 22**  
**SKIPPED - 117**

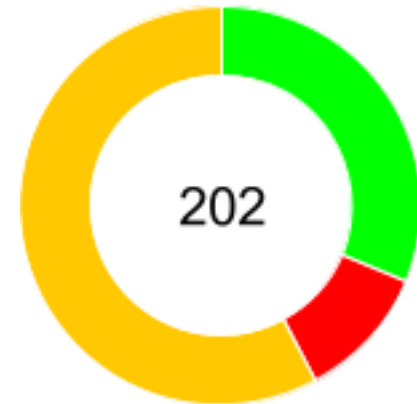

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Account Information</u>	33.335 s	3	2	1	0	17	16	1	0
<u>To Edit Address in Demo Cyclos classic payment software Application and do functions</u>	5.140 s	1	0	1	0	9	0	1	8
<u>To Edit Phone Number in Demo Cyclos classic payment software Application and do functions</u>	11.477 s	2	0	2	0	20	0	2	18
<u>To Edit User profile in Demo Cyclos classic payment software Application and do functions</u>	5.628 s	1	0	1	0	9	0	1	8
<u>User Processing the Advertisement Interests in Marketplace feature available in Cyclos Payment Software Web Application</u>	14.001 s	2	0	2	0	15	0	2	13
<u>To Login in Demo Cyclos classic payment software Application and do functions</u>	20.575 s	3	0	3	0	14	0	3	11
<u>To Manage password in Demo Cyclos classic payment software Application and do functions</u>	15.036 s	2	0	2	0	16	0	2	14
<u>User using Search Advertisements in Marketplace tab available in Cyclos Payment Software Application</u>	28.476 s	4	0	4	0	29	0	4	25
<u>To add existing in Mycontact</u>	9.680 s	1	0	1	0	8	0	1	7
<u>User access the Payment option to perform payment related actions in Cyclos</u>	1 m 12.769 s	2	0	2	0	11	7	2	2
<u>User uploads the profile picture in Cyclos web application</u>	51.273 s	1	0	1	0	4	2	1	1


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>To Register in Demo Cyclos classic payment software Application</u>	5.019 s	1	0	1	0	9	0	1	8
<u>The user accessing the Message functionality</u>	1 m 15.725 s	5	5	0	0	28	28	0	0
<u>User Buy and print voucher</u>	56.026 s	2	1	1	0	13	10	1	2

#	Feature Name	Scenario Name
1	<u>Account Information</u>	<u>View Account summary by adding payment filter as Member Payments</u>
2	<u>To Edit Address in Demo Cyclos classic payment software Application and do functions</u>	<u>Edit Address in profile</u>
3	<u>To Edit Phone Number in Demo Cyclos classic payment software Application and do functions</u>	<u>Add Mobile Number in Phone</u>
4		<u>Add Landline Number in Phone</u>
5	<u>To Edit User profile in Demo Cyclos classic payment software Application and do functions</u>	<u>Edit User Profile</u>
6	<u>User Processing the Advertisement Interests in Marketplace feature available in Cyclos Payment Software Web Application</u>	<u>User uses the Advertisement Interests</u>
7		<u>User uses the Advertisement Interests</u>
8	<u>To Login in Demo Cyclos classic payment software Application and do functions</u>	<u>Login with valid credentials</u>
9		<u>Login with Invalid credentials</u>

#	Feature Name	Scenario Name
10	<u>To Login in Demo Cyclos classic payment software Application and do functions</u>	<u>Login with Invalid credentials</u>
11	<u>To Manage password in Demo Cyclos classic payment software Application and do functions</u>	<u>Change password with valid input</u>
12		<u>Change password with Invalid input</u>
13	<u>User using Search Advertisements in Marketplace tab available in Cyclos Payment Software Application</u>	<u>User uses Price Highest filter</u>
14		<u>User access Price Lowest filter</u>
15		<u>User access Price Relevance filter</u>
16		<u>User removes a product from Price Highest filter</u>
17	<u>To add existing in Mycontact</u>	<u>To Manage My Contact</u>
18	<u>User access the Payment option to perform payment related actions in Cyclos</u>	<u>User to User payment</u>
19		<u>Receiving QR Code Payment</u>


#	Feature Name	Scenario Name
20	<u>User uploads the profile picture in Cyclos web application</u>	<u>User Uploading new profile picture</u>
21	<u>To Register in Demo Cyclos classic payment software Application</u>	<u>Register the User details</u>
22	<u>User Buy and print voucher</u>	<u>Buying and print vouchers</u>

<b>TAG</b>	<b>Scenario</b>				<b>Feature</b>			
<b>Name</b>	<b>T</b>	<b>P</b>	<b>F</b>	<b>S</b>	<b>T</b>	<b>P</b>	<b>F</b>	<b>S</b>
@AccountSummary	1	1	0	0	1	0	1	0
@SystemPayments	1	1	0	0	1	0	1	0
@MemberPayments	1	0	1	0	1	0	1	0
@MobileNumber	2	0	2	0	2	0	2	0
@LandlineNumber	1	0	1	0	1	0	1	0
@ValidCredentials	1	0	1	0	1	0	1	0
@Invalidcredentials	2	0	2	0	1	0	1	0
@ManagePassword	1	0	1	0	1	0	1	0
@MyContact	1	0	1	0	1	0	1	0
@UserToUserPayment	1	0	1	0	1	0	1	0
@ReceiveQRPayments	1	0	1	0	1	0	1	0
@SendMessage	1	1	0	0	1	1	0	0
@InBoxMessage	1	1	0	0	1	1	0	0
@TrashMessage	1	1	0	0	1	1	0	0
@MessageSendFunctionality	1	1	0	0	1	1	0	0
@MessageNotSend	1	1	0	0	1	1	0	0

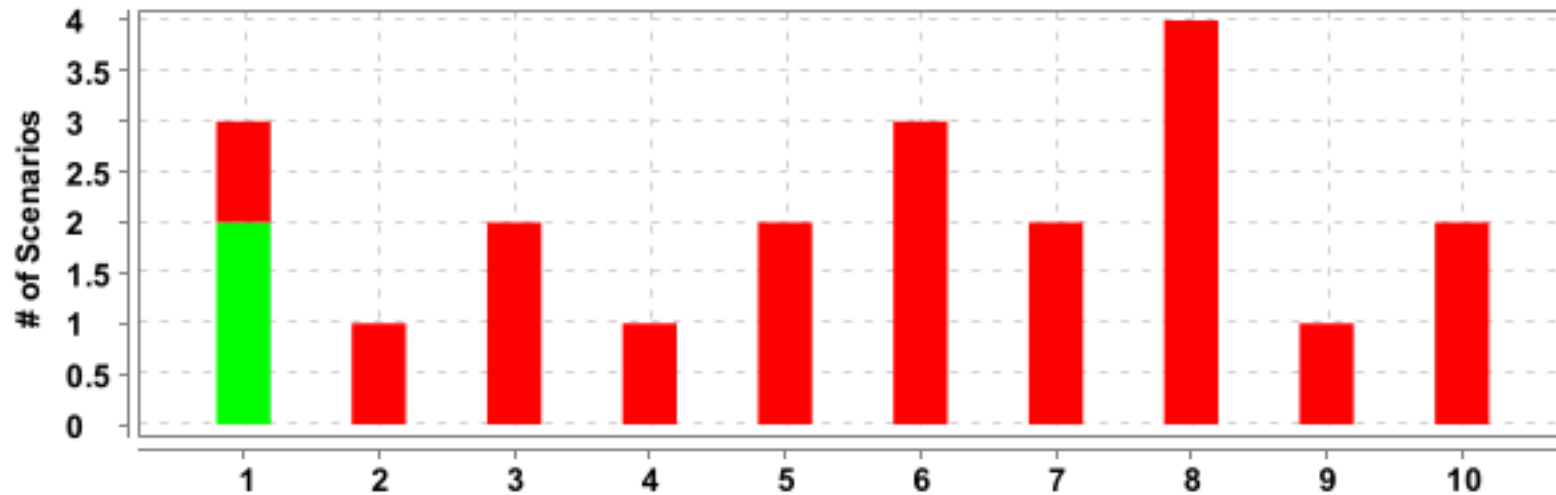


#	Feature Name	T	P	F	S	Duration
1	<u>Account Information</u>	3	2	1	0	33.335 s
2	<u>To Edit Address in Demo Cyclos classic payment software Application and do functions</u>	1	0	1	0	5.140 s
3	<u>To Edit Phone Number in Demo Cyclos classic payment software Application and do functions</u>	2	0	2	0	11.477 s
4	<u>To Edit User profile in Demo Cyclos classic payment software Application and do functions</u>	1	0	1	0	5.628 s
5	<u>User Processing the Advertisement Interests in Marketplace feature available in Cyclos Payment Software Web Application</u>	2	0	2	0	14.001 s
6	<u>To Login in Demo Cyclos classic payment software Application and do functions</u>	3	0	3	0	20.575 s
7	<u>To Manage password in Demo Cyclos classic payment software Application and do functions</u>	2	0	2	0	15.036 s
8	<u>User using Search Advertisements in Marketplace tab available in Cyclos Payment Software Application</u>	4	0	4	0	28.476 s
9	<u>To add existing in Mycontact</u>	1	0	1	0	9.680 s
10	<u>User access the Payment option to perform payment related actions in Cyclos</u>	2	0	2	0	1 m 12.769 s



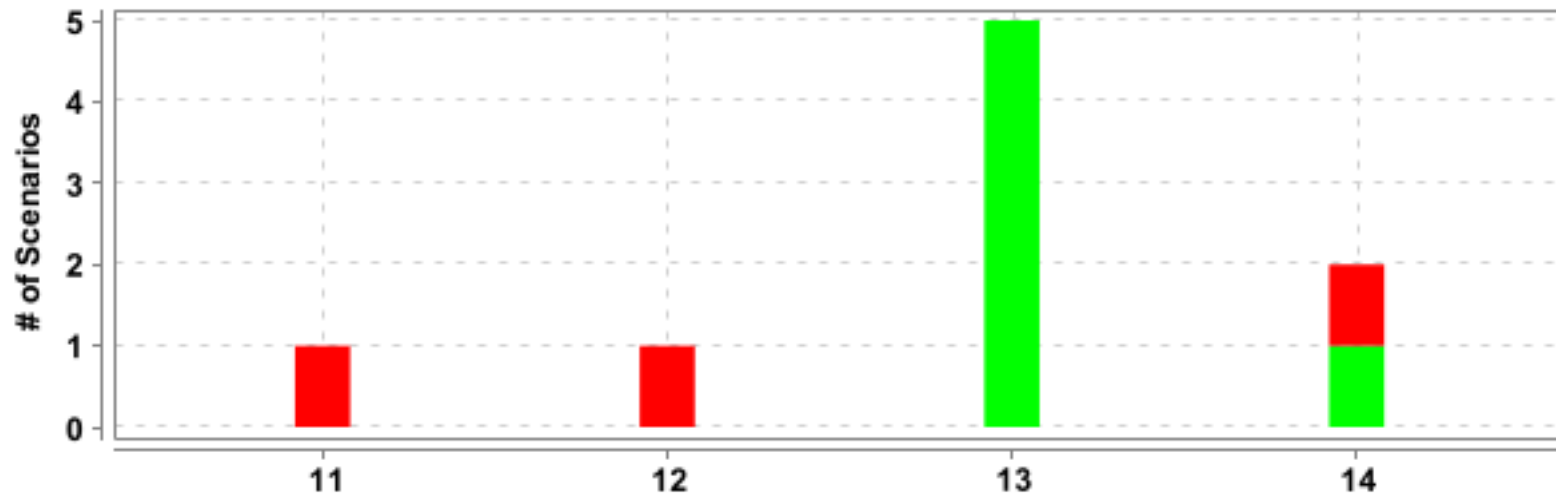


#	Feature Name	T	P	F	S	Duration
11	<u>User uploads the profile picture in Cyclos web application</u>	1	0	1	0	51.273 s
12	<u>To Register in Demo Cyclos classic payment software Application</u>	1	0	1	0	5.019 s
13	<u>The user accessing the Message functionality</u>	5	5	0	0	1 m 15.725 s
14	<u>User Buy and print voucher</u>	2	1	1	0	56.026 s

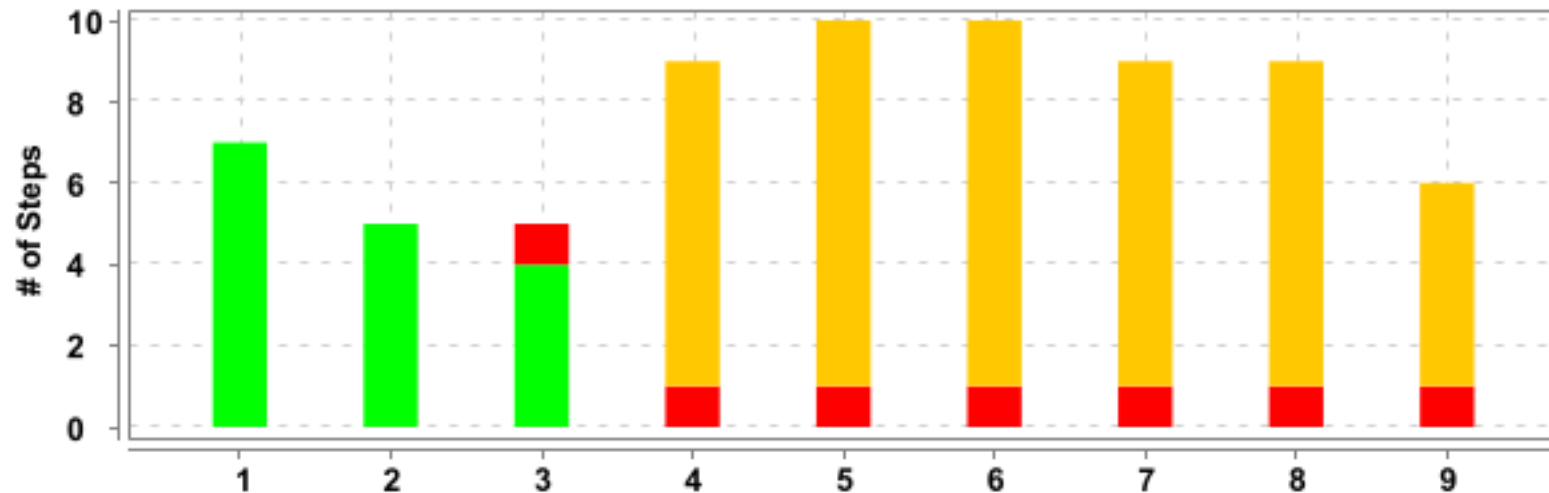

#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Account Information</u>	<u>View Account summary</u>	7	7	0	0	11.540 s
2		<u>View Account summary by adding payment filter as System Payments</u>	5	5	0	0	10.867 s
3		<u>View Account summary by adding payment filter as Member Payments</u>	5	4	1	0	10.887 s
4	<u>To Edit Address in Demo Cyclos classic payment software Application and do *</u>	<u>Edit Address in profile</u>	9	0	1	8	5.134 s
5	<u>To Edit Phone Number in Demo Cyclos classic payment software Application *</u>	<u>Add Mobile Number in Phone</u>	10	0	1	9	5.351 s
6		<u>Add Landline Number in Phone</u>	10	0	1	9	6.107 s
7	<u>To Edit User profile in Demo Cyclos classic payment software Application *</u>	<u>Edit User Profile</u>	9	0	1	8	5.628 s

\* The feature name and/or scenario name has been cropped to fit in the available space.


#	Feature Name	Scenario Name	T	P	F	S	Duration
8	<u>User Processing the Advertisement Interests in Marketplace feature *</u>	<u>User uses the Advertisement Interests</u>	9	0	1	8	7.449 s
9		<u>User uses the Advertisement Interests</u>	6	0	1	5	6.545 s

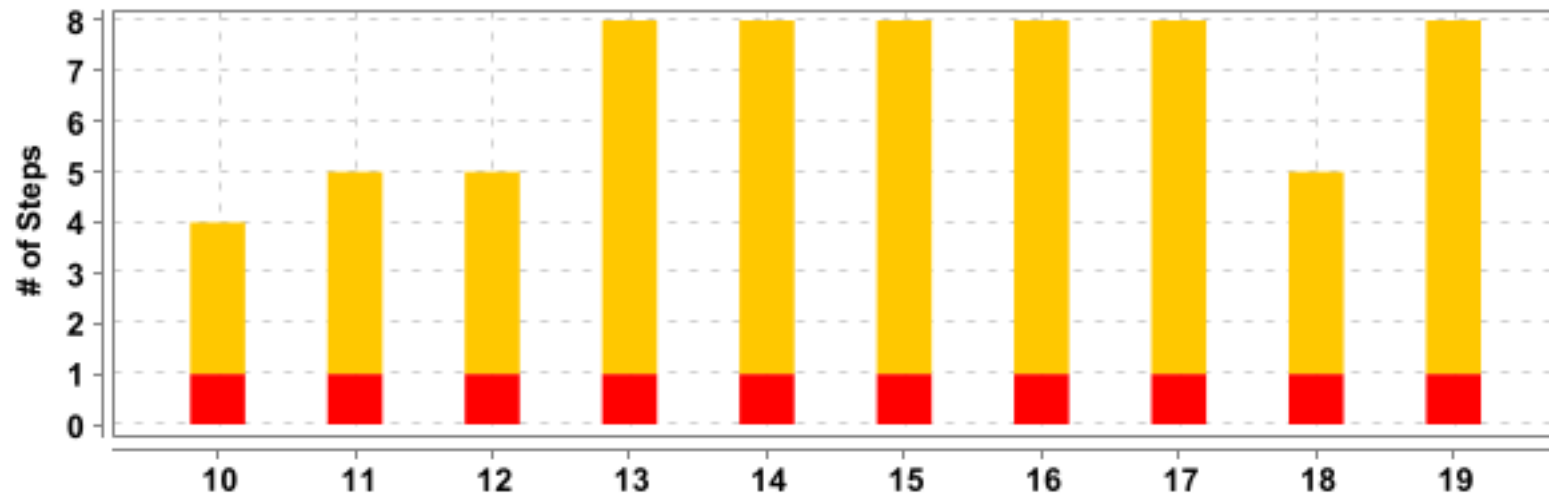

#	Feature Name	Scenario Name	T	P	F	S	Duration
10	<u>To Login in Demo Cyclos classic payment software Application and do *</u>	<u>Login with valid credentials</u>	4	0	1	3	6.527 s
11		<u>Login with Invalid credentials</u>	5	0	1	4	7.520 s
12		<u>Login with Invalid credentials</u>	5	0	1	4	6.514 s
13	<u>To Manage password in Demo Cyclos classic payment software Application *</u>	<u>Change password with valid input</u>	8	0	1	7	7.631 s
14		<u>Change password with Invalid input</u>	8	0	1	7	7.397 s
15	<u>User using Search Advertisements in Marketplace tab available in Cyclos *</u>	<u>User uses Price Highest filter</u>	8	0	1	7	7.547 s
16		<u>User access Price Lowest filter</u>	8	0	1	7	6.905 s
17		<u>User access Price Relevance filter</u>	8	0	1	7	6.902 s
18		<u>User removes a product from Price Highest filter</u>	5	0	1	4	7.099 s

\* The feature name and/or scenario name has been cropped to fit in the available space.


#	Feature Name	Scenario Name	T	P	F	S	Duration
19	<u>To add existing in Mycontact</u>	<u>To Manage My Contact</u>	8	0	1	7	9.680 s

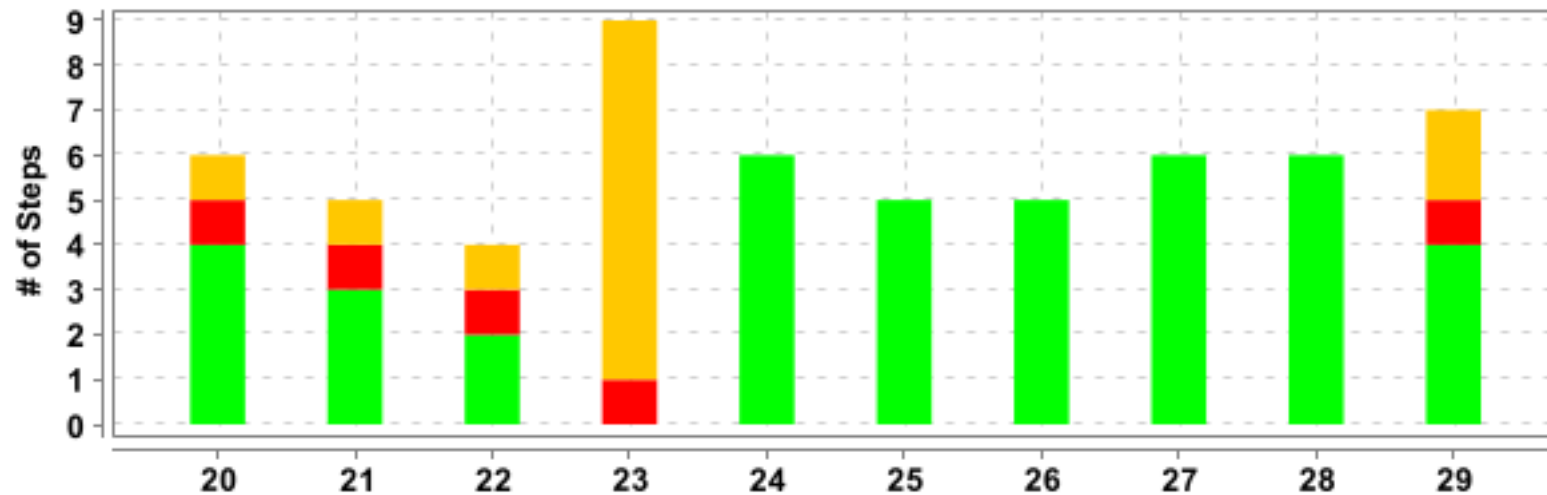

#	Feature Name	Scenario Name	T	P	F	S	Duration
20	<u>User access the Payment option to perform payment related actions in *</u>	<u>User to User payment</u>	6	4	1	1	39.741 s
21		<u>Receiving QR Code Payment</u>	5	3	1	1	33.018 s
22	<u>User uploads the profile picture in Cyclos web application</u>	<u>User Uploading new profile picture</u>	4	2	1	1	51.273 s
23	<u>To Register in Demo Cyclos classic payment software Application</u>	<u>Register the User details</u>	9	0	1	8	5.019 s
24	<u>The user accessing the Message functionality</u>	<u>The user view the message history of send message</u>	6	6	0	0	11.283 s
25		<u>The user view the message history of inbox message</u>	5	5	0	0	13.913 s
26		<u>The user view the message history of Trash message</u>	5	5	0	0	16.946 s
27		<u>The user send the message</u>	6	6	0	0	16.852 s
28		<u>The user not able to send message without required details</u>	6	6	0	0	16.704 s

\* The feature name and/or scenario name has been cropped to fit in the available space.

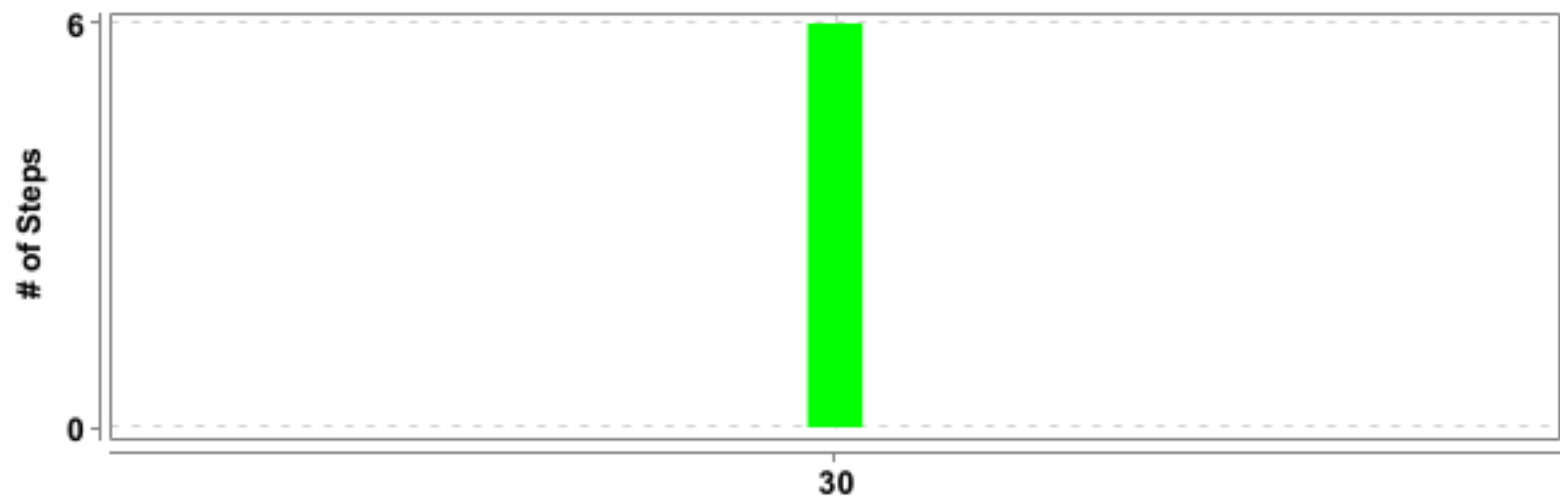

#	Feature Name	Scenario Name	T	P	F	S	Duration
29	<u>User Buy and print voucher</u>	<u>Buying and print vouchers</u>	7	4	1	2	38.642 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
30	<u>User Buy and print voucher</u>	<u>Checking My vouchers</u>	6	6	0	0	17.379 s



## Account Information

<b>FAILED</b>	DURATION - 33.335 s	Scenarios		Steps	
/ 12:50:54.982 PM // 12:51:28.317 PM /		Total - 3		Total - 17	
		Pass - 2		Pass - 16	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 0	

## View Account summary
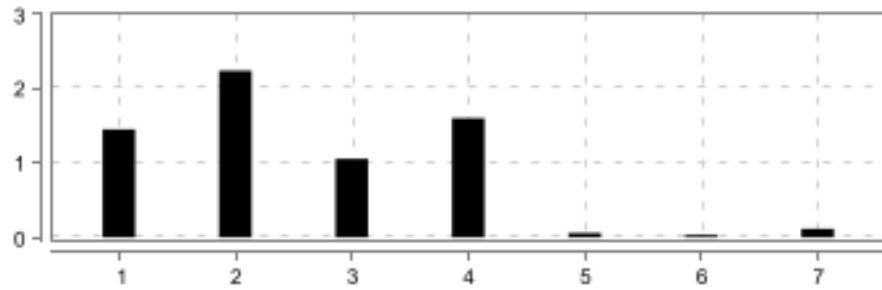
<div>PASSED</div> <div>DURATION - 11.540 s</div>	<div></div>	<div>Steps</div> <div>Total - 7</div> <div>Pass - 7</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 12:50:54.986 PM // 12:51:06.526 PM /</div>			
<div>Account Information</div>			
<div>@AccountSummary</div>			

#	Step / Hook Details	Status	Duration
1	Given User launch the url	PASSED	1.452 s
2	When User provide valid username and password	PASSED	2.238 s
3	And User choose the Banking Tab	PASSED	1.056 s
4	And User view the current balance	PASSED	1.599 s
5	And User checks the negative balance	PASSED	0.059 s
6	And User checks Total received	PASSED	0.031 s
7	Then User download the payment history	PASSED	0.113 s

## View Account summary by adding payment filter as System Payments


<b>PASSED</b>	DURATION - 10.867 s		<b>Steps</b> Total - 5 Pass - 5 Fail - 0 Skip - 0	
/ 12:51:06.545 PM // 12:51:17.412 PM /				
Account Information				
@SystemPayments				

#	Step / Hook Details	Status	Duration
1	Given User launch the url	PASSED	1.351 s
2	When User provide valid username and password	PASSED	1.785 s
3	And User choose the Banking Tab	PASSED	1.220 s
4	And User provide filters as System Payments and check the number of incoming payments	PASSED	2.397 s
5	Then User get the payment account details based on System filter	PASSED	0.065 s



### View Account summary by adding payment filter as Member Payments

<b>FAILED</b>	DURATION - 10.887 s		<b>Steps</b> Total - 5 Pass - 4 Fail - 1 Skip - 0	
/ 12:51:17.430 PM // 12:51:28.317 PM /				
Account Information				
@MemberPayments				



#	Step / Hook Details	Status	Duration
1	Given User launch the url	PASSED	1.304 s
2	When User provide valid username and password	PASSED	1.746 s
3	And User choose the Banking Tab	PASSED	1.039 s
4	And User provide filters as Member Payments and check the number of incoming payments	PASSED	2.334 s
5	Then User get the payment details based on Member filter	FAILED	0.039 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.JavascriptExecutor.executeScript(String, Object[])" because "com.utility.HelperClass.javascriptExe" is null at com.stepdefinitions.AccountInfoStepDefinition. user_get_the_payment_details_based_on_member_filter(AccountInfoStepDefinition.java:110)		

#	Step / Hook Details	Status	Duration
	<p>at ?.User get the payment details based on Member filter(file:///C:/Users/avelayudhan/eclipse-workspace/CodeRed/PilotProject_Cyclos_CodeRed/src/test/resources/Features/AccountInformation.feature:30)</p> <p>* Not displayable characters are replaced by '?'.  </p>		
	<p>AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)</p> <p>View Account summary by adding payment filter as Member Payments</p> 	PASSED	0.234 s

## To Edit Address in Demo Cyclos classic payment software Application and do functions

<b>FAILED</b> DURATION - 5.140 s / 12:51:28.362 PM // 12:51:33.502 PM /	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 9 Pass - 0 Fail - 1 Skip - 8	
---	--	---	--	---

## Edit Address in profile

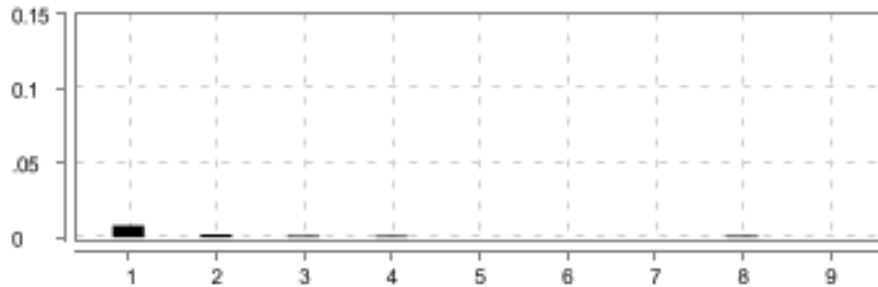

<b>FAILED</b> DURATION - 5.134 s / 12:51:28.368 PM // 12:51:33.502 PM / To Edit Address in Demo Cyclos classic payment software Application and do functions @MobileNumber		Steps Total - 9 Pass - 0 Fail - 1 Skip - 8	
--	---	--	--

#	Step / Hook Details	Status	Duration
1	<p>Given User is on Demo Cyclos classic Homepage</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.RegisterPage_definitions  at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)  at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)  at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)</p>	FAILED	0.008 s



#	Step / Hook Details	Status	Duration
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)		

#	Step / Hook Details	Status	Duration
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClass.data(UtilityClass.java:24) at com.utility.UtilityClass.<init>(UtilityClass.java:12) at com.stepdefinitions.RegisterPage_definitions.<init>(RegisterPage_definitions.java:15)		
2	When User click the Signin	SKIPPED	0.002 s
3	And User proides valid credentials LoginName and Password	SKIPPED	0.001 s
4	And User click Personal field	SKIPPED	0.001 s
5	And User click the Address	SKIPPED	0.000 s
6	And User click the new in Address	SKIPPED	0.000 s
7	And User enter the Name Address Zip code City State and Country using sheetname "sheet1" and rownumber 0	SKIPPED	0.000 s
8	And User Choose the Visibility	SKIPPED	0.001 s
9	Then User Click the save and user get Save Successfull Message	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.140 s
	Edit Address in profile		

**To Edit Phone Number in Demo Cyclos classic payment software Application and do functions**

<b>FAILED</b>	<b>DURATION - 11.477 s</b>	Scenarios Total - 2 Pass - 0 Fail - 2 Skip - 0		Steps Total - 20 Pass - 0 Fail - 2 Skip - 18	
/ 12:51:33.535 PM // 12:51:45.012 PM /					

### Add Mobile Number in Phone
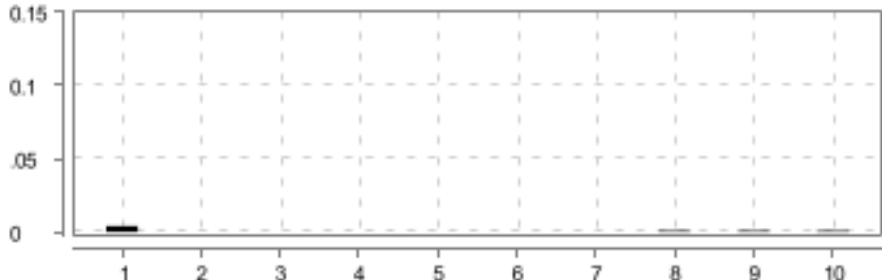
<b>FAILED</b>	<b>DURATION - 5.351 s</b>		Steps Total - 10 Pass - 0 Fail - 1 Skip - 9	
/ 12:51:33.536 PM // 12:51:38.887 PM /				
To Edit Phone Number in Demo Cyclos classic payment software Application and do functions				
@MobileNumber				

#	Step / Hook Details	Status	Duration
1	<p>Given User is on Demo Cyclos classic Homepage</p> <pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.RegisterPage_definitions   at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)   at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)   at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)   at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)   at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)   at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)   at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)   at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)   at io.cucumber.core.runner.TestStep.run(TestStep.java:56)   at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)   at io.cucumber.core.runner.TestCase.run(TestCase.java:84)   at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)   at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)   at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)   at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)   at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)   at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)   at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) </pre>	FAILED	0.004 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClass.data(UtilityClass.java:24) at com.utility.UtilityClass.&lt;init&gt;(UtilityClass.java:12) at com.stepdefinitions.RegisterPage_definitions.&lt;init&gt;(RegisterPage_definitions.java:15) </pre>		

#	Step / Hook Details	Status	Duration				
2	When User click the Signin	SKIPPED	0.000 s				
3	And User proides valid credentials LoginName and Password	SKIPPED	0.000 s				
4	And User click Personal field	SKIPPED	0.000 s				
5	And User click the Phone in leftside Column	SKIPPED	0.000 s				
6	And User click the Phone in profile	SKIPPED	0.000 s				
7	And User click the new for Adding Mobile	SKIPPED	0.000 s				
8	And User select the Mobile number	SKIPPED	0.001 s				
9	And User enter the Mobile Nuumber Name	SKIPPED	0.001 s				
	<table><tr><td>Name</td><td>MobileNumber</td></tr><tr><td>Arun</td><td>+91 9809876543</td></tr></table>			Name	MobileNumber	Arun	+91 9809876543
Name	MobileNumber						
Arun	+91 9809876543						
10	Then User Click the save and should able to see the phone edit Message	SKIPPED	0.001 s				
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.193 s				
	Add Mobile Number in Phone						

### Add Landline Number in Phone

<b>FAILED</b> DURATION - 6.107 s / 12:51:38.905 PM // 12:51:45.012 PM / To Edit Phone Number in Demo Cyclos classic payment software Application and do functions @LandlineNumber		Steps Total - 10 Pass - 0 Fail - 1 Skip - 9	
--	--	---	--



#	Step / Hook Details	Status	Duration
1	Given User is on Demo Cyclos classic Homepage	FAILED	0.004 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.RegisterPage_definitions at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		





#	Step / Hook Details	Status	Duration
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)		

#	Step / Hook Details	Status	Duration		
	<pre> at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClass.data(UtilityClass.java:24) at com.utility.UtilityClass.&lt;init&gt;(UtilityClass.java:12) at com.stepdefinitions.RegisterPage_definitions.&lt;init&gt;(RegisterPage_definitions.java:15) </pre>				
2	When User click the Signin	SKIPPED	0.001 s		
3	And User provides valid credentials LoginName and Password	SKIPPED	0.001 s		
4	And User click Personal field	SKIPPED	0.000 s		
5	And User click the Phone in leftside Column	SKIPPED	0.001 s		
6	And User click the Phone in profile	SKIPPED	0.001 s		
7	And User click the new for Adding Landline	SKIPPED	0.000 s		
8	And User select the Landline number	SKIPPED	0.000 s		
9	And User enter the Landline number Name	SKIPPED	0.001 s		
	<table border="1"> <tr> <td>Name2</td><td>Landline</td></tr> <tr> <td>Nirupama</td><td>(201) 555-1111</td></tr> </table>			Name2	Landline
Name2	Landline				
Nirupama	(201) 555-1111				
10	Then User Click the save and should be able to see the LandLine phone edit Message	SKIPPED	0.000 s		
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.213 s		
	Add Landline Number in Phone				

**To Edit User profile in Demo Cyclos classic payment software Application and do functions**

<b>FAILED</b>	<b>DURATION - 5.628 s</b>	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 9 Pass - 0 Fail - 1 Skip - 8	
/ 12:51:45.025 PM // 12:51:50.653 PM /					

### Edit User Profile
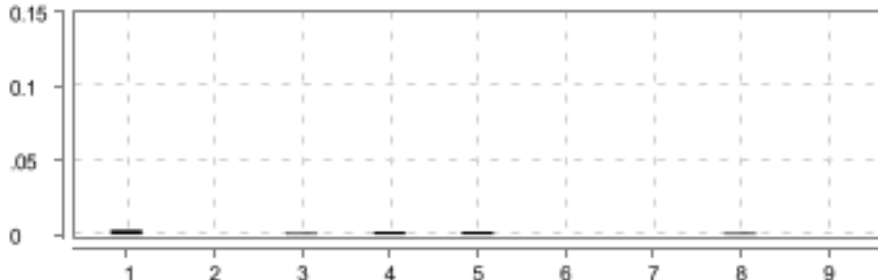
<b>FAILED</b>	<b>DURATION - 5.628 s</b>		Steps Total - 9 Pass - 0 Fail - 1 Skip - 8	
/ 12:51:45.025 PM // 12:51:50.653 PM /				
To Edit User profile in Demo Cyclos classic payment software Application and do functions				


#	Step / Hook Details	Status	Duration
1	<p>Given User is on Demo Cyclos classic Homepage</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.RegisterPage_definitions            at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)            at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)            at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)            at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)            at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)            at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)            at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)            at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)            at io.cucumber.core.runner.TestStep.run(TestStep.java:56)            at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)            at io.cucumber.core.runner.TestCase.run(TestCase.java:84)            at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)            at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)            at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)            at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)            at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)            at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)            at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClass.data(UtilityClass.java:24) at com.utility.UtilityClass.&lt;init&gt;(UtilityClass.java:12) at com.stepdefinitions.RegisterPage_definitions.&lt;init&gt;(RegisterPage_definitions.java:15) </pre>		



#	Step / Hook Details	Status	Duration
2	When User click the Signin	SKIPPED	0.000 s
3	And User provides valid credentials LoginName and Password	SKIPPED	0.001 s
4	And User click Personal field	SKIPPED	0.002 s
5	And User click edit option	SKIPPED	0.002 s
6	And User enter Website	SKIPPED	0.000 s
	Website Expleo.com		
7	And User choose Gender	SKIPPED	0.000 s
8	And User choose Business type	SKIPPED	0.001 s
9	Then User click save and should be able to see edit success message	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.233 s
	Edit User Profile		

## User Processing the Advertisement Interests in Marketplace feature available in Cyclos Payment Software Web Application

FAILED	DURATION - 14.001 s	Scenarios		Steps	
/ 12:51:50.667 PM // 12:52:04.668 PM /		Total - 2		Total - 15	
		Pass - 0		Pass - 0	
		Fail - 2		Fail - 2	
		Skip - 0		Skip - 13	



### User uses the Advertisement Interests

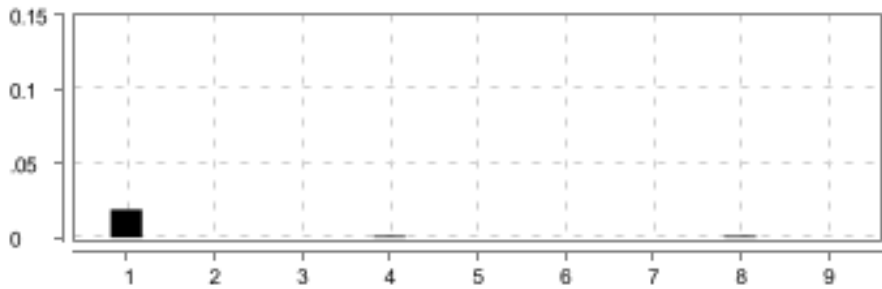

<b>FAILED</b>	<b>DURATION - 7.449 s</b>		<b>Steps</b> Total - 9 Pass - 0 Fail - 1 Skip - 8				
/ 12:51:50.667 PM // 12:51:58.116 PM /							
User Processing the Advertisement Interests in Marketplace feature available in Cyclos Payment *							

#	Step / Hook Details	Status	Duration
1	<p>Given User launches the url of the Cyclos Web Application</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.InterestsDefinitions  at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)  at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)  at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)  at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)  at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)  at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)  at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)  at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)  at io.cucumber.core.runner.TestStep.run(TestStep.java:56)  at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)  at io.cucumber.core.runner.TestCase.run(TestCase.java:84)  at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)  at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)  at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)  at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)  at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)  at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)  at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)  at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)  at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)  at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)  at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)  at org.junit.runners.ParentRunner.run(ParentRunner.java:413)  at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.019 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassInterests.data(UtilityClassInterests.java:27) at com.utility.UtilityClassInterests.&lt;init&gt;(UtilityClassInterests.java:13) at com.stepdefinitions.InterestsDefinitions.&lt;init&gt;(InterestsDefinitions.java:13) </pre>		
2	When User clicks Advertisement Interests in the left column	SKIPPED	0.000 s
3	And User clicks New interests	SKIPPED	0.000 s
4	And User provides the valid name	SKIPPED	0.001 s
5	And User clicks the category dropdown	SKIPPED	0.000 s
6	And User chooses any of the category based on interest	SKIPPED	0.000 s
7	And User saved the interest	SKIPPED	0.000 s
8	And User go back to the Advertisement interests	SKIPPED	0.001 s
9	Then User is going to print the total number of interests	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.174 s
	User uses the Advertisement Interests		

### User uses the Advertisement Interests

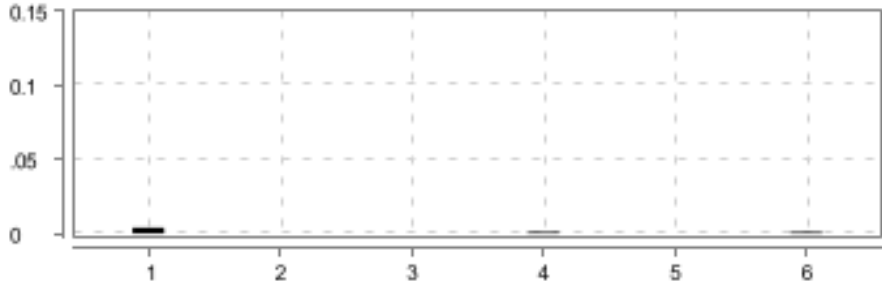FAILED	DURATION - 6.545 s		<b>Steps</b> Total - 6 Pass - 0 Fail - 1 Skip - 5				
/ 12:51:58.123 PM // 12:52:04.668 PM /							
User Processing the Advertisement Interests in Marketplace feature available in Cyclos Payment *							



#	Step / Hook Details	Status	Duration
1	Given User launches the url of the Cyclos Web Application  io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.InterestsDefinitions at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)	FAILED	0.004 s





#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)  at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)  at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)  at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)  at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)  at org.junit.runners.ParentRunner.run(ParentRunner.java:413)  at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)  at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)  at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)  at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148)  at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)  at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)  at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)  at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)  at org.junit.runners.ParentRunner.run(ParentRunner.java:413)  at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)  at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)  at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)  at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)  at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)  at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)  Caused by: java.lang.reflect.InvocationTargetException  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)  at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)  ... 45 more  Caused by: java.lang.NullPointerException: inStream parameter is null  at java.base/java.util.Objects.requireNonNull(Objects.java:235)  at java.base/java.util.Properties.load(Properties.java:407)  at com.utility.UtilityClassInterests.data(UtilityClassInterests.java:27)  at com.utility.UtilityClassInterests.&lt;init&gt;(UtilityClassInterests.java:13) </p>		

#	Step / Hook Details	Status	Duration
	at com.stepdefinitions.InterestsDefinitions.<init>(InterestsDefinitions.java:13)		
2	When User clicks Advertisement Interests in the left column	SKIPPED	0.000 s
3	And User clicks New interests	SKIPPED	0.000 s
4	And User provides the already exists name	SKIPPED	0.001 s
5	And User saved the interest with the name which is already exists	SKIPPED	0.000 s
6	Then User gets a warning message	SKIPPED	0.001 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.216 s
	User uses the Advertisement Interests		

## To Login in Demo Cyclos classic payment software Application and do functions

FAILED	DURATION - 20.575 s	Scenarios Total - 3 Pass - 0 Fail - 3 Skip - 0		Steps Total - 14 Pass - 0 Fail - 3 Skip - 11	
/ 12:52:04.678 PM // 12:52:25.253 PM /					

## Login with valid credentials


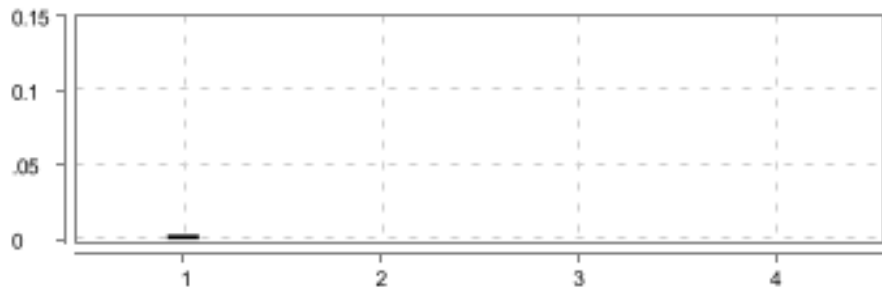
FAILED	DURATION - 6.527 s		<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 12:52:04.678 PM // 12:52:11.205 PM /				
To Login in Demo Cyclos classic payment software Application and do functions				
@ValidCredentials				

#	Step / Hook Details	Status	Duration
1	Given User is on Demo Cyclos classic Homepage	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.RegisterPage_definitions  at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)  at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)  at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)  at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)  at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)  at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)  at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)  at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)  at io.cucumber.core.runner.TestStep.run(TestStep.java:56)  at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)  at io.cucumber.core.runner.TestCase.run(TestCase.java:84)  at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)  at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)  at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)  at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)  at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)  at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)  at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)  at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)  at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)  at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)  at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)  at org.junit.runners.ParentRunner.run(ParentRunner.java:413)  at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)  at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)  at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)  at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148)  at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)  at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)  at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)  at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)  at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p>		

#	Step / Hook Details	Status	Duration
	at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClass.data(UtilityClass.java:24) at com.utility.UtilityClass.<init>(UtilityClass.java:12) at com.stepdefinitions.RegisterPage_definitions.<init>(RegisterPage_definitions.java:15)		
2	When User click the Signin	SKIPPED	0.000 s
3	And User provides valid credentials LoginName and Password	SKIPPED	0.000 s
4	Then User should be able to login Successfully Message	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.170 s
	Login with valid credentials		

## Login with Invalid credentials

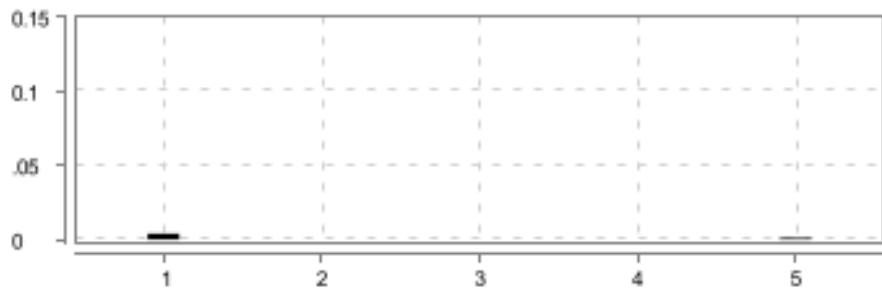

<div>FAILED</div> <div>DURATION - 7.520 s</div>		<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
<div>/ 12:52:11.211 PM // 12:52:18.731 PM /</div>			
<div>To Login in Demo Cyclos classic payment software Application and do functions</div>			
<div>@Invalidcredentials</div>			

#	Step / Hook Details	Status	Duration
1	<p>Given User is on Demo Cyclos classic Homepage</p> <pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.RegisterPage_definitions   at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)   at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)   at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)   at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)   at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)   at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)   at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)   at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)   at io.cucumber.core.runner.TestStep.run(TestStep.java:56)   at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)   at io.cucumber.core.runner.TestCase.run(TestCase.java:84)   at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)   at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)   at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)   at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)   at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)   at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)   at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)   at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)   at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)   at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)   at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)   at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)   at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)   at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)   at org.junit.runners.ParentRunner.run(ParentRunner.java:413)   at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)   at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) </pre>	FAILED	0.004 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClass.data(UtilityClass.java:24) at com.utility.UtilityClass.<init>(UtilityClass.java:12) at com.stepdefinitions.RegisterPage_definitions.<init>(RegisterPage_definitions.java:15)		
2	When User click the Signin	SKIPPED	0.000 s
3	And User proides Invalid Sign in name "Lavanya1703"	SKIPPED	0.000 s
4	And User proides Invalid Sign in Password "Lavanya@170"	SKIPPED	0.000 s
5	Then User click submit for invalid and should be able to login Error Message	SKIPPED	0.001 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.180 s
	Login with Invalid credentials		

#	Step / Hook Details	Status	Duration

## Login with Invalid credentials

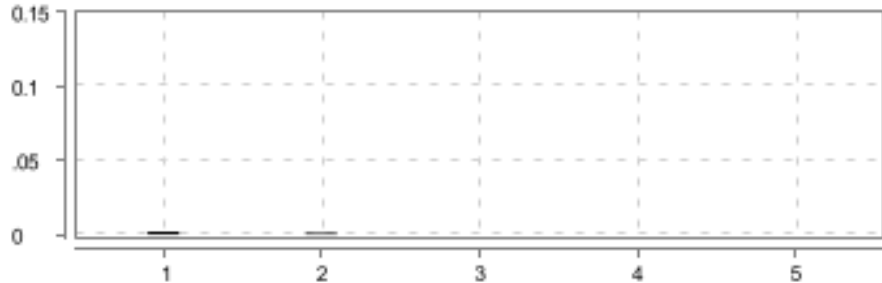FAILED	DURATION - 6.514 s		<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:52:18.739 PM // 12:52:25.253 PM /				
To Login in Demo Cyclos classic payment software Application and do functions				
@Invalidcredentials				



#	Step / Hook Details	Status	Duration
1	<p>Given User is on Demo Cyclos classic Homepage</p> <pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.RegisterPage_definitions   at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)   at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)   at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)   at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)   at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)   at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)   at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)   at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)   at io.cucumber.core.runner.TestStep.run(TestStep.java:56)   at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)   at io.cucumber.core.runner.TestCase.run(TestCase.java:84)   at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)   at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)   at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)   at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)   at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)   at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)   at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)   at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) </pre>	<b>FAILED</b>	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClass.data(UtilityClass.java:24) at com.utility.UtilityClass.&lt;init&gt;(UtilityClass.java:12) at com.stepdefinitions.RegisterPage_definitions.&lt;init&gt;(RegisterPage_definitions.java:15) </pre>		





#	Step / Hook Details	Status	Duration
2	When User click the Signin	SKIPPED	0.001 s
3	And User provides Invalid Sign in name "Lavanya170"	SKIPPED	0.000 s
4	And User provides Invalid Sign in Password "Lavanya@1703"	SKIPPED	0.000 s
5	Then User click submit for invalid and should be able to login Error Message	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.256 s
	Login with Invalid credentials		

## To Manage password in Demo Cyclos classic payment software Application and do functions

<b>FAILED</b>	DURATION - 15.036 s	Scenarios		Steps	
/ 12:52:25.269 PM // 12:52:40.305 PM /		Total - 2	2	Total - 16	16
		Pass - 0		Pass - 0	
		Fail - 2		Fail - 2	
		Skip - 0		Skip - 14	

## Change password with valid input

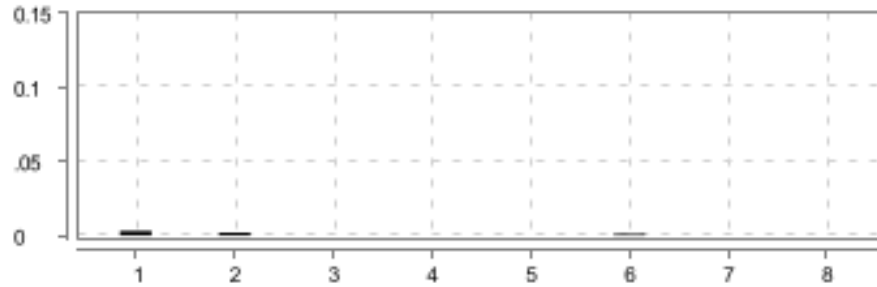

<div>FAILED</div> <div>DURATION - 7.631 s</div>			<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 7</div>	
/ 12:52:25.269 PM // 12:52:32.900 PM /				
To Manage password in Demo Cyclos classic payment software Application and do functions				
@ManagePassword				

#	Step / Hook Details	Status	Duration
1	Given User is on Demo Cyclos classic Homepage	FAILED	0.003 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.RegisterPage_definitions		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) </pre>		

#	Step / Hook Details	Status	Duration						
	<div>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)</div> <div>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)</div> <div>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</div> <div>Caused by: java.lang.reflect.InvocationTargetException</div> <div>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)</div> <div>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)</div> <div>at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)</div> <div>at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)</div> <div>at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)</div> <div>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)</div> <div>... 45 more Caused by: java.lang.NullPointerException: inputStream parameter is null</div> <div>at java.base/java.util.Objects.requireNonNull(Objects.java:235)</div> <div>at java.base/java.util.Properties.load(Properties.java:407)</div> <div>at com.utility.UtilityClass.data(UtilityClass.java:24)</div> <div>at com.utility.UtilityClass.&lt;init&gt;(UtilityClass.java:12)</div> <div>at com.stepdefinitions.RegisterPage_definitions.&lt;init&gt;(RegisterPage_definitions.java:15)</div>								
2	When User click the Signin	SKIPPED	0.002 s						
3	And User proides valid credentials LoginName and Password	SKIPPED	0.000 s						
4	And User click Personal field	SKIPPED	0.000 s						
5	And User Click Change Password	SKIPPED	0.000 s						
6	And User Click Change Option	SKIPPED	0.001 s						
7	And User enter the Old password New password Confirm New password	SKIPPED	0.000 s						
	<table><tr><td>OldPassword</td><td>NewPassword</td><td>ConfirmNewPassword</td></tr><tr><td>Lavanya@1703</td><td>Lavanya@1703</td><td>Lavanya@1703</td></tr></table>	OldPassword	NewPassword	ConfirmNewPassword	Lavanya@1703	Lavanya@1703	Lavanya@1703		
OldPassword	NewPassword	ConfirmNewPassword							
Lavanya@1703	Lavanya@1703	Lavanya@1703							
8	Then User Click the Confirm button and able to see Password reset message	SKIPPED	0.000 s						
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.200 s						
	Change password with valid input								

**Change password with Invalid input**



<div>FAILED</div> <div>DURATION - 7.397 s</div>			<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 7</div>	
/ 12:52:32.908 PM // 12:52:40.305 PM /				
To Manage password in Demo Cyclos classic payment software Application and do functions				

#	Step / Hook Details	Status	Duration
1	<p>Given User is on Demo Cyclos classic Homepage</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.RegisterPage_definitions  at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)  at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)  at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)  at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)  at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)  at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)  at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)  at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)  at io.cucumber.core.runner.TestStep.run(TestStep.java:56)  at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)  at io.cucumber.core.runner.TestCase.run(TestCase.java:84)  at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)  at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)  at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)  at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)  at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)  at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)  at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)  at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)  at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)  at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)  at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)  at org.junit.runners.ParentRunner.run(ParentRunner.java:413)  at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.003 s



#	Step / Hook Details	Status	Duration						
	<div>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClass.data(UtilityClass.java:24) at com.utility.UtilityClass.&lt;init&gt;(UtilityClass.java:12) at com.stepdefinitions.RegisterPage_definitions.&lt;init&gt;(RegisterPage_definitions.java:15)</div>								
2	When User click the Signin	SKIPPED	0.000 s						
3	And User proides valid credentials LoginName and Password	SKIPPED	0.000 s						
4	And User click Personal field	SKIPPED	0.000 s						
5	And User Click Change Password	SKIPPED	0.001 s						
6	And User Click Change Option	SKIPPED	0.001 s						
7	And User enter the Old password New password Confirm New password	SKIPPED	0.001 s						
	<table><tr><td>OldPassword</td><td>NewPassword</td><td>ConfirmNewPassword</td></tr><tr><td>Lavanya@1703</td><td>Lavanya@1703</td><td>Lavanya@170</td></tr></table>	OldPassword	NewPassword	ConfirmNewPassword	Lavanya@1703	Lavanya@1703	Lavanya@170		
OldPassword	NewPassword	ConfirmNewPassword							
Lavanya@1703	Lavanya@1703	Lavanya@170							

#	Step / Hook Details	Status	Duration
8	Then User Click the Confirm button and able to see Password Error reset message	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.152 s
	Change password with Invalid input		

### User using Search Advertisements in Marketplace tab available in Cyclos Payment Software Application

FAILED	DURATION - 28.476 s	Scenarios Total - 4 Pass - 0 Fail - 4 Skip - 0		Steps Total - 29 Pass - 0 Fail - 4 Skip - 25	
/ 12:52:40.317 PM // 12:53:08.793 PM /					

### User uses Price Highest filter

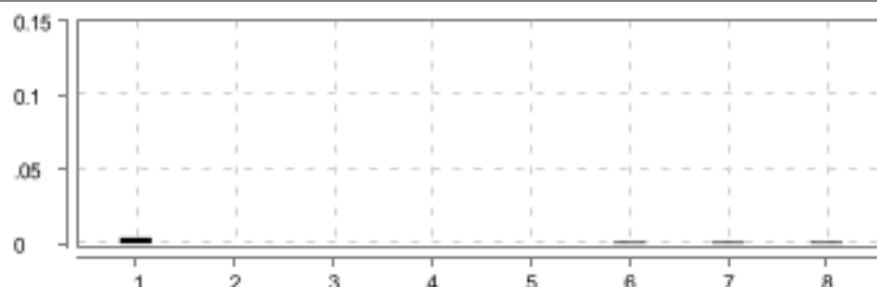FAILED		DURATION - 7.547 s			Steps Total - 8 Pass - 0 Fail - 1 Skip - 7	
/ 12:52:40.317 PM // 12:52:47.864 PM /						
User using Search Advertisements in Marketplace tab available in Cyclos Payment Software Application						



#	Step / Hook Details	Status	Duration
1	Given User launches the url of the web page	FAILED	0.004 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.MarketPlaceDefinitions at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		

#	Step / Hook Details	Status	Duration
	Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassMarketPlace.data(UtilityClassMarketPlace.java:27) at com.utility.UtilityClassMarketPlace.<init>(UtilityClassMarketPlace.java:13) at com.stepdefinitions.MarketPlaceDefinitions.<init>(MarketPlaceDefinitions.java:14)		
2	When User provide correct username and password	SKIPPED	0.000 s
3	And User goes to List ads	SKIPPED	0.000 s
4	And User applies the filter tab	SKIPPED	0.000 s
5	And User chooses price highest filter	SKIPPED	0.000 s
6	And User clicks for the product and added to favorites	SKIPPED	0.001 s
7	And User enables the checkbox (Show only favorites)	SKIPPED	0.001 s
8	Then User prints the total number of results available in favorites after added from highest filter	SKIPPED	0.001 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.201 s
	User uses Price Highest filter		

## User access Price Lowest filter

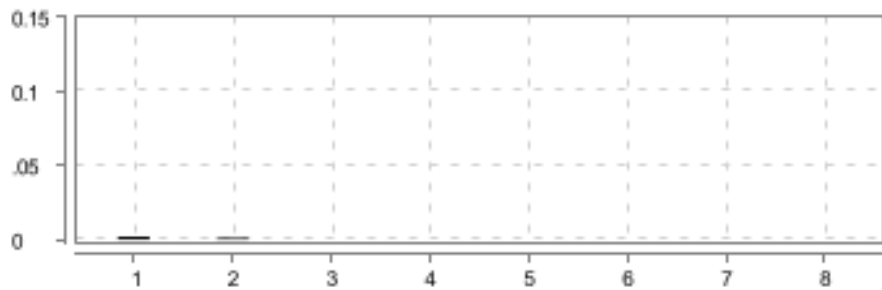



<div>FAILED</div> <div>DURATION - 6.905 s</div>		<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 7</div>	
<div>/ 12:52:47.872 PM // 12:52:54.777 PM /</div>			
<div>User using Search Advertisements in Marketplace tab available in Cyclos Payment Software Application</div>			

#	Step / Hook Details	Status	Duration
1	<p>Given User launches the url of the web page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.MarketPlaceDefinitions  at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)  at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)  at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)  at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)  at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)  at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)  at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)  at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)  at io.cucumber.core.runner.TestStep.run(TestStep.java:56)  at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)  at io.cucumber.core.runner.TestCase.run(TestCase.java:84)  at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)  at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)  at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)  at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)  at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)  at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)  at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)  at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)  at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)  at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)  at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)  at org.junit.runners.ParentRunner.run(ParentRunner.java:413)  at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassMarketPlace.data(UtilityClassMarketPlace.java:27) at com.utility.UtilityClassMarketPlace.<init>(UtilityClassMarketPlace.java:13) at com.stepdefinitions.MarketPlaceDefinitions.<init>(MarketPlaceDefinitions.java:14)		
2	When User provide correct username and password	SKIPPED	0.001 s
3	And User goes to List ads	SKIPPED	0.000 s
4	And User applies the filter tab	SKIPPED	0.000 s
5	And User chooses price lowest filter	SKIPPED	0.000 s
6	And User clicks for the product and adds it to favorites	SKIPPED	0.000 s
7	And User enables the checkbox (Show only favorites)	SKIPPED	0.000 s
8	Then User prints the total number of results available in favorites after added from lowest filter	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.230 s

#	Step / Hook Details	Status	Duration
	User access Price Lowest filter		

### User access Price Relevance filter


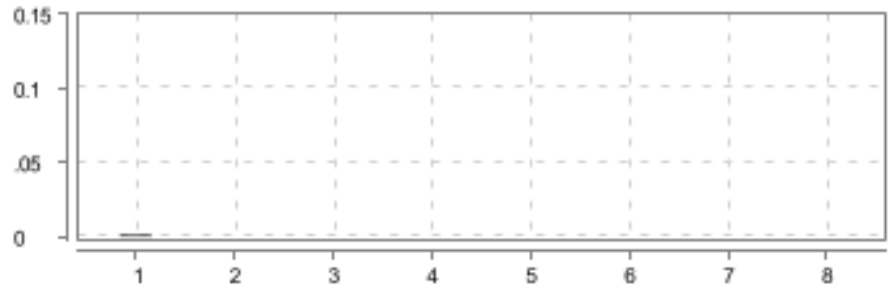
<div>FAILED</div> <div>DURATION - 6.902 s</div>			<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 7</div>	
/ 12:52:54.786 PM // 12:53:01.688 PM /				
User using Search Advertisements in Marketplace tab available in Cyclos Payment Software Application				

#	Step / Hook Details	Status	Duration
1	Given User launches the url of the web page  io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.MarketPlaceDefinitions at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassMarketPlace.data(UtilityClassMarketPlace.java:27) at com.utility.UtilityClassMarketPlace.&lt;init&gt;(UtilityClassMarketPlace.java:13) at com.stepdefinitions.MarketPlaceDefinitions.&lt;init&gt;(MarketPlaceDefinitions.java:14) </pre>		

#	Step / Hook Details	Status	Duration
2	When User provide correct username and password	SKIPPED	0.000 s
3	And User goes to List ads	SKIPPED	0.000 s
4	And User applies the filter tab	SKIPPED	0.000 s
5	And User chooses relevance filter	SKIPPED	0.000 s
6	And User clicks for the product ann adds it to favorites	SKIPPED	0.000 s
7	And User enables the checkbox (Show only favorites)	SKIPPED	0.000 s
8	Then User prints the total number of results available in favorites after added from relevance filter	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.166 s
	User access Price Relevance filter		

### User removes a product from Price Highest filter

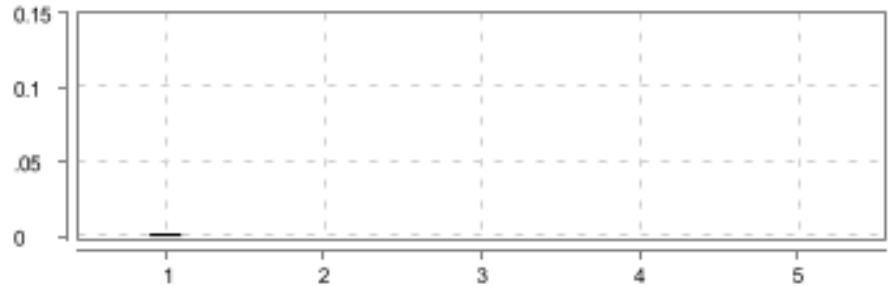

FAILED		DURATION - 7.099 s			Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
/ 12:53:01.694 PM // 12:53:08.793 PM /						
User using Search Advertisements in Marketplace tab available in Cyclos Payment Software Application						

#	Step / Hook Details	Status	Duration
1	Given User launches the url of the web page io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.MarketPlaceDefinitions at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)	FAILED	0.002 s



#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClassMarketPlace.data(UtilityClassMarketPlace.java:27) at com.utility.UtilityClassMarketPlace.<init>(UtilityClassMarketPlace.java:13) at com.stepdefinitions.MarketPlaceDefinitions.<init>(MarketPlaceDefinitions.java:14)		
2	When User correct valid username and password	SKIPPED	0.000 s
3	And User enables the checkbox (Show only favorites)	SKIPPED	0.000 s
4	And User removes a product from list	SKIPPED	0.000 s
5	Then user prints the total number of results available in favorites after removing product	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.157 s
	User removes a product from Price Highest filter		

## To add existing in Mycontact

FAILED	DURATION - 9.680 s	Scenarios		Steps	
/ 12:53:08.799 PM // 12:53:18.479 PM /		Total - 1		Total - 8	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 7	

## To Manage My Contact
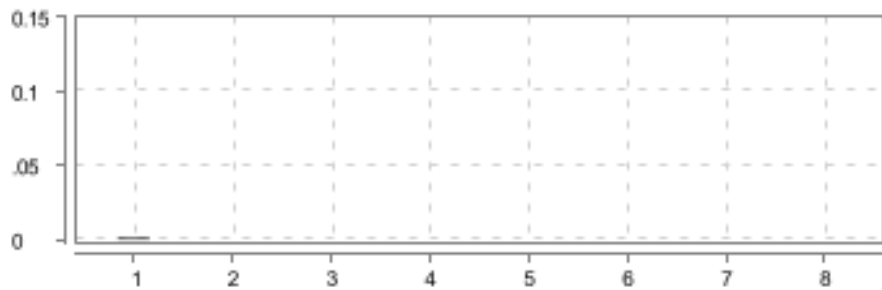
<div>FAILED</div> <div>DURATION - 9.680 s</div>		<div></div>	<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 7</div>	<div></div>
/ 12:53:08.799 PM // 12:53:18.479 PM /				
To add existing in Mycontact				
@MyContact				



#	Step / Hook Details	Status	Duration
1	<p>Given User is on Demo Cyclos classic Homepage</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.RegisterPage_definitions  at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)  at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)  at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)  at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)  at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)  at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)  at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)  at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)  at io.cucumber.core.runner.TestStep.run(TestStep.java:56)  at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)  at io.cucumber.core.runner.TestCase.run(TestCase.java:84)  at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)  at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)  at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)  at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)  at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)  at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)  at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)  at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)  at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)  at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)  at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)  at org.junit.runners.ParentRunner.run(ParentRunner.java:413)  at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s





#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: inputStream parameter is null at java.base/java.util.Objects.requireNonNull(Objects.java:235) at java.base/java.util.Properties.load(Properties.java:407) at com.utility.UtilityClass.data(UtilityClass.java:24) at com.utility.UtilityClass.&lt;init&gt;(UtilityClass.java:12) at com.stepdefinitions.RegisterPage_definitions.&lt;init&gt;(RegisterPage_definitions.java:15) </pre>		
2	When User click the Signin	SKIPPED	0.000 s
3	And User provides valid credentials LoginName and Password	SKIPPED	0.000 s
4	And User Click User option	SKIPPED	0.000 s
5	And User Click My Contact	SKIPPED	0.000 s
6	And User Click Add option	SKIPPED	0.000 s
7	And User enter the Name to add in My Contact list	SKIPPED	0.000 s
	<div>MyContactName</div> <div>junio</div>		

#	Step / Hook Details	Status	Duration
8	Then User Click save and able to see My Contact Added list	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.222 s
	To Manage My Contact		

### User access the Payment option to perform payment related actions in Cyclos


FAILED	DURATION - 1 m 12.769 s	Scenarios Total - 2 Pass - 0 Fail - 2 Skip - 0		Steps Total - 11 Pass - 7 Fail - 2 Skip - 2	
/ 12:53:18.487 PM // 12:54:31.256 PM /					

### User to User payment

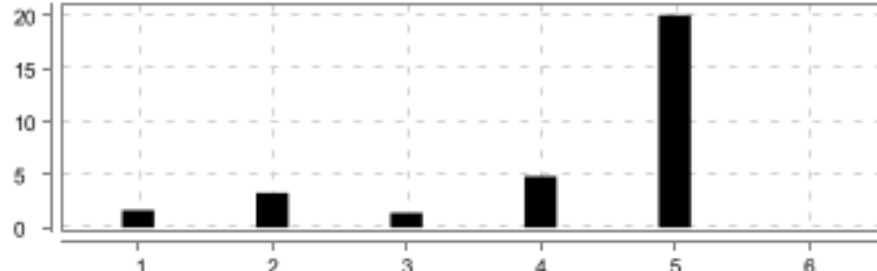

FAILED		DURATION - 39.741 s			Steps Total - 6 Pass - 4 Fail - 1 Skip - 1	
/ 12:53:18.487 PM // 12:53:58.228 PM /						
User access the Payment option to perform payment related actions in Cyclos						
@UserToUserPayment						

#	Step / Hook Details	Status	Duration
1	Given User launched the url	PASSED	1.629 s
2	When User provide username and password	PASSED	3.277 s
3	And User choose the Payment to user Tab	PASSED	1.376 s
4	And User selects the ReceiverName and amount	PASSED	4.849 s
5	And User choose the schedule as Pay now	FAILED	20.049 s
	org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//div[@title='Pay now (not scheduled)']"} (Session info: chrome=114.0.5735.199) For documentation on this error, please visit: <a href="https://www.selenium.dev/">https://www.selenium.dev/</a>		


#	Step / Hook Details	Status	Duration
	<p>documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [4dfe367105931814e73e5458a2070936, findElement {using=xpath, value=//div[@title='Pay now (not scheduled)'}]] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\AVELAY~1\AppData\Local\..., goog:chromeOptions: {debuggerAddress: localhost:56104}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56104/devtoo..., se:cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 4dfe367105931814e73e5458a2070936</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52)  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191)  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200)  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175)  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)  at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165)  at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59)  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359)  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353)  at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68)  at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38)  at jdk.proxy2/jdk.proxy2.\$Proxy37.click(Unknown Source)  at com.actions.PaymentActions.clickSchedule(PaymentActions.java:54)  at com.stepdefinitions.PaymentsStepDefinition.user_choose_the_schedule_as_pay_now(PaymentsStepDefinition.java:51)  at ?.User choose the schedule as Pay now(file:///C:/Users/avelayudhan/eclipse-workspace/CodeRed/PilotProject_Cyclos_CodeRed/src/test/resources/Features/Payments.feature:10)  * Not displayable characters are replaced by '?'. </p>		
6	Then User gets a verification message	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.223 s
	User to User payment		

#	Step / Hook Details	Status	Duration
			

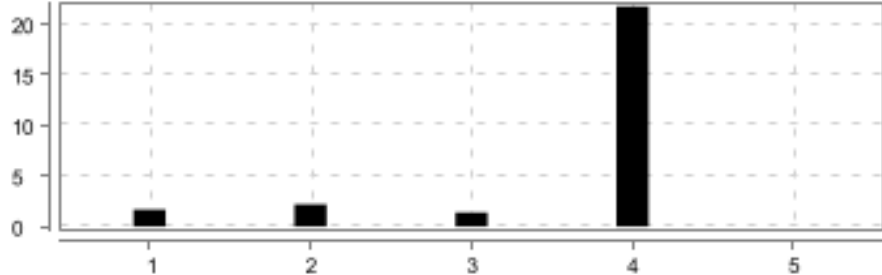

## Receiving QR Code Payment

FAILED		DURATION - 33.018 s			<div>Steps</div> <div>Total - 5</div> <div>Pass - 3</div> <div>Fail - 1</div> <div>Skip - 1</div>			
/ 12:53:58.238 PM // 12:54:31.256 PM /								
User access the Payment option to perform payment related actions in Cyclos								
@ReceiveQRPayments								

#	Step / Hook Details	Status	Duration
1	Given User launched the url	PASSED	1.675 s
2	When User provide username and password	PASSED	2.193 s
3	And User choose the Receive QR Payments Tab	PASSED	1.389 s
4	And User provides the amount which will be converted into a QR code	FAILED	21.758 s
	org.openqa.selenium.ElementNotInteractableException: element not interactable (Session info: chrome=114.0.5735.199) Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [83172fd5e5cddb47c0350da91eb4035b, sendKeysToElement {id=BFD97D9D0874D0EFCE3CFBE8EE10672B_element_18, value=[Ljava.lang.CharSequence;@2d3eecda]] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\AVELAY~1\AppData\Local\Temp\chrome-win-114.0.5735.90\userDataDir}, goog:chromeOptions: {debuggerAddress: localhost:56158}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56158/devtools, se:cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Element: [[ChromeDriver: chrome on windows (83172fd5e5cddb47c0350da91eb4035b)] -> xpath: //input[@class='inputField large rightAligned']] Session ID: 83172fd5e5cddb47c0350da91eb4035b at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:224) at org.openqa.selenium.remote.RemoteWebElement.sendKeys(RemoteWebElement.java:111) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:51) at jdk.proxy2/jdk.proxy2.\$Proxy37.sendKeys(Unknown Source) at com.actions.PaymentActions.clickQRPayment(PaymentActions.java:107) at com.stepdefinitions.PaymentsStepDefinition. user_provides_the_amount_which_will_be_converted_into_a_qr_code(PaymentsStepDefinition.java:72)   at ?.User provides the amount which will be converted into a QR code(file:///C:/Users/avelayudhan/eclipse-workspace/CodeRed/ PilotProject_Cyclos_CodeRed/src/test/resources/Features/Payments.feature:19) * Not displayable characters are replaced by '?'. </pre>		
5	Then User gets the QR	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.204 s
	Receiving QR Code Payment		
			

## User uploads the profile picture in Cyclos web application


<b>FAILED</b> DURATION - 51.273 s / 12:54:31.261 PM // 12:55:22.534 PM /	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 4 Pass - 2 Fail - 1 Skip - 1	
--	--	---	--	---

## User Uploading new profile picture

<div>FAILED</div> <div>DURATION - 51.273 s</div>		<table border="1"><thead><tr><th>Step</th><th>Duration (s)</th></tr></thead><tbody><tr><td>1</td><td>3.6</td></tr><tr><td>2</td><td>1.8</td></tr><tr><td>3</td><td>40.1</td></tr></tbody></table>	Step	Duration (s)	1	3.6	2	1.8	3	40.1	<div>Steps</div> <div>Total - 4</div> <div>Pass - 2</div> <div>Fail - 1</div> <div>Skip - 1</div>	
Step	Duration (s)											
1	3.6											
2	1.8											
3	40.1											
/ 12:54:31.261 PM // 12:55:22.534 PM /												
User uploads the profile picture in Cyclos web application												



#	Step / Hook Details	Status	Duration
1	Given User launched the web application and login into the application	PASSED	3.643 s
2	When User goes to Personal Tab and goes to profile image option	PASSED	1.776 s
3	And User choose Upload new option and added picture from the system org.openqa.selenium.TimeoutException: Expected condition failed: waiting for visibility of Proxy element for: DefaultElementLocator 'By.xpath: //button[@class='actionButton']' (tried for 20 second(s) with 500 milliseconds interval) at org.openqa.selenium.support.ui.WebDriverWait.timeoutException(WebDriverWait.java:84) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:230) at com.actions.ProfilePhotoUpdateActions.clickUploadNew(ProfilePhotoUpdateActions.java:43) at com.stepdefinitions.ProfilePhotoUpdateStepDefinition. user_choose_upload_new_option_and_added_picture_from_the_system(ProfilePhotoUpdateStepDefinition.java:37) at ?.User choose Upload new option and added picture from the system(file:///C:/Users/avelayudhan/eclipse-workspace/CodeRed/ PilotProject_Cyclos_CodeRed/src/test/resources/Features/ProfilePhotoUpdate.feature:7) Caused by: org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//button[@class='actionButton']"} (Session info: chrome=114.0.5735.199) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa. selenium.chrome.ChromeDriver Command: [5527f8b189a42cdc8678ab8a4f015f58, findElement {using=xpath, value=//button[@class='actionButton']} Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\AVELAY~1\AppData\Local\..., goog:chromeOptions: {debuggerAddress: localhost:56195}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:56195/devtools..., se:cdpVersion: 114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 5527f8b189a42cdc8678ab8a4f015f58 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)	FAILED	40.116 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy37.isDisplayed(Unknown Source) at org.openqa.selenium.support.ui.ExpectedConditions.elementIfVisible(ExpectedConditions.java:304) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:290) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:287) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:205) at com.actions.ProfilePhotoUpdateActions.clickUploadNew(ProfilePhotoUpdateActions.java:43) at com.stepdefinitions.ProfilePhotoUpdateStepDefinition. user_choose_upload_new_option_and_added_picture_from_the_system(ProfilePhotoUpdateStepDefinition.java:37) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) </pre>		



#	Step / Hook Details	Status	Duration
	<p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</p> <p>at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p> <p>at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p> <p>at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p> <p>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p> <p>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</p> <p>at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</p> <p>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)</p> <p>at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)</p> <p>at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)</p> <p>at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p> <p>at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)</p> <p>at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)</p> <p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>* Not displayable characters are replaced by '?'.  </p>		
4	Then User checks the profile picture	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.230 s
	User Uploading new profile picture		
			



## To Register in Demo Cyclos classic payment software Application

<b>FAILED</b>	<b>DURATION - 5.019 s</b>	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 9 Pass - 0 Fail - 1 Skip - 8	
/ 12:55:22.540 PM // 12:55:27.559 PM /					

### Register the User details

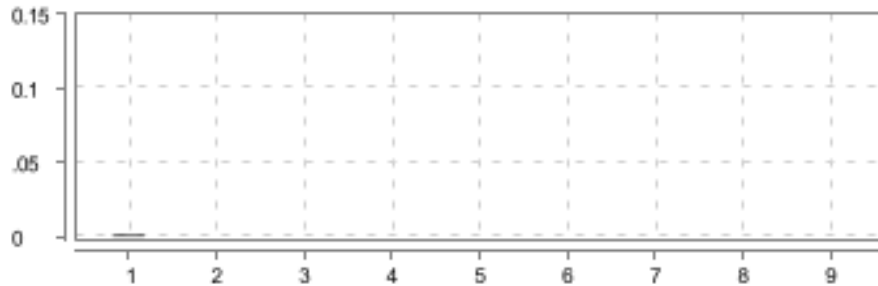

<div>FAILED</div> <div>DURATION - 5.019 s</div>		<div></div>	<div>Steps</div> <div>Total - 9</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 8</div>	<div></div>
/ 12:55:22.540 PM // 12:55:27.559 PM /				
To Register in Demo Cyclos classic payment software Application				

#	Step / Hook Details	Status	Duration
1	<p>Given User is on Demo Cyclos classic Homepage</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepdefinitions.RegisterPage_definitions   at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)   at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)   at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)   at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)   at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)   at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)   at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)   at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)   at io.cucumber.core.runner.TestStep.run(TestStep.java:56)   at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)   at io.cucumber.core.runner.TestCase.run(TestCase.java:84)   at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)   at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)   at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)   at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)   at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)</pre>	FAILED	0.001 s


#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)  at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)  at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)  at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)  at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)  at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)  at org.junit.runners.ParentRunner.run(ParentRunner.java:413)  at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)  at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)  at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)  at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148)  at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)  at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)  at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)  at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)  at org.junit.runners.ParentRunner.run(ParentRunner.java:413)  at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)  at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)  at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)  at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)  at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)  at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)  Caused by: java.lang.reflect.InvocationTargetException  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)  at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)  ... 45 more  Caused by: java.lang.NullPointerException: inStream parameter is null  at java.base/java.util.Objects.requireNonNull(Objects.java:235)  at java.base/java.util.Properties.load(Properties.java:407)  at com.utility.UtilityClass.data(UtilityClass.java:24) </p>		

#	Step / Hook Details	Status	Duration
	at com.utility.UtilityClass.<init>(UtilityClass.java:12) at com.stepdefinitions.RegisterPage_definitions.<init>(RegisterPage_definitions.java:15)		
2	When User click the register button	SKIPPED	0.000 s
3	And User enter the Name	SKIPPED	0.000 s
4	And User enter the LoginName	SKIPPED	0.000 s
5	And User enter the Email	SKIPPED	0.000 s
6	And User enter the Password	SKIPPED	0.000 s
7	And User enter the confirmPassword	SKIPPED	0.000 s
8	And User click the RegistrationAgreement	SKIPPED	0.000 s
9	Then User click Submit button	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.138 s
	Register the User details		

### The user accessing the Message functionality


<b>PASSED</b>		DURATION - 1 m 15.725 s		Scenarios				Steps			
/ 12:55:27.566 PM // 12:56:43.291 PM /				Total - 5 Pass - 5 Fail - 0 Skip - 0		5		Total - 28 Pass - 28 Fail - 0 Skip - 0		28	

### The user view the message history of send message

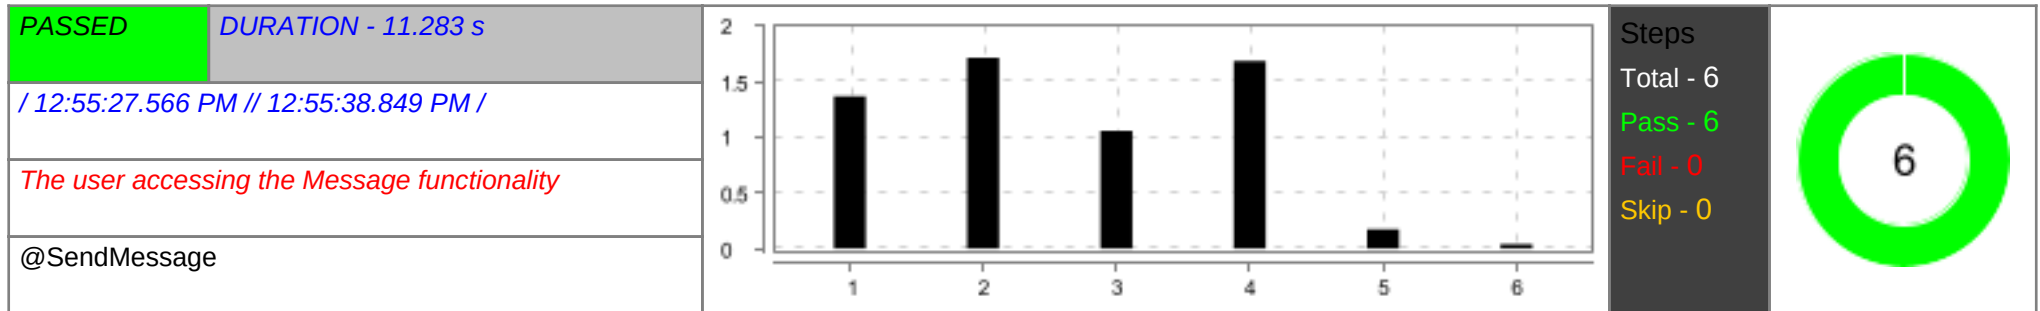


#	Step / Hook Details	Status	Duration
1	Given Users launch the url	PASSED	1.369 s
2	When Users provide valid username and password	PASSED	1.715 s
3	And User choose the Message Tab	PASSED	1.060 s
4	And User select the Sent message option	PASSED	1.687 s
5	And User gets the number of results in send message page	PASSED	0.172 s
6	Then Print the send messages	PASSED	0.037 s

### The user view the message history of inbox message

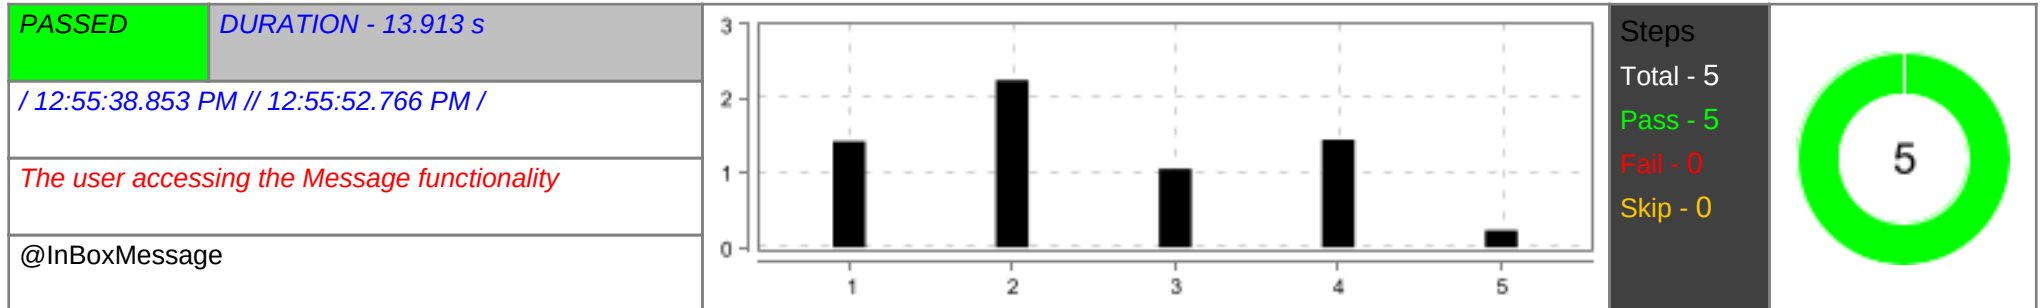


#	Step / Hook Details	Status	Duration
1	Given Users launch the url	PASSED	1.424 s
2	When Users provide valid username and password	PASSED	2.246 s
3	And User choose the Message Tab	PASSED	1.057 s
4	And User choose the inbox option	PASSED	1.446 s
5	And User gets the number of results in inbox page.	PASSED	0.230 s

### The user view the message history of Trash message

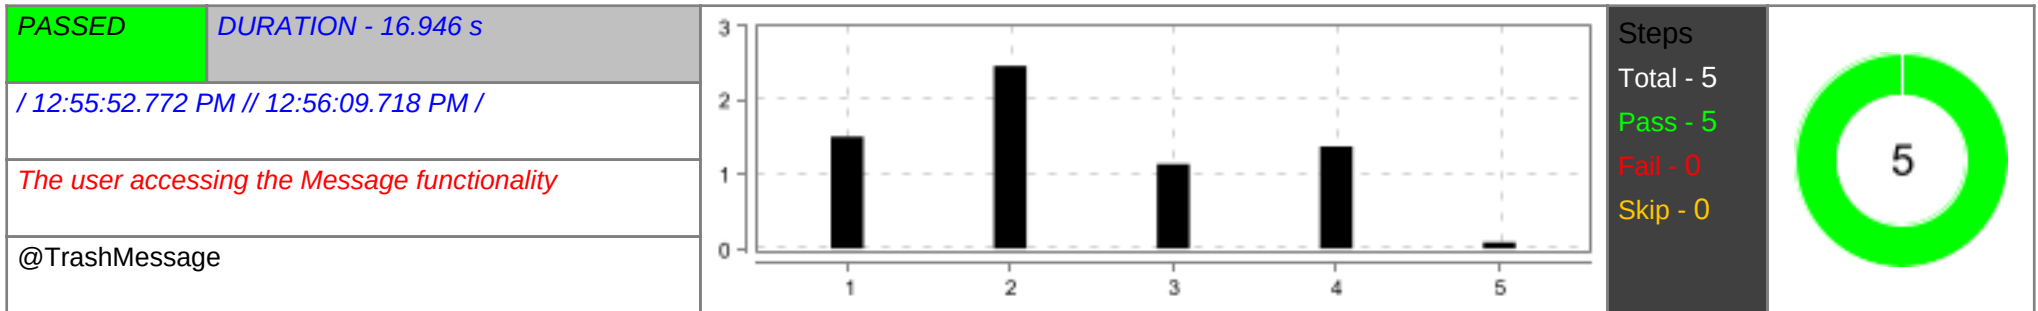

#	Step / Hook Details	Status	Duration
1	Given Users launch the url	PASSED	1.510 s
2	When Users provide valid username and password	PASSED	2.465 s
3	And User choose the Message Tab	PASSED	1.139 s
4	And User choose the Trash option	PASSED	1.375 s
5	Then User gets the number of results in Trash pages	PASSED	0.085 s

### The user send the message

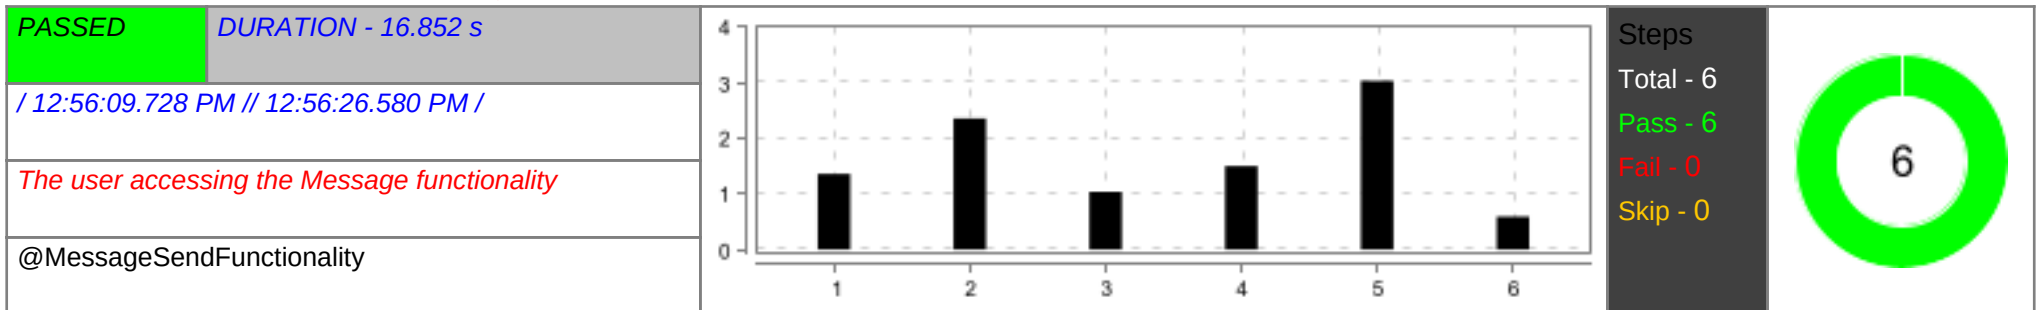



#	Step / Hook Details	Status	Duration
1	Given Users launch the url	PASSED	1.359 s
2	When Users provide valid username and password	PASSED	2.357 s
3	And User choose the Message Tab	PASSED	1.039 s
4	When User Creating new message	PASSED	1.504 s
5	And Enter the required details	PASSED	3.035 s
6	Then User receives a verification message	PASSED	0.591 s

### The user not able to send message without required details

<div>PASSED</div> <div>DURATION - 16.704 s</div>	<div><table><thead><tr><th>Step</th><th>Duration (s)</th></tr></thead><tbody><tr><td>1</td><td>1.6</td></tr><tr><td>2</td><td>2.4</td></tr><tr><td>3</td><td>1.1</td></tr><tr><td>4</td><td>1.3</td></tr><tr><td>5</td><td>3.0</td></tr><tr><td>6</td><td>0.6</td></tr></tbody></table></div>	Step	Duration (s)	1	1.6	2	2.4	3	1.1	4	1.3	5	3.0	6	0.6	<div>Steps</div> <div>Total - 6</div> <div>Pass - 6</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div><div>6</div></div>
Step		Duration (s)															
1		1.6															
2		2.4															
3	1.1																
4	1.3																
5	3.0																
6	0.6																
<div>/ 12:56:26.587 PM // 12:56:43.291 PM /</div>																	
<div>The user accessing the Message functionality</div>																	
<div>@MessageNotSend</div>																	

#	Step / Hook Details	Status	Duration
1	Given Users launch the url	PASSED	1.572 s
2	When Users provide valid username and password	PASSED	2.432 s
3	And User choose the Message Tab	PASSED	1.068 s
4	When User Creating new message	PASSED	1.331 s
5	And User enter the user name and subject	PASSED	2.967 s
6	Then User receives verification message shows the message not able to send	PASSED	0.579 s

### User Buy and print voucher

<div>FAILED</div> <div>DURATION - 56.026 s</div>		<div>Scenarios</div> <div>Total - 2</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 0</div>	<div></div>	<div>Steps</div> <div>Total - 13</div> <div>Pass - 10</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
/ 12:56:43.300 PM // 12:57:39.326 PM /					

### Buying and print vouchers


<div>FAILED</div> <div>DURATION - 38.642 s</div>		<div><table border="1"><thead><tr><th>Step</th><th>Duration (s)</th></tr></thead><tbody><tr><td>1</td><td>1.5</td></tr><tr><td>2</td><td>2.0</td></tr><tr><td>3</td><td>1.0</td></tr><tr><td>4</td><td>0.5</td></tr><tr><td>5</td><td>20.0</td></tr><tr><td>6</td><td>0.5</td></tr><tr><td>7</td><td>0.5</td></tr></tbody></table></div>	Step	Duration (s)	1	1.5	2	2.0	3	1.0	4	0.5	5	20.0	6	0.5	7	0.5	<div>Steps</div> <div>Total - 7</div> <div>Pass - 4</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div><div>7</div></div>
Step	Duration (s)																			
1	1.5																			
2	2.0																			
3	1.0																			
4	0.5																			
5	20.0																			
6	0.5																			
7	0.5																			
/ 12:56:43.300 PM // 12:57:21.942 PM /																				
User Buy and print voucher																				

#	Step / Hook Details	Status	Duration
1	Given User launched url	PASSED	1.582 s
2	When User provides Name and password	PASSED	2.232 s
3	And User choose the marketpalce tab	PASSED	1.024 s
4	And User selects the buy voucher	PASSED	0.050 s
5	And User selects the Gift voucher	FAILED	20.023 s



org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//div[contains(text(),'Gift voucher')]"} (Session info: chrome=114.0.5735.199) For documentation on this error, please visit: <https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception> Build info: version: '4.14.1', revision: '03f8ede370' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [c5a66ffcee039c1061b7e6142ea50ef9, findElement {using=xpath, value=//div[contains(text(),'Gift voucher')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 114.0.5735.199, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f..., userDataDir: C:\Users\AVELAY~1\AppData\Local\Temp\chrome-win-1069619\chrome.exe}, goog:chromeOptions: {debuggerAddress: localhost:57319}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:57319/devtools/page/114.0.5735.199, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: c5a66ffcee039c1061b7e6142ea50ef9

at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)  
at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)  
at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)  
at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)  
at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)  
at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)  
at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)  
at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52)  
at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191)  
at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200)  
at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175)  
at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)  
at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165)  
at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59)  
at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359)  
at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353)  
at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68)  
at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38)  
at jdk.proxy2/jdk.proxy2.\$Proxy37.click(Unknown Source)  
at com.actions.GiftVoucherActions.clickGiftVoucher(GiftVoucherActions.java:38)  
at com.stepdefinitions.VoucherStepdefinition.user\_selects\_the\_gift\_voucher(VoucherStepdefinition.java:54)  
at ?.User selects the Gift voucher(file:///C:/Users/avelayudhan/eclipse-workspace/CodeRed/PilotProject\_Cyclos\_CodeRed/src/test/resources/Features/voucher.feature:9)

\* Not displayable characters are replaced by '?'.

#	Step / Hook Details	Status	Duration
6	And User enters the amount and submit	SKIPPED	0.000 s
7	Then User print the gift voucher pdf and the submission verified.	SKIPPED	0.000 s
	AFTER - com.stepdefinitions.HookClass.tearDown(io.cucumber.java.Scenario)	PASSED	0.223 s
	Buying and print vouchers		
			

### Checking My vouchers

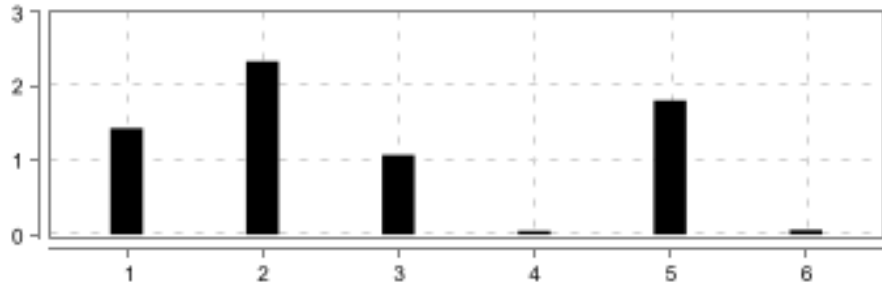PASSED		DURATION - 17.379 s			<div>Steps</div> <div>Total - 6</div> <div>Pass - 6</div> <div>Fail - 0</div> <div>Skip - 0</div>	
/ 12:57:21.947 PM // 12:57:39.326 PM /						
User Buy and print voucher						

#	Step / Hook Details	Status	Duration
1	Given User launched url	PASSED	1.433 s
2	When User provides Name and password	PASSED	2.337 s
3	And User choose the marketpalce tab	PASSED	1.073 s
4	And User Selects the my voucher option	PASSED	0.050 s
5	And User Verified the page is successfully opened	PASSED	1.809 s
6	Then User download the gift voucher pdf	PASSED	0.060 s