

A MINI PROJECT REPORT
ON
HOUSING MANAGEMENT SYSTEM

Submitted to Sri Indu College Of Engineering & Technology, Hyderabad in partial fulfillment of the requirements for the award of degree.

BACHELOR OF TECHNOLOGY
in
COMPUTER SCIENCE & ENGINEERING

By
S. LAVANYA (19D41A05J6)

Under the guidance of
Ms.Roopa
(Assistant.Proffesor)



DEPARTMENT OF COMPUTER SCIENCE & ENGINEERING
SRI INDU COLLEGE OF ENGINEERING AND TECHNOLOGY
(An Autonomous Institution under UGC, accredited by NBA, Affiliated to JNTUH)
Sheriguda, Ibrahimpatnam (2022-2023)

SRI INDU COLLEGE OF ENGINEERING AND TECHNOLOGY

(An Autonomous Institution under UGC, Accredited by NBA, Affiliated to JNTUH)

DEPARTMENT OF COMPUTER SCIENCE & ENGINEERING



CERTIFICATE

Certified that the Mini Project entitled **“HOUSING SOCIETY MANAGEMENT SYSTEM”** is a bonafide work carried out by **S.LAVANYA(19D41A05J6)** in partial fulfilment for the award of **Bachelor of Technology in Computer Science and Engineering** of SICET, Hyderabad for the academic year **2019-2023**. The Project has been approved as it satisfies academic requirements in respect of the work prescribed for **IV YEAR, I-SEMESTER** of **B.TECH** course.

INTERNAL GUIDE

S.Roopa

HOD

Dr.T.Charan singh

DEAN

Dr.K.S.SADASIVA RAO

EXTERNAL EXAMIER

ACKNOWLEDGMENT

“Task successful” makes everyone happy. But the happiness will be gold without glitter if we didn’t state the persons who have supported us to make it a success.

Success will be crowned to people who made it a reality but the people whose constant guidance and encouragement made it possible will be crowned first on the eve of success.

This acknowledgement transcends the reality of formality when we would like to express deep gratitude and respect to all those people behind the screen who guided, inspired and helped me for the completion of our project work.

I consider myself lucky enough to get such a good project. This project would add as an asset to my academic profile.

I would like to express my thankfulness to my project guide, **Ms. ROOPA** for his constant motivation and valuable help through the project work, and I express my gratitude to **Mr. BHASKAR RAO**, Director of Sri indu college of engineering and technology, Hyderabad, for his constant supervision, guidance and co-operation through out the project.

I also extend my thanks to my Team Members for their co-operation during my course. Finally I would like to thanks my friends for their co-operation to complete this project.

S. LAVANYA (19D41A05J6)

S.NO	CONTENTS	PAGENO.
	CHAPTERS	
	ABSTRACT	
	LIST OF FIGURES	
	LIST OF SCREENSHOTS	
1.	INTRODUCTION-----	1
	INTRODUCTION TO PROJECT-----	1
	PURPOSE OF THE PROJECT -----	1
	EXISTING SYSTEM & ITS DISADVANTAGES-----	1
	PROPOSED SYSTEM & ITS ADVANTAGES-----	1
2.	SYSTEM ANALYSIS-----	12
2.1.	STUDY OF THE SYSTEM-----	2
2.2	INPUT & OUTPUT REPRESENTATION-----	4
2.3	PROCESS MODELS USED WITH JUSTIFICATION-----	11
2.4	SYSTEM ARCHITECTURE-----	13
3.	FEASIBILITY STUDY-----	15
3.1.	TECHNICAL FEASIBILITY-----	16
3.2.	OPERATIONAL FEASIBILITY-----	16
3.3.	ECONOMIC FEASIBILITY-----	17
4.	REQUIREMENT SPECIFICATIONS-----	32
4.1.	FUNCTIONAL REQUIREMENTS-----	18

4.2.	PERFORMANCE REQUIREMENTS-----	18
4.3.	SOFTWARE REQUIREMENTS-----	19
4.4.	HARDWARE REQUIREMENTS-----	19
4.4.1.	INTRODUCTION TO JAVA-----	20
4.4.2.	Servlets/JSP-----	21
4.4.3.	JDBC-----	24
4.4.4.	Oracle-----	26
4.4.5.	HTML-----	32
4.4.6.	Java Script-----	33
4.	SYSTEM DESIGN-----	34
5.1 .	INTRODUCTION-----	35
5.2	UML DIAGRAMS-----	41
5.3	NORMALIZATION-----	43
5.4	DATA DICTIONARY-----	43
5.	OUTPUT SCREENS-----	52
6.	SYSTEM TESTING-----	55
7.1	INTRODUCTION TO TESTING-----	53
7.2	TESTING STRATEGIES-----	55
8.	SYSTEM SECURITY-----	56
8.1	INTRODUCTION-----	56
8.2	SECURITY IN SOFTWARE-----	57
9.	BIBLIOGRAPHY-----	59

ABSTRACT

A housing society management and billing project that effectively manages and handles all the functioning of a cooperative housing society. The software system can store the data of various flat owners and their family members along with their images. The system also maintains and calculates the society maintenance as well as parking, cultural funds, emergency funds and other charges and adds them automatically in individual flat bill. System i.e. secretary can add water bill to each flat account and track the payments. The system needs an administrator to input various flat owner data and billing amounts into it. The rest of the work is done by the system on its own. The system consists of automatic bill generation facility. It calculates various associated costs, adds them up and provides a bill accordingly. System has to send email notification for maintenance details and water bill due date. Secretary can create event and add flat owners to this event. Also he can able to modify event or cancel event. Event notification should be send to email

CHAPTER-1

INTRODUCTION

1.1. INTRODUCTION & OBJECTIVE

In recent years, Web applications have grown rapidly. As Web applications become complex, there is a growing concern about their quality and reliability. In this system, we present a methodology that **uses** an Object-Oriented Web Est Model (WTM) to support Web application testing. The test model captures both structural and behavioral test artifacts of Web applications and represents the artifacts from the object, behavior, and structure perspectives. Based on the test model, both structural and behavioral test cases can be derived automatically to ensure the quality of Web applications. Moreover, the model also can be used as a road map to identify change ripple effects and to find cost-effective testing strategies for reducing test efforts required in the regression testing.

1.2. PURPOSE OF THE PROJECT

Using this project we can test the web application easily by using Object-Oriented Web Est model.

1.3. EXISTING SYSTEM & DISADVANTAGES

In the existing system we can't test the web application easily. Manually we can test the web application but it is so difficult. And it is time taking process.

1.4. PROPOSED SYSTEM & ITS DISADVANTAGES

In this system, we present a methodology that **uses** an Object-Oriented Web Est Model (WTM) to support Web application testing. The test model captures both structural and behavioral test artifacts of Web applications and represents the artifacts from the object, behavior, and structure perspectives.

CHAPTER-2

SYSTEM ANALYSIS

2.1 STUDY OF THE SYSTEM

To provide flexibility to the users, the interfaces have been developed that are accessible through a browser. The GUI'S at the top level have been categorized as

1. Administrative user interface
2. The operational or generic user interface

The 'administrative user interface' concentrates on the consistent information that is practically, part of the organizational activities and which needs proper authentication for the data collection. These interfaces help the administrators with all the transactional states like Data insertion, Data deletion and Date updation along with the extensive data search capabilities.

The 'operational or generic user interface' helps the end users of the system in transactions through the existing data and required services. The operational user interface also helps the ordinary users in managing their own information in a customized manner as per the included flexibilities

2.2 INPUT & OUTPOUT REPRESENTETION

Input design is a part of overall system design. The main objective during the input design is as given below:

- To produce a cost-effective method of input.
- To achieve the highest possible level of accuracy.
- To ensure that the input is acceptable and understood by the user.

INPUT STAGES:

The main input stages can be listed as below:

- Data recording
- Data transcription
- Data conversion
- Data verification
- Data control
- Data transmission
- Data validation
- Data correction

INPUT TYPES:

It is necessary to determine the various types of inputs. Inputs can be categorized as follows:

- External inputs, which are prime inputs for the system.
- Internal inputs, which are user communications with the system.
- Operational, which are computer department's communications to the system?
- Interactive, which are inputs entered during a dialogue

INPUT MEDIA:

At this stage choice has to be made about the input media. To conclude about the input media consideration has to be given to;

- Type of input
- Flexibility of format
- Speed
- Accuracy
- Verification methods
- Rejection rates
- Ease of correction
- Storage and handling requirements
- Security
- Easy to use
- Portability

Keeping in view the above description of the input types and input media, it can be said that most of the inputs are of the form of internal and interactive. As

Input data is to be the directly keyed in by the user, the keyboard can be considered to be the most suitable input device.

OUTPUT DESIGN:

In general are:

- External Outputs whose destination is outside the organization.
- Internal Outputs whose destination is with in organization and they are the User's main interface with the computer. Outputs from computer systems are required primarily to communicate the results of processing to users. They are also used to provide a permanent copy of the results for later consultation. The various types of outputs
- Operational outputs whose use is purely with in the computer department.
- Interface outputs, which involve the user in communicating directly with the system.

OUTPUT DEFINITION

The outputs should be defined in terms of the following points:

- Type of the output
- Content of the output
- Format of the output
- Location of the output
- Frequency of the output
- Volume of the output
- Sequence of the output

It is not always desirable to print or display data as it is held on a computer. It should be decided as which form of the output is the most suitable.

For Example

- Will decimal points need to be inserted
- Should leading zeros be suppressed.

OUTPUT MEDIA:

In the next stage it is to be decided that which medium is the most appropriate for the output. The main considerations when deciding about the output media are:

- The suitability for the device to the particular application.
- The need for a hard copy.
- The response time required.
- The location of the users
- The software and hardware available.

Keeping in view the above description the project is to have outputs mainly coming under the category of internal outputs. The main outputs desired according to the requirement specification are:

The outputs were needed to be generated as a hard copy and as well as queries to be viewed on the screen. Keeping in view these outputs, the format for the output is taken from the outputs, which are currently being obtained after manual processing. The standard printer is to be used as output media for hard copies.

2.3 PROCESS MODEL USED WITH JUSTIFICATION

SDLC (Umbrella Model):

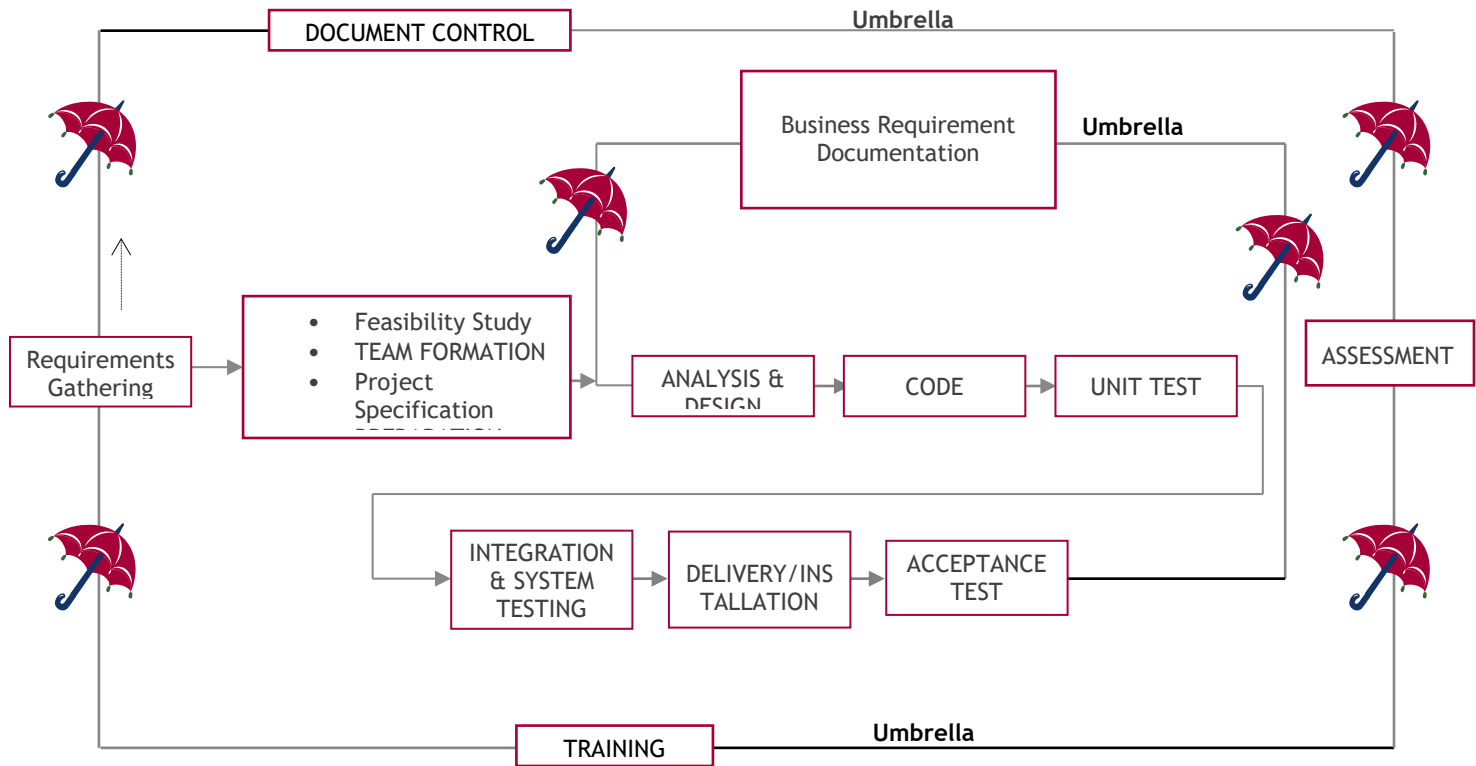


Fig.2.3.1:process model

SDLC is nothing but Software Development Life Cycle. It is a standard which is used by software industry to develop good software.

Stages in SDLC:

- ◆ Requirement Gathering
- ◆ Analysis
- ◆ Designing
- ◆ Coding
- ◆ Testing
- ◆ Maintenance

Requirements Gathering stage:

The requirements gathering process takes as its input the goals identified in the high-level requirements section of the project plan. Each goal will be refined into a set of one or more requirements. These requirements define the major functions of the intended application, define operational data areas and reference data areas, and define the initial data entities. Major functions include critical processes to be managed, as well as mission critical inputs, outputs and reports. A user class hierarchy is developed and associated with these major functions, data areas, and data entities. Each of these definitions is termed a Requirement. Requirements are identified by unique requirement identifiers and, at minimum, contain a requirement title and textual description.

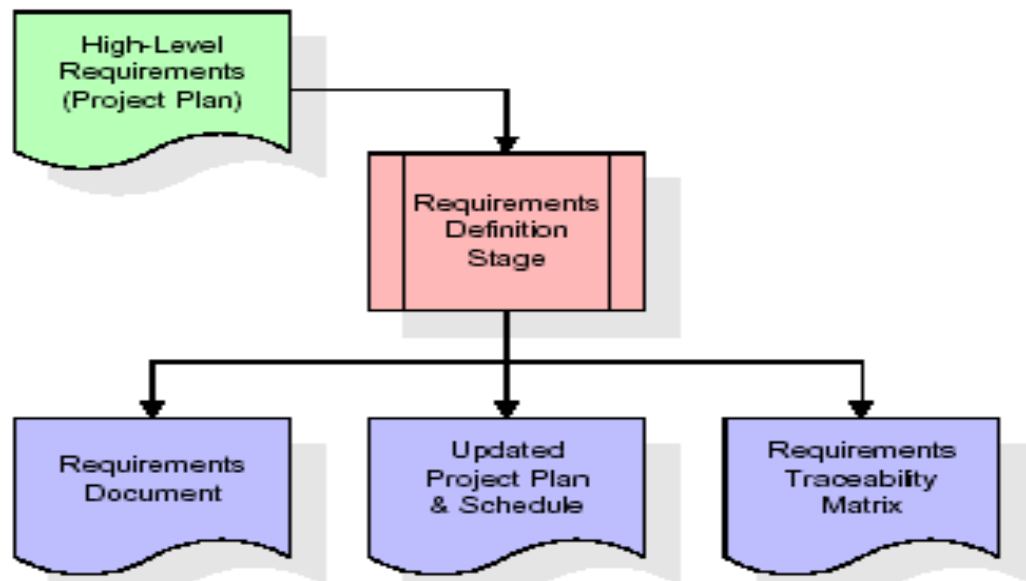


Fig.2.3.2:requirements gathering

These requirements are fully described in the primary deliverables for this stage: the Requirements Document and the Requirements Traceability Matrix (RTM). The requirements document contains complete descriptions of each requirement, including diagrams and references to external documents as necessary. Note that detailed listings of database tables and fields are *not* included in the requirements document.

The title of each requirement is also placed into the first version of the RTM, along with the title of each goal from the project plan. The purpose of the RTM is to show that the product components developed during each stage of the software development lifecycle are formally connected to the components developed in prior stages.

In the requirements stage, the RTM consists of a list of high-level requirements, or goals, by title, with a listing of associated requirements for each goal, listed by requirement title. In this hierarchical listing, the RTM shows that each requirement developed during this stage is formally linked to a specific product goal. In this format, each requirement can be traced to a specific product goal, hence the term *requirements traceability*.

The outputs of the requirements definition stage include the requirements document, the RTM, and an updated project plan.

- ◆ Feasibility study is all about identification of problems in a project.
- ◆ No. of staff required to handle a project is represented as Team Formation, in this case only modules are individual tasks will be assigned to employees who are working for that project.
- ◆ Project Specifications are all about representing of various possible inputs submitting to the server and corresponding outputs along with reports maintained by administrator

Analysis Stage:

The planning stage establishes a bird's eye view of the intended software product, and uses this to establish the basic project structure, evaluate feasibility and risks associated with the project, and describe appropriate management and technical approaches.

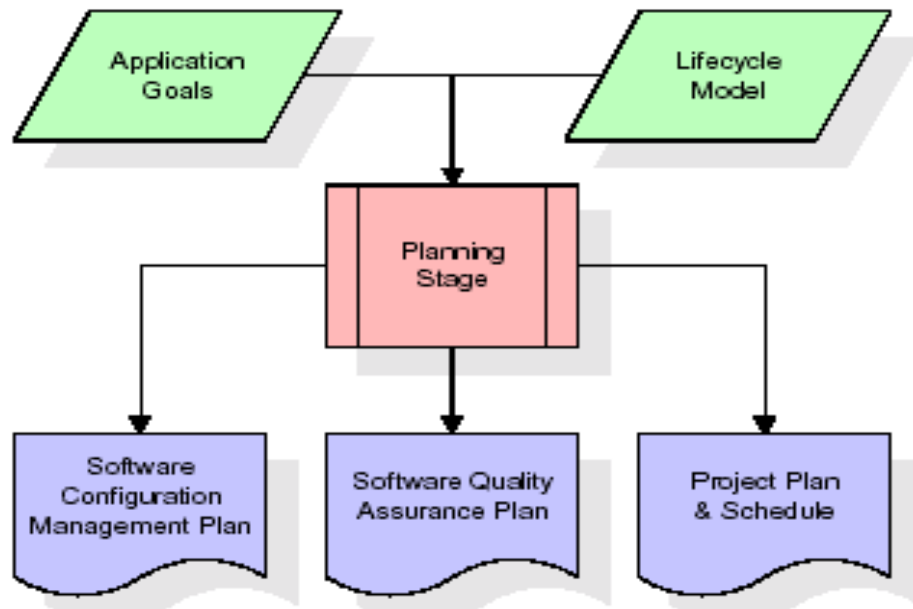


Fig.2.3.3:analysis stage

The most critical section of the project plan is a listing of high-level product requirements, also referred to as goals. All of the software product requirements to be developed during the requirements definition stage flow from one or more of these goals. The minimum information for each goal consists of a title and textual description, although additional information and references to external documents may be included. The outputs of the project planning stage are the configuration management plan, the quality assurance plan, and the project plan and schedule, with a detailed listing of scheduled activities for the upcoming Requirements stage, and high level estimates of effort for the out stages.

Designing Stage:

The design stage takes as its initial input the requirements identified in the approved requirements document. For each requirement, a set of one or more design elements will be produced as a result of interviews, workshops, and/or prototype efforts. Design elements describe the desired software features in detail, and generally include functional hierarchy diagrams, screen layout diagrams, tables of business rules, business process diagrams, pseudo code, and a complete entity-relationship diagram with a full data dictionary. These design elements are intended to describe the software in sufficient detail that skilled programmers may develop the software with minimal additional input.

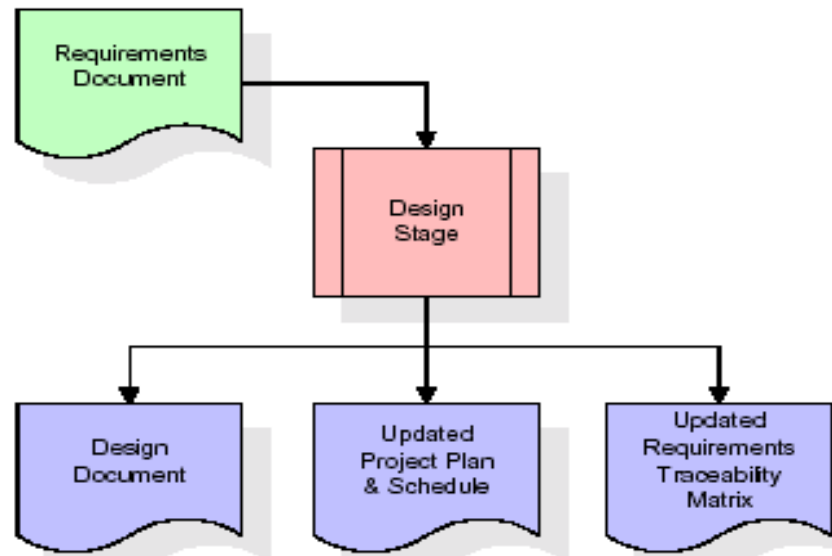


Fig.2.3.4:designing stage

When the design document is finalized and accepted, the RTM is updated to show that each design element is formally associated with a specific requirement. The outputs of the design stage are the design document, an updated RTM, and an updated project plan.

Development (Coding) Stage:

The development stage takes as its primary input the design elements described in the approved design document. For each design element, a set of one or more software artifacts will be produced. Software artifacts include but are not limited to menus, dialogs, data management forms, data reporting formats, and specialized procedures and functions. Appropriate test cases will be developed for each set of functionally related software artifacts, and an online help system will be developed to guide users in their interactions with the software.

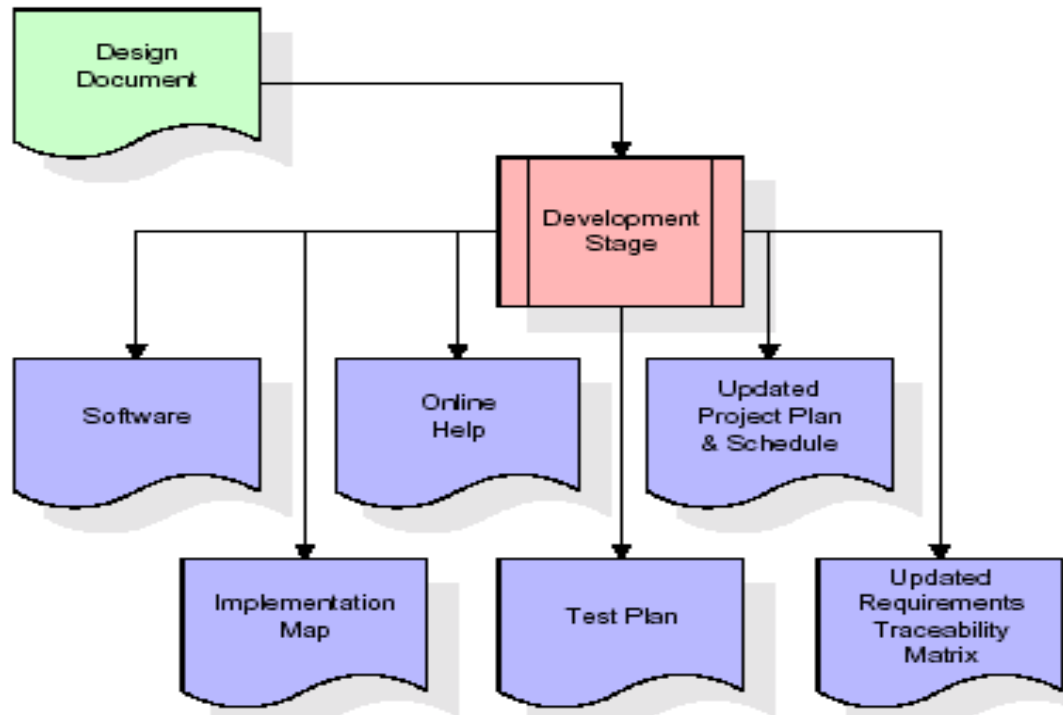


Fig2.3.5:developing stage

The RTM will be updated to show that each developed artifact is linked to a specific design element, and that each developed artifact has one or more corresponding test case items. At this point, the RTM is in its final configuration. The outputs of the development stage include a fully functional set of software that satisfies the requirements and design elements previously documented, an online help system that describes the operation of the software, an implementation map that identifies the primary code entry points for all major system functions, a test plan that describes the test cases to be used to validate the correctness and completeness of the software, an updated RTM, and an updated project plan.

Integration & Test Stage:

During the integration and test stage, the software artifacts, online help, and test data are migrated from the development environment to a separate test environment. At this point, all test cases are run to verify the correctness and completeness of the software. Successful execution of the test suite confirms a robust and complete migration capability. During this stage, reference data is finalized for production use and production users are identified and linked to their appropriate roles. The final reference data (or links to reference data source files) and production user list are compiled into the Production Initiation Plan.

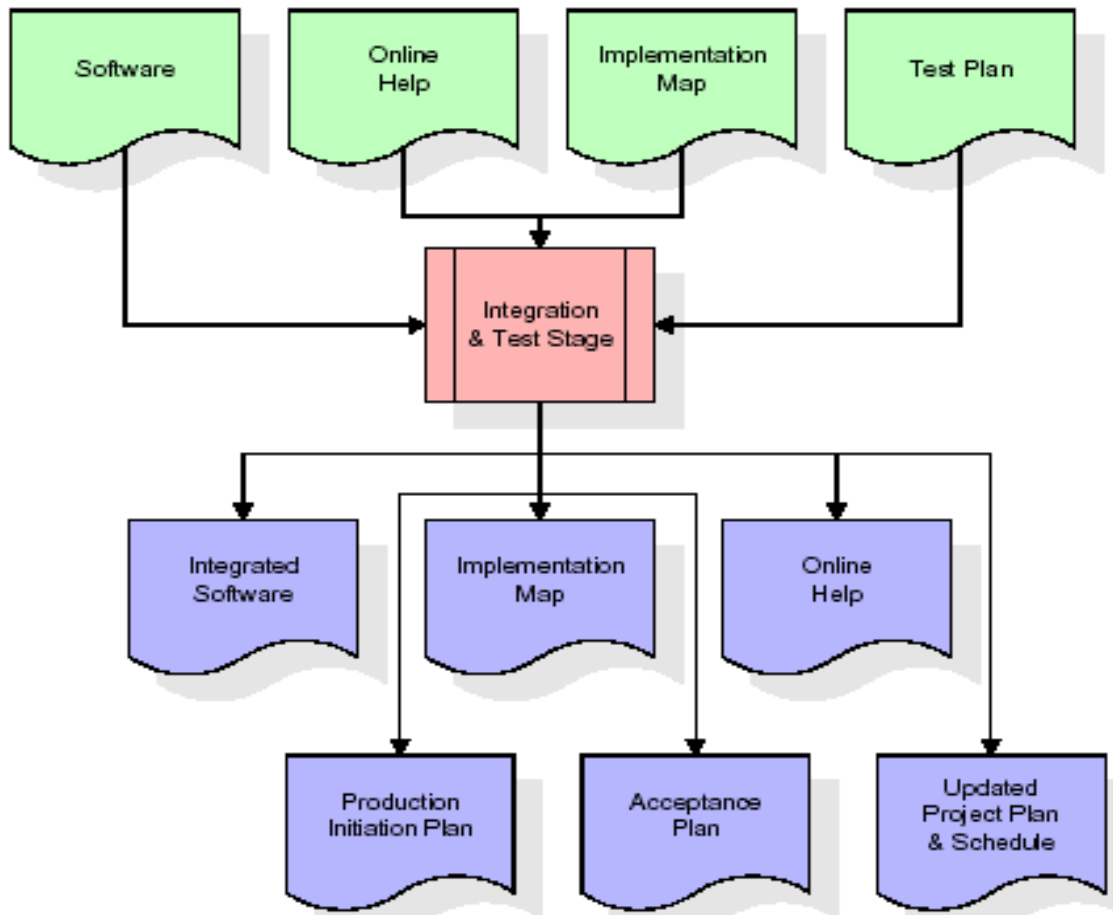


Fig2.3.6: integration and test case

The outputs of the integration and test stage include an integrated set of software, an online help system, an implementation map, a production initiation plan that describes reference data and production users, an acceptance plan which contains the final suite of test cases, and an updated project plan.

♦ Installation & Acceptance Test:

During the installation and acceptance stage, the software artifacts, online help, and initial production data are loaded onto the production server. At this point, all test cases are run to verify the correctness and completeness of the software. Successful execution of the test suite is a prerequisite to acceptance of the software by the customer.

After customer personnel have verified that the initial production data load is correct and the test suite has been executed with satisfactory results, the customer formally accepts the delivery of the software.

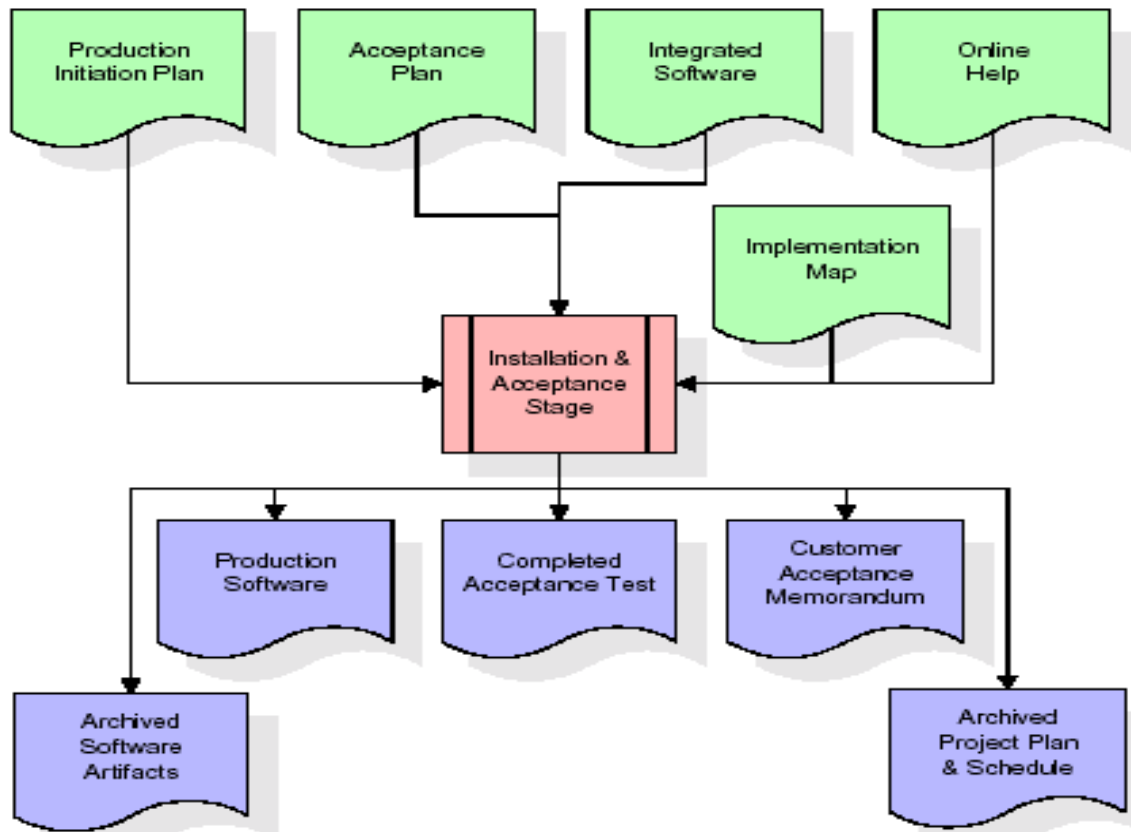


Fig2.3.7:installation and acceptance

The primary outputs of the installation and acceptance stage include a production application, a completed acceptance test suite, and a memorandum of customer acceptance of the software. Finally, the PDR enters the last of the actual labor data into the project schedule and locks the project as a permanent project record. At this point the PDR "locks" the project by archiving all software items, the implementation map, the source code, and the documentation for future reference.

Maintenance:

Outer rectangle represents maintenance of a project, Maintenance team will start with requirement study, understanding of documentation later employees will be assigned work and they will under go training on that particular assigned category.


For this life cycle there is no end, it will be continued so on like an umbrella (no ending point to umbrella sticks).

2.4 SYSTEM ARCHITECTURE

Architecture flow:

Below architecture diagram represents mainly flow of requests from users to database through servers. In this scenario overall system is designed in three tiers separately using three layers called presentation layer, business logic layer and data link layer. This project was developed using 3-tire architecture.

Fig2.4.1:System architecture

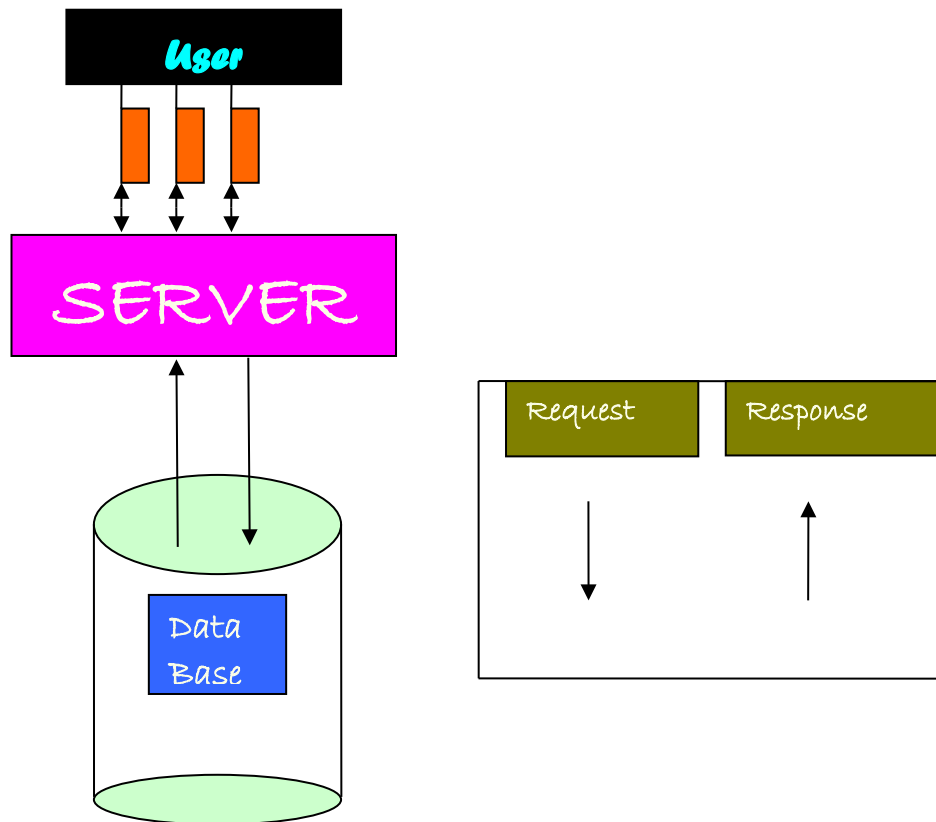

URL Pattern:

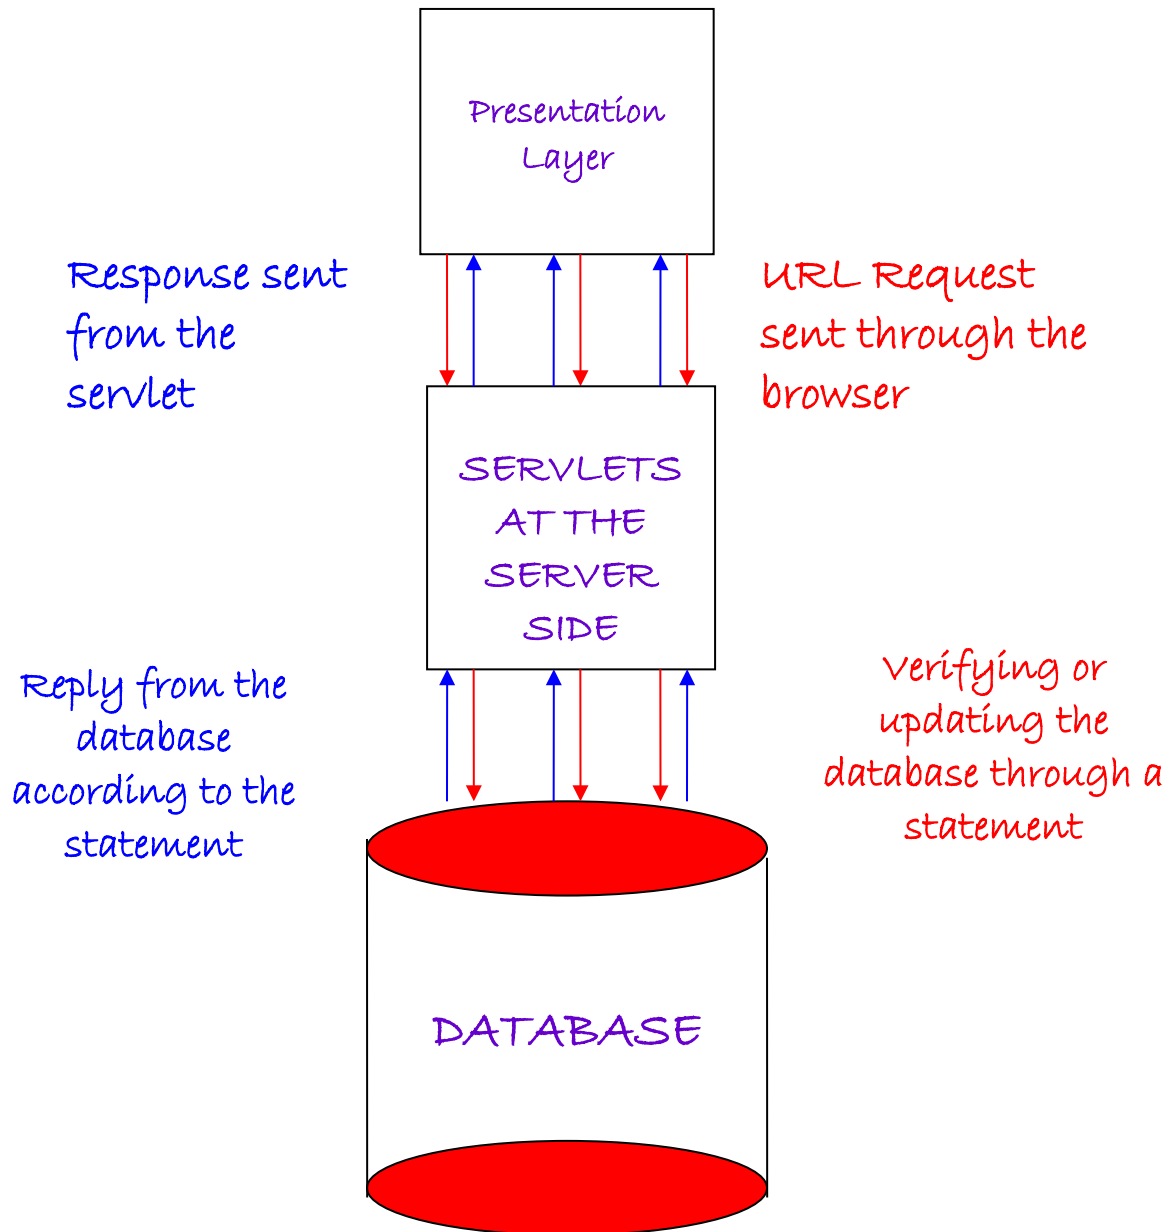


Fig2.4.2:Url pattern

URL pattern represents how the requests are flowing through one layer to another layer and how the responses are getting by other layers to presentation layer through server in architecture diagram.

CHAPTER-3

FEASIBILITY STUDY

Feasibility Study:

Preliminary investigation examines project feasibility, the likelihood the system will be useful to the organization. The main objective of the feasibility study is to test the Technical, Operational and Economical feasibility for adding new modules and debugging old running system. All systems are feasible if they are given unlimited resources and infinite time. There are aspects in the feasibility study portion of the preliminary investigation:

- Technical Feasibility
- Operation Feasibility

Economical Feasibility

3.1 TECHNICAL FEASIBILITY

The technical issue usually raised during the feasibility stage of the investigation includes the following:

- Does the necessary technology exist to do what is suggested?
- Do the proposed equipments have the technical capacity to hold the data required to use the new system?
- Will the proposed system provide adequate response to inquiries, regardless of the number or location of users?
- Can the system be upgraded if developed?

Are there technical guarantees of accuracy, reliability, ease of access and data security?

3.2 OPERATIONAL FEASIBILITY

User-friendly

Customer will use the forms for their various transactions i.e. for adding new routes, viewing the routes details. Also the Customer wants the reports to view the various transactions based on the constraints. Theses forms and reports are generated as user-friendly to the Client.

Reliability

The package will pick-up current transactions on line. Regarding the old transactions, User will enter them in to the system.

Security

The web server and database server should be protected from hacking, virus etc

Portability

The application will be developed using standard open source software (Except Oracle) like Java, tomcat web server, Internet Explorer Browser etc these software will work both on Windows and Linux o/s. Hence portability problems will not arise.

Availability

This software will be available always.

Maintainability

The system called the wheel uses the 2-tier architecture. The 1st tier is the GUI, which is said to be front-end and the 2nd tier is the database, which uses My-Sql, which is the back-end.

The front-end can be run on different systems (clients). The database will be running at the server. Users access these forms by using the user-ids and the passwords.

3.3 ECONOMIC FEASILITY

The computerized system takes care of the present existing system's data flow and procedures completely and should generate all the reports of the manual system besides a host of other management reports.

It should be built as a web based application with separate web server and database server. This is required as the activities are spread through out the organization customer wants a centralized database. Further some of the linked transactions take place in different locations.

Open source software like TOMCAT, JAVA, Mysql and Linux is used to minimize the cost for the Customer.

CHAPTER-4

REQUIREMENTS SPECIFICATION

4.1 FUNCTIONAL REQUIREMENTS SPECIFICATION

This application mainly consist four modules

- 1) Object Aspect**
- 2) Behavior Aspect**
- 3) Structure Aspect**

Object Aspect:

In this module we are selecting one web application. In this module it finds the request goes to from which jsp/servlet to which jsp and the response goes to from which jsp/servlet file to which jsp.

Behavior Aspect:

In this module it will find the behavior of the application. It will find the control or action goes from where to where.

Structure Aspect:

In this module it will shows the structure of whole application.

4.2 PERFORMANCE REQUIREMENTS

Performance is measured in terms of the output provided by the application. Requirement specification plays an important part in the analysis of a system. Only when the requirement specifications are properly given, it is possible to design a system, which will fit into required environment. It rests largely with the users of the existing system to give the requirement specifications because they are the people who finally use the system. This is because the requirements have to be known during the initial stages so that the system can be designed according to those requirements. It is very difficult to change the system once it has been designed and on the other hand designing a system, which does not cater to the requirements of the user, is of no use.

The requirement specification for any system can be broadly stated as given below:

The system should be able to interface with the existing system

- The system should be accurate
- The system should be better than the existing system

The existing system is completely dependent on the user to perform all the duties.

4.3 Soft Ware Requirements

- **Operating System** : Windows 2000 server Family or higher version
- **Techniques** : JDK 1.5
- **Data Bases** : Oracle10g

4.4 Hard ware Requirements:

- **Processor:: Pentium-III (or) Higher**
- **Ram:: 64MB (or) Higher**
- **Cache:: 512MB**
- **Hard disk:: 10GB**

4.4.1. INTRODUCTION TO JAVA

About Java:

Initially the language was called as “oak” but it was renamed as “java” in 1995. The primary motivation of this language was the need for a platform-independent (i.e. architecture neutral) language that could be used to create software to be embedded in various consumer electronic devices.

- Java is a programmer’s language
- Java is cohesive and consistent
- Except for those constraint imposed by the Internet environment. Java gives the programmer, full control

Finally Java is to Internet Programming where c was to System Programming.

Importance of Java to the Internet

Java has had a profound effect on the Internet. This is because; java expands the Universe of objects that can move about freely in Cyberspace. In a network, two categories of objects are transmitted between the server and the personal computer. They are passive information and Dynamic active programs. in the areas of Security and probability. But Java addresses these concerns and by doing so, has opened the door to an exciting new form of program called the Applet.

Applications and applets

.An application is a program that runs on our Computer under the operating system of that computer. It is more or less like one creating using C or C++.Java's ability to create Applets makes it important. An Applet is an application, designed to be transmitted over the Internet and executed by a Java-compatible web browser. An applet is actually a tiny Java program, dynamically downloaded across the network, just like an image. But the difference is, it is an intelligent program, not just a media file. It can react to the user input and dynamically change.

Java Architecture

Java architecture provides a portable, robust, high performing environment for development. Java provides portability by compiling the byte codes for the Java Virtual Machine, which is then interpreted on each platform by the run-time environment. Java is a dynamic system, able to load code when needed from a machine in the same room or across the planet.

Compilation of code

When you compile the code, the Java compiler creates machine code (called byte code) for a hypothetical machine called Java Virtual Machine(JVM). The JVM is supposed to execute the byte code. The JVM is created for overcoming the issue of portability. The code is written and compiled for one machine and interpreted on all machines. This machine is called Java Virtual Machine.

Compiling and interpreting java source code.

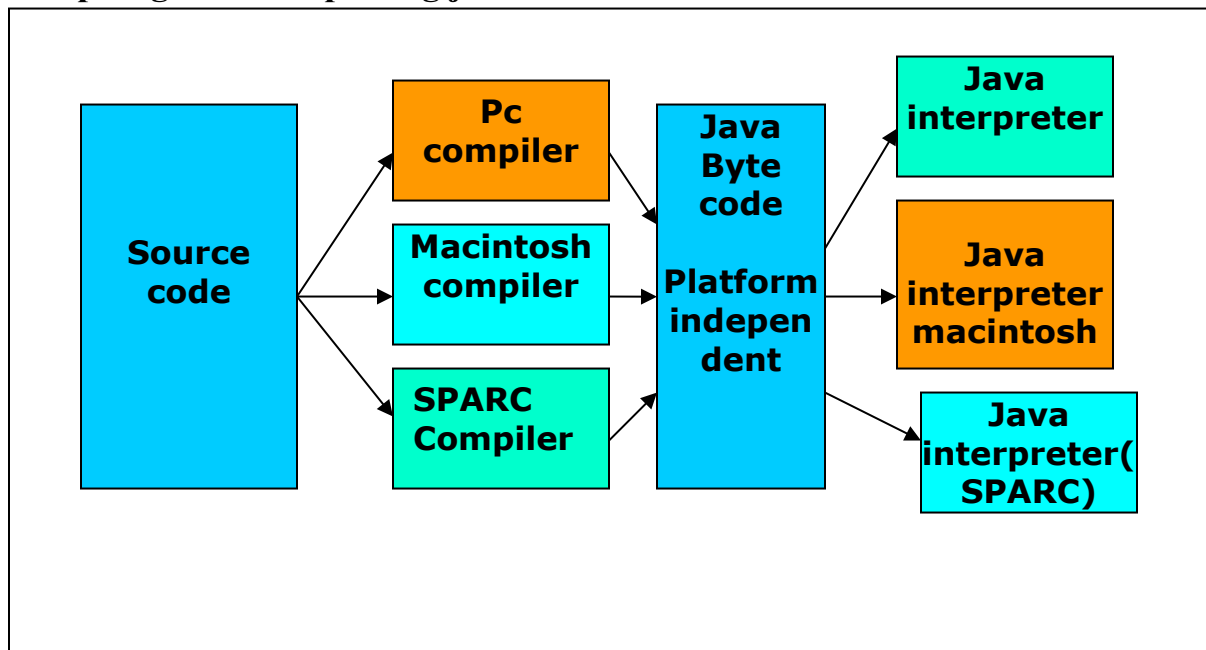


Fig.4.4.1:compiling and interpreting java source code

During run-time the Java interpreter tricks the byte code file into thinking that it is running on a Java Virtual Machine. In reality this could be an Intel Pentium windows 95 or sun SPARCstation running Solaris or Apple Macintosh running system and all could receive code from any computer through internet and run the Applets.

Simple:

Java was designed to be easy for the Professional programmer to learn and to use effectively. If you are an experienced C++ Programmer. Learning Java will oriented features of C++ . Most of the confusing concepts from C++ are either left out of Java or implemented in a cleaner, more approachable manner. In Java there are a small number of clearly defined ways to accomplish a given task.

Object oriented

Java was not designed to be source-code compatible with any other language. This allowed the Java team the freedom to design with a blank state. One outcome of this was a clean usable, pragmatic approach to objects. The object model in Java is simple and easy to extend, while simple types, such as integers, are kept as high-performance non-objects.

Robust

The multi-platform environment of the web places extraordinary demands on a program, because the program must execute reliably in a variety of systems. The ability to create robust programs. Was given a high priority in the design of Java. Java is strictly typed language; it checks your code at compile time and runtime.

Java virtually eliminates the problems of memory management and deal location, which is completely automatic. In a well-written Java program, all run-time errors can and should be managed by your program.

4.4.2 Servlets/JSP

INTRODUCTION

A Servlet Is a generic server extension. a Java class that can be loaded Dynamically to expand the functionality of a server. Servlets are commonly used with web servers. Where they can take the place CGI scripts.

A servlet is similar to proprietary server extension, except that it runs inside a Java Virtual Machine (JVM) on the server, so it is safe and portable

Servlets operate solely within the domain of the server.

Unlike CGI and Fast CGI, which use multiple processes to handle separate program or separate requests, separate threads within web server process handle all servlets. This means that servlets are all efficient and scalable.

Servlets are portable; both across operating systems and also across web servers. Java Servlets offer the best possible platform for web application development.

Servlets are used as replacement for CGI scripts on a web server, they can extend any sort of server such as a mail server that allows servlets to extend its functionality perhaps by performing a virus scan on all attached documents or handling mail filtering tasks.

Servlets provide a Java-based solution used to address the problems currently associated with doing server-side programming including inextensible scripting solutions platform-specific API's and incomplete interface.

Servlets are objects that conform to a specific interface that can be plugged into a Java-based server. Servlets are to the server-side what applets are to the client-side. They are object byte codes that can be dynamically loaded off the net. They differ from applets in that they are faceless objects (without graphics or a GUI component). They serve as platform independent, dynamically loadable, pluggable helper byte code objects on the server side that can be used to dynamically extend server-side functionality.

For example an HTTP servlet can be used to generate dynamic HTML content when you use servlets to do dynamic content you get the following advantages:

- They're faster and cleaner than CGI scripts
- They use a standard API (the servlet API)
- They provide all the advantages of Java (run on a variety of servers without needing to be rewritten)

Attractiveness of Servlets:

There are many features of servlets that make them easy and attractive to use. These include:

- Easily configured using the GUI-based Admin tool
- Can be loaded and invoked from a local disk or remotely across the network.
- Can be linked together or chained, so that one servlet can call another servlet, or several servlets in sequence.
- Can be called dynamically from within HTML, pages using server-side include-tags.

- Are secure-even when downloading across the network, the servlet security model and servlet and box protect your system from unfriendly behavior.,

Advantages of the servlet API

One of the great advantages of the servlet API is protocol independent. It assumes nothing about:

- The protocol being used to transmit on the net
- How it is loaded
- The server environment it will be running in
- These quantities are important, because it allows the Servlet API to be embedded in many different kinds of servers. There are other advantages to the servlet API as well These include:
- It's extensible-you can inherit all your functionality from the base classes made available to you
- It's simple small, and easy to use.

Features of Servlets:

- Ⓢ Servlets are persistent. Servlet are loaded only by the web server and can maintain services between requests.
- Ⓢ Servlets are fast. Since servlets only need to be loaded once, they offer much better performance over their CGI counterparts.
- Ⓢ Servlets are platform independent.
- Ⓢ Servlets are extensible Java is a robust, object-oriented programming language, which easily can be extended to suit your needs.
- Ⓢ Servlets are secure
- Ⓢ Servlets are used with a variety of client.

Servlets are classes and interfaces from two packages, `javax .servlet` and `javax.servlet.http`. The `java.servlet` package contains classes to support generic, protocol-independent servlets. The classes in the `javax.servelt.http` package To and HTTP specific functionality extend these classes

Every servlet must implement the `javax.servelt` interface. Most servlets implement it by extending one of two classes, `javax.servlet.GenericServlet` or `javax.servlet.http.HttpServlet`. A protocol-independent servlet should subclass `Generic-Servlet`. while an Http servlet should subclass `HttpServlet`, which is itself a subclass of `Generic-servlet` with added HTTP-specific functionality.

Unlike a java program, a servlet does not have a `main()` method, Instead the server in the process of handling requests invoke certain methods of a servlet. Each time the server dispatches a request to a servlet, it invokes the `servelts Service()` method,

A generic servlet should override its `service()` method to handle requests as appropriate for the servlet. The `service()` accepts two parameters a request object and a response object .The request object tells the servlet about the request, while the response object is used to return a response

In Contrast, an `HttpServlet` usually does not override the `service()` method. Instead it overrides `doGet()` to handle GET requests and `doPost()` to handle Post requests. An `HttpServlet` can override either or both of these modules the `service()` method of `HttpServlet` handles the setup and dispatching to all the `doXXX()` methods. which is why it usually should not be overridden

The remainders in the `javax.servlet` and `javax.servlet.http` package are largely support classes .The `ServletRequest` and `ServletResponse` classes in `javax.servlet` provide access to generic server requests and responses while `HttpServletRequest` and `HttpServletResponse` classes in `javax.servlet.http` provide access to generic HTTP requests and responses . The `javax.servlet.http` provide contains an `HttpSession` class that provides built-in session tracking functionality and `Cookie` class that allows quickly setup and processing `HttpCookies`.

Loading Servlets:

Servlets can be loaded from their places. From a directory that is on the CLASSPATH. The CLASSPATH of the `JavaWebServer` includes `service root/classes/`, which is where the system classes reside

From the `<SERVICE_ROOT/servlets/directory`. This is not in the server's classpath. A class loader is used to create servlets from this directory. New servlets can be added-existing servlets can be recompiled and the server will notice these changes. From a remote location. For this a code base like <http://nine.eng/classes/foo/> is required in addition to the servlet's class name. Refer to the admin Gui docs on servlet section to see how to set this up.

Loading Remote Servlets

Remote servlets can be loaded by:

- Configuring the admin Tool to setup automatic loading of remote servlets.
- Selecting up server side include tags in .html files
- Defining a filter chain Configuration

Invoking Servlets

A servlet invoker is a servlet that invokes the “server” method on a named servlet. If the servlet is not loaded in the server, then the invoker first loads the servlet (either from local disk or from the network) and then invokes the “service” method. Also like applets, local servlets in the server can be identified by just the class name. In other words, if a servlet name is not absolute, it is treated as local.

A Client can Invoke Servlets in the Following Ways:

- The client can ask for a document that is served by the servlet.
- The client (browser) can invoke the servlet directly using a URL, once it has been mapped using the `SERVLET ALIASES` Section of the admin GUI

- The servlet can be invoked through server side include tags.
- The servlet can be invoked by placing it in the servlets/directory
- The servlet can be invoked by using it in a filter chain

The Servlet Life Cycle:-

The Servlet life cycle is one of the most exciting features of Servlets. This life cycle is a powerful hybrid of the life cycles used in CGI programming and lower-level NSAPI and ISAPI programming.

The servlet life cycle allows servlet engines to address both the performance and resource problems of CGI and the security concerns of low level server API programming.

Servlet life cycle is highly flexible. Servers have significant leeway in how they choose to support servlets. The only hard and fast rule is that a servlet engine must conform to the following life cycle contract:

- Create and initialize the servlets
- Handle zero or more service from clients
- Destroy the servlet and then garbage Collects it.

It's perfectly legal for a servlet to be loaded, created and initialized in its own JVM, only to be destroyed and garbage collected without handling any client request or after handling just one request.

The most common and most sensible life cycle implementations for HTTP servlets are:

Single java virtual machine and stateless persistence.

Init and Destroy:-

Just like Applets, servlets can define `init()` and `destroy()` methods. A servlet's `init(ServiceConfig)` method is called by the server immediately after the server constructs the servlet's instance. Depending on the server and its configuration, this can be at any of these times:

- ⌚ When the server starts
- ⌚ When the servlet is first requested, just before the `service()` method is invoked
- ⌚ At the request of the server administrator

In any case, `init()` is guaranteed to be called before the servlet handles its first request.

The `init()` method is typically used to perform servlet initialization, creating or loading objects that are used by the servlet in handling of its request. In order to provide a new servlet any information about itself and its environment, a server has to call a servlet's `init()` method and pass an object that implements the `ServletConfig` interface.

This `ServletConfig` object supplies a servlet with information about its initialization parameters. These parameters are given to the servlets and are not associated with any single request. They can specify initial values, such as where a counter should begin counting, or default values, perhaps a template to use when not specified by the request.

The server calls a servlet's `destroy()` method when the servlet is about to be unloaded. In the `destroy()` method, a servlet should free any resources it has acquired that will not be garbage collected. The `destroy()` method also gives a servlet a chance to write out its unsaved, cached information or any persistent information that should be read during the next call to `init()`.

Session Tracking:

HTTP is a stateless protocol, it provides no way for a server to recognize that a sequence of requests is all from the same client. This causes a problem for application such as shopping cart applications. Even in chat application server can't know exactly who's making a request of several clients.

The solution for this is for client to introduce itself as it makes each request, Each clients needs to provide a unique identifier that lets the server identify it, or it needs to give some information that the server can use to properly handle the request, There are several ways to send this introductory information with each request Such as:

USER AUTHORIZATION:

One way to perform session tracking is to leverage the information that comes with

User authorization. When a web server restricts access to some of its resources to only those clients that log in using a recognized username and password. After the client logs in, the username is available to a servlet through `getRemoteUser()`

We can use the username to track the session. Once a user has logged in, the browser remembers her username and resends the name and password as the user views new pages on the site. A servlet can identify the user through her username and they're by

Track her session.

The biggest advantage of using user authorization to perform session tracking is that it's easy to implement. Simply tell the protect a set of pages, and use `getRemoteUser()` to identify each client. Another advantage is that the technique works even when the user accesses your site from or exists her browser before coming back.

The biggest disadvantage of user authorization is that it requires each user to register for an account and then log in in each time the starts visiting your site. Most users will tolerate registering and logging in as a necessary evil when they are accessing sensitive information, but its all overkill for simple session tracking. Other problem with user authorization is that a user cannot simultaneously maintain more than one session at the same site.

Hidden Form Fields:

One way to support anonymous session tracking is to use hidden form fields. As the name implies, these are fields added to an HTML form that are not displayed in the client's browser. They are sent back to the server when the form that contains them is submitted.

In a sense, hidden form fields define constant variables for a form. To a servlet receiving a submitted form, there is no difference between a hidden field and a visible field.

As more and more information is associated with a client's session, it can become burdensome to pass it all using hidden form fields. In these situations it's possible to pass on just a unique session ID that identifies a particular client's session.

That session ID can be associated with complete information about its session that is stored on the server.

The advantage of hidden form fields is their ubiquity and support for anonymity. Hidden fields are supported in all the popular browsers, they demand no special server requirements, and they can be used with clients that haven't registered or logged in.

The major disadvantage with this technique, however, is that it works only for a sequence of dynamically generated forms. The technique breaks down immediately with static documents, emailed documents, bookmarked documents, and browser shutdowns.

URL Rewriting:

URL rewriting is another way to support anonymous session tracking. With URL rewriting every local URL the user might click on is dynamically modified, or rewritten, to include extra information. The extra information can be in the form of extra path information, added parameters, or some custom, server-specific URL change. Due to the limited space available in rewriting a URL, the extra information is usually limited to a unique session.

Each rewriting technique has its own advantage and disadvantage.

Using extra path information works on all servers, and it works as a target for forms that use both the Get and Post methods. It does not work well if the servlet has to use the extra path information as true path information.

The advantages and disadvantages of URL rewriting closely match those of hidden form fields. The major difference is that URL rewriting works for all dynamically created documents, such as the Help servlet, not just forms. With the right server support, custom URL rewriting can even work for static documents.

Persistent Cookies:

A fourth technique to perform session tracking involves persistent cookies. A cookie is a bit of information sent by a web server to a browser that can later be read back from that browser. When a browser receives a cookie, it saves the cookie and then sends the cookie back to the server each

time it accesses a page on that server, subject to certain rules. Because a cookie's value can uniquely identify a client, cookies are often used for session tracking.

Persistent cookies offer an elegant, efficient easy way to implement session tracking. Cookies provide as automatic an introduction for each request as we could hope for. For each request, a cookie can automatically provide a client's session ID or perhaps a list of clients performance. The ability to customize cookies gives them extra power and versatility.

The biggest problem with cookies is that browsers don't always accept cookies sometimes this is because the browser doesn't support cookies. More often its because

The browser doesn't support cookies. More often its because the user has specifically configured the browser to refuse cookies.

The power of serves:

The power of servlets is nothing but the advantages of servlets over other approaches, which include portability, power, efficiency, endurance, safety elegance, integration, extensibility and flexibility.

Portability:

As servlets are written in java and conform to a well defined and widely accepted API .they are highly portable across operating systems and across server implementation

We can develop a servlet on a windows NT machine running the java web server and later deploy it effortlessly on a high-end Unix server running apache. With servlets we can really "write once, serve every where"

Servlet portability is not the stumbling block it so often is with applets, for two reasons

First, Servlet portability is not mandatory i.e. servlets has to work only on server machines that we are using for development and deployment

Second, servlets avoid the most error-prone and inconstancy implemented portion of the java languages.

Power:

Servlets can harness the full power of the core java. API's: such as Networking and Url access, multithreading, image manipulation, data compression, data base connectivity, internationalization, remote method invocation(RMI) CORBA connectivity, and object serialization, among others,

Efficiency And Endurance:

Servlet invocation is highly efficient, Once a servlet is loaded it generally remains in the server's memory as a single object instance, There after the server invokes the servelt to handle a request using a simple, light weighted method invocation .Unlike the CGI, there's no process to spawn or interpreter

to invoke, so the servlet can begin handling the request almost immediately, Multiple, concurrent requests are handled the request almost immediately. Multiple, concurrent requests are handled by separate threads, so servlets are highly scalable.

Servlets in general are enduring objects. Because a servlets stays in the server's memory as a single object instance. it automatically maintains its state and can hold onto external resources, such as database connections.

Safety:

Servlets support safe programming practices on a number of levels.

As they are written in java,servlets inherit the strong type safety of the java language. In addition the servlet API is implemented to be type safe. Java's automatic garbage collection and lack of pointers mean that servlets are generally safe from memory management problems like dangling pointers invalid pointer references and memory leaks.

Servlets can handle errors safely, due to java's exception – handling mechanism. If a servlet divides by zero or performs some illegal operations, it throws an exception that can be safely caught and handled by the server.

A server can further protect itself from servlets through the use of java security manager. A server can execute its servlets under the watch of a strict security manager.

Elegance:

The elegance of the servlet code is striking .Servlet code is clean, object oriented modular and amazingly simple one reason for this simplicity is the served API itself. Which includes methods and classes to handle many of the routine chores of servlet development. Even advanced to operations like cookie handling and session tracking tracking are abstracted int convenient classes.

Integration:

Servlets are tightly integrated with the server. This integration allows a servlet to cooperate with the server in two ways . for e.g.: a servlet can use the server to translate file paths, perform logging, check authorization, perform MIME type mapping and in some cases even add users to the server's user database.

Extensibility and Flexibility:

The servlet API is designed to be easily extensible. As it stands today the API includes classes that are optimized for HTTP servlets.But later it can be extended and optimized for another type of servlets. It is also possible that its support for HTTP servlets could be further enhanced.

Servlets are also quite flexible, Sun also introduced java server pages. which offer a way to write snippets of servlet code directly with in a static HTML page using syntax similar to Microsoft's Active server pages(ASP)

4.4.3 JDBC

What is JDBC?

any relational database. One can write a single program using the JDBC API, and the JDBC is a Java Api for executing SQL, Statements(As a point of interest JDBC is trademarked name and is not an acronym; nevertheless ,Jdbc is often thought of as standing for Java Database Connectivity. It consists of a set of classes and interfaces written in the Java Programming language. JDBC provides a standard API for tool/database developers and makes it possible to write database applications using a pure Java API

Using JDBC, it is easy to send SQL statements to virtually program will be able to send SQL .statements to the appropriate database. The Combination of Java and JDBC lets a programmer writes it once and run it anywhere.

What Does JDBC Do?

Simply put, JDBC makes it possible to do three things

- Establish a connection with a database
- Send SQL statements
- Process the results
- JDBC Driver Types
- The JDBC drivers that we are aware of this time fit into one of four categories
- JDBC-ODBC Bridge plus ODBC driver
- Native-API party-java driver
- JDBC-Net pure java driver
- Native-protocol pure Java driver

An individual database system is accessed via a specific JDBC driver that implements the `java.sql.Driver` interface. Drivers exist for nearly all-popular RDBMS systems, through few are available for free. Sun bundles a free JDBC-ODBC bridge driver with the JDK to allow access to a standard ODBC,data sources, such as a Microsoft Access database, Sun advises against using the bridge driver for anything other than development and very limited development.

JDBC drivers are available for most database platforms, from a number of vendors and in a number of different flavours. There are four driver categories

Type 01-JDBC-ODBC Bridge Driver

Type 01 drivers use a bridge technology to connect a java client to an ODBC database service. Sun's JDBC-ODBC bridge is the most common type 01 driver. These drivers implemented using native code.

Type 02-Native-API party-java Driver

Type 02 drivers wrap a thin layer of java around database-specific native code libraries for databases, the native code libraries might be based on the OCI(Oracle call Interface) libraries, which were originally designed for c/c++ programmers, Because type-02 drivers are implemented using native code. in some cases they have better performance than their all-java counter parts. They add an element of risk, however, because a defect in a driver's native code section can crash the entire server

Type 03-Net-Protocol All-Java Driver

Type 03 drivers communicate via a generic network protocol to a piece of custom middleware. The middleware component might use any type of driver to provide the actual database access. These drivers are all java, which makes them useful for applet deployment and safe for servlet deployment

Type-04-native-protocol All-java Driver

Type o4 drivers are the most direct of the lot. Written entirely in java, Type 04 drivers understand database-specific networking. protocols and can access the database directly without any additional software

JDBC-ODBC Bridge

If possible use a Pure Java JDBC driver instead of the Bridge and an ODBC driver. This completely eliminates the client configuration required by ODBC. It also eliminates the potential that the Java VM could be corrupted by an error in the native code brought in by the Bridge(that is, the Bridge native library, the ODBC driver manager library, library, the ODBC driver library, and the database client library)

WHAT IS The JDBC-ODBE Bridge ?

The JDBC-ODBC Bridge is a Jdbc driver, which implements JDBC operations by translating them into ODBC operations. To ODBC it appears as a normal application program. The Bridge is implemented as the sun.jdbc.odbc Java package and contains a native library used to access ODBC.The Bridge is joint development of Intersolv and Java Soft

4.4.3 Oracle

Oracle is a relational database management system, which organizes data in the form of tables. Oracle is one of many database servers based on RDBMS model, which manages a seer of data that attends three specific things-data structures, data integrity and data manipulation.

With oracle cooperative server technology we can realize the benefits of open, relational systems for all the applications. Oracle makes efficient use of all systems resources, on all hardware architecture; to deliver unmatched performance, price performance and scalability. Any DBMS to be called as RDBMS has to satisfy Dr.E.F.Codd's rules.

Features of Oracle:

Portable

The Oracle RDBMS is available on wide range of platforms ranging from PCs to super computers and as a multi user loadable module for Novel NetWare, if you develop application on system you can run the same application on other systems without any modifications.

Compatible

Oracle commands can be used for communicating with IBM DB2 mainframe RDBMS that is different from Oracle, which is Oracle compatible with DB2. Oracle RDBMS is a high performance fault tolerant DBMS, which is specially designed for online transaction processing and for handling large database applications.

Multithreaded Server Architecture

Oracle adaptable multithreaded server architecture delivers scalable high performance for very large number of users on all hardware architecture including symmetric multiprocessors (sumps) and loosely coupled multiprocessors. Performance is achieved by eliminating CPU, I/O, memory and operating system bottlenecks and by optimizing the Oracle DBMS server code to eliminate all internal bottlenecks.

Oracle has become the most popular RDBMS in the market because of its ease of use

- Client/server architecture.
- Data independence.
- Ensuring data integrity and data security.
- Managing data concurrency.
- Parallel processing support for speed up data entry and online transaction processing used for applications.
- DB procedures, functions and packages.

Dr.E.F.Codd's Rules

These rules are used for valuating a product to be called as relational database management systems. Out of 12 rules, a RDBMS product should satisfy at least 8 rules + rule called rule 0 that must be satisfied.

RULE 0: Foundation Rule

For any system to be advertised as, or claimed to be relational DBMS should manage database with in it self, with out using an external language.

RULE 1: Information Rule

All information in relational database is represented at logical level in only one way as values in tables.

RULE 2: Guaranteed Access

Each and every data in a relational database is guaranteed to be logically accessibility by using to a combination of table name, primary key value and column name.

RULE 3: Systematic Treatment of Null Values

Null values are supported for representing missing information and inapplicable information. They must be handled in systematic way, independent of data types.

RULE 4: Dynamic Online Catalog based Relation Model

The database description is represented at the logical level in the same way as ordinary data so that authorized users can apply the same relational language to its interrogation as they do to the regular data.

RULE 5: Comprehensive Data Sub Language

A relational system may support several languages and various models of terminal use. However there must be one language whose statement can express all of the following:

Data Definitions, View Definitions, Data Manipulations, Integrity, Constraints, Authorization and transaction boundaries.

RULE 6: View Updating

Any view that is theoretical can be updatable if changes can be made to the tables that effect the desired changes in the view.

RULE 7: High level Update, Insert and Delete

The capability of handling a base relational or derived relational as a single operand applies not only retrieval of data also to its insertion, updating, and deletion.

RULE 8: Physical Data Independence

Application program and terminal activities remain logically unimpaired whenever any changes are made in either storage representation or access method.

RULE 9: Logical Data Independence

Application programs and terminal activities remain logically unimpaired whenever any changes are made in either storage representation or access methods.

RULE 10: Integrity Independence

Integrity constraints specific to particular database must be definable in the relational data stored in the catalog, not in application program.

RULE 11: Distributed Independence

Whether or not a system supports database distribution, it must have a data sub-language that can support distributed databases without changing the application program.

RULE 12: Non Sub-Version

If a relational system has low level language, that low language cannot use to subversion or by pass the integrity rules and constraints expressed in the higher level relational language.

Oracle supports the following Codd's Rules

- Rule 1: Information Rule (Representation of information)-YES.
- Rule 2: Guaranteed Access-YES.
- Rule 3: Systematic treatment of Null values-YES.
- Rule 4: Dynamic on-line catalog-based Relational Model-YES.
- Rule 5: Comprehensive data sub language-YES.
- Rule 6: View Updating-PARTIAL.
- Rule 7: High-level Update, Insert and Delete-YES.
- Rule 8: Physical data Independence-PARTIAL.
- Rule 9: Logical data Independence-PARTIAL.
- Rule 10: Integrity Independence-PARTIAL.
- Rule 11: Distributed Independence-YES.
- Rule 12: Non-subversion-YES.

4.4.4 HTML

Hypertext Markup Language (HTML), the languages of the world wide web(WWW), allows users to produces web pages that included text, graphics and pointer to other web pages (Hyperlinks).

HTML is not a programming language but it is an application of ISO Standard 8879, SGML(Standard Generalized Markup Language),but

Specialized to hypertext and adapted to the Web. The idea behind Hypertext one point to another point. We can navigate through the information based on out interest and preference. A markup language is simply a series of items enclosed within the elements should be displayed.

Hyperlinks are underlined or emphasized works that load to other documents or some portions of the same document.

Html can be used to display any type of document on the host computer, which can be geographically at a different location. It is a versatile language and can be used on any platform or desktop

HTML provides tags(special codes) to make the document look attractive.

HTML provides are not case-sensitive. Using graphics, fonts, different sizes, color, etc.. can enhance the presentation of the document. Anything

That is not a tag is part of the document it self.

Basic Html Tags:

<!-- -->	Specific Comments.
<A>.....	Creates Hypertext links.
.....	Creates hypertext links.
<Big>.....</Big>	Formats text in large-font
<Body>.....</Body>	contains all tags and text in the Html-document
<Center>.....</Center>	Creates Text
<DD>.....</DD>	Definition of a term.
<TABLE>.....</TABLE>	creates table
<Td>.....</Td>	indicates table data in a table.
<Tr>.....</Tr>	designates a table row
<Th>.....</Th>	creates a heading in a table.

ADVANTAGES:-

- ▶ A HTML document is small and hence easy to send over the net .It is small because it does not include formatted information.
- ▶ HTML is platform independent

HTML tags are not case-sensitive.

4.4.6 JAVA SCRIPT

The Java Script Language

JavaScript is a compact , object-based scripting language for developing client and server internet applications. Netscape Navigator 2.0 interprets JavaScript statements embedded directly in an HTML page. and Livewire enables you to create server-based applications similar to common gateway interface(cgi) programs.

In a client application for Navigator, JavaScript statements embedded in an HTML Page can recognize and respond to user events such as mouse clicks form

Input, and page navigation.

For example, you can write a JavaScript function to verify that users enter valid information into a form requesting a telephone number or zip code . Without any network transmission, an Html page with embedded Java Script can interpret the entered text and alert the user with a message dialog if the input is invalid or you can use JavaScript to perform an action (such as play an audio file, execute an applet, or communicate with a plug-in) in response to the user opening or exiting a page.

CHAPTER-5

SYSTEM DESIGN

5.1 INTRODUCTION

Systems design is the process or art of defining the architecture, components, modules, interfaces, and data for a system to satisfy specified requirements. One could see it as the application of systems theory to product development. There is some overlap and synergy with the disciplines of systems analysis, systems architecture and systems engineering.

5.2 UML DIAGRAMS

Unified Modeling Language:

UML stands for Unified Modeling Language. UML is a standardized general-purpose modeling language in the field of object-oriented software engineering. The standard is managed, and was created by, the Object Management Group.

The goal is for UML to become a common language for creating models of object oriented computer software. In its current form UML is comprised of two major components: a Meta-model and a notation. In the future, some form of method or process may also be added to; or associated with, UML.

The Unified Modeling Language is a standard language for specifying, Visualization, Constructing and documenting the artifacts of software system, as well as for business modeling and other non-software systems.

The UML represents a collection of best engineering practices that have proven successful in the modeling of large and complex systems.

The UML is a very important part of developing objects oriented software and the software development process. The UML uses mostly graphical notations to express the design of software projects.

GOALS:

The Primary goals in the design of the UML are as follows:

1. Provide users a ready-to-use, expressive visual modeling Language so that they can develop and exchange meaningful models.
2. Provide extendibility and specialization mechanisms to extend the core concepts.
3. Be independent of particular programming languages and development process.
4. Provide a formal basis for understanding the modeling language.
5. Encourage the growth of OO tools market.
6. Support higher level development concepts such as collaborations, frameworks, patterns and components.
7. Integrate best practices.

UML DIAGRAMS

USE CASE DIAGRAM:

A use case diagram in the Unified Modeling Language (UML) is a type of behavioral diagram defined by and created from a Use-case analysis. Its purpose is to present a graphical overview of the functionality provided by a system in terms of actors, their goals (represented as use cases), and any dependencies between those use cases. The main purpose of a use case diagram is to show what system functions are performed for which actor. Roles of the actors in the system can be depicted.

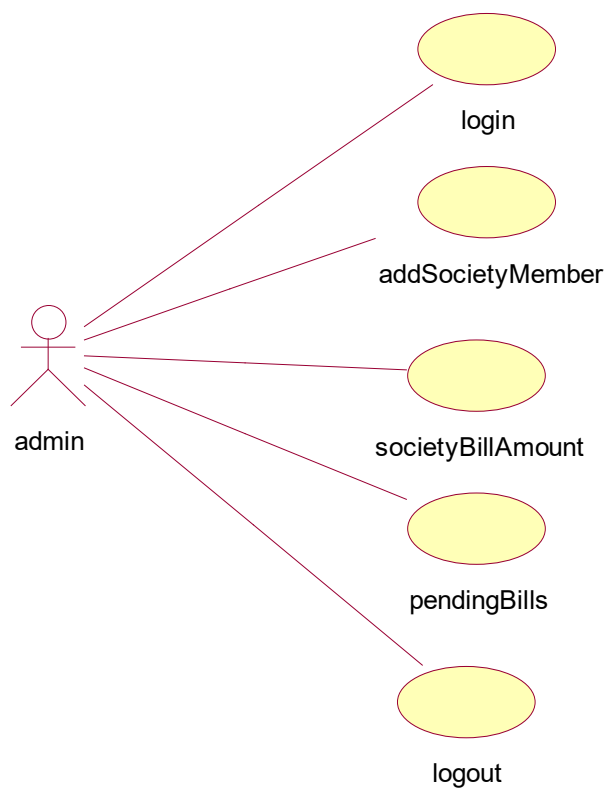


Fig5.2.1:admin use case

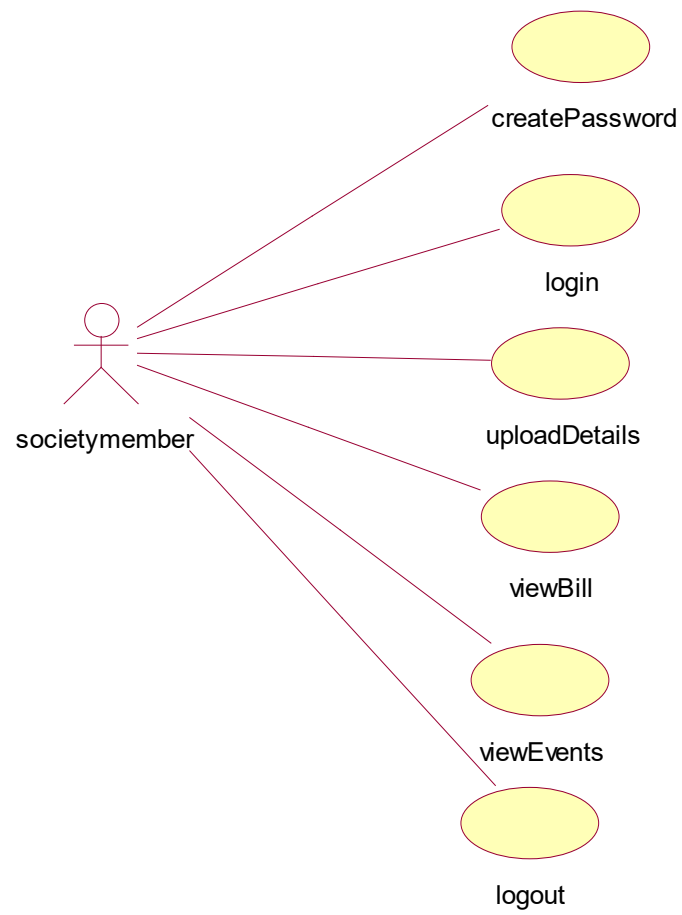


Fig5.2.2:society member use case

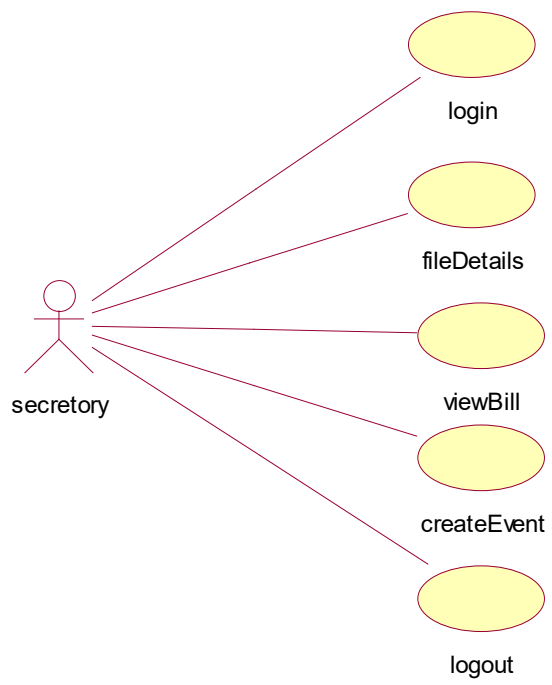


Fig5.2.3: secretary use case

CLASS DIAGRAM:

In software engineering, a class diagram in the Unified Modeling Language (UML) is a type of static structure diagram that describes the structure of a system by showing the system's classes, their attributes, operations (or methods), and the relationships among the classes. It explains which class contains information.

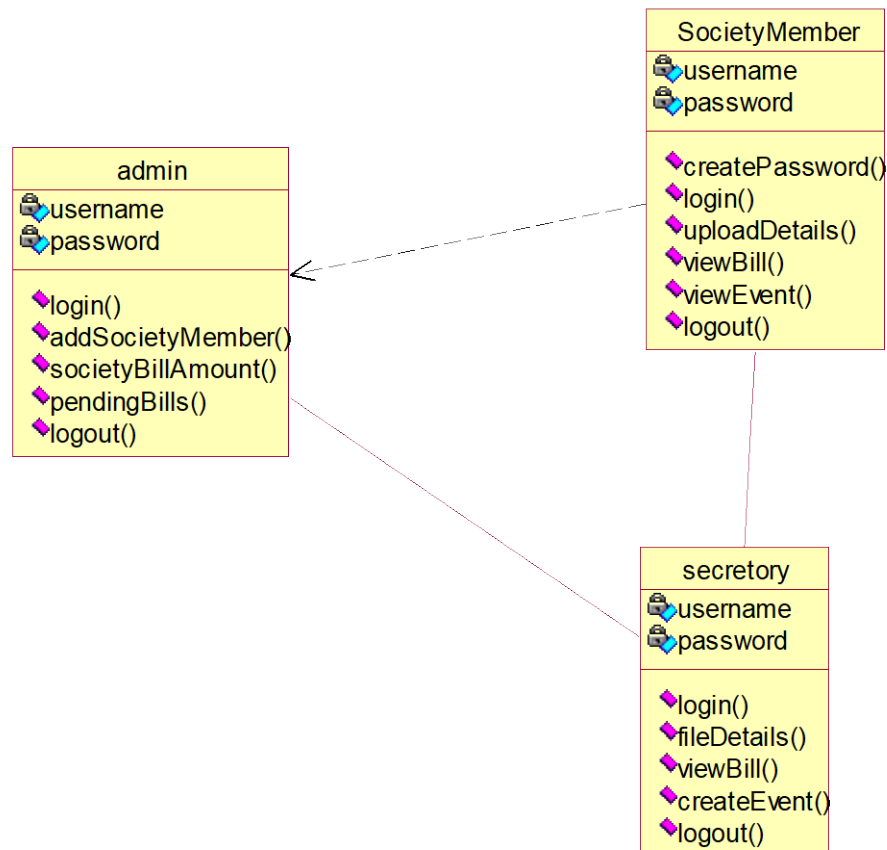


Fig5.2.4: class diagram

SEQUENCE DIAGRAM:

A sequence diagram in Unified Modeling Language (UML) is a kind of interaction diagram that shows how processes operate with one another and in what order. It is a construct of a Message Sequence Chart. Sequence diagrams are sometimes called event diagrams, event scenarios, and timing diagrams.

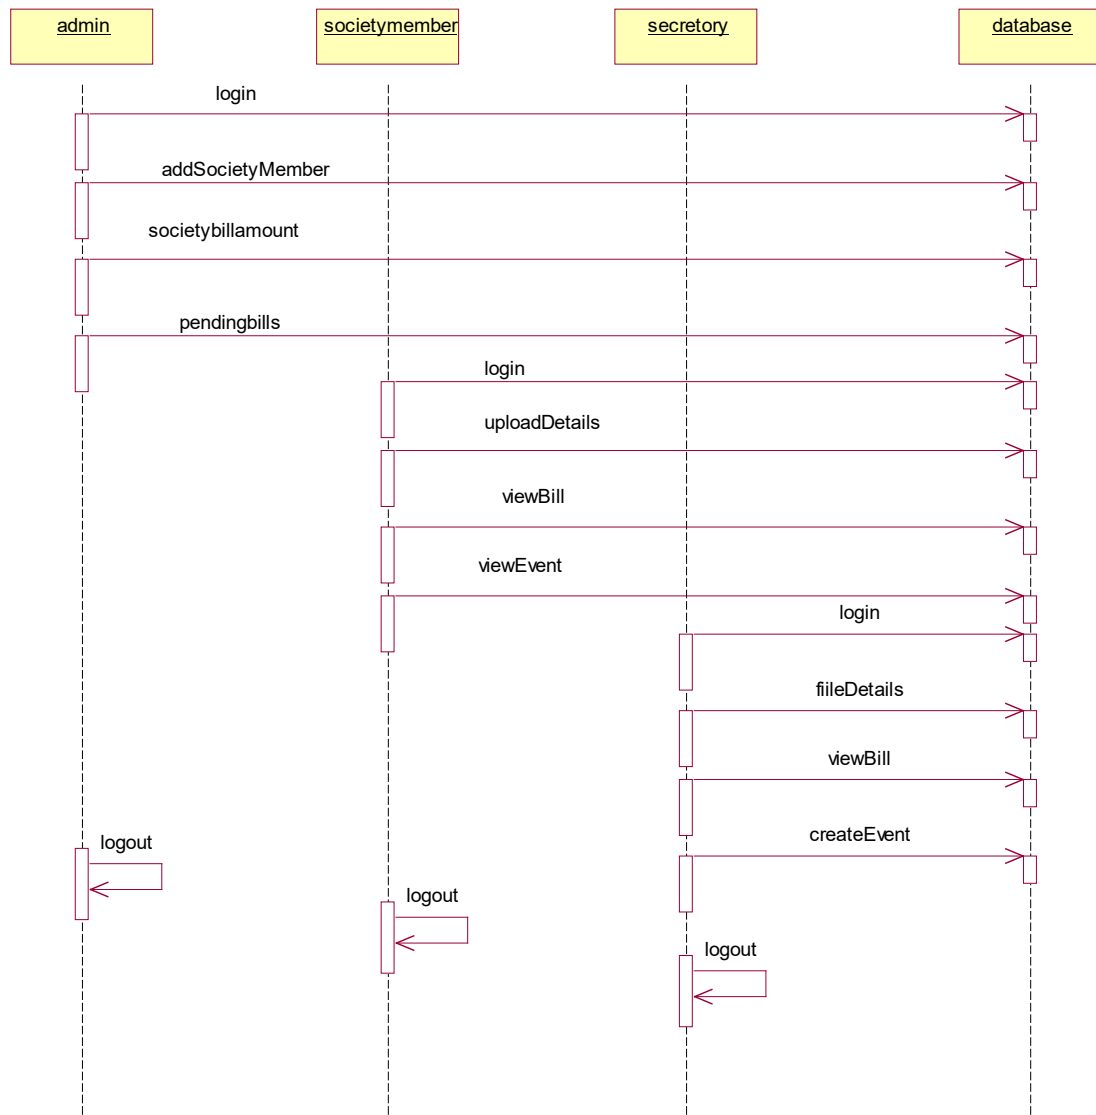


Fig5.2.5:sequence diagram

Collaboration :

A collaboration diagram, also known as a communication diagram, is an illustration of the relationships and interactions among software objects in the Unified Modeling Language (UML). These diagrams can be used to portray the dynamic behavior of a particular usecase and define the role of each object.

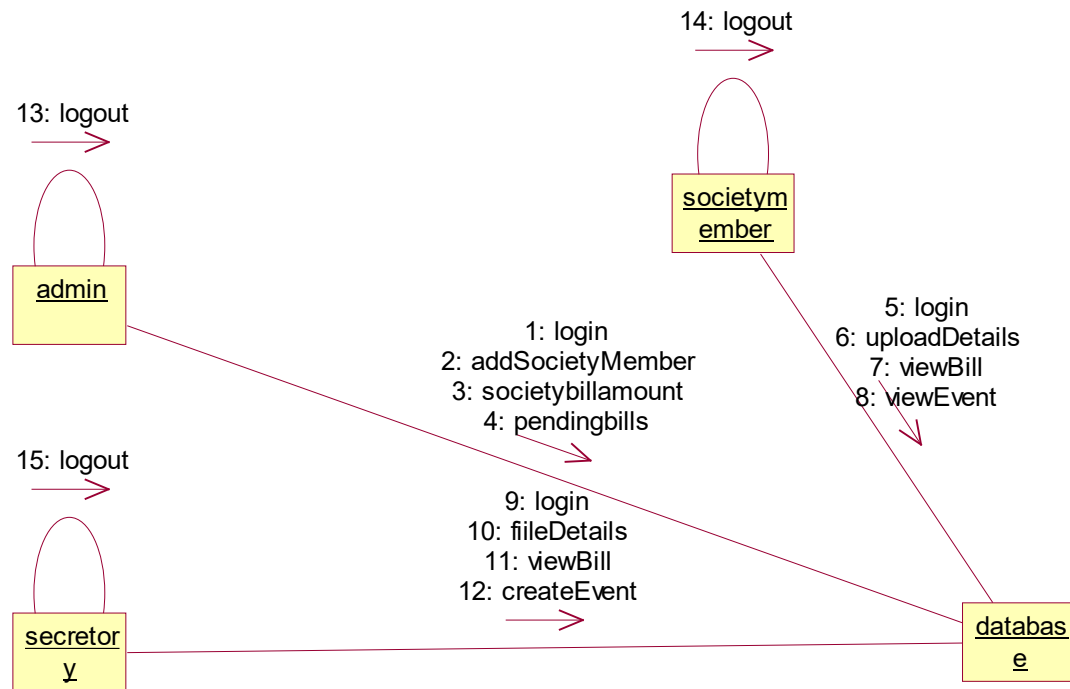


Fig5.2.6:collaboration

5.3. NORMALIZATION

A Database is a collection of interrelated data stored with a minimum of redundancy to serve many applications. The database design is used to group data into a number of tables and minimizes the artificiality embedded in using separate files. The tables are organized to:

- ② Reduced duplication of data.
- ② Simplify functions like adding, deleting, modifying data etc.,
- ② Retrieving data
- ② Clarity and ease of use
- ② More information at low cost

Normalization

Normalization is built around the concept of normal forms. A relation is said to be in a particular normal form if it satisfies a certain specified set of constraints on the kind of function dependencies that

associated with the relation. The normal forms are used to ensure that various types of anomalies and inconsistencies are not introduced into the database.

First Normal Form:

A relation R is in first normal form if and only if all underlying domains contained atomic values only.

Second Normal Form:

A relation R is said to be in second normal form if and only if it is in first normal form and every non-key attribute is fully dependent on the primary key.

Third Normal Form:

A relation R is said to be in third normal form if and only if it is in second normal form and every non key attribute is non transitively depend on the primary key

CHAPTER-6

OUTPUT SCREENS

Implementation

MODULE DESCRIPTION:

There are mainly 6 modules in the project “Housing Society Management”. They are:

- Admin Account
- Society Member data
- Member Photo Addition
- Society bill amounts
- Member Login
- Bill Print

AdminAccount:

Admin login. Admin can check and add various member details.

Society Member data:

Admin can add and update member data.

Member Photo Addition:

Member Photo to add in Admin Account.

Society bill amounts:

The software system calculates various billing data including, maintenance, water , parking, event fund for flat owners.

Member Login:

View own bill and information. Pay The Amount To admin. Incase pending Amount if will Pay the next month added.

Bill Print:

It provides bills in printable format to users.

Home screen

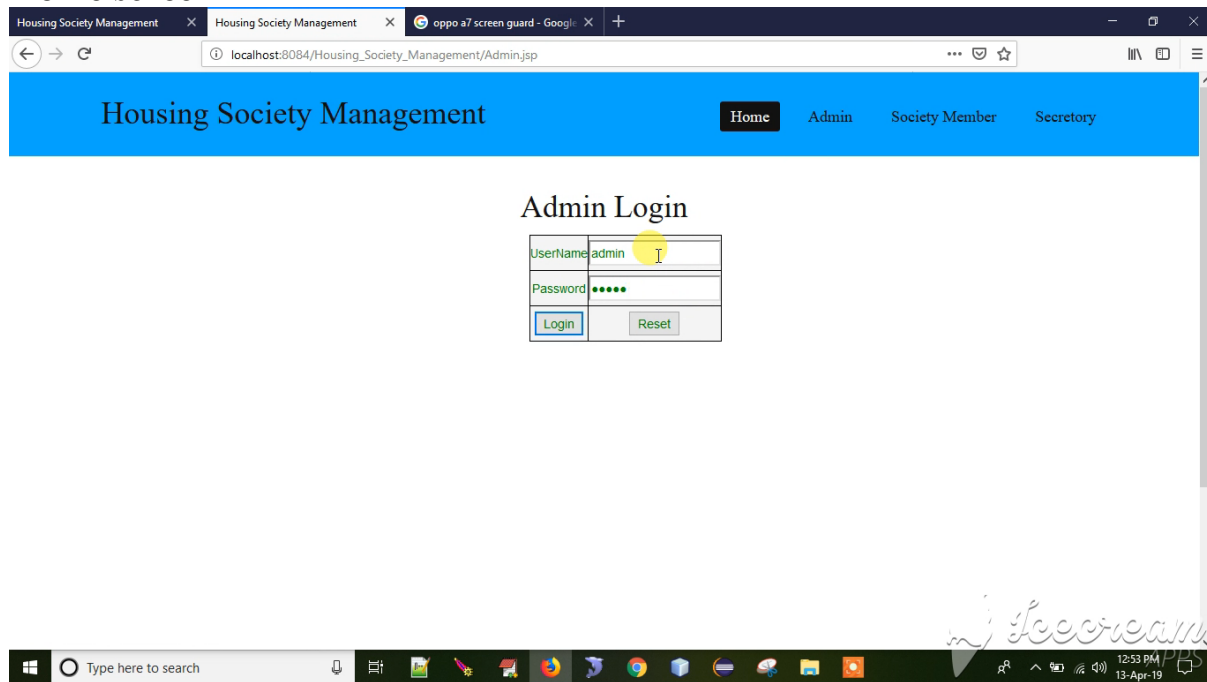


Fig6.1:home screen

Admin home screen



Fig6.2:admin home screen

Add society member

The screenshot shows a web browser window with the title 'Housing Society Management'. The address bar shows the URL 'localhost:8084/Housing_Society_Management/AddSocietyMember.jsp'. The page has a blue header with the title 'Housing Society Management' and a navigation bar with links: 'Home', 'Add Society Member' (highlighted), 'Society Bill Amount', 'Pending Bills', and 'Logout'. The main content area is titled 'ADD Society Member' and contains a form with the following fields: 'Fast Name', 'Last Name', 'Email ID', 'Mobile Number', 'Gender' (with a dropdown menu showing 'Male'), 'Age' (with a dropdown menu), 'Occupation', 'Monthly Income', 'Residential Address', 'Flat Number', and 'User Name'. There is a 'Select image' button and a 'Browse...' button with the text 'No file selected.' below the form. The Windows taskbar at the bottom shows the time as 12:53 PM on 13-Apr-19.

Fig6.3:add society member

Society member

The screenshot shows a web browser window with the title 'Housing Society Management'. The address bar shows the URL 'localhost:8084/Housing_Society_Management/society/Member.jsp'. The page has a blue header with the title 'Housing Society Management' and a navigation bar with links: 'Home', 'Admin', 'Society Member' (highlighted), and 'Secretary'. The main content area is titled 'Society Member Login' and contains a form with the following fields: 'Email ID' and 'Password'. There are 'Login' and 'Reset' buttons below the form. A link 'Don't Have Password ? Create Password' is also present. The Windows taskbar at the bottom shows the time as 12:54 PM on 13-Apr-19.

Fig6.4:society member

Create password

The screenshot shows a web browser window with the title 'Housing Society Management'. The address bar displays 'localhost:8084/Housing_Society_Management/societyMember.jsp?value='create''. The page has a blue header with the title 'Housing Society Management' and navigation links: 'Home', 'Admin', 'Society Member', and 'Secretary'. The main content area is titled 'Create Password' and contains a form with a label 'Email ID' and a text input field. A yellow circle highlights the input field. Below the input field is a 'Submit' button. The Windows taskbar at the bottom shows the search bar and various application icons. A watermark 'iTeccream' is visible in the bottom right corner.

Fig6.5:create password

Society home screen

The screenshot shows a web browser window with the title 'Housing Society Management'. The address bar displays 'localhost:8084/Housing_Society_Management/SocietyHome.jsp'. The page has a blue header with the title 'Housing Society Management' and navigation links: 'Home', 'Update Details', 'View Bill', 'View Events', and 'Logout'. Below the header, the email address 'kishangadicheria508@gmail.com' is displayed. A yellow circle highlights the email address. The Windows taskbar at the bottom shows the search bar and various application icons. A watermark 'iTeccream' is visible in the bottom right corner.

Fig6.6:society home screen

Update details

The screenshot shows a web browser window with the URL `localhost:8084/Housing_Society_Management/UpdateDetails.jsp`. The page has a blue header with the title "Housing Society Management" and navigation links: "Home", "Update Details", "View Bill", "View Events", and "Logout". The main content area is titled "UPDATE DETAILS" and contains a form with the following fields:

- FLAT NO**: A text input field containing the value "306".
- FLAT TYPE**: A dropdown menu with a yellow circle highlighting the selection arrow.
- FAMILY MEMBERS**: A text input field.
- VEHICLE**: A dropdown menu.
- NUMBER OF VEHICLE**: A text input field.
- UPDATE**: A green button at the bottom of the form.

The Windows taskbar at the bottom shows the search bar, task view icon, and several application icons. The system clock indicates 12:54 PM on 13-Apr-19.

Fig6.7:update details

Secretary login screen

The screenshot shows a web browser window with the URL `localhost:8084/Housing_Society_Management/Hoseowner.jsp`. The page has a blue header with the title "Housing Society Management" and navigation links: "Home", "Admin", "Society Member", and "Secretary". The main content area is titled "Secretary Member Login" and contains a login form with the following fields:

- UserName**: A text input field with a yellow circle highlighting the cursor.
- Password**: A text input field.
- Login**: A green button.
- Reset**: A green button.

The Windows taskbar at the bottom shows the search bar, task view icon, and several application icons. The system clock indicates 12:54 PM on 13-Apr-19.

Fig6.8:secretory login

Secretary home page

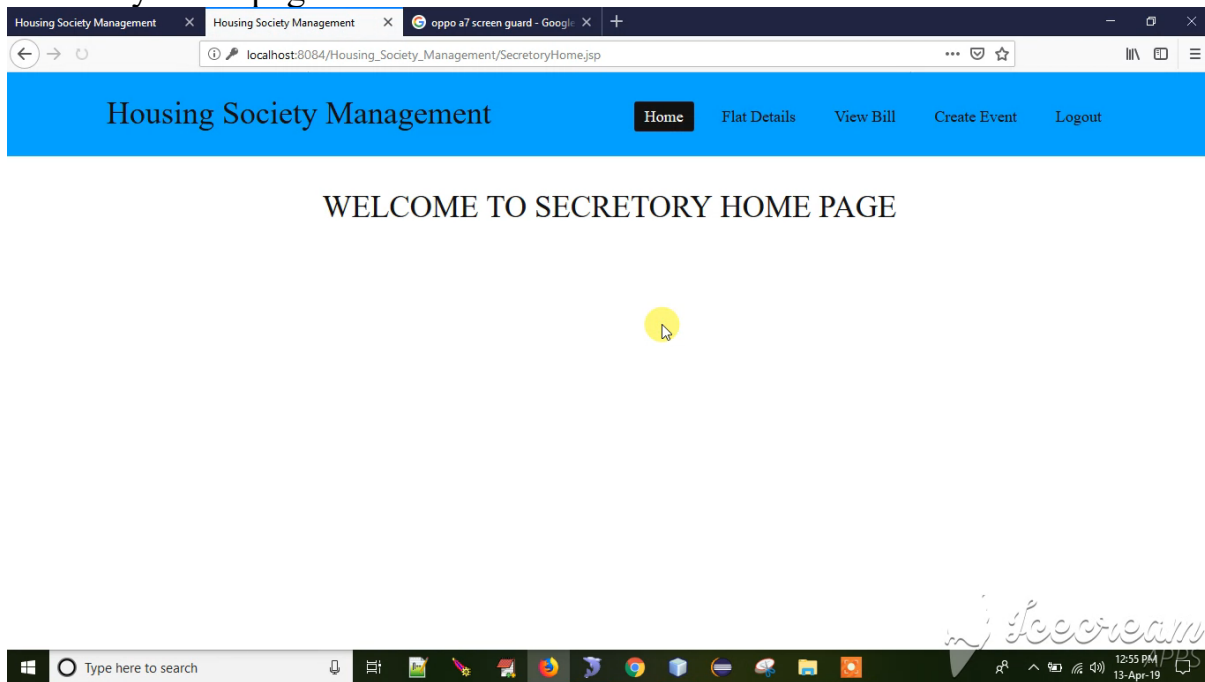


Fig6.9:secretory home page

Flat details

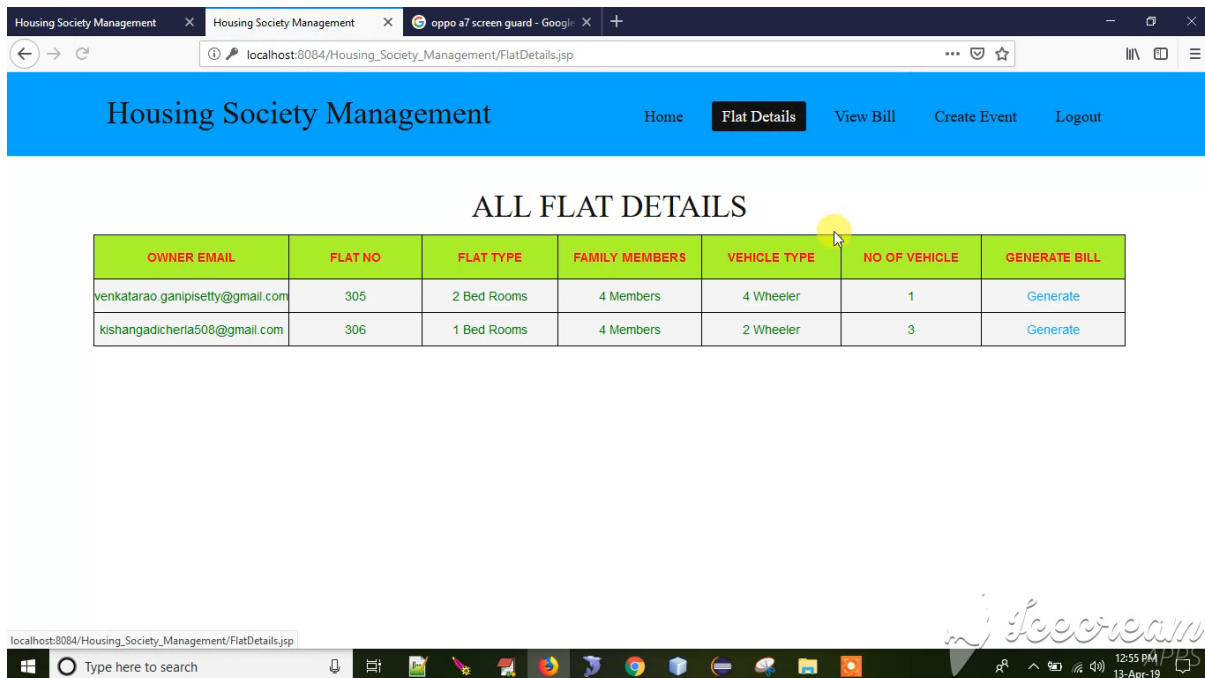


Fig6.10:flat details

Bill screen

BILL

FLAT NUMBER : 306

FLAT TYPE : 1 Bed Room

FAMILY MEMBERS : 4 Members

VEHICLE : 2 Wheeler

NO.OF VEHICLE : 3 Only

MAINTENANCE

Flat Maintenance 550

Vehicle Maintenance 240

WATER 100

PARKING 150

ENTER EVENT FUND

MONTH mm / dd / yyyy

SUBMIT

Fig6.11: bill screen

View bill

BILL DETAILS

FLAT NO	FLAT MAINTENANCE	VEHICLE MAINTENANCE	WATER BILL	PARKING BILL	EVENT FUND	MONTH	TOTAL
305	250	150	110	70	3000	2019-05-01	3580RS/-
306	550	240	100	150	1000	2019-05-01	2040RS/-

Fig6.12:view bill

Create an event screen

Housing Society Management

Home Flat Details View Bill **Create Event** Logout

CREATE EVENT

EVENT DATE	<input type="text" value="mm / dd / yyyy"/>
EVENT NAME	<input type="text"/>
DESCRIPTION	<input type="text"/>

CREATE EVENT

localhost:8084/Housing_Society_Management/Create_Event.jsp

Type here to search

12:55 PM 13-Apr-19

Fig6.12:create event

CHAPTER-7

SYSTEM TESTING

7.1 INTRODUCTION TO TESTING

Introduction to Testing: Testing is a process, which reveals errors in the program. It is the major quality measure employed during software development. During testing, the program is executed with a set of test cases and the output of the program for the test cases is evaluated to determine if the program is performing as it is expected to perform.

7.2 TESTING IN STRATEGIES

In order to make sure that the system does not have errors, the different levels of testing strategies that are applied at differing phases of software development are:

Unit Testing:

Unit Testing is done on individual modules as they are completed and become executable. It is confined only to the designer's requirements.

Each module can be tested using the following two Strategies:

Black Box Testing:

In this strategy some test cases are generated as input conditions that fully execute all functional requirements for the program. This testing has been used to find errors in the following categories:

- ❖ Incorrect or missing functions
- ❖ Interface errors
- ❖ Errors in data structure or external database access
- ❖ Performance errors
- ❖ Initialization and termination errors.

In this testing only the output is checked for correctness.

The logical flow of the data is not checked.

White Box testing :

In this the test cases are generated on the logic of each module by drawing flow graphs of that module and logical decisions are tested on all the cases. It has been used to generate the test cases in the following cases:

- ✓ Guarantee that all independent paths have been Executed.
- ✓ Execute all logical decisions on their true and false Sides.
- ✓ Execute all loops at their boundaries and within their operational bounds
- ✓ Execute internal data structures to ensure their validity.

Integrating Testing :

Integration testing ensures that software and subsystems work together a whole. It tests the interface of all the modules to make sure that the modules behave properly when integrated together.

System Testing:

Involves in-house testing of the entire system before delivery to the user. It's aim is to satisfy the user the system meets all requirements of the client's specifications.

Acceptance Testing :

It is a pre-delivery testing in which entire system is tested at client's site on real world data to find errors.

Test Approach :

Testing can be done in two ways:

- Bottom up approach
- Top down approach

Bottom up Approach:

Testing can be performed starting from smallest and lowest level modules and proceeding one at a time. For each module in bottom up testing a short program executes the module and provides the needed data so that the module is asked to perform the way it will when embedded with in the larger system. When bottom level modules are tested attention turns to those on the next level that use the lower level ones they are tested individually and then linked with the previously examined lower level modules.

Top down approach:

This type of testing starts from upper level modules. Since the detailed activities usually performed in the lower level routines are not provided stubs are written. A stub is a module shell called by upper level module and that when reached properly will return a message to the calling module indicating that proper interaction occurred. No attempt is made to verify the correctness of the lower level module.

Validation:

The system has been tested and implemented successfully and thus ensured that all the requirements as listed in the software requirements specification are completely fulfilled. In case of erroneous input corresponding error messages are displayed

CHAPTER-8

SYSTEM SECURITY

8.1 INTRODUCTION

System Security:

Setting Up Authentication for Web Applications

Introduction:

To configure authentication for a Web Application, use the `<login-config>` element of the `web.xml` deployment descriptor. In this element you define the security realm containing the user credentials, the method of authentication, and the location of resources for authentication.

8.2 SECURITY IN SOFTWARE

To set up authentication for Web Applications:

1. Open the `web.xml` deployment descriptor in a text editor or use the Administration Console. Specify the authentication method using the `<auth-method>` element. The available options are:

BASIC

Basic authentication uses the Web Browser to display a username/password dialog box. This username and password is authenticated against the realm.

FORM

Form-based authentication requires that you return an HTML form containing the username and password. The fields returned from the form elements must be: `j_username` and `j_password`, and the action attribute must be `j_security_check`. Here is an example of the HTML coding for using FORM authentication:

```
<form method="POST" action="j_security_check">  
  <input type="text" name="j_username">  
  <input type="password" name="j_password">  
</form>
```

The resource used to generate the HTML form may be an HTML page, a JSP, or a servlet. You define this resource with the `<form-login-page>` element.

The HTTP session object is created when the login page is served. Therefore, the `session.isNew()` method returns `FALSE` when called from pages served after successful authentication.

CHAPTER-9

BIBLIOGRAPHY

References for the Project Development Were Taken From the following Books and Web Sites.

JAVA Technologies

JAVA Complete Reference

Java Script Programming by Yehuda Shiran

Mastering JAVA Security

JAVA2 Networking by Pistoria

JAVA Security by Scotl oaks

Head First EJB Sierra Bates

J2EE Professional by Shadab siddiqui

JAVA server pages by Larne Pekowsley

JAVA Server pages by Nick Todd

HTML

HTML Black Book by Holzner

JDBC

Java Database Programming with JDBC by Patel moss.

Software Engineering by Roger Pressman