

HandsOn-12

Create a React Application named “ticketbookingapp” where the guest user can browse the page where the flight details are displayed whereas the logged in user only can book tickets.

The Login and Logout buttons should accordingly display different pages. Once the user is logged in the User page should be displayed. When the user clicks on Logout, the Guest page should be displayed.

.

Implementation

→App.js

```
import React, { Component } from 'react';
import Guest from './Guest';
import User from './User';
class App extends Component {
  constructor(props) {
    super(props);
    this.state = {
      isLoggedIn: false
    };
  }
  handleLogin = () => {
    this.setState({ isLoggedIn: true });
  }
  handleLogout = () => {
    this.setState({ isLoggedIn: false });
  }
  render() {
    let content;
    if (this.state.isLoggedIn) {
      content = <User />;
    }
  }
}
```

```

    } else {
      content = <Guest />;
    }
    return (
      <div style={{ textAlign: 'center', marginTop: '50px' }}>
        <h1>✈ Ticket Booking Portal</h1>
        {this.state.isLoggedIn ? (
          <button onClick={this.handleLogout}>Logout</button>
        ) : (
          <button onClick={this.handleLogin}>Login</button>
        )}
        <hr style={{ margin: '20px' }} />
        {content}
      </div>
    );
  }
}
export default App;

```

→App.css

```

.App {
  text-align: center;
}
.App-logo {
  height: 40vmin;
  pointer-events: none;
}
@media (prefers-reduced-motion: no-preference) {
  .App-logo {
    animation: App-logo-spin infinite 20s linear;
  }
}

```

```

    }
  }
  .App-header {
    background-color: #282c34;
    min-height: 100vh;
    display: flex;
    flex-direction: column;
    align-items: center;
    justify-content: center;
    font-size: calc(10px + 2vmin);
    color: white;
  }
  .App-link {
    color: #61dafb;
  }
  @keyframes App-logo-spin {
    from {
      transform: rotate(0deg);
    }
    to {
      transform: rotate(360deg);
    }
  }
}

```

→Guests.js

```

import React from 'react';
function Guest() {
  return (
    <div>

```

```
    <h2>Welcome, Guest!</h2>

    <p>You can view flight details, but need to log in to book tickets.</p>
  </div>

);
}

export default Guest;
```

➔User.js

```
import React from 'react';

function User() {
  return (
    <div>

      <h2>Welcome, User!</h2>

      <p>You can now book your flight tickets.</p>
    </div>

  );
}


export default User;
```

Output

```
JS Guest.js U JS User.js U X JS App.js
ticketbookingapp > src > JS User.js > User
1 import React from 'react';
2
3 Tabnine | Edit | Test | Explain | Document
4 function User() {
5   return (
6     <div>
7       <h2>Welcome, User!</h2>
8       <p>You can now book your
9     </div>
10   );
11 }
12 export default User;
13
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

```
:3000
Note that the development build is not
optimized.
To create a production build, use npm
run build.
webpack compiled successfully
```

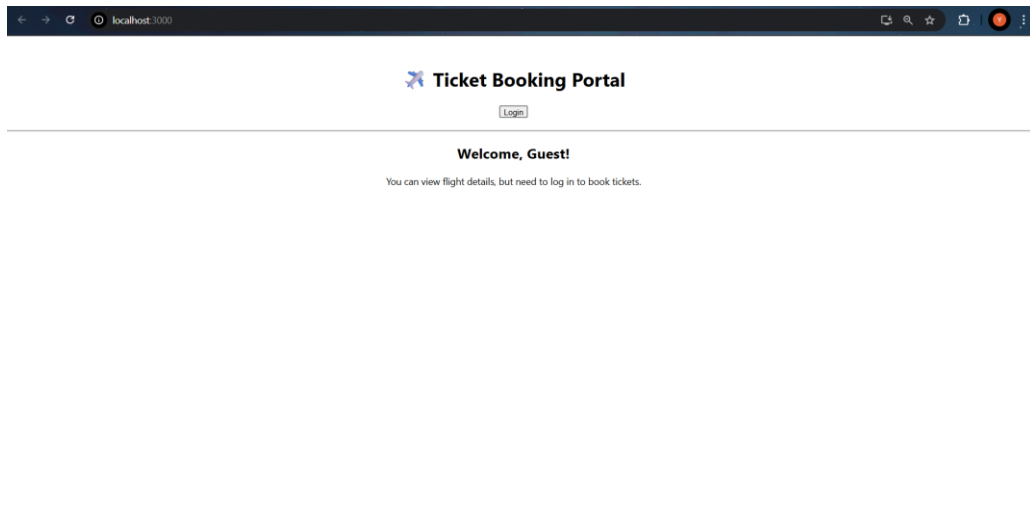

 Ticket Booking Portal

[Logout](#)

Welcome, User!

You can now book your flight tickets.

