

HandsOn-16

Create a React App named “mailregisterapp” which will have a component named “register.js”. Create a form which accepts the name, email and password and validate the fields as per the following:

1. Name should have atleast 5 characters
2. Email should have @ and .
3. Password should have atleast 8 characters.

Ensure that validations are implemented through eventhandle and events submit of a form.

.

Implementation

→App.js

```
// src/App.js
```

```
import React from 'react';
import Register from './components/Register';

function App() {
  return (
    <div className="App">
      <Register />
    </div>
  );
}

export default App;
```

→App.css

```
.App {
  text-align: center;
}

.App-logo {
```

```
height: 40vmin;
pointer-events: none;
}
@media (prefers-reduced-motion: no-preference) {
  .App-logo {
    animation: App-logo-spin infinite 20s linear;
  }
}
.App-header {
  background-color: #282c34;
  min-height: 100vh;
  display: flex;
  flex-direction: column;
  align-items: center;
  justify-content: center;
  font-size: calc(10px + 2vmin);
  color: white;
}
.App-link {
  color: #61dafb;
}
@keyframes App-logo-spin {
  from {
    transform: rotate(0deg);
  }
  to {
    transform: rotate(360deg);
  }
}
```

→Register.js

```
// src/components/Register.js
import React, { useState } from 'react';
import './Register.css';
function Register() {
  const [formData, setFormData] = useState({ name: "", email: "", password: "" });
  const [errors, setErrors] = useState({});
  const validate = () => {
    let tempErrors = {};
    let isValid = true;
    // Name Validation
    if (formData.name.length < 5) {
      tempErrors.name = "Name must be at least 5 characters long";
      isValid = false;
    }
    // Email Validation
    if (!formData.email.includes('@') || !formData.email.includes('.')) {
      tempErrors.email = "Email must include @ and .";
      isValid = false;
    }
    // Password Validation
    if (formData.password.length < 8) {
      tempErrors.password = "Password must be at least 8 characters long";
      isValid = false;
    }
    setErrors(tempErrors);
    return isValid;
  };
  const handleSubmit = (e) => {
    e.preventDefault();
    if (validate()) {
      alert(`Registered Successfully!\nName: ${formData.name}\nEmail:
${formData.email}`);
      setFormData({ name: "", email: "", password: "" });
      setErrors({});
    }
  };
  const handleChange = (e) => {
    setFormData({ ...formData, [e.target.name]: e.target.value });
  };
  return (
    <div className="register-container">
      <h2>Mail Registration Form</h2>
      <form onSubmit={handleSubmit} noValidate>
```

```

    <div>
      <label>Name:</label>
      <input
        type="text"
        name="name"
        value={formData.name}
        onChange={handleChange}
      />
      <div className="error">{errors.name}</div>
    </div>
    <div>
      <label>Email:</label>
      <input
        type="email"
        name="email"
        value={formData.email}
        onChange={handleChange}
      />
      <div className="error">{errors.email}</div>
    </div>
    <div>
      <label>Password:</label>
      <input
        type="password"
        name="password"
        value={formData.password}
        onChange={handleChange}
      />
      <div className="error">{errors.password}</div>
    </div>
    <button type="submit">Register</button>
  </form>
</div>
);
}
export default Register;

```

→ Register.css


```

.register-container {
  max-width: 400px;
  margin: 50px auto;
  padding: 20px;
  border: 2px solid #333;
  border-radius: 8px;
  background-color: #f9f9f9;
}

```

```
    font-family: sans-serif;
}
.register-container h2 {
    text-align: center;
    color: #333;
}
input {
    width: 100%;
    padding: 8px;
    margin-top: 4px;
    margin-bottom: 12px;
    box-sizing: border-box;
}
button {
    width: 100%;
    padding: 10px;
    background-color: #333;
    color: white;
    border: none;
    cursor: pointer;
    font-weight: bold;
}
.error {
    color: red;
    font-size: 12px;
}
```

Output

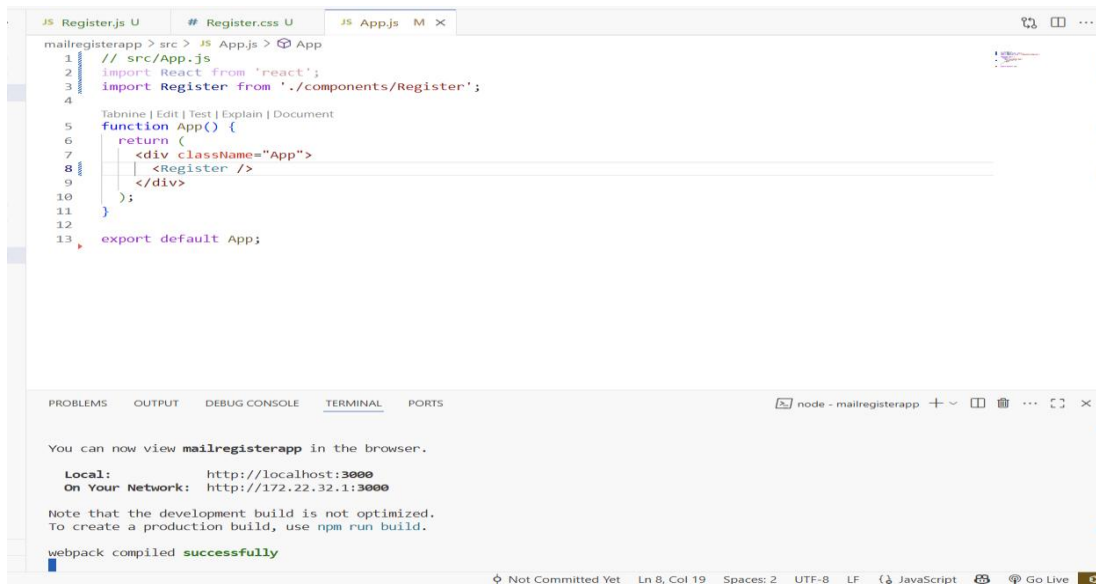

The screenshot shows the VS Code editor with the `Register.js` file open. The code defines a React component `App` that renders a `Register` component. The terminal output shows the command `node - mailregisterapp` and the message "webpack compiled successfully".

```
1 // src/App.js
2 import React from 'react';
3 import Register from '../components/Register';
4
5 function App() {
6   return (
7     <div className="App">
8       <Register />
9     </div>
10   );
11 }
12
13 export default App;
```

node - mailregisterapp

You can now view **mailregisterapp** in the browser.

Local: <http://localhost:3000>
On Your Network: <http://172.22.32.1:3000>

Note that the development build is not optimized.
To create a production build, use `npm run build`.

webpack compiled **successfully**



Mail Registration Form

Name:

Email:

Password:

Register

Mail Registration Form

Name:
YANNAM LAVANYA

Email:
yannamlavanya2005@gmail.com

Password:

Register

localhost:3000 says

Registered Successfully!
Name: YANNAM LAVANYA
Email: yannamlavanya2005@gmail.com

OK

Email:
yannamlavanya2005@gmail.com

Password:

Register

Mail Registration Form

Name:

H2

Name must be at least 5 characters long

Email:

h2222

Email must include @ and .

Password:

Password must be at least 6 characters long

Register