

HandsOn-2

Create a **“.log”** file and a **log folder** in the working directory of Git. Update the **.gitignore** file in such a way that on committing, these files (.log extensions and log folders) are ignored.

Verify if the git status reflects the same about working directory, local repository and git repository.

Commands to add in created Repo

```
cd ~/GitDemo
```

- ◆ Changes the current directory to your GitDemo repository folder.

```
echo "this is a root log" > server.log
```

- ◆ Creates a file named server.log in the current directory and writes the text "this is a root log" into it.

```
mkdir -p log
```

- ◆ Creates a directory named log; the -p option ensures no error if it already exists.

```
echo "app log line 1" > log/app.log
```

- ◆ Creates a file named app.log inside the log folder with the text "app log line 1".

```
cat > .gitignore <<'EOF'
```

- ◆ Creates or overwrites the .gitignore file, adding rules to ignore:

*.log → all .log files

log/ → the log folder and its contents

```
git add .gitignore
```

- ◆ Stages .gitignore so it will be included in the next commit.

```
git commit -m "Add .gitignore to ignore .log files and log/ directories"
```

- ◆ Creates a new commit with the staged .gitignore and the provided commit message.

```
git push origin master
```

- ◆ Uploads your local master branch commits (including .gitignore) to the origin remote repository on GitHub.

Output Screens:

```
LAVANYA@LAPTOP-7H755M1L MINGW64 ~/GitDemo (master)
$ git status
On branch master
nothing to commit, working tree clean

LAVANYA@LAPTOP-7H755M1L MINGW64 ~/GitDemo (master)
$ echo "this is a root log" > server.log

LAVANYA@LAPTOP-7H755M1L MINGW64 ~/GitDemo (master)
$ mkdir -p log

LAVANYA@LAPTOP-7H755M1L MINGW64 ~/GitDemo (master)
$ echo "app log line 1" > log/app.log

LAVANYA@LAPTOP-7H755M1L MINGW64 ~/GitDemo (master)
$ touch log/placeholder.txt

LAVANYA@LAPTOP-7H755M1L MINGW64 ~/GitDemo (master)
$ git status
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
    log/
    server.log

nothing added to commit but untracked files present (use "git add" to track)
```

```
LAVANYA@LAPTOP-7H755M1L MINGW64 ~/GitDemo (master)
$ cat > .gitignore <<'EOF'
> *.log
> log/
> EOF

LAVANYA@LAPTOP-7H755M1L MINGW64 ~/GitDemo (master)
$ cat .gitignore
*.log
log/

LAVANYA@LAPTOP-7H755M1L MINGW64 ~/GitDemo (master)
$ git add .gitignore
warning: in the working copy of '.gitignore', LF will be replaced by CRLF the next time Git touches it

LAVANYA@LAPTOP-7H755M1L MINGW64 ~/GitDemo (master)
$ git commit -m "Add .gitignore to ignore *.log files and log/ directories"
[master e5af4ff] Add .gitignore to ignore *.log files and log/ directories
1 file changed, 2 insertions(+)
create mode 100644 .gitignore
```

```

LAVANYA@LAPTOP-7H755M1L MINGW64 ~/GitDemo (master)
$ git status
On branch master
nothing to commit, working tree clean


LAVANYA@LAPTOP-7H755M1L MINGW64 ~/GitDemo (master)
$ git push origin master
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 325 bytes | 325.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/Lavanya-Yannam/GitDemo.git
   b4d7583..e5af4ff  master -> master

LAVANYA@LAPTOP-7H755M1L MINGW64 ~/GitDemo (master)
$ git ls-files --cached | grep .gitignore || echo ".gitignore not cached"
.gitignore

LAVANYA@LAPTOP-7H755M1L MINGW64 ~/GitDemo (master)
$ git status
On branch master
nothing to commit, working tree clean

LAVANYA@LAPTOP-7H755M1L MINGW64 ~/GitDemo (master)
$ git ls-files | grep '\.log$' || echo "no .log files tracked"
no .log files tracked

```

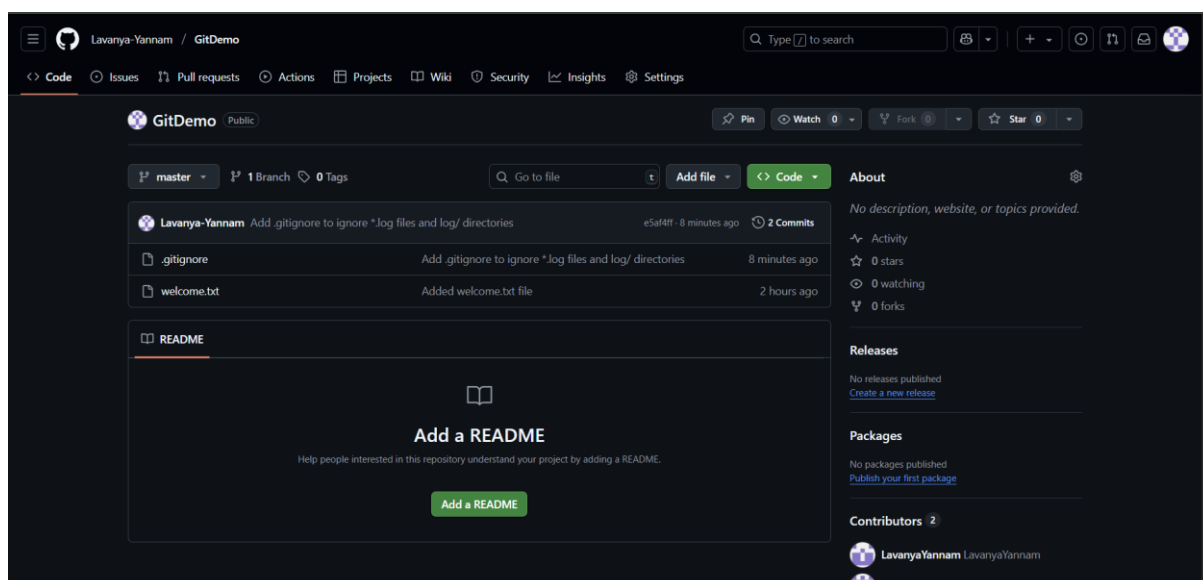

Lavanya-Yannam / GitDemo

🔍 Type **/** to search

<> Code

Issues

Pull requests

Actions

Projects

Wiki

Security

Insights

Settings

Files

master

Go to file

.gitignore

welcome.txt

GitDemo / .gitignore

Lavanya-Yannam Add .gitignore to ignore *.log files and log/ directories e5af4ff · 9 minutes ago History

Code

Blame

2 lines (2 loc) · 11 Bytes

Raw

1

2

*.log

log/