



# Screenshoot Hasil Program API Aplikasi Inventaris

## -Laveda Nafis Arshanda-


### a) API Login

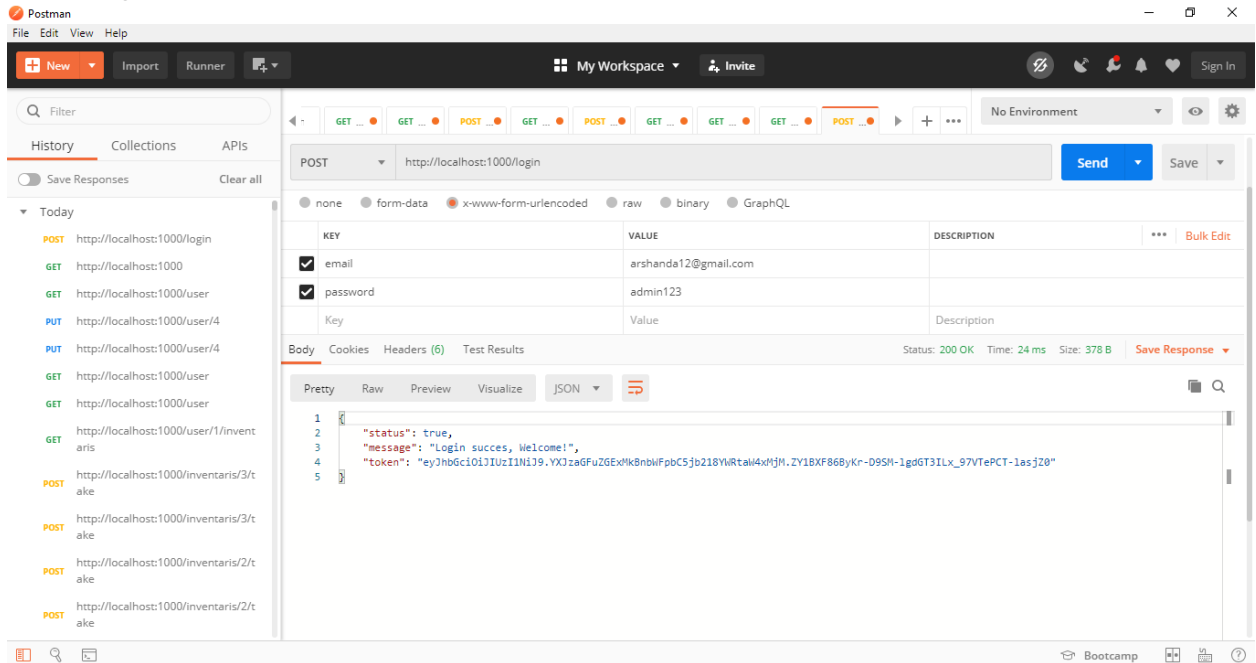


### b) API Get Profil

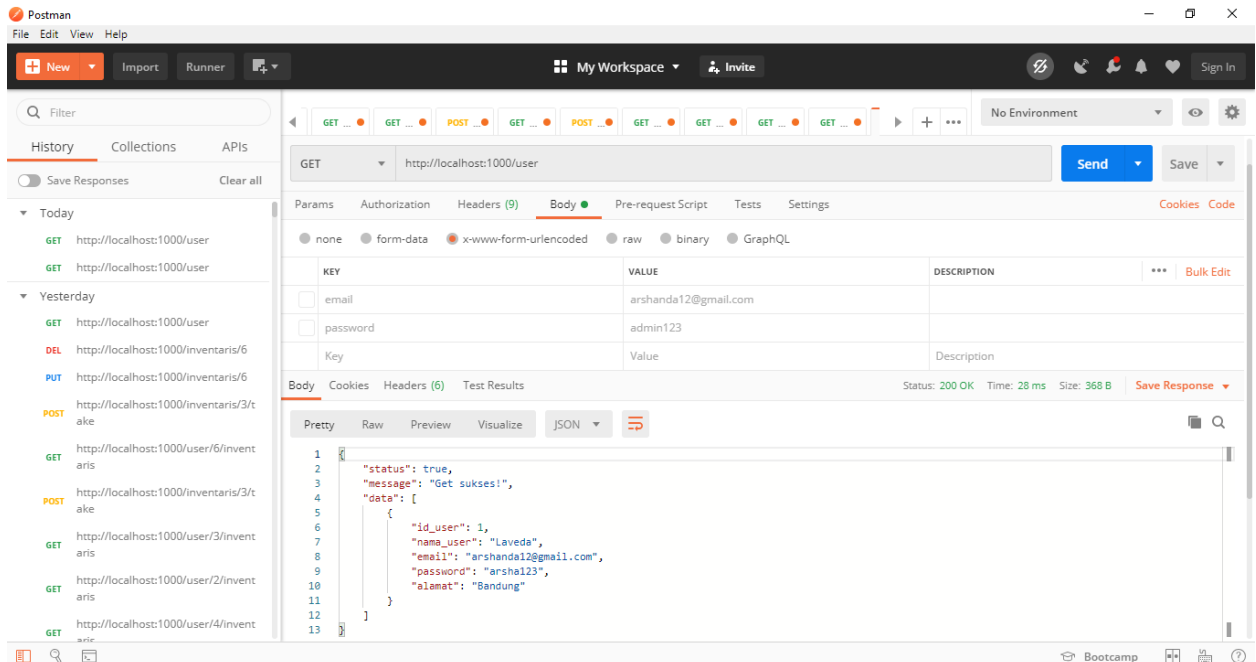

### c) API Update Profile

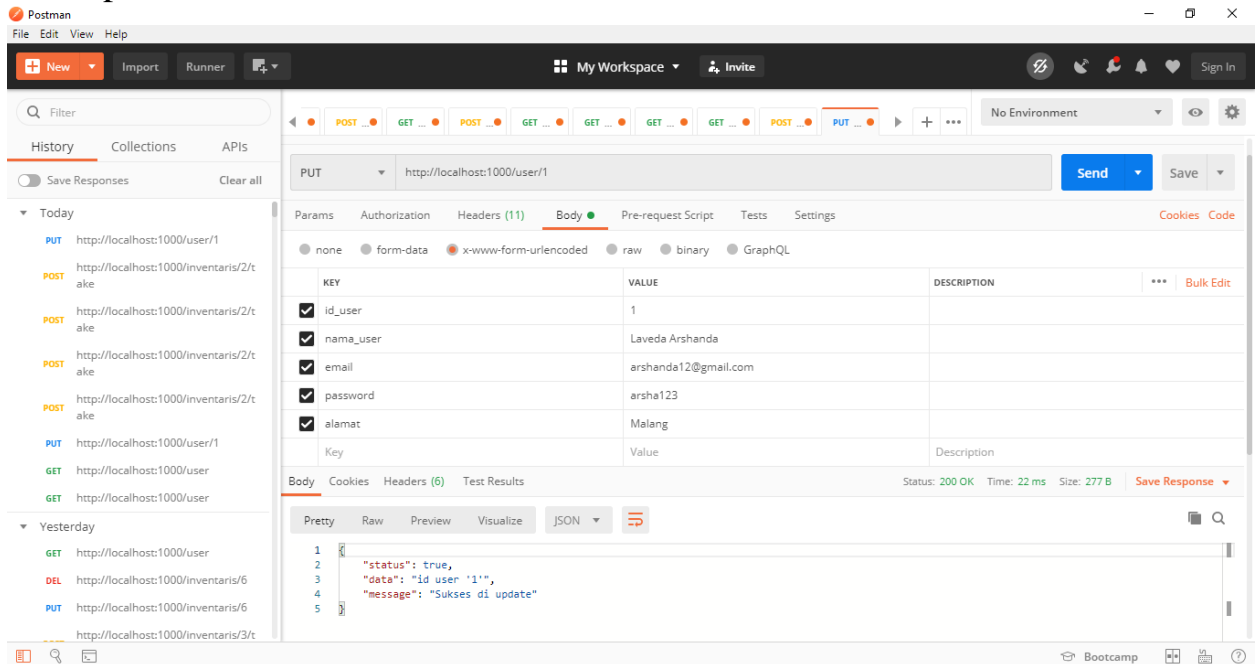

### d) API Tambah Inventaris

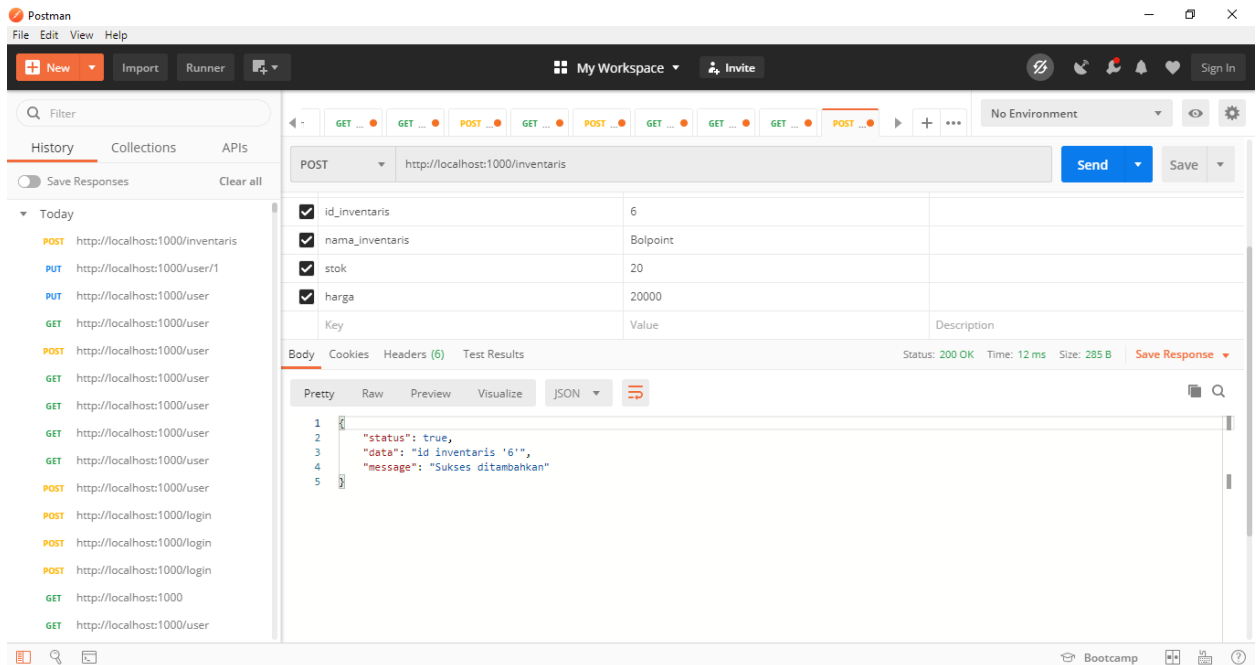

## e) API Update Inventaris

The screenshot shows the Postman application with a PUT request configured to update an inventory item. The URL is `http://localhost:1000/inventaris/6`. The request body is a JSON object with the following fields:

Field	Value
<code>id_inventaris</code>	6
<code>nama_inventaris</code>	Bolpoint
<code>stok</code>	20
<code>harga</code>	17000
<code>Key</code>	Value
<code>Description</code>	

The response status is 200 OK, with a time of 19 ms and a size of 283 B. The response body is a JSON object:

```
{  "status": true,  "data": "id inventaris '6'",  "message": "Sukses di update"}
```

## f) API Hapus Inventaris

The screenshot shows the Postman application with a DELETE request configured to delete an inventory item. The URL is `http://localhost:1000/inventaris/6`. The response status is 200 OK, with a time of 18 ms and a size of 266 B. The response body is a JSON object:

```
{  "status": true,  "data": null,  "message": "Sukses dihapus"}
```

## g) API List Inventaris

Postman interface showing a POST request to `http://localhost:1000/inventaris/1/take`. The response is a JSON array with two inventory items.

```
1 {
2   "status": true,
3   "message": "sukses",
4   "data": [
5     {
6       "id_inventaris": 1,
7       "name_inventaris": "Kertas HVS",
8       "stok": 15,
9       "harga": "10000",
10      "id_user": 1,
11      "name_user": "Loveda Arshanda",
12      "email": "arshanda12@gmail.com",
13      "password": "arshel123",
14      "alamat": "Malang"
15    },
16    {
17      "id_inventaris": 2,
18      "name_inventaris": "Spidol",
19      "stok": 2,
20      "harga": "25000",
21      "id_user": 1,
22      "name_user": "Loveda Arshanda",
23      "email": "arshanda12@gmail.com",
24      "password": "arshel123",
25      "alamat": "Malang"
26    }
27  ]
28 }
```

## h) API Inventaris By Id

Postman interface showing a GET request to `http://localhost:1000/user/6/inventaris`. The response is a JSON object with inventory details for a specific user.

Key	Value	Description
<input checked="" type="checkbox"/> id_user	6	
<input checked="" type="checkbox"/> id_inventaris	3	

```
1 {
2   "status": true,
3   "message": "Alhamdulillah Sukses",
4   "data": {
5     "name_inventaris": "Printer",
6     "stok": 2,
7     "harga": "5270000"
8   }
9 }
10 ]
11 }
```