

# NN\_Jax\_PDE6

June 20, 2022

## 1 Solving PDEs with Jax - Problem 6

### 1.1 Description

#### 1.1.1 Average time of execution

Between 3 and 4 minutes on GPU

#### 1.1.2 PDE

We will try to solve the problem 6 of the article <https://ieeexplore.ieee.org/document/712178>

$$\Delta\psi(x, y) = f(x, y) \text{ on } \Omega = [0, 1]^2$$

with  $f(x, y) = e^{-\frac{ax+y}{5}} \{ [-\frac{4}{5}a^3x - \frac{2}{5} + 2a^2] \cos(a^2x^2 + y) + [\frac{1}{25} - 1 - 4a^4x^2 + \frac{a^2}{25}] \sin(a^2x^2 + y) \}$

If we take  $a=3$ , we will have  $f(x, y) = e^{-\frac{3x+y}{5}} \{ [-\frac{108}{5}x + \frac{88}{5}] \cos(9x^2 + y) - [\frac{3}{5} + 324x^2] \sin(9x^2 + y) \}$

#### 1.1.3 Boundary conditions

$$\psi(0, y) = e^{-\frac{y}{5}} \sin(y), \quad \psi(1, y) = e^{-\frac{3+y}{5}} \sin(9 + y), \quad \psi(x, 0) = e^{-\frac{3x}{5}} \sin(9x^2) \text{ and } \psi(x, 1) = e^{-\frac{3x+1}{5}} \sin(9x^2 + 1)$$

#### 1.1.4 Loss function

The loss to minimize here is  $\mathcal{L} = \|\Delta\psi(x, y) - f(x, y)\|_2$

#### 1.1.5 Analytical solution

The true function  $\psi$  should be  $\psi(x, y) = e^{-\frac{ax+y}{5}} \sin(a^2x^2 + y)$

Thus, for  $a=3$ , we have the analytical solution:  $\psi(x, y) = e^{-\frac{3x+y}{5}} \sin(9x^2 + y)$

#### 1.1.6 Approximated solution

We want find a solution  $\psi(x, y) = A(x, y) + F(x, y)N(x, y)$  s.t:

$$F(x, y) = \sin(x - 1) \sin(y - 1) \sin(x) \sin(y)$$

$$A(x, y) = (1 - x)e^{-y/5} \sin(y) + xe^{-\frac{3+y}{5}} \sin(9 + y) + (1 - y)\{e^{-\frac{3x}{5}} \sin(9x^2) - xe^{-\frac{3}{5}} \sin(9)\} + y\{e^{-\frac{3x+1}{5}} \sin(9x^2 + 1) - [(1 - x)e^{-\frac{1}{5}} \sin(1) + xe^{-\frac{4}{5}} \sin(10)]\}$$

## 1.2 Importing libraries

```
[73]: # Jax libraries
from jax import value_and_grad, vmap, jit, jacfwd
from functools import partial
from jax import random as jran
from jax.example_libraries import optimizers as jax_opt
from jax.nn import tanh, sigmoid
from jax.lib import xla_bridge
import jax.numpy as jnp

# Others libraries
from time import time
import matplotlib.pyplot as plt
import numpy as np
import os
import pickle
print(xla_bridge.get_backend().platform)
```

gpu

## 1.3 Multilayer Perceptron

```
[74]: class MLP:
    """
        Create a multilayer perceptron and initialize the neural network
        Inputs :
            A SEED number and the layers structure
    """

    # Class initialization
    def __init__(self, SEED, layers):
        self.key=jran.PRNGKey(SEED)
        self.keys = jran.split(self.key, len(layers))
        self.layers=layers
        self.params = []

    # Initialize the MLP weights and bias
    def MLP_create(self):
        for layer in range(0, len(self.layers)-1):
            in_size, out_size=self.layers[layer], self.layers[layer+1]
            std_dev = jnp.sqrt(2/(in_size + out_size ))
            weights=jran.truncated_normal(self.keys[layer], -2, 2,
            ↪shape=(out_size, in_size), dtype=np.float32)*std_dev
            bias=jran.truncated_normal(self.keys[layer], -1, 1, shape=(out_size,
            ↪1), dtype=np.float32).reshape((out_size,))
            self.params.append((weights,bias))
```

```

        return self.params

    # Evaluate a position XY using the neural network
    @partial(jit, static_argnums=(0,))
    def NN_evaluation(self, new_params, inputs):
        for layer in range(0, len(new_params)-1):
            weights, bias = new_params[layer]
            inputs = sigmoid(jnp.add(jnp.dot(inputs, weights.T), bias))
        weights, bias = new_params[-1]
        output = jnp.dot(inputs, weights.T)+bias
        return output

    # Get the key associated with the neural network
    def get_key(self):
        return self.key

```

## 2 PDE operators

```

[75]: class PDE_operators:
    """
        Class with the most common operators used to solve PDEs
        Input:
        A function that we want to compute the respective operator
    """

    # Class initialization
    def __init__(self, function):
        self.function=function

    # Compute the two dimensional laplacian
    def laplacian_2d(self, params, inputs):
        fun = lambda params, x, y: self.function(params, x, y)
        @partial(jit)
        def action(params, x, y):
            u_xx = jacfwd(jacfwd(fun, 1), 1)(params, x, y)
            u_yy = jacfwd(jacfwd(fun, 2), 2)(params, x, y)
            return u_xx + u_yy
        vec_fun = vmap(action, in_axes = (None, 0, 0))
        laplacian = vec_fun(params, inputs[:,0], inputs[:,1])
        return laplacian

    # Compute the derivative in x
    @partial(jit, static_argnums=(0,))
    def du_dx(self, params, inputs):
        fun = lambda params, x, y: self.function(params, x, y)
        @partial(jit)

```

```

def action(params,x,y):
    u_x = jacfwd(fun, 1)(params,x,y)
    return u_x
vec_fun = vmap(action, in_axes = (None, 0, 0))
return vec_fun(params, inputs[:,0], inputs[:,1])

# Compute the derivative in y
@partial(jit, static_argnums=(0,))
def du_dy(self,params,inputs):
    fun = lambda params,x,y: self.function(params, x,y)
    @partial(jit)
    def action(params,x,y):
        u_y = jacfwd(fun, 2)(params,x,y)
        return u_y
    vec_fun = vmap(action, in_axes = (None, 0, 0))
    return vec_fun(params, inputs[:,0], inputs[:,1])

```

### 3 Physics Informed Neural Networks

```

[76]: class PINN:
    """
    Solve a PDE using Physics Informed Neural Networks
    Input:
        The evaluation function of the neural network
    """

    # Class initialization
    def __init__(self,NN_evaluation):
        self.operators=PDE_operators(self.solution)
        self.laplacian=self.operators.laplacian_2d
        self.NN_evaluation=NN_evaluation

    # Definition of the function A(x,y) mentioned above
    @partial(jit, static_argnums=(0,))
    def A_function(self,inputX,inputY):
        A1=jnp.multiply(1-inputX,jnp.multiply(jnp.exp(-inputY/5),jnp.
↪sin(inputY)))
        A2=jnp.multiply(jnp.multiply(inputX,jnp.exp(-(3+inputY)/5)),jnp.
↪sin(9+inputY))
        A3=jnp.multiply(1-inputY,jnp.add(jnp.multiply(jnp.exp(-3*inputX/5),jnp.
↪sin(9*inputX**2)), -inputX*jnp.exp(-3/5)*jnp.sin(9)))
        A4=jnp.multiply(inputY,jnp.add(jnp.multiply(jnp.exp(-(3*inputX+1)/5),jnp.
↪sin(9*inputX**2+1)), -jnp.add((1-inputX)*jnp.exp(-1/5)*jnp.sin(1),inputX*jnp.
↪exp(-4/5)*jnp.sin(10))))
        return jnp.add(jnp.add(A1,A2),jnp.add(A3,A4)).reshape(-1,1)

```

```

# Definition of the function  $F(x,y)$  mentioned above
@partial(jit, static_argnums=(0,))
def F_function(self, inputX, inputY):
    F1=jnp.multiply(jnp.sin(inputX),jnp.sin(inputX-jnp.ones_like(inputX)))
    F2=jnp.multiply(jnp.sin(inputY),jnp.sin(inputY-jnp.ones_like(inputY)))
    return jnp.multiply(F1,F2).reshape((-1,1))

# Definition of the function  $f(x,y)$  mentioned above
@partial(jit, static_argnums=(0,))
def target_function(self, inputs):
    t_f1=jnp.multiply(-108/5*inputs[:,0]+88/5,jnp.cos(jnp.add(9*inputs[:,0],0)**2,inputs[:,1])))
    t_f2=-jnp.multiply(3/5+324*inputs[:,0]**2,jnp.sin(jnp.add(9*inputs[:,0],0)**2,inputs[:,1])))
    t_f3=jnp.exp(-jnp.add(3*inputs[:,0],inputs[:,1])/5)
    return jnp.multiply(t_f3,jnp.add(t_f1,t_f2)).reshape(-1,1)

# Compute the solution of the PDE on the points  $(x,y)$ 
@partial(jit, static_argnums=(0,))
def solution(self, params, inputX, inputY):
    inputs=jnp.column_stack((inputX,inputY))
    NN = vmap(partial(jit(self.NN_evaluation), params))(inputs)
    F=self.F_function(inputX,inputY)
    A=self.A_function(inputX,inputY)
    return jnp.add(jnp.multiply(F,NN),A).reshape(-1,1)

# Compute the loss function
@partial(jit, static_argnums=(0,))
def loss_function(self, params, batch, targets):
    targets=self.target_function(batch)
    preds=self.laplacian(params, batch).reshape(-1,1)
    return jnp.linalg.norm(preds-targets)

# Train step
@partial(jit, static_argnums=(0,))
def train_step(self, i, opt_state, inputs, pred_outputs):
    params = get_params(opt_state)
    loss, gradient = value_and_grad(self.loss_function)(params, inputs,
    ↪pred_outputs)
    return loss, opt_update(i, gradient, opt_state)

```

## 4 Initialize neural network

```
[77]: # Neural network parameters
SEED = 351
n_features, n_targets = 2, 1          # Input and output dimension
layers = [n_features,30,30,n_targets] # Layers structure

# Initialization
NN_MLP=MLP(SEED,layers)
params = NN_MLP.MLP_create()          # Create the MLP
NN_eval=NN_MLP.NN_evaluation          # Evaluate function
solver=PINN(NN_eval)
key=NN_MLP.get_key()
```

## 5 Train parameters

```
[78]: batch_size = 10000
num_batches = 25000
report_steps=500
loss_history = []
```

## 6 Adam optimizer

It's possible to continue the last training if we use options=1

```
[79]: opt_init, opt_update, get_params = jax_opt.adam(0.001)

options=0
if options==0: # Start a new training
    opt_state=opt_init(params)

else:          # Continue the last training
    # Load trained parameters for a NN with the layers [2,30,30,1]
    best_params = pickle.load(open("./NN_saves/NN_jax_params.pkl", "rb"))
    opt_state = jax_opt.pack_optimizer_state(best_params)
    params=get_params(opt_state)
```

## 7 Solving PDE

```
[80]: # Main loop to solve the PDE
for ibatch in range(0,num_batches):
    ran_key, batch_key = jran.split(key)
    XY_train = jran.uniform(batch_key, shape=(batch_size, n_features), minval=0,
    ↪maxval=1)
```

```

targets = solver.target_function(XY_train)
loss, opt_state = solver.train_step(ibatch,opt_state, XY_train,targets)
loss_history.append(float(loss))

if ibatch%report_steps==report_steps-1:
    print("Epoch n°{:}: ".format(ibatch+1), loss.item())
if ibatch%5000==0:
    trained_params = jax_opt.unpack_optimizer_state(opt_state)
    pickle.dump(trained_params, open("./NN_saves/NN_jax_checkpoint.pkl",
↪"wb"))

```

```

Epoch n°500: 440.803466796875
Epoch n°1000: 95.96310424804688
Epoch n°1500: 47.0954475402832
Epoch n°2000: 43.77584457397461
Epoch n°2500: 42.837059020996094
Epoch n°3000: 42.07849884033203
Epoch n°3500: 41.4610481262207
Epoch n°4000: 12.413284301757812
Epoch n°4500: 10.878263473510742
Epoch n°5000: 9.588128089904785
Epoch n°5500: 8.208154678344727
Epoch n°6000: 6.623982906341553
Epoch n°6500: 5.031591892242432
Epoch n°7000: 3.8925867080688477
Epoch n°7500: 3.327918291091919
Epoch n°8000: 3.0145041942596436
Epoch n°8500: 2.7829487323760986
Epoch n°9000: 2.607973575592041
Epoch n°9500: 2.4742391109466553
Epoch n°10000: 2.370198965072632
Epoch n°10500: 2.2852537631988525
Epoch n°11000: 2.218566417694092
Epoch n°11500: 2.159852981567383
Epoch n°12000: 2.111814022064209
Epoch n°12500: 2.0678865909576416
Epoch n°13000: 2.026113748550415
Epoch n°13500: 1.9999103546142578
Epoch n°14000: 1.970981240272522
Epoch n°14500: 1.9449925422668457
Epoch n°15000: 1.9077969789505005
Epoch n°15500: 1.8958704471588135
Epoch n°16000: 1.872464895248413
Epoch n°16500: 1.8571228981018066
Epoch n°17000: 1.8350434303283691
Epoch n°17500: 1.819772481918335
Epoch n°18000: 1.8042713403701782

```

```

Epoch n°18500: 1.7832424640655518
Epoch n°19000: 1.7727572917938232
Epoch n°19500: 1.7534531354904175
Epoch n°20000: 1.7425590753555298
Epoch n°20500: 1.7251068353652954
Epoch n°21000: 1.709639310836792
Epoch n°21500: 1.7076295614242554
Epoch n°22000: 1.6874972581863403
Epoch n°22500: 1.6759374141693115
Epoch n°23000: 1.660073161125183
Epoch n°23500: 1.6646336317062378
Epoch n°24000: 1.6427518129348755
Epoch n°24500: 1.6284480094909668
Epoch n°25000: 1.6234050989151

```

## 8 Plot loss function

```


[81]: fig, ax = plt.subplots(1, 1)
      __=ax.plot(np.log10(loss_history))
      xlabel = ax.set_xlabel(r'\rm Step')
      ylabel = ax.set_ylabel(r'\log_{10}(\rm (loss_function))')
      title = ax.set_title(r'\rm Training')
      plt.show

```

```

[81]: <function matplotlib.pyplot.show(close=None, block=None)>

```

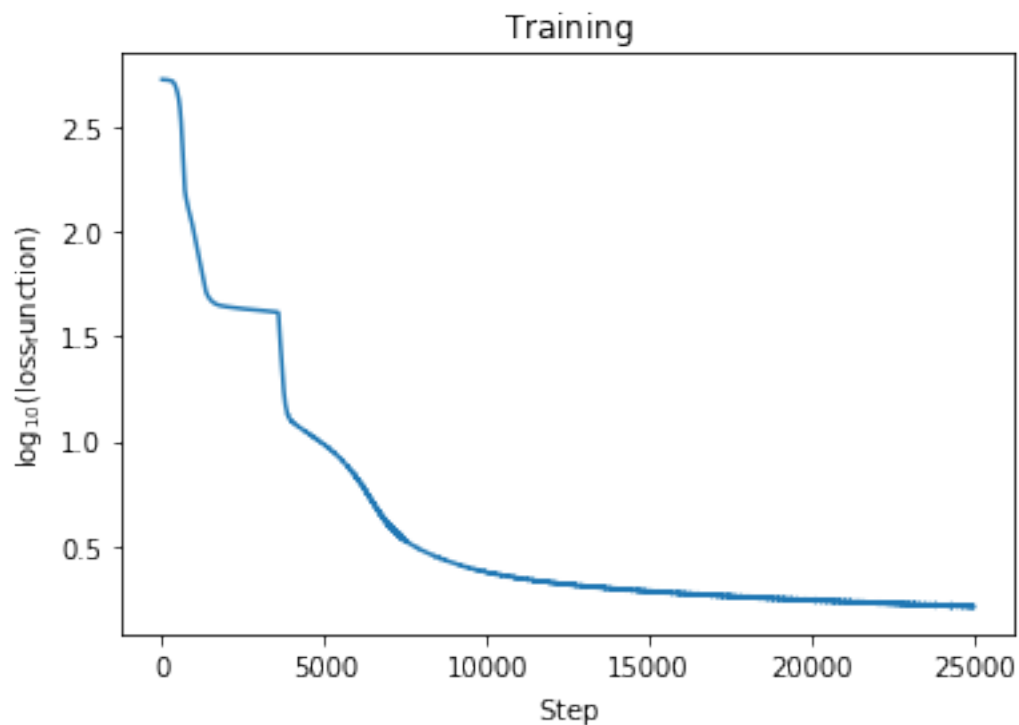




## 9 Approximated solution

We plot the solution obtained with our NN

```
[82]: plt.figure()
      params=get_params(opt_state)
      n_points=100000
      ran_key, batch_key = jran.split(key)
      XY_test = jran.uniform(batch_key, shape=(n_points, n_features), minval=0,
      ↪maxval=1)

      predictions = solver.solution(params,XY_test[:,0],XY_test[:,1])
      plt.scatter(XY_test[:,0],XY_test[:,1], c=predictions, cmap="hot",s=2)
      plt.clim(vmin=jnp.min(predictions),vmax=jnp.max(predictions))
      plt.colorbar()
      plt.title("NN solution")
      plt.show()
```

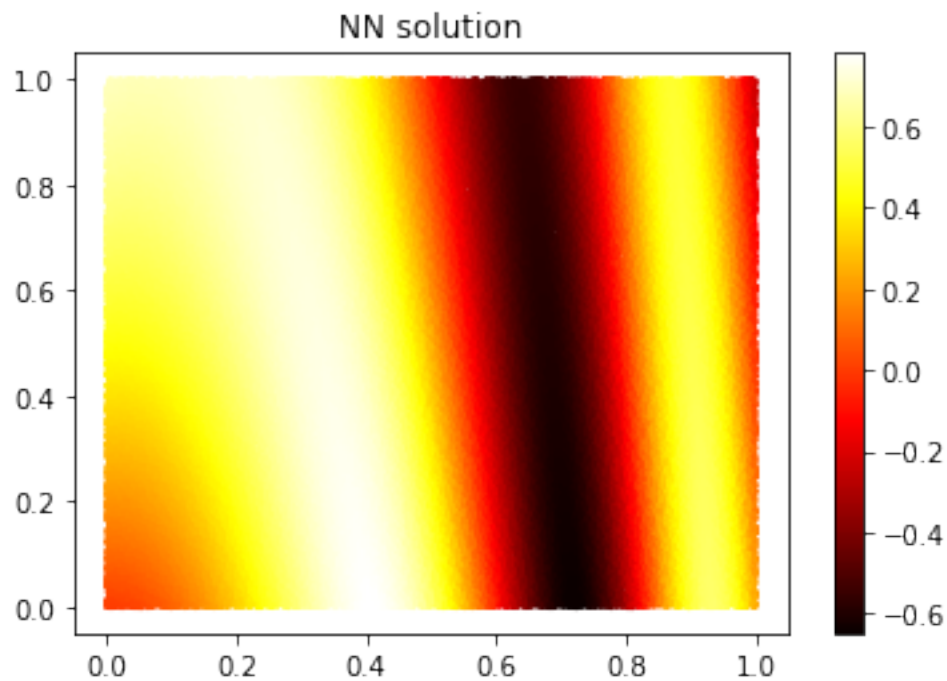


## 10 True solution

We plot the true solution, its form was mentioned above

```
[83]: def true_solution(inputs):
        return jnp.multiply(jnp.exp(-(3*inputs[:,0]+inputs[:,1])/5),jnp.sin(jnp.
        ↪add(9*inputs[:,0]**2,inputs[:,1])))

plt.figure()
n_points=100000
ran_key, batch_key = jran.split(key)
XY_train = jran.uniform(batch_key, shape=(n_points, n_features), minval=0,
        ↪maxval=1)

true_sol = true_solution(XY_test)
plt.scatter(XY_test[:,0],XY_test[:,1], c=true_sol, cmap="hot",s=2)
plt.colorbar()
plt.title("True solution")
plt.show()
```

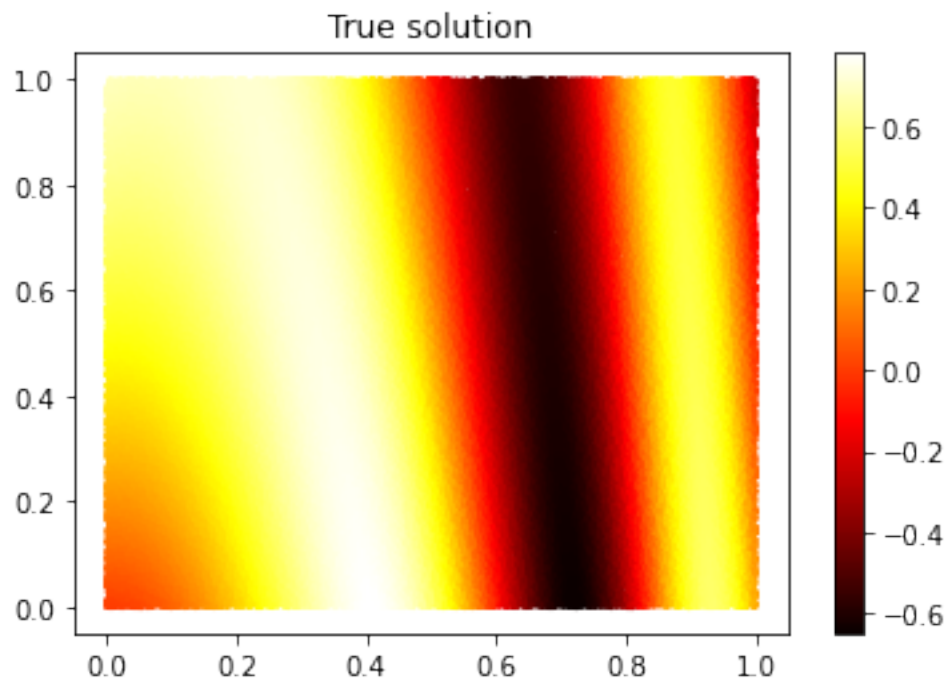

## 11 Absolut error

We plot the absolut error, it's  $|\text{true solution} - \text{neural network output}|$

```
[84]: plt.figure()
params=get_params(opt_state)
n_points=100000
ran_key, batch_key = jran.split(key)
```


```

XY_test = jran.uniform(batch_key, shape=(n_points, n_features), minval=0,
    ↪maxval=1)

predictions = solver.solution(params,XY_test[:,0],XY_test[:,1])[:,0]
true_sol = true_solution(XY_test)
error=abs(predictions-true_sol)

plt.scatter(XY_test[:,0],XY_test[:,1], c=error, cmap="viridis",s=2)
plt.colorbar()
plt.title("Absolut error")
plt.show()

```

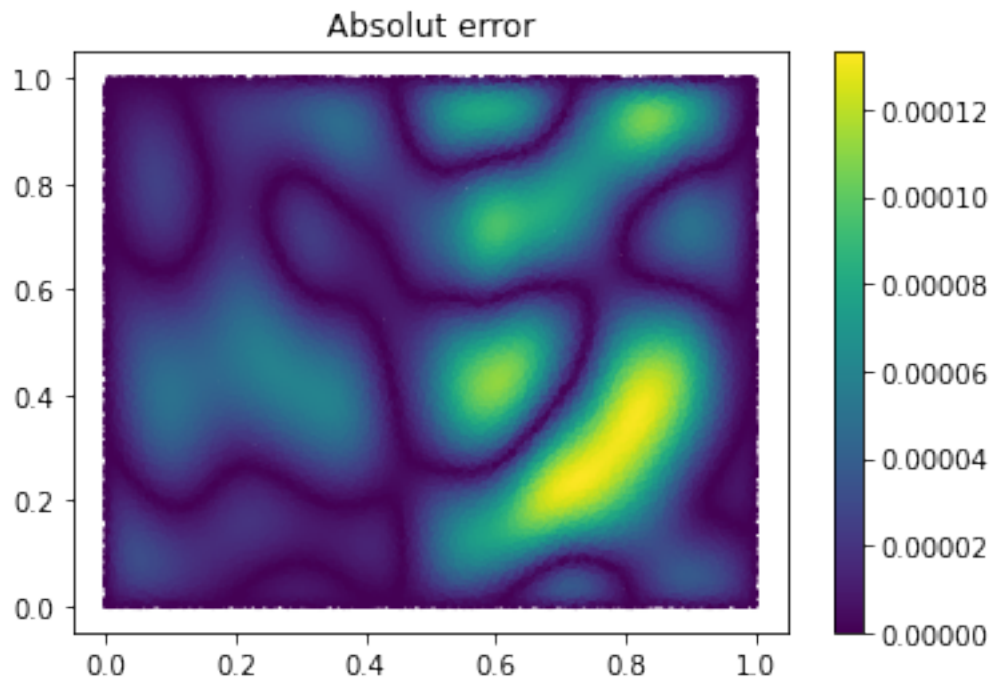

## 12 Save NN parameters

```

[85]: trained_params = jax_opt.unpack_optimizer_state(opt_state)
      pickle.dump(trained_params, open("./NN_saves/NN_jax_params.pkl", "wb"))

```