



Name :- Laxmi Swami

Topic :- Integrating Public and Private Git Repositories with Jenkins


STEP 1 : Create instance

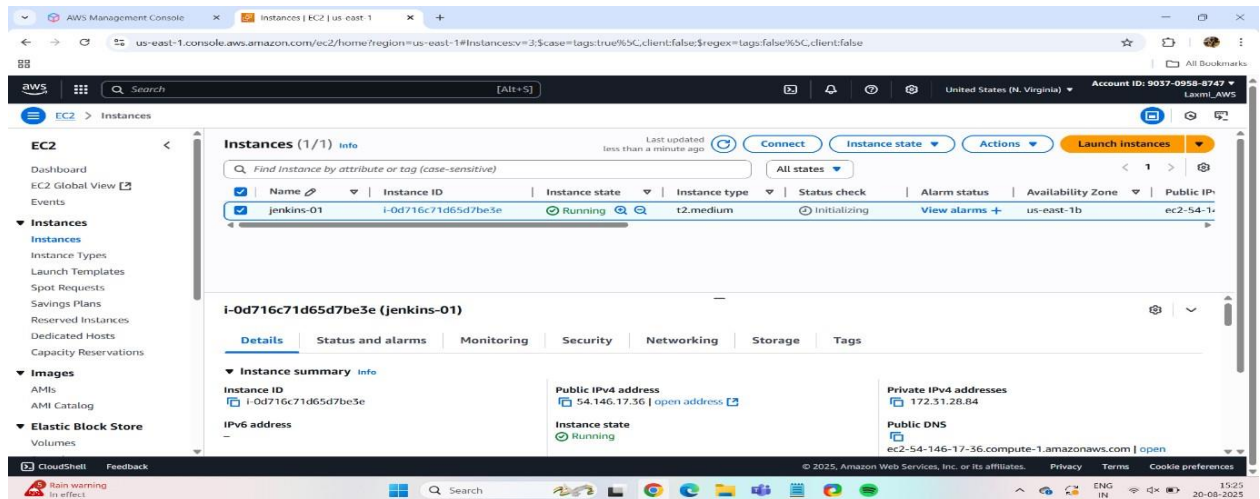

STEP 2 : Connect to instance via gitbash

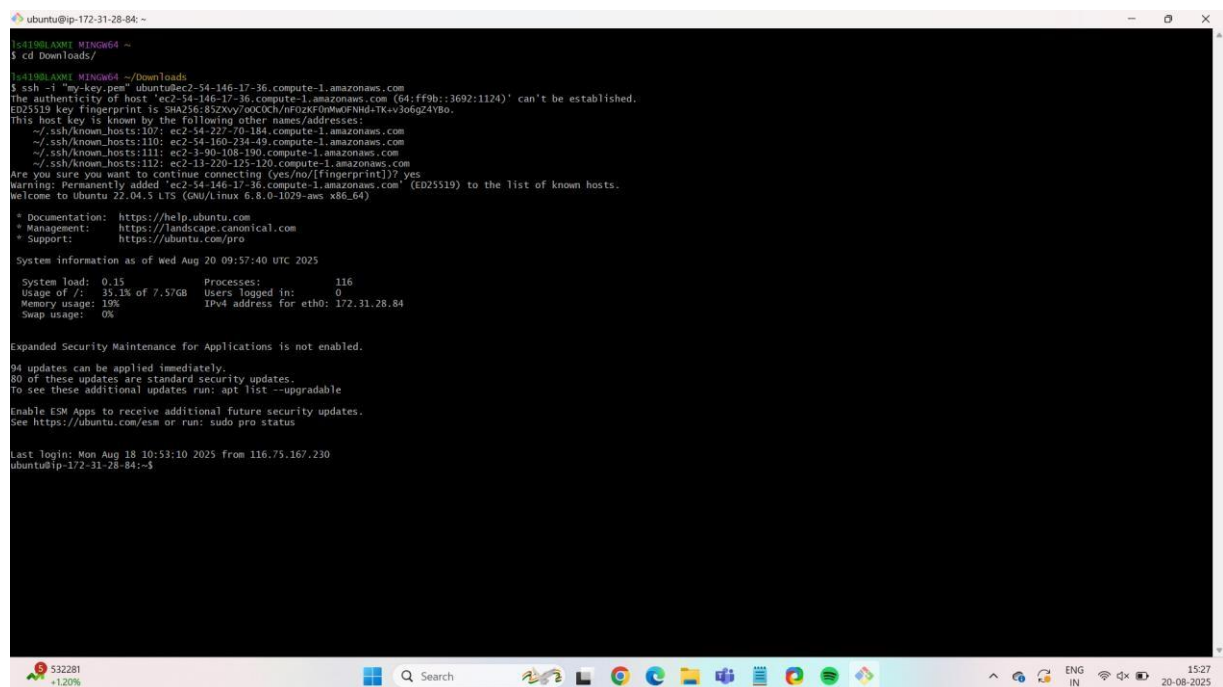


STEP 3: after connection hit public ip and sign in to jenkins

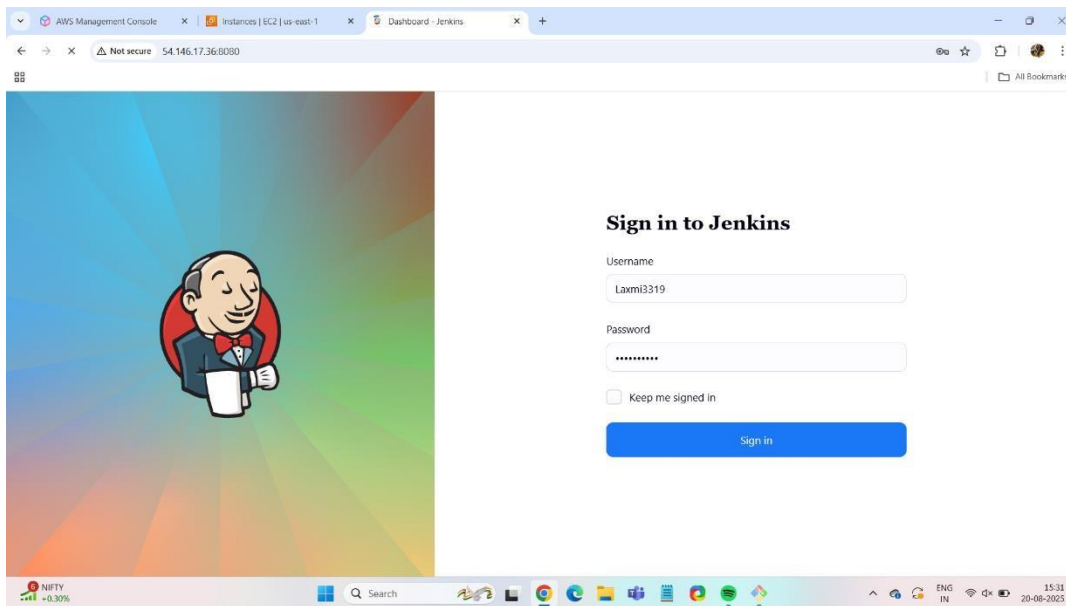


STEP 4: by default, path of Jenkins is **/var/lib/Jenkins**.


STEP 5: Go to **Jenkins home** click on create **New Item** > Name it > select the item type as **Freestyle project**. Click on ok.

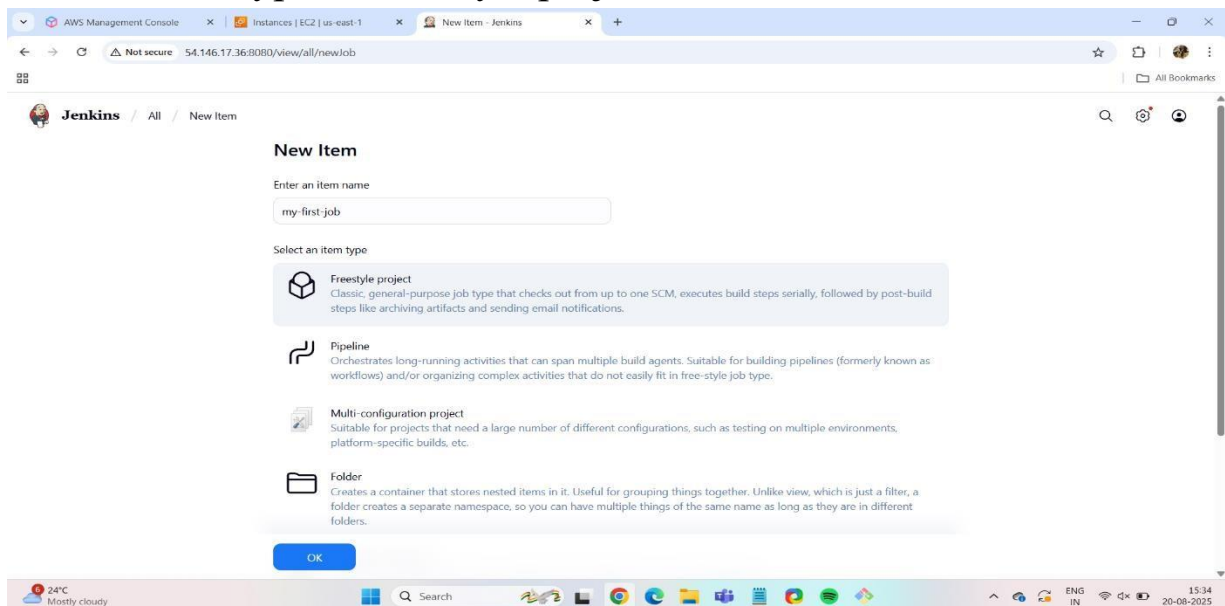


STEP 6: Provide description keep some steps by default for now.

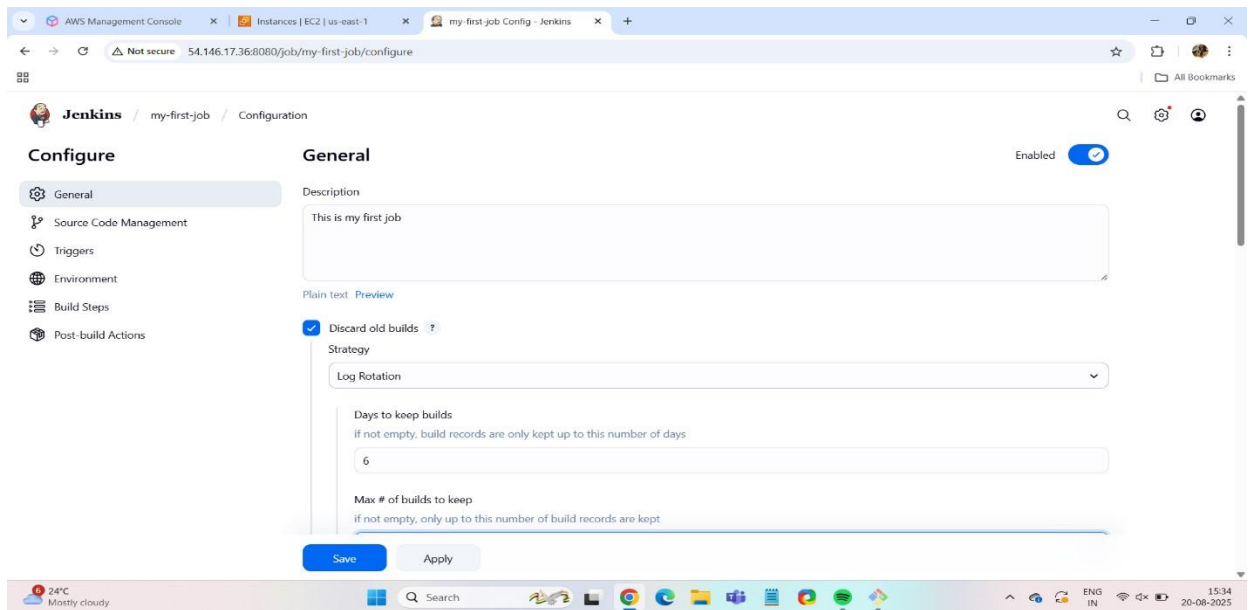


STEP 7: Select discard old builds give number of days you want to keep builds 5, Max days want to keep days 6.

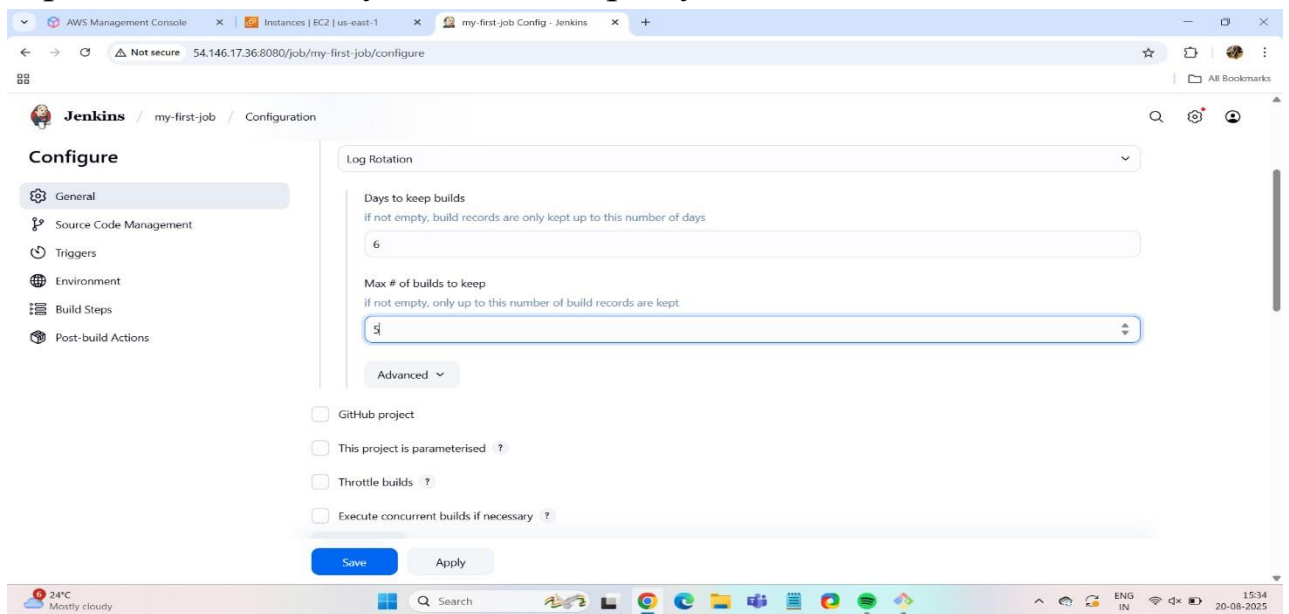


STEP 8: Now move to builds steps select type as a execute shell fetch commands **mkdir devops** and in that create one empty file and **ls**.

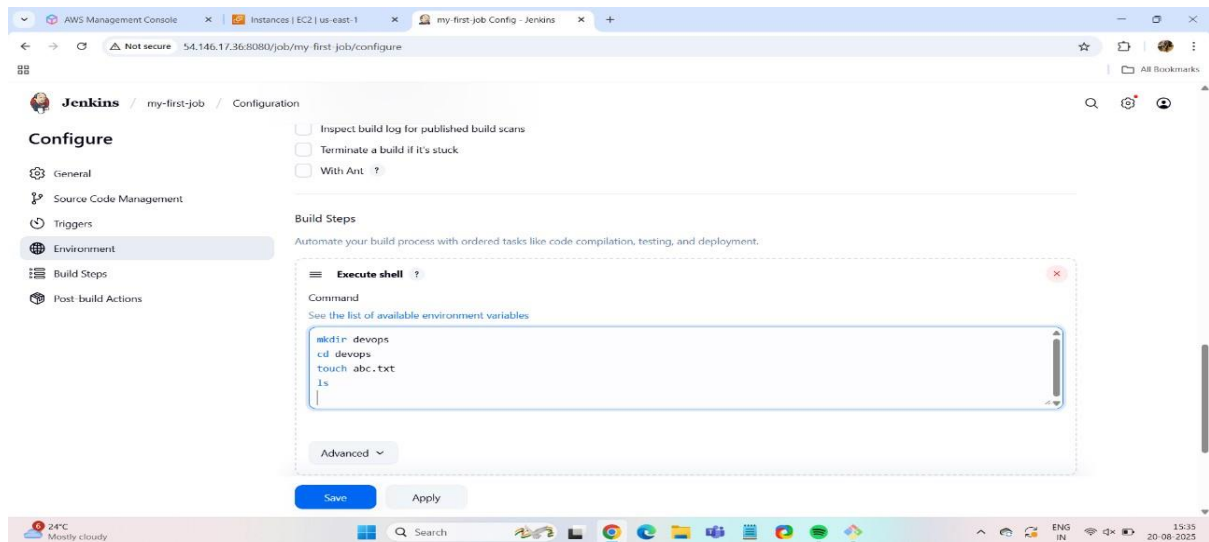


STEP 9: after that do **apply** and **save** click on **build now**.

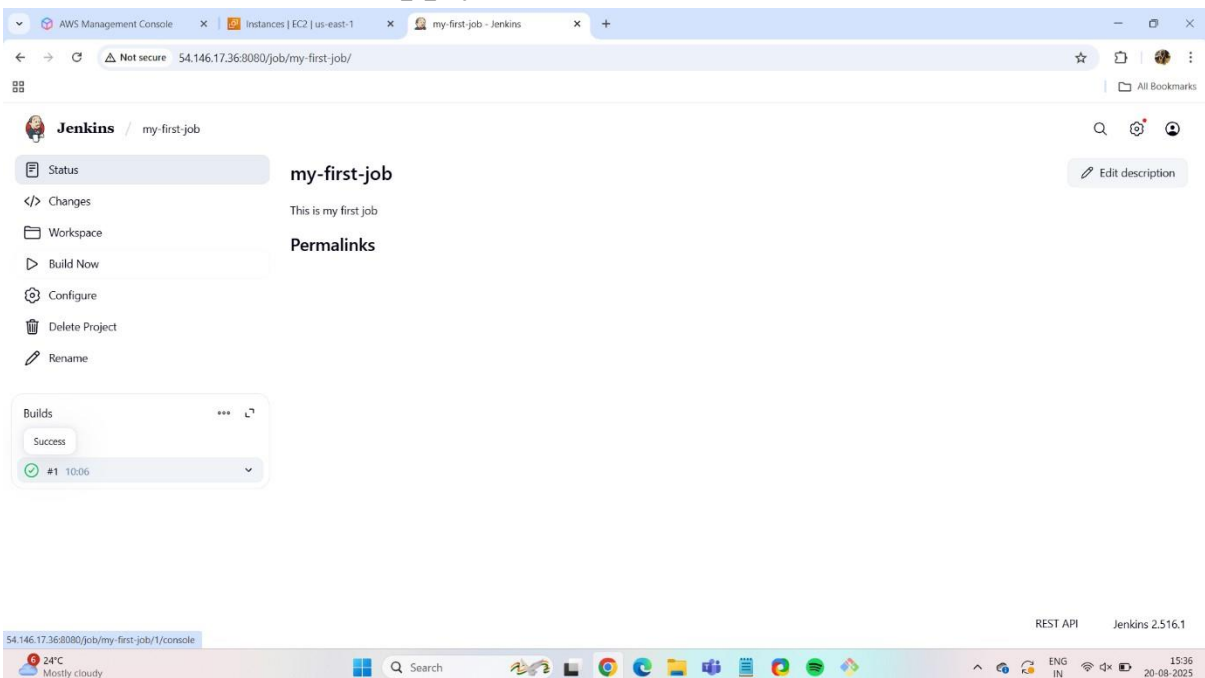

If you also see output in Jenkins dashboard, go to console output and see output

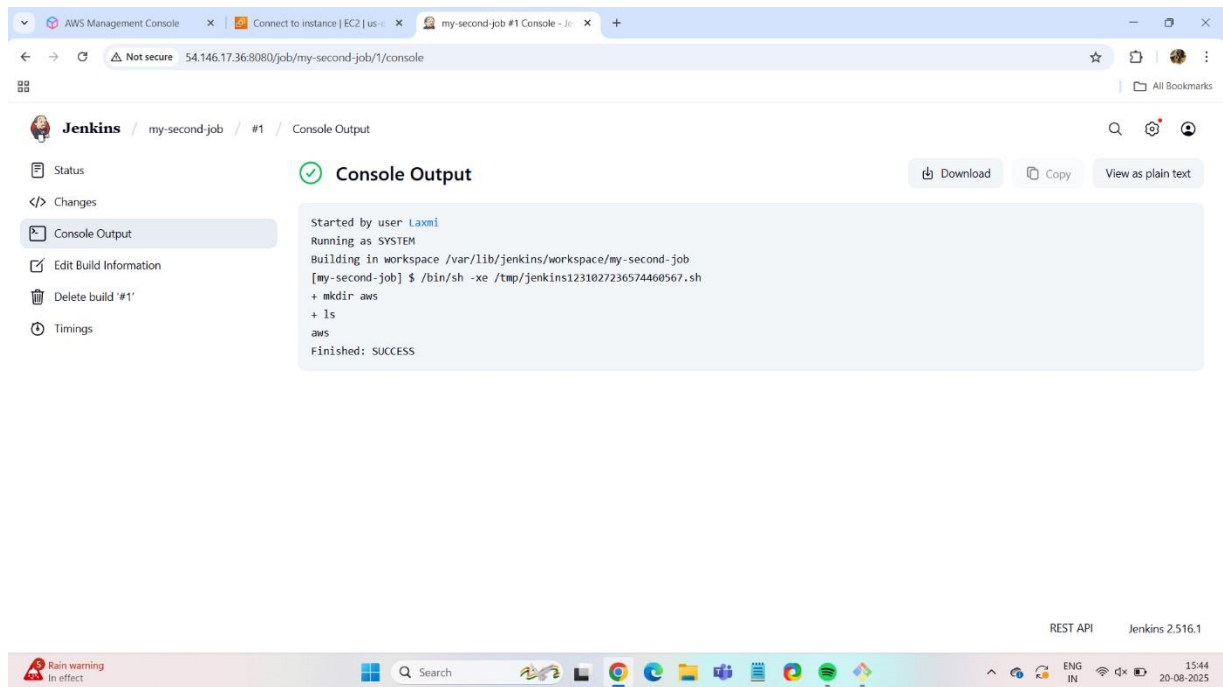

STEP 10: Now after doing this, you will get one folder inside Jenkins name **workspace**.

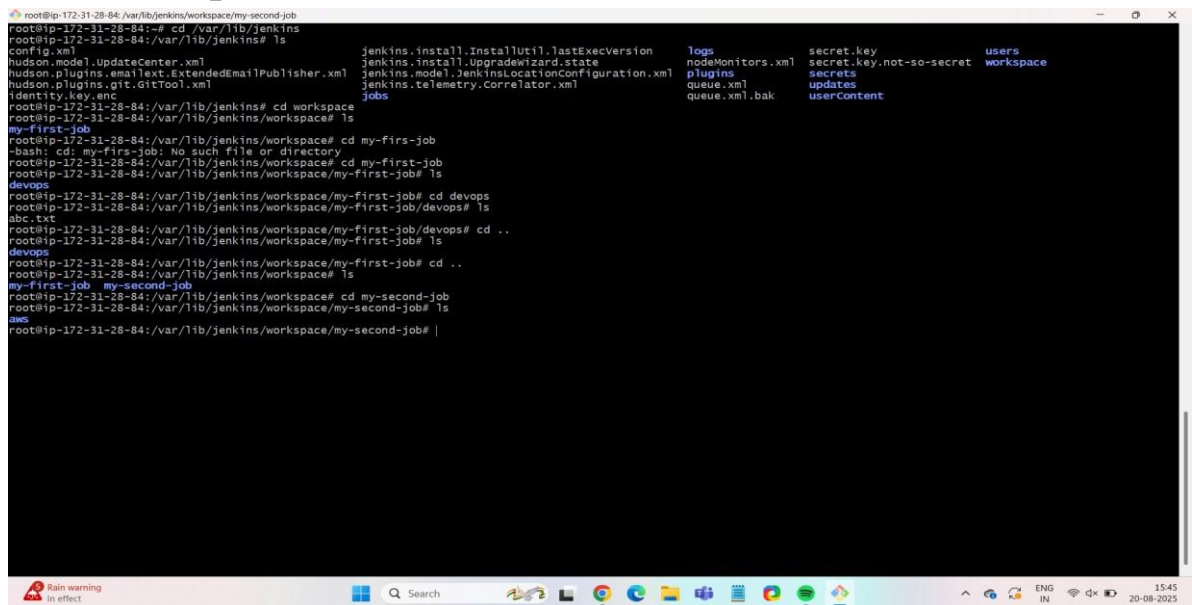


STEP 11: If you click on build job again the job will be failed as the job is already built.

The screenshot shows the Jenkins interface for a job named 'my-second-job'. The job status is 'Failed'. The left sidebar contains links for Status, Changes, Workspace, Build Now, Configure, Delete Project, and Rename. The main area shows the job name with a green checkmark, a description 'this is my 2nd job', and a list of permalinks for the last build, last stable build, last successful build, and last completed build. Below this is a 'Builds' section with a filter and a list of builds: #2 (Failed, 10:16) and #1 (Successful, 10:13). The bottom of the page shows the REST API and Jenkins version 2.516.1.

The screenshot shows the Jenkins Dashboard. The left sidebar contains links for New Item, Build History, Build Queue, and Build Executor Status. The main area shows a table of jobs with columns for S, W, Name, Last Success, Last Failure, and Last Duration. The table lists two jobs: 'my-first-job' (Successful, 10 min, #1) and 'my-second-job' (Failed, 2 min 43 sec, #1). The bottom of the page shows the REST API and Jenkins version 2.516.1.

S	W	Name ↓	Last Success	Last Failure	Last Duration
✓	☀	my-first-job	10 min #1	N/A	0.21 sec
✗	☁	my-second-job	2 min 43 sec #1	11 sec #2	16 ms

STEP 12: Now create new item name and select the item type.

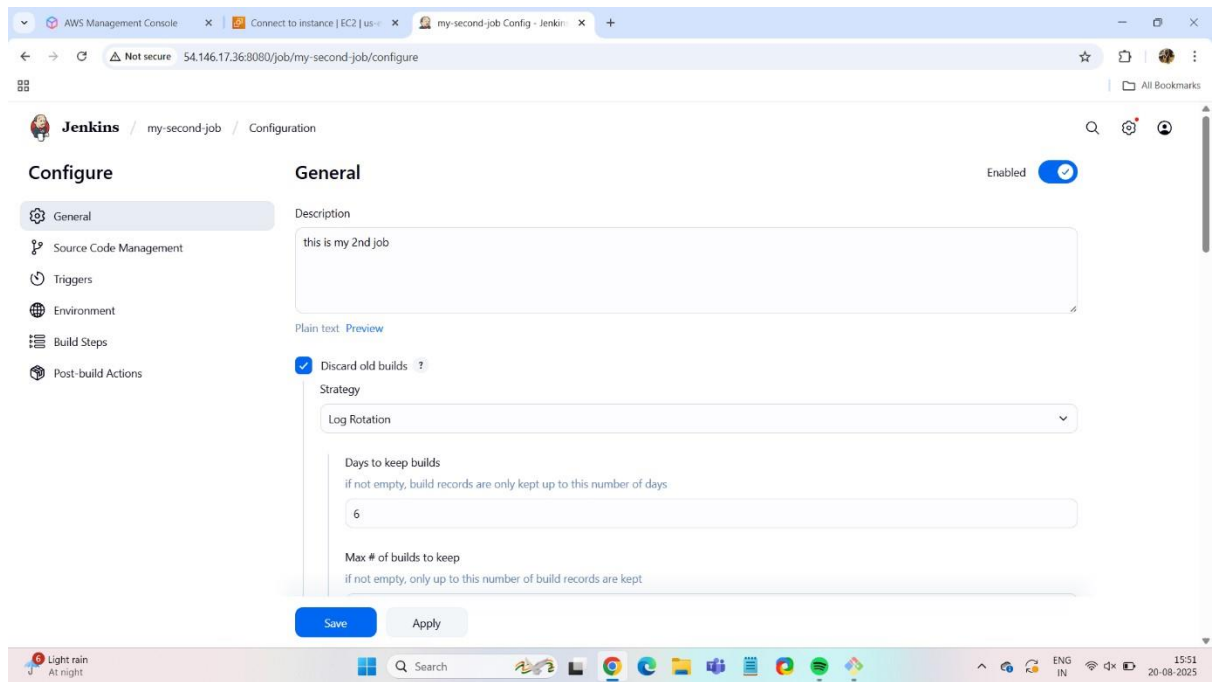


STEP 13: Now I have written below script and click on build now and got the below output.

mkdir aws

cd aws ls

touch

abc.txt

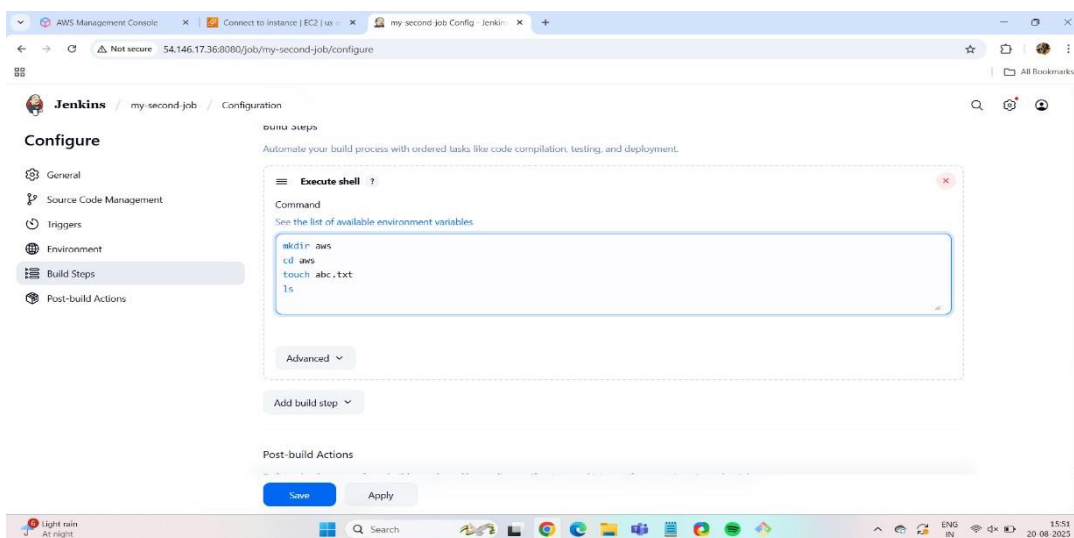

STEP 14: Now If I try fail the job 1 it won't fail if I go to **Environment variable** and select the **delete before build start** option it will delete the job and again execute it.

So I untick that option and then the job gets failed.


STEP 15: If I failed the job for 3 times the below symbol will be show (raining cloud).

The screenshot displays the Jenkins web interface and a terminal window. The Jenkins dashboard shows a table of jobs with columns for Name, Last Success, Last Failure, and Last Duration. The job 'my-second-job' is shown with a failure icon (a cloud with rain) and a duration of 16 sec. Below the dashboard, a terminal window shows the command prompt 'root@ip-172-31-28-84: /var/lib/jenkins/workspace/my-second-job' and the execution of 'ls' command, listing files in the workspace directory. The files listed include 'jenkins.install.InstallUtil.LastExecVersion', 'jenkins.install.UpgradeWizard.state', 'jenkins.model.JenkinsLocationConfiguration.xml', 'jenkins.telemetry.Correlator.xml', 'logs', 'nodeMonitors.xml', 'secret.key', 'secret.key.not-so-secret', 'users', 'workspace', 'plugins', 'queue.xml', 'updates', and 'userContent'.


S	W	Name	Last Success	Last Failure	Last Duration
		my first job	16 min #1	N/A	0:21 sec
		my-second-job	0 min 22 sec #1	16 sec #5	16 ms

```
root@ip-172-31-28-84: /var/lib/jenkins/workspace/my-second-job
root@ip-172-31-28-84:~# cd /var/lib/jenkins
root@ip-172-31-28-84: /var/lib/jenkins# ls
config.xml
jenkins.install.InstallUtil.LastExecVersion
jenkins.install.UpgradeWizard.state
jenkins.model.JenkinsLocationConfiguration.xml
jenkins.telemetry.Correlator.xml
logs
nodeMonitors.xml
secret.key
secret.key.not-so-secret
users
workspace
plugins
queue.xml
updates
userContent
root@ip-172-31-28-84: /var/lib/jenkins# cd workspace
root@ip-172-31-28-84: /var/lib/jenkins/workspace# ls
my-first-job
root@ip-172-31-28-84: /var/lib/jenkins/workspace# cd my-first-job
root@ip-172-31-28-84: /var/lib/jenkins/workspace/my-first-job# ls
devops
root@ip-172-31-28-84: /var/lib/jenkins/workspace/my-first-job# cd devops
root@ip-172-31-28-84: /var/lib/jenkins/workspace/my-first-job/devops# ls
abc.txt
root@ip-172-31-28-84: /var/lib/jenkins/workspace/my-first-job/devops# cd ..
root@ip-172-31-28-84: /var/lib/jenkins/workspace/my-first-job# ls
devops
root@ip-172-31-28-84: /var/lib/jenkins/workspace/my-first-job# cd ..
root@ip-172-31-28-84: /var/lib/jenkins/workspace# ls
my-first-job  my-second-job
root@ip-172-31-28-84: /var/lib/jenkins/workspace# cd my-second-job
root@ip-172-31-28-84: /var/lib/jenkins/workspace/my-second-job# ls
aws
root@ip-172-31-28-84: /var/lib/jenkins/workspace/my-second-job# |
```


STEP 17: Now again I click on new item and name and select the item type.

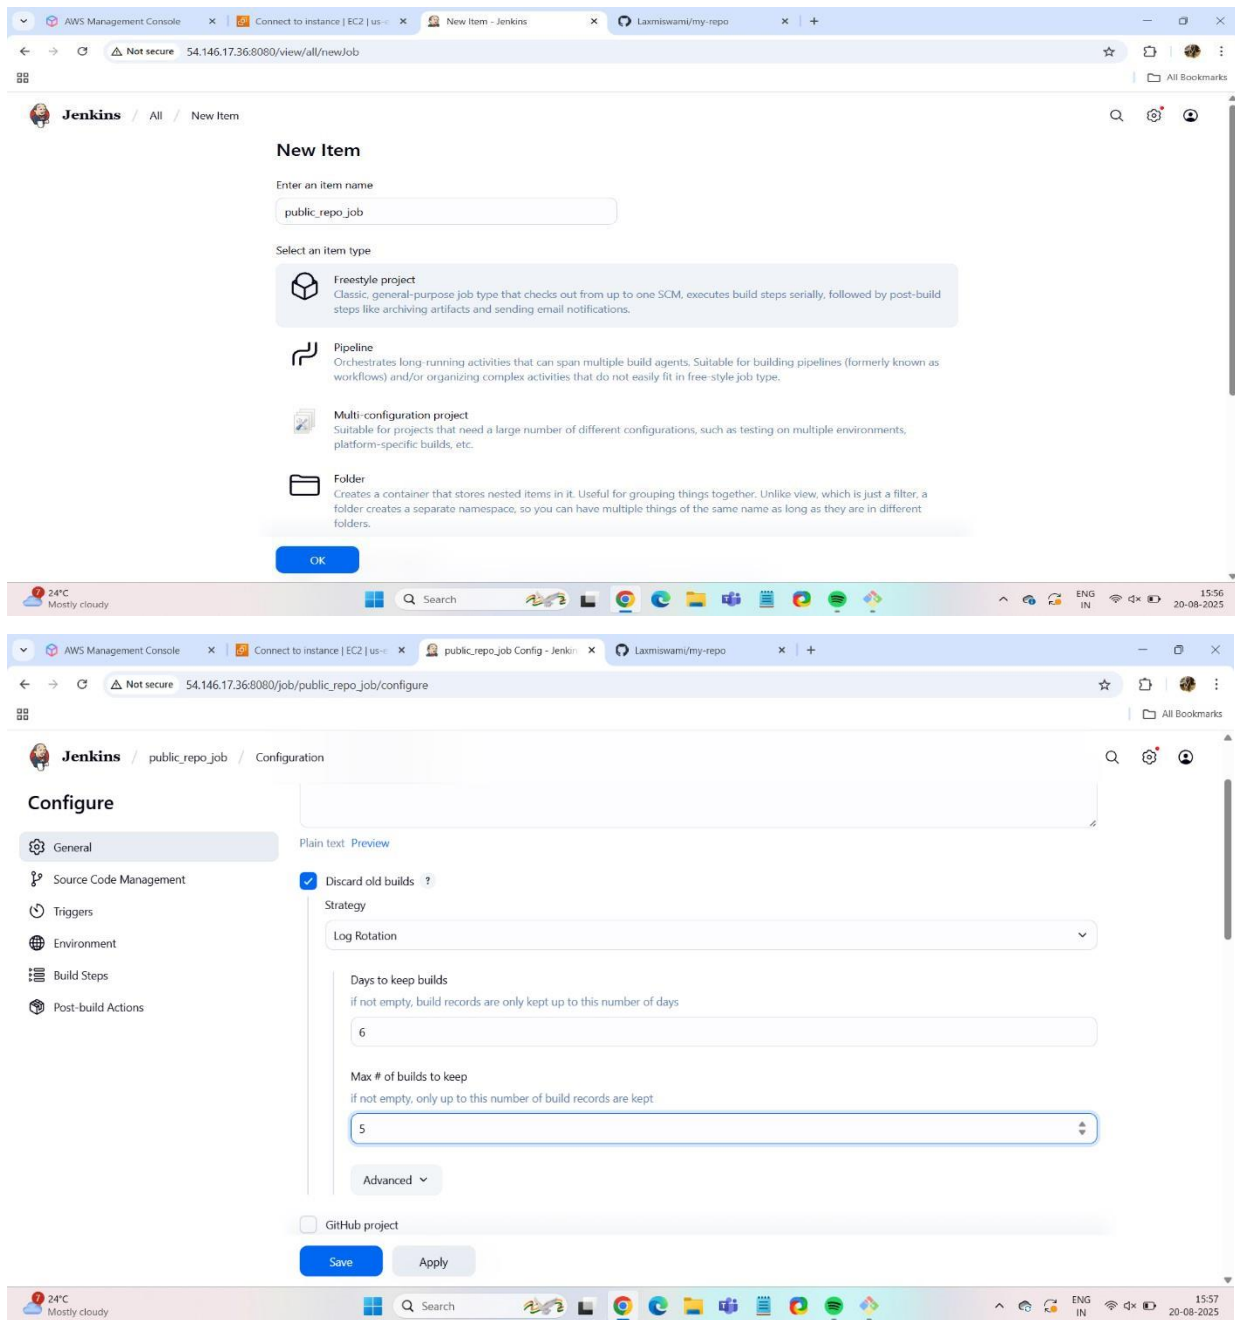


STEP 18: Now I will go to git-hub and copy the path and select the git option inside git and paste the path there.

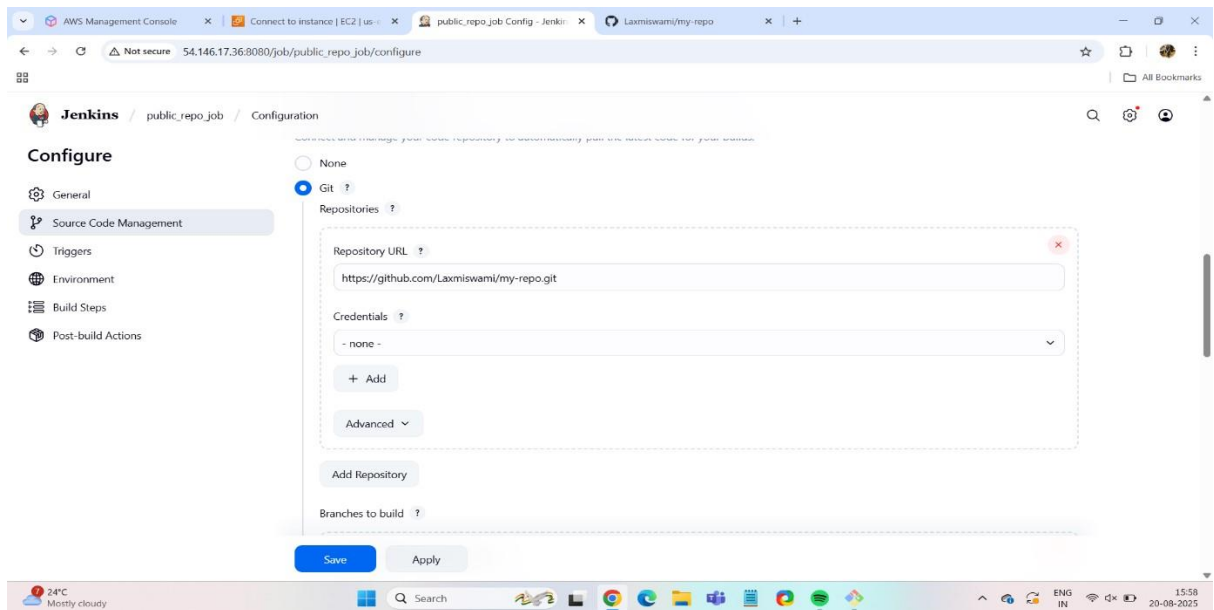


STEP 19: Check the branch where your folder is present main/master.

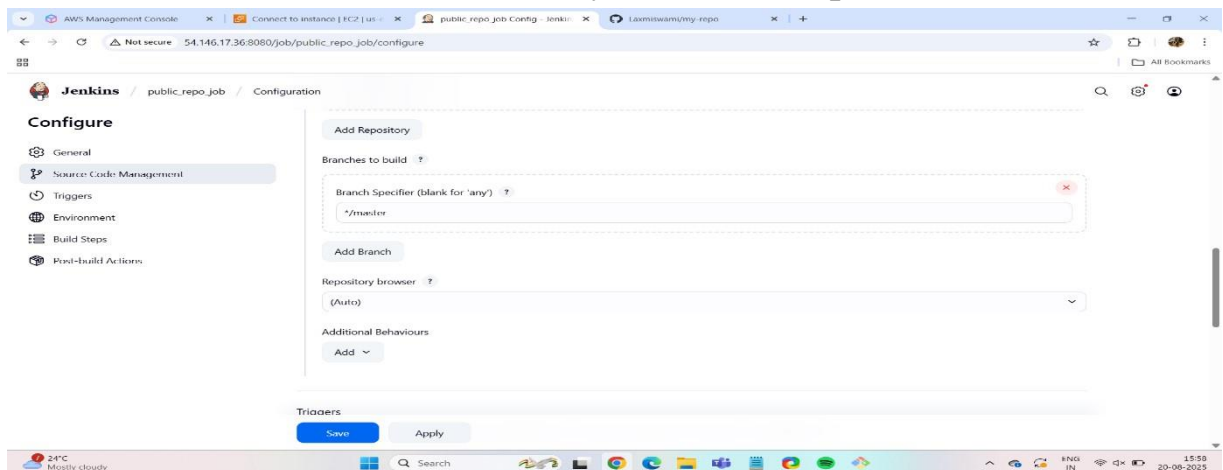

STEP 20 : I have only fetch ls command in shell script.

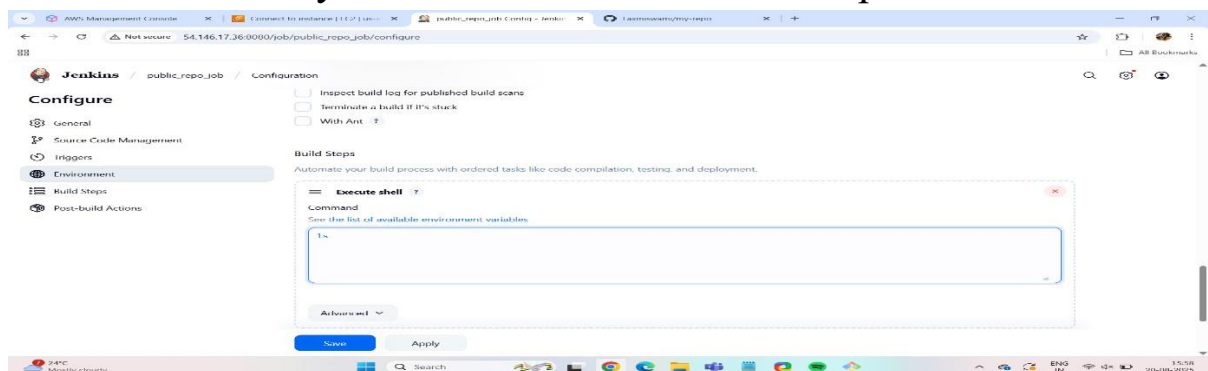


STEP 21: Now when I click on build now and check the output I got below output.

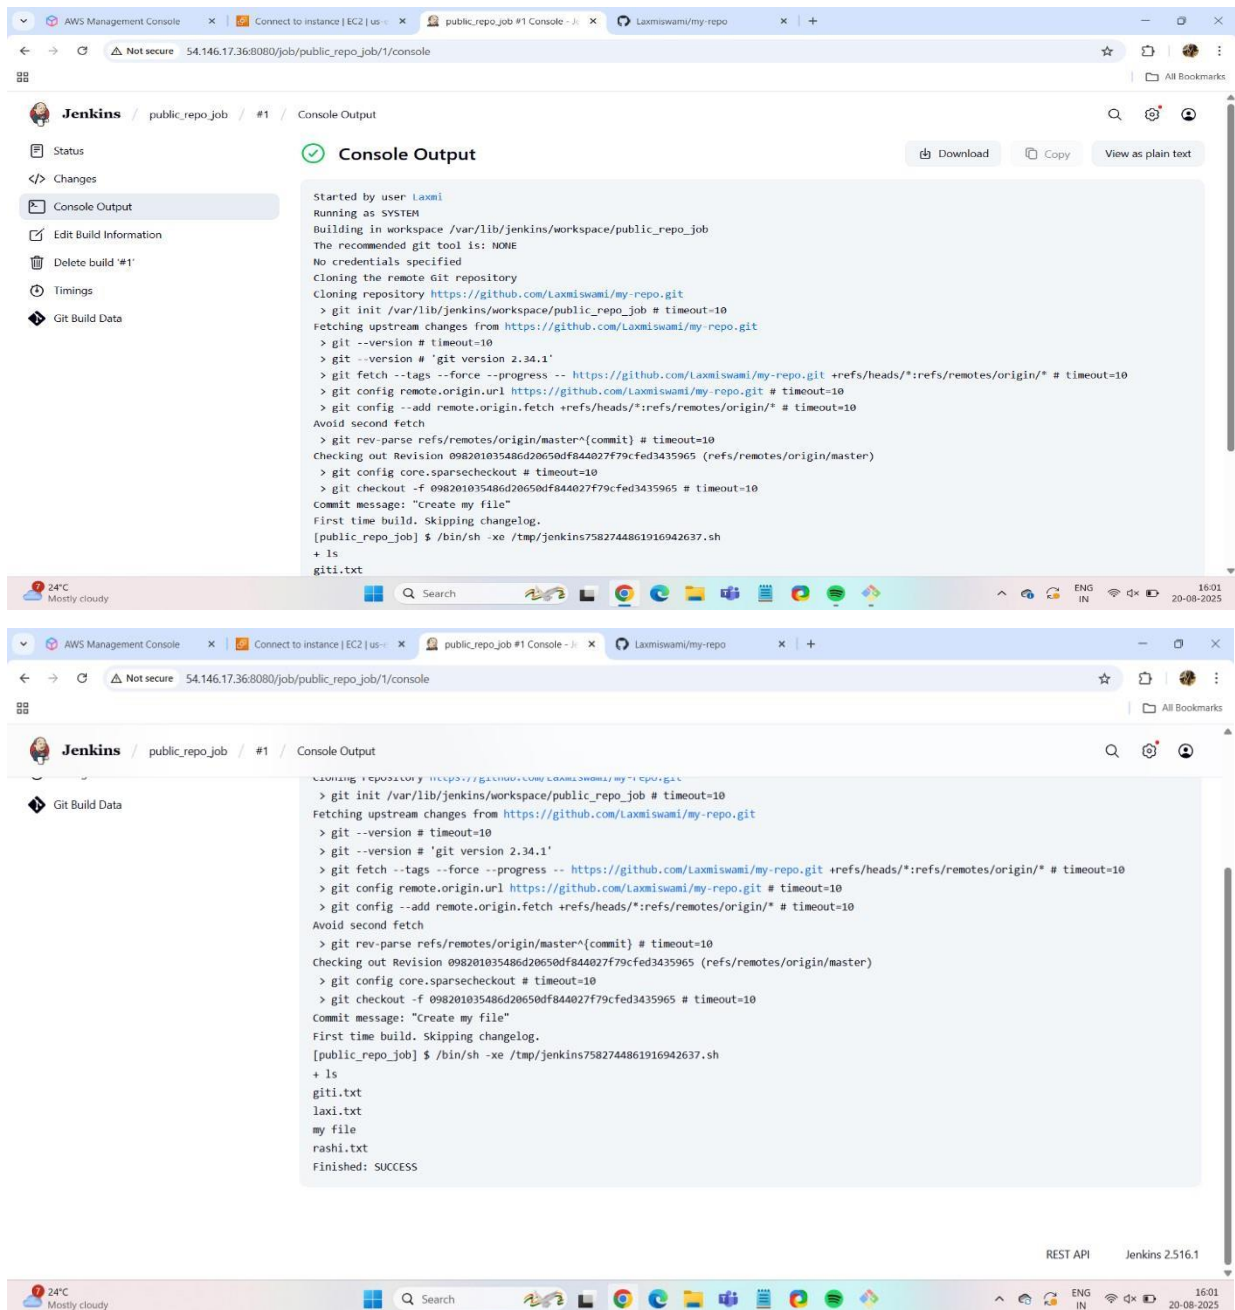


STEP 22 : Now if I go inside the third job folder on git-bash I will get below folder present on github same files and folder will reflect here.


```
root@ip-172-31-28-84: /var/lib/jenkins/workspace/public_repo_job
my-first-job my-second-job
root@ip-172-31-28-84: /var/lib/jenkins/workspace# cd my-second-job
root@ip-172-31-28-84: /var/lib/jenkins/workspace/my-second-job# ls
aws
root@ip-172-31-28-84: /var/lib/jenkins/workspace/my-second-job# cd aws
root@ip-172-31-28-84: /var/lib/jenkins/workspace/my-second-job/aws# ls
root@ip-172-31-28-84: /var/lib/jenkins/workspace/my-second-job/aws# cd ..
root@ip-172-31-28-84: /var/lib/jenkins/workspace/my-second-job# cd ..
root@ip-172-31-28-84: /var/lib/jenkins/workspace# ls
my-first-job my-second-job public_repo_job
root@ip-172-31-28-84: /var/lib/jenkins/workspace# cd public_repo_job
root@ip-172-31-28-84: /var/lib/jenkins/workspace/public_repo_job# ls
git1.txt lax1.txt 'my file' rash1.txt
root@ip-172-31-28-84: /var/lib/jenkins/workspace/public_repo_job# |
```

STEP 23: Now I will try to fetch the private repo on Jenkins I will copy the path. create another job name as private-repo-job job select the item type.

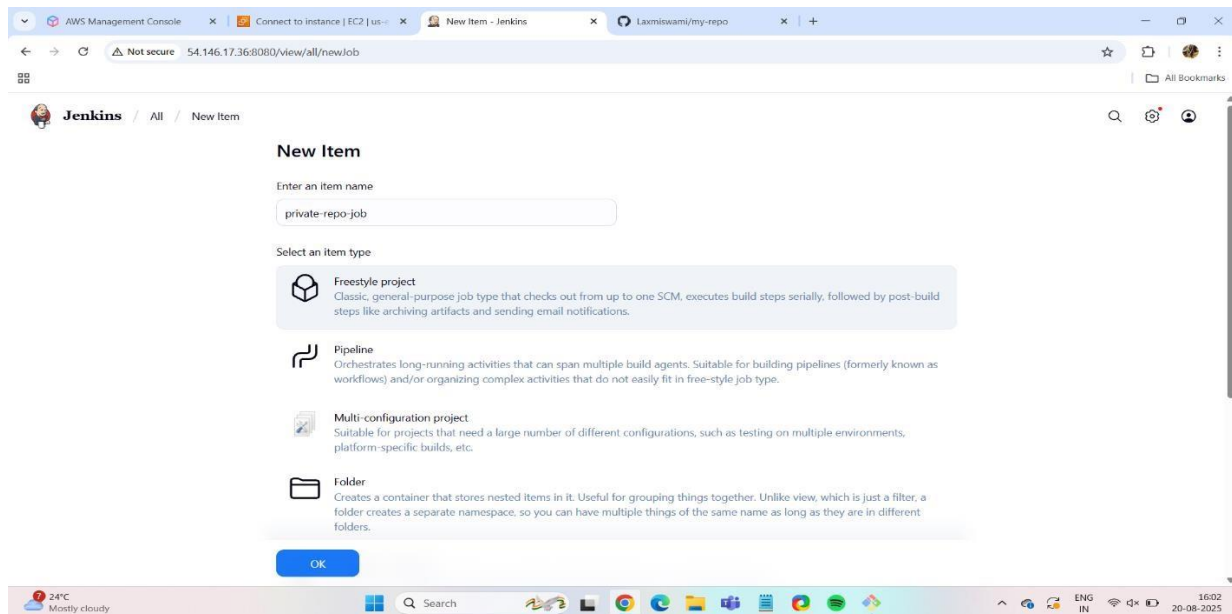


STEP 24: Now inside git section we will get below error so I will click on add credentials I will add username and will paste token as a password here.

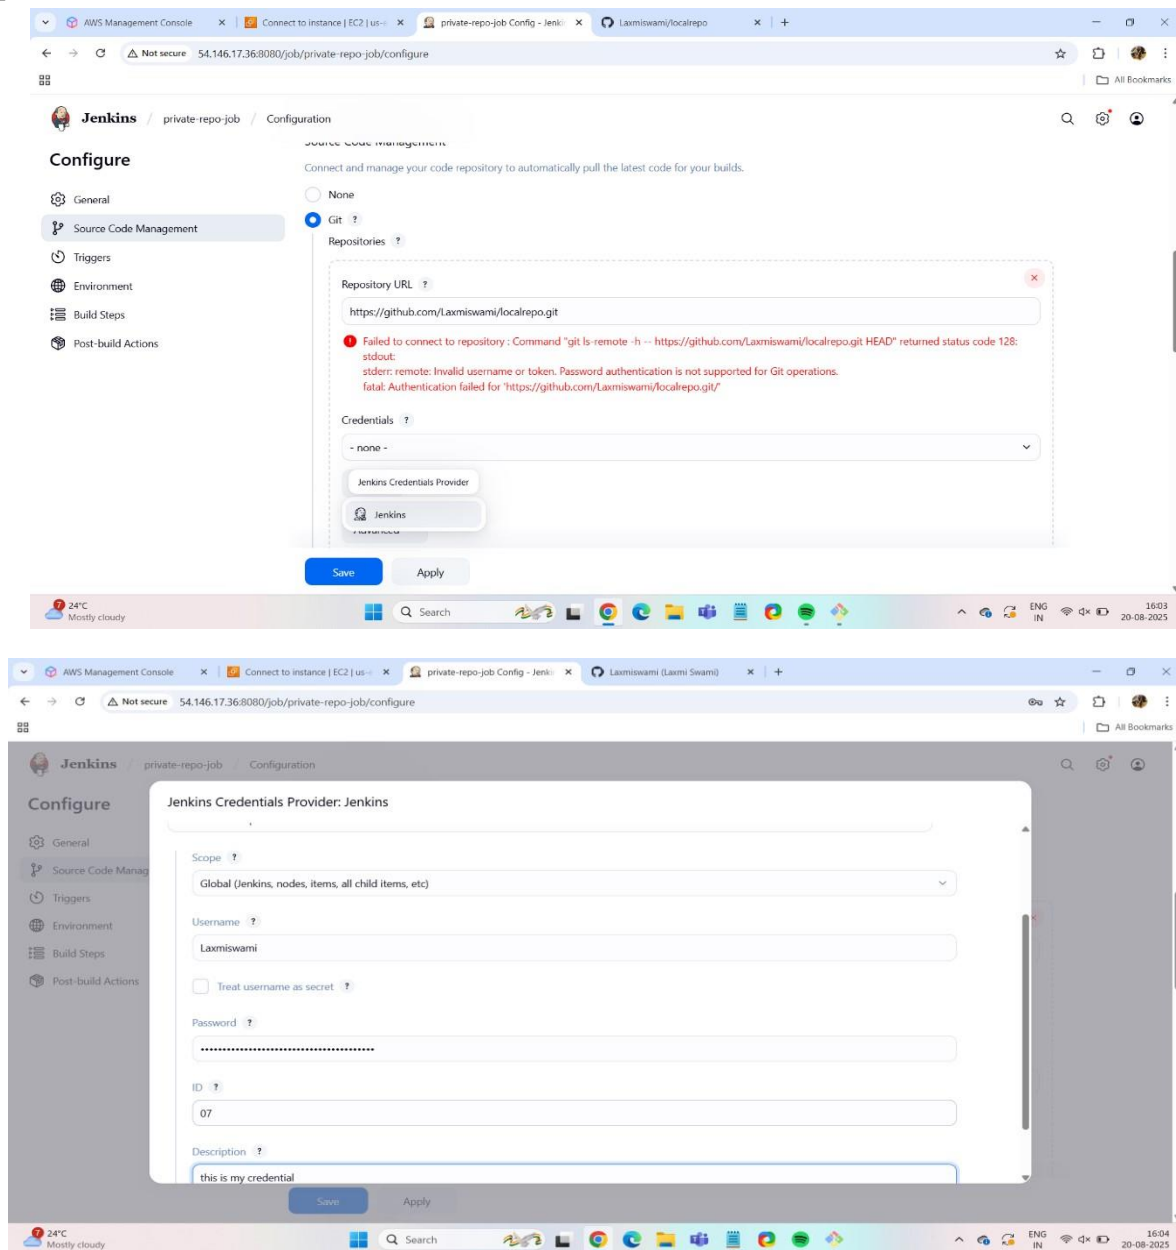


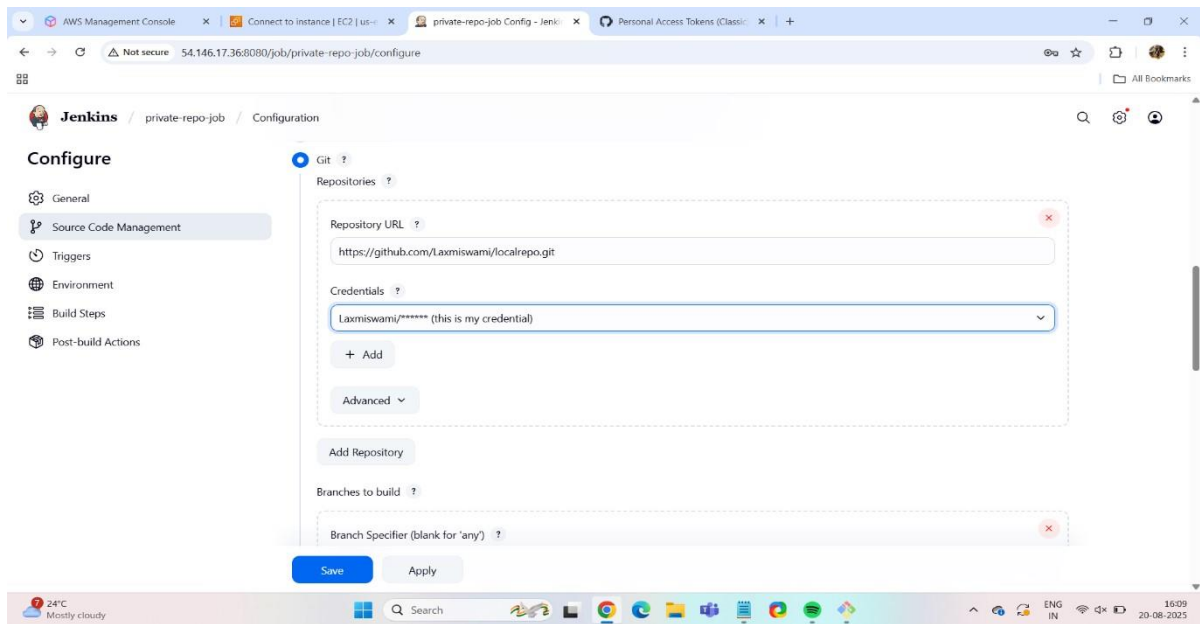


STEP 25: Inside shell I will only do ls.

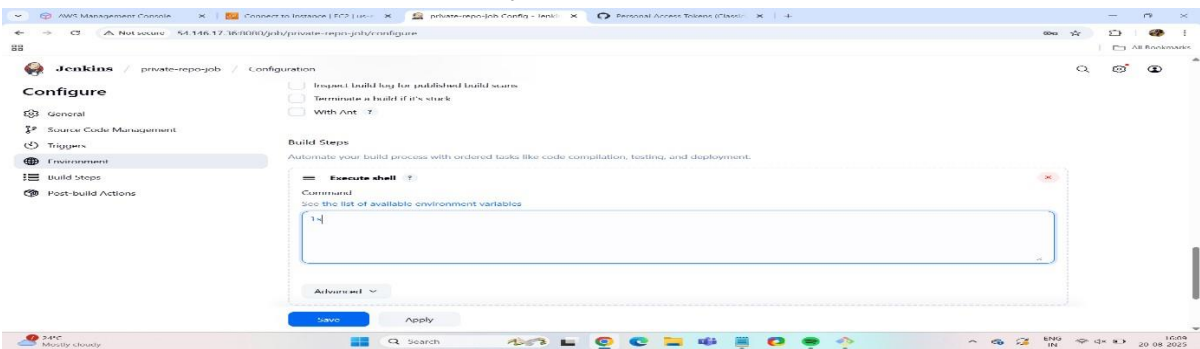

STEP 26 : Now when click on build on I got below output.

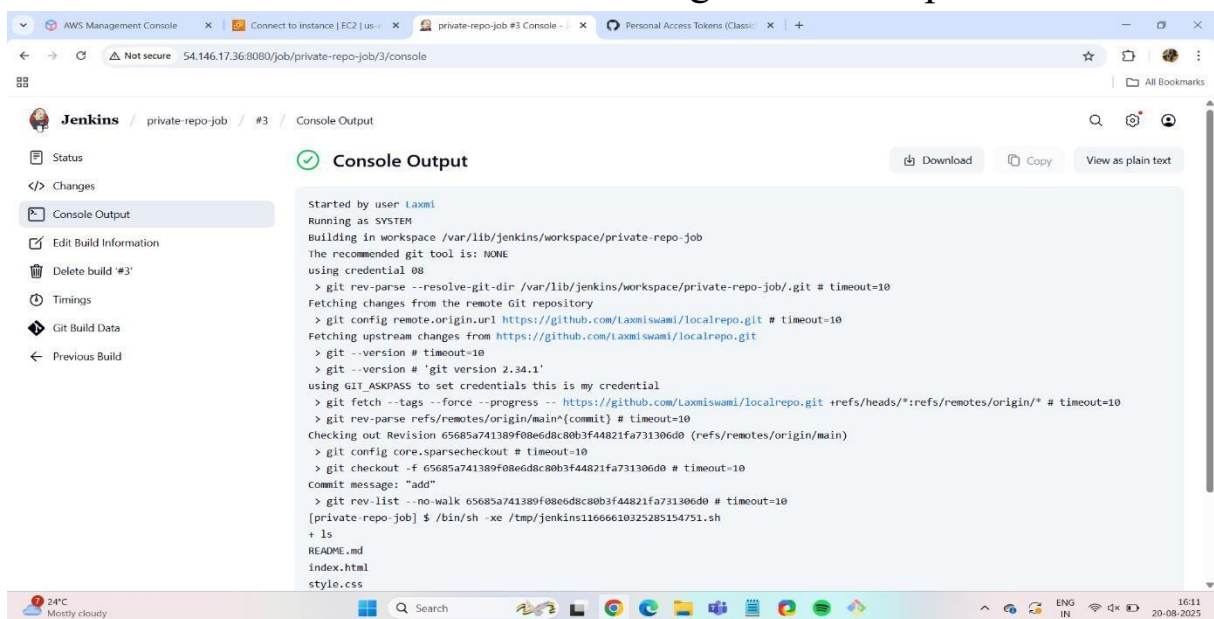

STEP 27: When I go to fourth job on git-bash and do ls will get all the data which was available on git-hub private repo.

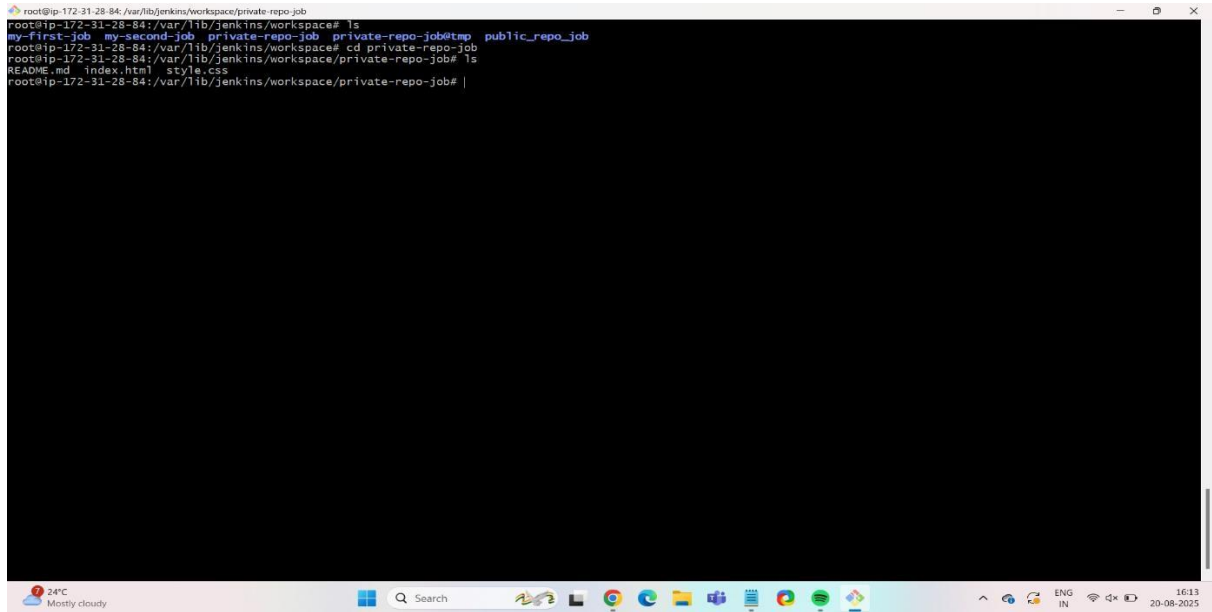

```
root@ip-172-31-28-84: /var/lib/jenkins/workspace/private-repo-job
root@ip-172-31-28-84:/var/lib/jenkins/workspace# ls
my-first-job  my-second-job  private-repo-job  private-repo-job@tmp  public_repo_job
root@ip-172-31-28-84:/var/lib/jenkins/workspace# cd private-repo-job
root@ip-172-31-28-84:/var/lib/jenkins/workspace/private-repo-job# ls
README.md  index.html  style.css
root@ip-172-31-28-84:/var/lib/jenkins/workspace/private-repo-job# |
```

The screenshot shows a terminal window with a Windows taskbar at the bottom. The terminal displays the following sequence of commands and outputs:

- `root@ip-172-31-28-84: /var/lib/jenkins/workspace/private-repo-job`
- `root@ip-172-31-28-84:/var/lib/jenkins/workspace# ls`
Output: `my-first-job my-second-job private-repo-job private-repo-job@tmp public_repo_job`
- `root@ip-172-31-28-84:/var/lib/jenkins/workspace# cd private-repo-job`
- `root@ip-172-31-28-84:/var/lib/jenkins/workspace/private-repo-job# ls`
Output: `README.md index.html style.css`
- `root@ip-172-31-28-84:/var/lib/jenkins/workspace/private-repo-job# |`

The Windows taskbar at the bottom shows the Start button, a search bar, and several application icons. The system tray on the right indicates a temperature of 24°C, mostly cloudy weather, and the time 16:13 on 20-08-2025.