


Name: - Laxmi Swami

Topic: - Jenkins Parameter Job

Step 1: First Change your public Ip in Jenkins URL

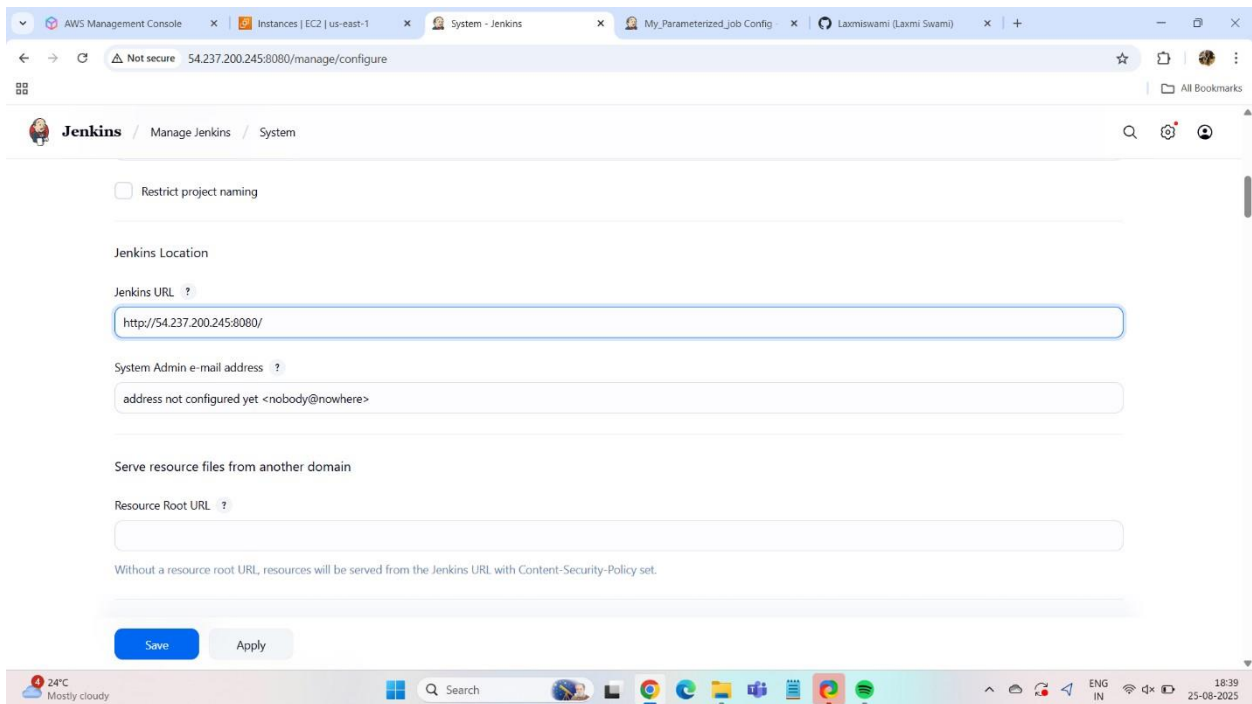

Step 2: Now Create one Job integrate with git public repo

Browser tabs: AWS Management Console, Instances | EC2 | us-east-1, Dashboard - Jenkins, New Item - Jenkins, My_Parameterized_Job - Yahoo.

URL: 54.237.200.245:8080/view/all/newJob

Jenkins / All / New Item

New Item

Enter an item name

My_Parameterized_Job

Select an item type

- Freestyle project**
Classic, general purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.
- Pipeline**
Orchestrates long-running activities that can span multiple build agents. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.
- Multi-configuration project**
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.
- Folder**
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.

OK

News for you: Yes Bank shares...

Search

18:19 25-08-2025

Browser tabs: AWS Management Console, Instances | EC2 | us-east-1, Dashboard - Jenkins, My_Parameterized_Job Config, Laxmishwami/my-repo.

URL: 54.237.200.245:8080/job/My_Parameterized_Job/configure

Jenkins / My_Parameterized_Job / Configuration

Configure

General | Source Code Management | Triggers | Environment | Build Steps | Post-build Actions

General

Enabled

Description

Plain text Preview

☒ Discard old builds ?

Strategy

Log Rotation

Days to keep builds
if not empty, build records are only kept up to this number of days

6

Max # of builds to keep
if not empty, only up to this number of build records are kept

Save Apply

Top Stories: 20 Killed In Israel...

Search

18:22 25-08-2025

Browser tabs: AWS Management Console, Instances | EC2 | us-east-1, Dashboard - Jenkins, My_Parameterized_Job Config, Laxmishwami/my-repo.

URL: 54.237.200.245:8080/job/My_Parameterized_Job/configure

Jenkins / My_Parameterized_Job / Configuration

Configure

General | Source Code Management | Triggers | Environment | Build Steps | Post-build Actions

Source Code Management

Branches to build ?

Branch Specifier (blank for 'any') ?

*/master

Add Branch

Repository browser ?

(Auto)

Additional Behaviours

Add

Triggers


Set up automated actions that start your build based on specific events, like code changes or scheduled times.

Save Apply



Top Stories: 20 Killed In Israel...

Search

18:22 25-08-2025

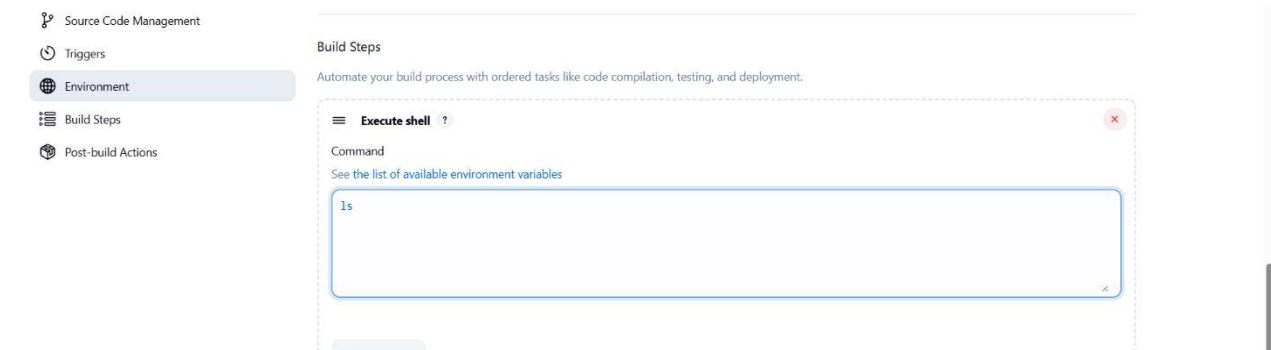

Step 3: After Create one job go to >System Manage> Security>in GitHub server advanced edit> override hook>change Ip in that hook and copy > go to GitHub >choose repo>setting>add webhook>paste URL in payload

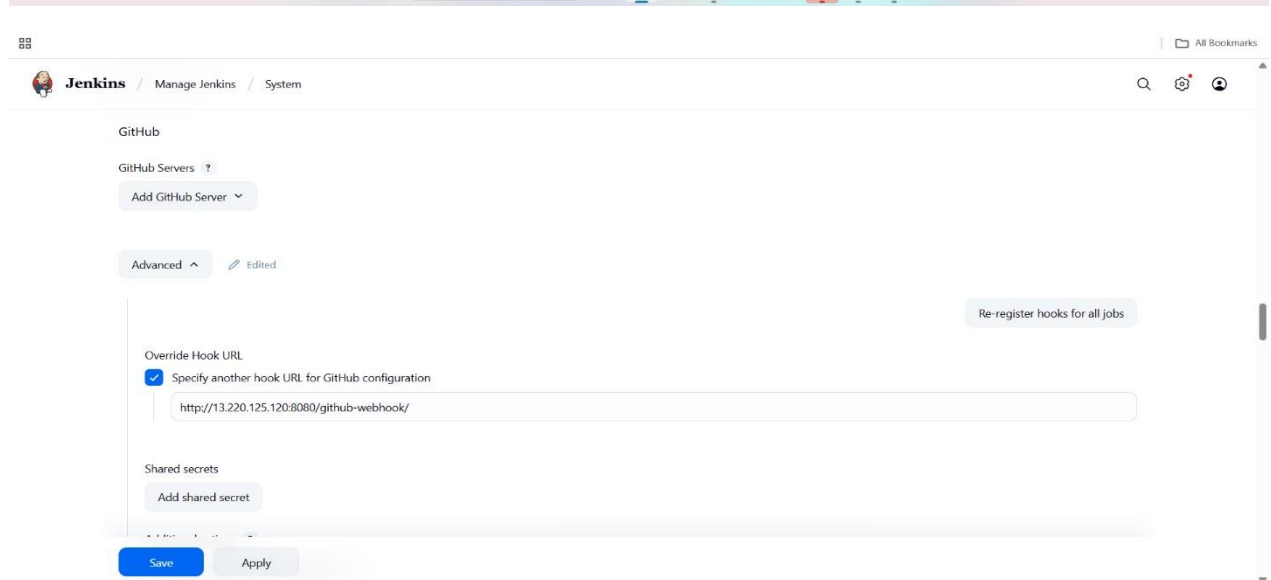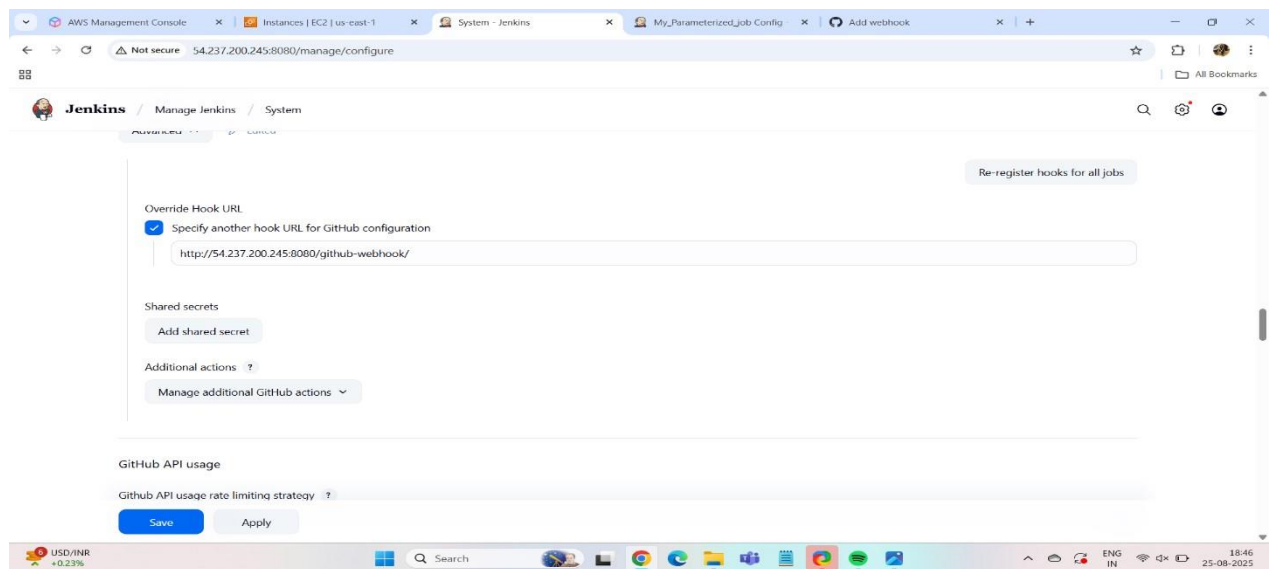

AWS Management Console | Instances | EC2 | us-east-1 | System - Jenkins | My_Parameterized_Job_Config | Webhooks - Settings - Laxmiwami

github.com/Laxmiwami/my-repo/settings/hooks

Laxmiwami / my-repo

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

General Webhooks Add webhook

Access Collaborators Moderation options

Code and automation Branches Tags Rules Actions Models (Preview) Webhooks Copilot Environments Codespaces Pages Security

Webhooks

Webhooks allow external services to be notified when certain events happen. When the specified events happen, we'll send a POST request to each of the URLs you provide. Learn more in our [Webhooks Guide](#).

Rain warning In effect

Search

24°C Mostly cloudy

18:41 25-08-2025

AWS Management Console | Instances | EC2 | us-east-1 | System - Jenkins | My_Parameterized_Job_Config | Webhook - http://54.237.200.245

github.com/Laxmiwami/my-repo/settings/hooks/565930667

Laxmiwami / my-repo

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

General Webhooks / Manage webhook

Settings Recent Deliveries

We'll send a POST request to the URL below with details of any subscribed events. You can also specify which data format you'd like to receive (JSON, x-www-form-urlencoded, etc). More information can be found in our [developer documentation](#).

Payload URL * http://54.237.200.245:8080/github-webhook/

Content type * application/x-www-form-urlencoded

Secret

SSL verification By default, we verify SSL certificates when delivering payloads. ☒ Enable SSL verification ☐ Disable (not recommended)

Which events would you like to trigger this webhook? ☒ Just the push event. ☐ Send me everything.

24°C Mostly cloudy

Search

18:50 25-08-2025

AWS Management Console | Instances | EC2 | us-east-1 | System - Jenkins | My_Parameterized_Job_Config | Webhooks - Settings - Laxmiwami

github.com/Laxmiwami/my-repo/settings/hooks

Laxmiwami / my-repo

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

General Webhooks Add webhook

Access Collaborators Moderation options

Code and automation Branches Tags Rules Actions Models (Preview) Webhooks Copilot Environments Codespaces Pages Security

Webhooks

Webhooks allow external services to be notified when certain events happen. When the specified events happen, we'll send a POST request to each of the URLs you provide. Learn more in our [Webhooks Guide](#).

✓ http://54.237.200.245:8080/github-... (push) Edit Delete

Last delivery was successful.

24°C Mostly cloudy

Search

18:51 25-08-2025

Step 4: Now go to your job configure>and add Boolean parameter and also select trigger as > GitHub hook trigger for GITScm polling


The image displays two screenshots of the Jenkins web interface, specifically the configuration page for a job named "My_Parameterized_job".

Top Screenshot: The "General" tab is selected in the left-hand "Configure" menu. The "Enabled" toggle is turned on. The "Description" field contains the text "This is Parameterized Job". The "Discard old builds" checkbox is checked, and the "Strategy" dropdown is set to "Log Rotation". The "Days to keep builds" field is set to "6". The "Max # of builds to keep" field is empty. The "Save" and "Apply" buttons are at the bottom.

Bottom Screenshot: The "Parameters" tab is selected in the left-hand "Configure" menu. The "GitHub project" checkbox is unchecked. The "This project is parameterised" checkbox is checked. A "Boolean Parameter" is added, with the following details:

- Name: Boolean_Job
- Set by Default: checked
- Description: This is Boolean Parameterized

The "Add Parameter" dropdown is visible below the parameter list. The "Save" and "Apply" buttons are at the bottom.

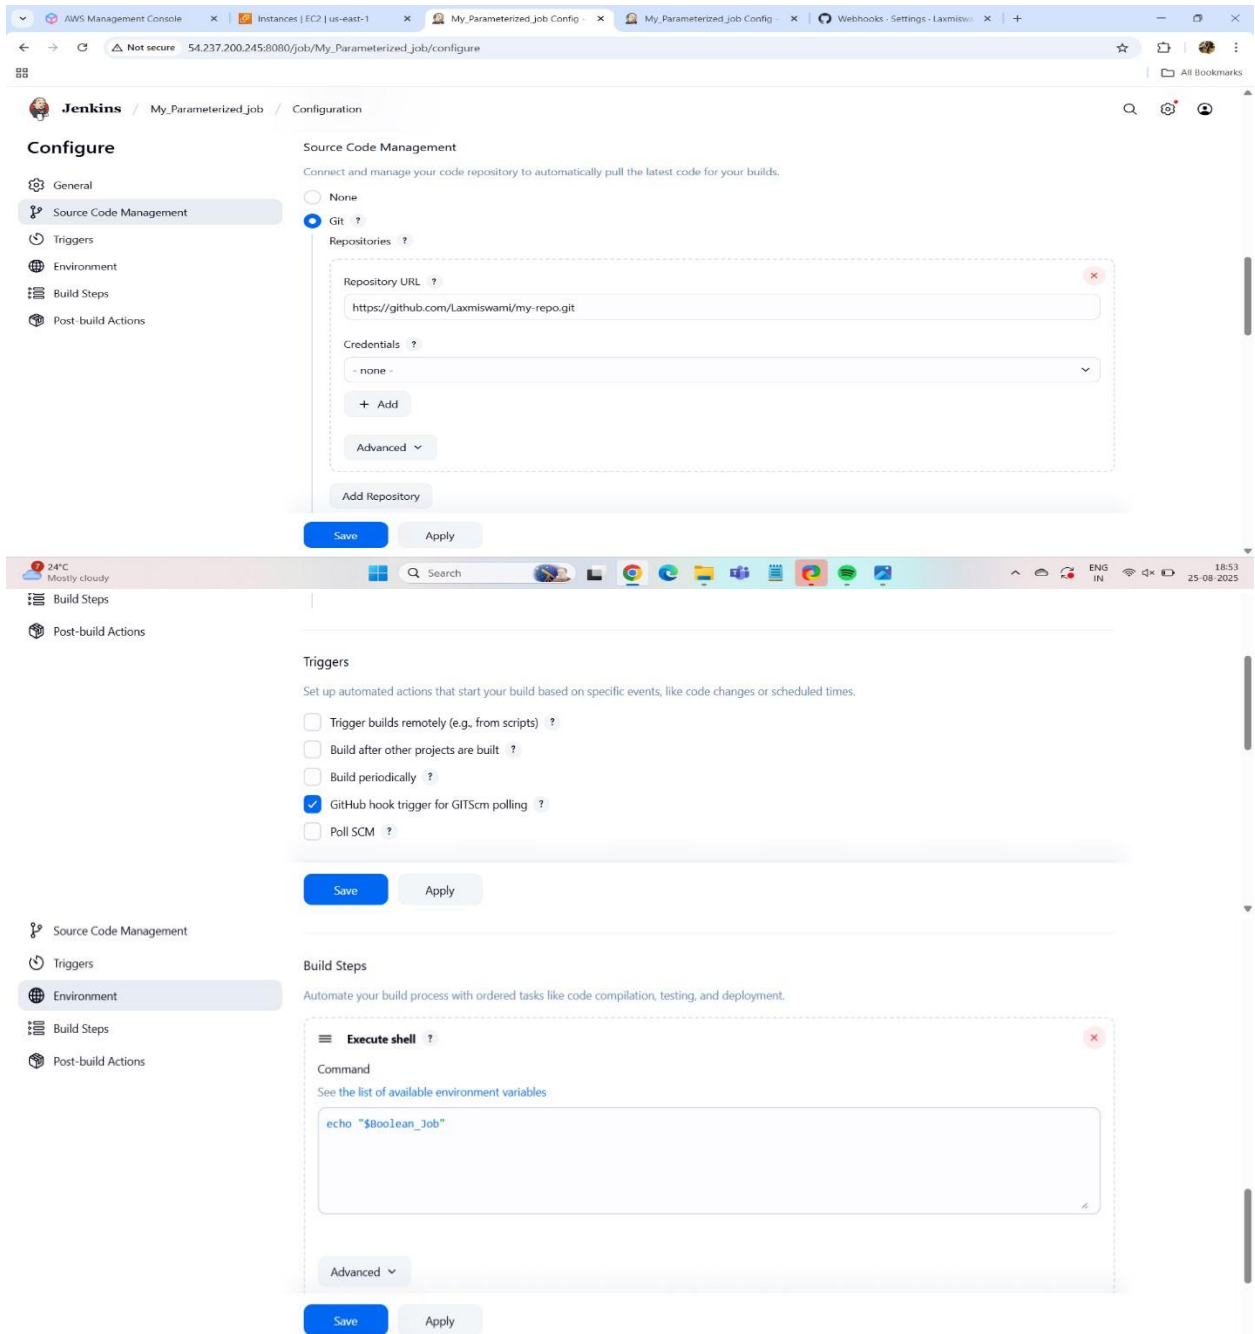

After applying and saving the job, when you build it:

Boolean: A **Boolean parameter in Jenkins** is a parameter that lets you pass a simple **true/false** value to a build.

⌵

AWS Management Console

×

Instances | EC2 | us-east-1

×

Jenkins

×

My_Parameterized_Job Config

×

Webhooks - Settings - Laxmish...

×

+

← → ↻ ⚠ Not secure 54.237.200.245:8080/job/My_Parameterized_Job/build?delay=0sec ☆ 📄 📄 📄 ⋮

 Jenkins

My_Parameterized_Job

Status

</> Changes

Workspace

▶ Build with Parameters

⚙️ Configure

🗑️ Delete Project

📄 Github Hook Log

✎ Rename

Project My_Parameterized_job

This build requires parameters:

☒ Boolean_Job

This is Boolean Parameterized

▶ Build

Cancel

Buils

*** 🗑️

🔍 Filter

/

Today

✔️ #3 13:22


▼

🟢

..

The image shows two screenshots from a Jenkins environment. The top screenshot displays the 'Build Steps' configuration page for a job named 'My_Parameterized_job'. The 'Execute shell' step is selected, and the command field contains the text `echo "$Boolean_Job"`. The 'Advanced' dropdown is visible, and 'Save' and 'Apply' buttons are at the bottom. The bottom screenshot shows the 'Console Output' for the same job. The output log shows the execution of a series of Git commands, including `git rev-parse --resolve-git-dir`, `git fetch --tags --force --progress`, and `git checkout -f`, followed by `echo true` and `true`, resulting in a 'Finished: SUCCESS' status. The Jenkins interface includes a left sidebar with navigation options like 'Status', 'Changes', 'Console Output', 'Edit Build Information', 'Delete build #5', 'Parameters', 'Timings', 'Git Build Data', and 'Previous Build'. The top of the console output shows 'Started by user Laxmi' and 'Running as SYSTEM'.

Choice Parameter: A **Choice parameter** in Jenkins lets you provide a **dropdown list of predefined options**, and the user must select one before running the build.

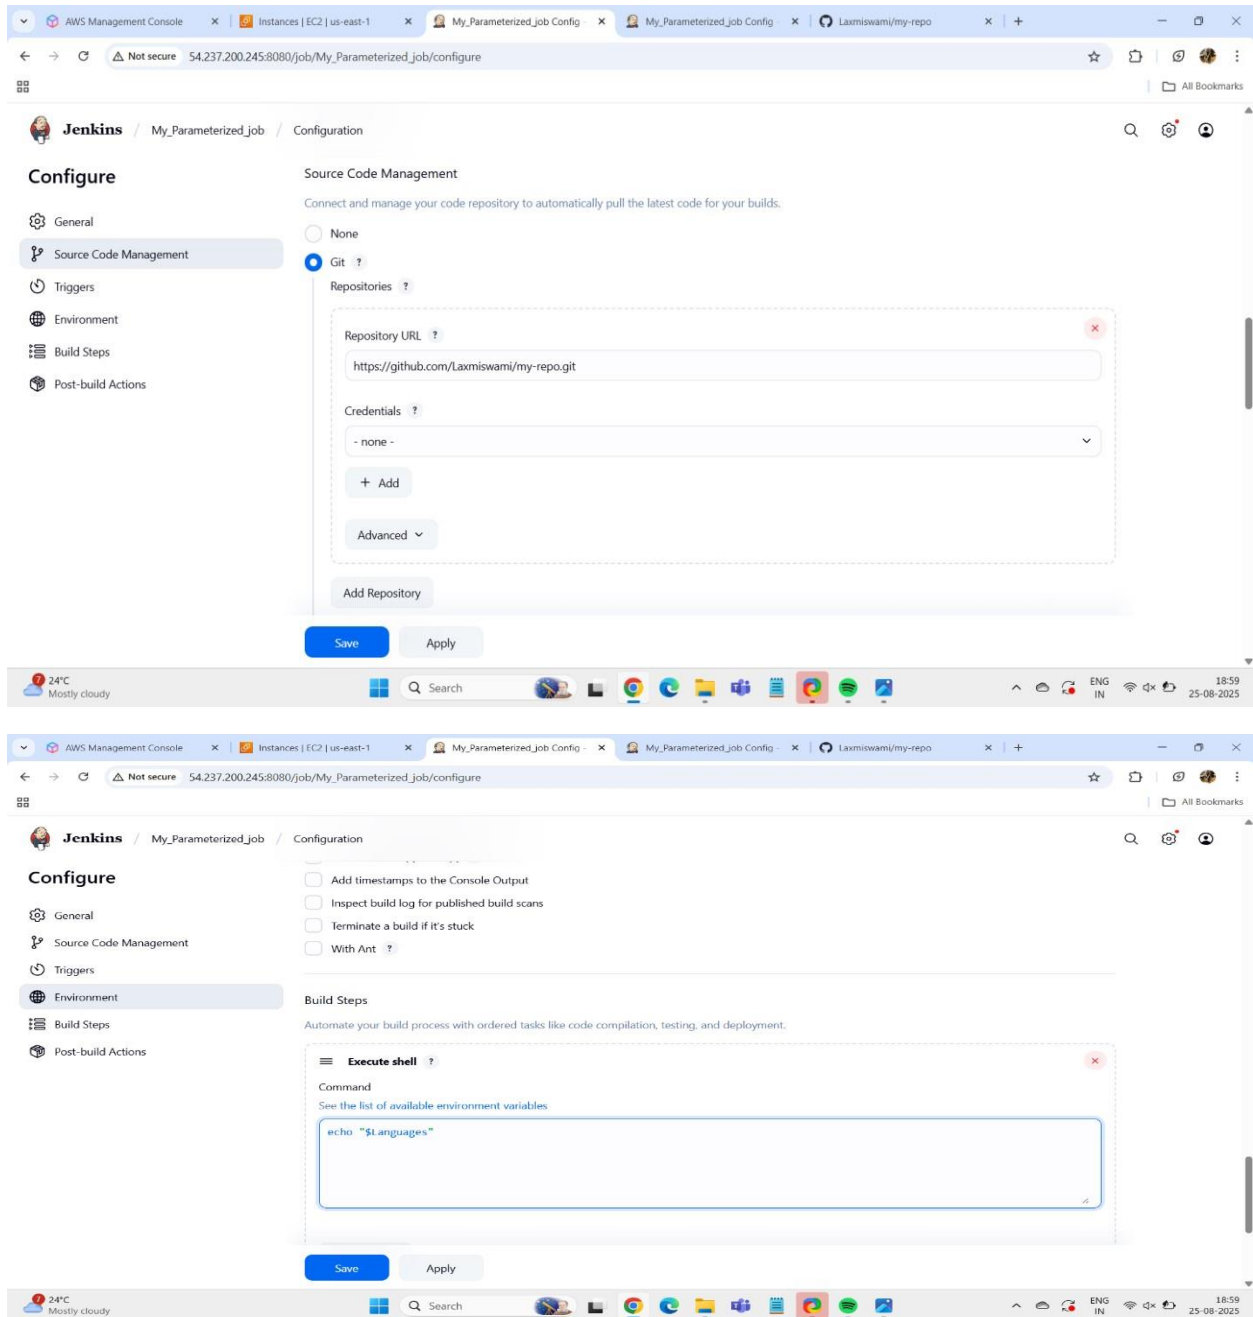

After applying and saving the job, when you Build it and choose your languages:

AWS Management Console | Instances | EC2 | us-east-1 | Jenkins | My_Parameterized_job Config | Laxmishwami/my-repo

Not secure 54.237.200.245:8080/job/My_Parameterized_job/build?delay=0sec

Jenkins / My_Parameterized_job

- Status
- Changes
- Workspace
- Build with Parameters
- Configure
- Delete Project
- GitHub Hook Log
- Rename

Project My_Parameterized_job

This build requires parameters:

Languages
This is Choice Parameterized

Java

Build Cancel

Builds

Filter

Today

#5 13:27

AWS Management Console | Instances | EC2 | us-east-1 | Jenkins | My_Parameterized_job Config | Laxmishwami/my-repo

Not secure 54.237.200.245:8080/job/My_Parameterized_job/build?delay=0sec

Jenkins / My_Parameterized_job

- Status
- Changes
- Workspace
- Build with Parameters
- Configure
- Delete Project
- GitHub Hook Log
- Rename

Project My_Parameterized_job

This build requires parameters:

Languages
This is Choice Parameterized

Java
Java
C++
Python
Devops
AWS

Builds

Filter

Today

#5 13:27

#4 13:23

AWS Management Console | Instances | EC2 | us-east-1 | My_Parameterized_job #6 Console | My_Parameterized_job Config | Laxmishwami/my-repo

Not secure 54.237.200.245:8080/job/My_Parameterized_job/6/console

Jenkins / My_Parameterized_job / #6 / Console Output

- Status
- Changes
- Console Output
- Edit Build Information
- Delete build '#6'
- Parameters
- Timings
- Git Build Data
- Previous Build

Console Output

Download Copy View as plain text

```
Started by user: Laxmi
Running as SYSTEM
Building in workspace /var/lib/jenkins/workspace/My_Parameterized_job
The recommended git tool is: NONE
No credentials specified
> git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/My_Parameterized_job/.git # timeout=10
Fetching changes from the remote Git repository
> git config remote.origin.url https://github.com/Laxmishwami/my-repo.git # timeout=10
Fetching upstream changes from https://github.com/Laxmishwami/my-repo.git
> git --version # 'git version 2.34.1'
> git fetch --tags --force --progress -- https://github.com/Laxmishwami/my-repo.git +refs/heads/*:refs/remotes/origin/* # timeout=10
> git rev-parse refs/remotes/origin/master^(commit) # timeout=10
Checking out Revision 098201035486d20650df844027f79cfed3435965 (refs/remotes/origin/master)
> git config core.sparsecheckout # timeout=10
> git checkout -f 098201035486d20650df844027f79cfed3435965 # timeout=10
Commit message: "Create my file"
> git rev-list --no-walk 098201035486d20650df844027f79cfed3435965 # timeout=10
[My_Parameterized_job] $ /bin/sh -xe /tmp/jenkins3307935427360729033.sh
+ echo Python
python
Finished: SUCCESS
```

Password Parameter: A **Password parameter in Jenkins** is a parameter that lets you securely pass a hidden password or secret value to a build.


The screenshot displays the Jenkins configuration interface. On the left, a sidebar lists navigation options: Source Code Management, Triggers, Environment, Build Steps, and Post-build Actions. The main panel is titled 'Plain text Preview' and shows a 'Password Parameter' configuration. The 'Name' field is 'My Password', the 'Default Value' is masked with dots, and the 'Description' is 'This is my password parameterized'. Below this, there are 'Save' and 'Apply' buttons. The bottom of the screenshot shows the Windows taskbar with various application icons and system status indicators. Below the main panel, the 'Build Steps' section is visible, showing an 'Execute shell' step with the command: `echo "$Languages"` and `echo "$ My Password"`. The 'Save' and 'Apply' buttons are also present for this step.

After applying and saving the job, when you build it > you also change your password.

The top screenshot shows the Jenkins configuration page for 'My_Parameterized_job'. The left sidebar contains links for Status, Changes, Workspace, Build with Parameters, Configure, Delete Project, GitHub Hook Log, and Rename. The main area shows the job configuration with a 'Build' button. The 'Languages' section is set to 'Java', and the 'My Password' section is set to 'Concealed'. The bottom screenshot shows the 'Console Output' for build #7. The output displays the execution of a script that clones a repository, checks out a commit, and echoes the password.

```
Started by user Laxmi
Running as SYSTEM
Building in workspace /var/lib/jenkins/workspace/My_Parameterized_job
The recommended git tool is: NONE
No credentials specified
> git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/My_Parameterized_job/.git # timeout=10
Fetching changes from the remote Git repository
> git config remote.origin.url https://github.com/Laxmismami/my-repo.git # timeout=10
Fetching upstream changes from https://github.com/Laxmismami/my-repo.git
> git --version # timeout=10
> git --version # 'git version 2.34.1'
> git fetch --tags --force --progress -- https://github.com/Laxmismami/my-repo.git +refs/heads/*:refs/remotes/origin/* # timeout=10
> git rev-parse refs/remotes/origin/master^{commit} # timeout=10
Checking out Revision 098201035486d20650df844027f79cfed3435965 (refs/remotes/origin/master)
> git config core.sparsecheckout # timeout=10
> git checkout -f 098201035486d20650df844027f79cfed3435965 # timeout=10
Commit message: "Create my file"
> git rev-list --no-walk 098201035486d20650df844027f79cfed3435965 # timeout=10
[My_Parameterized_job] $ /bin/sh -xe /tmp/jenkins7194173263750313069.sh
+ echo Devops
Devops
+ echo $ My Password
$ My Password
Finished: SUCCESS
```

String Parameter: A **String parameter** in Jenkins is used to pass a single line of text input any custom value like a username, filename, or version number to the build.

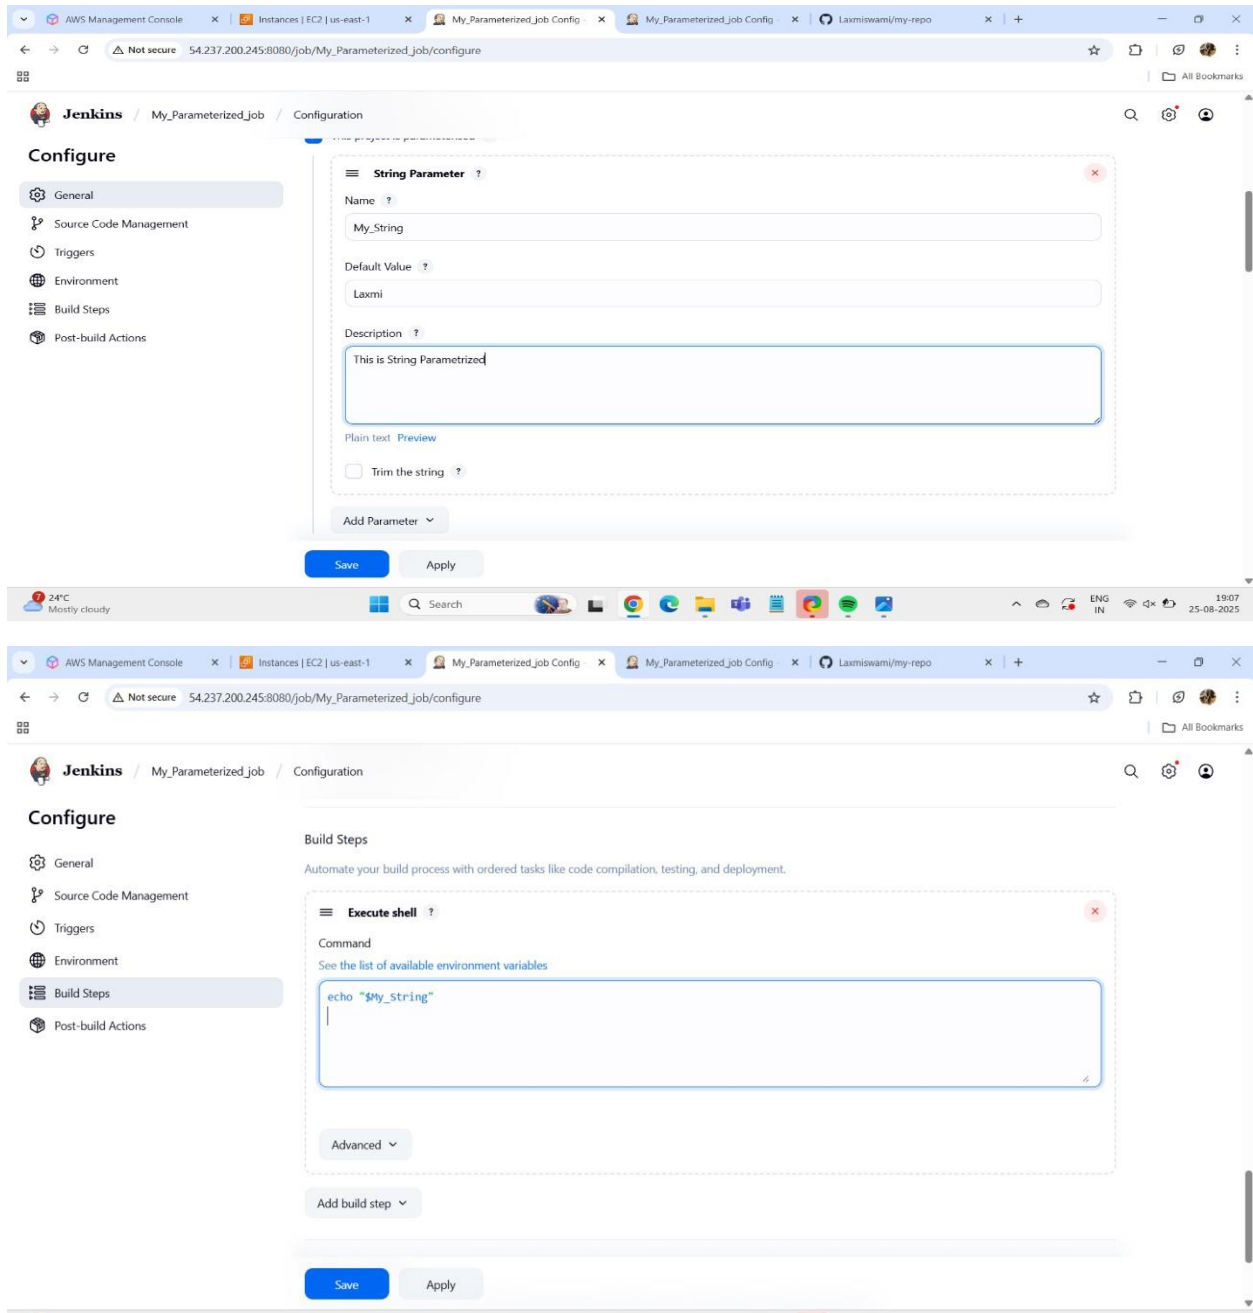

After applying and saving the job, when you build it> you also change your string and this will reflect in output.

The image displays two screenshots of the Jenkins web interface, illustrating the configuration and execution of a parameterized job.

Top Screenshot: Project Configuration



- Project:** My_Parameterized_job
- Status:** This build requires parameters:
- My_String:** This is String Parametrized
- Parameter Value:** Rasheshwari
- Buttons:** Build, Cancel

Bottom Screenshot: Console Output

- Build:** #8
- Status:** Success (Green checkmark)
- Console Output:**

```
Started by user Laxmi
Running as SYSTEM
Building in workspace /var/lib/jenkins/workspace/My_Parameterized_job
The recommended git tool is: NONE
No credentials specified
> git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/My_Parameterized_job/.git # timeout=10
Fetching changes from the remote Git repository
> git config remote.origin.url https://github.com/Laxmishwami/my-repo.git # timeout=10
Fetching upstream changes from https://github.com/Laxmishwami/my-repo.git
> git --version # timeout=10
> git --version # 'git version 2.34.1'
> git fetch --tags --force --progress -- https://github.com/Laxmishwami/my-repo.git :refs/heads/*:refs/remotes/origin/* # timeout=10
> git rev-parse refs/remotes/origin/master^{commit} # timeout=10
Checking out Revision 098201035486d20650df844027f79cfed3435965 (refs/remotes/origin/master)
> git config core.sparsecheckout # timeout=10
> git checkout -f 098201035486d20650df844027f79cfed3435965 # timeout=10
Commit message: "Create my file"
> git rev-list --no-walk 098201035486d20650df844027f79cfed3435965 # timeout=10
[my_Parameterized_job] $ /bin/sh -xe /tmp/jenkins4099476480453351726.sh
+ echo Rasheshwari
Rasheshwari
Finished: SUCCESS
```

File Parameter: A **File parameter** in Jenkins allows you to upload a file from your local system and provide it as input to the build.

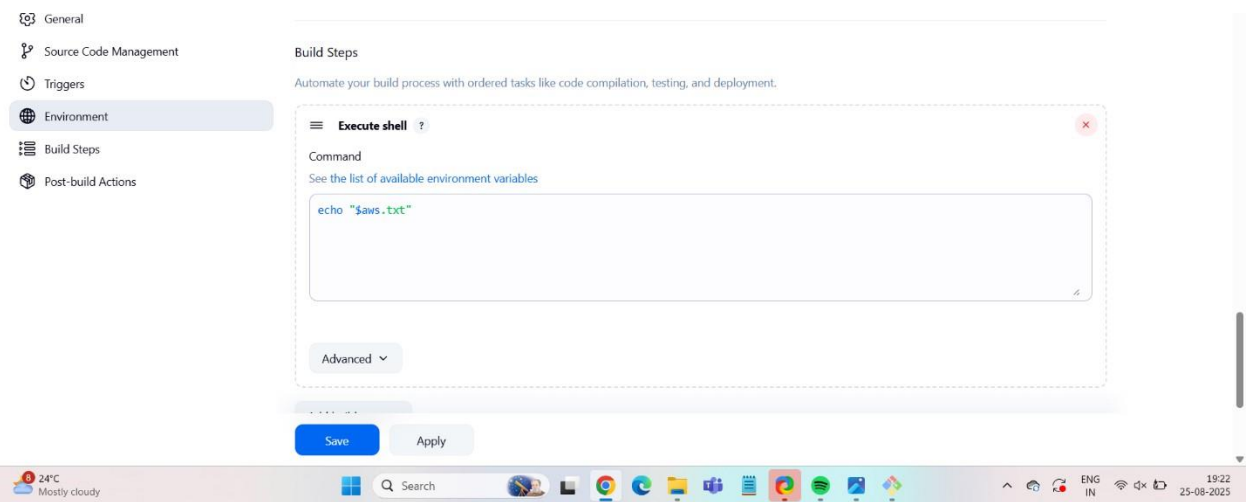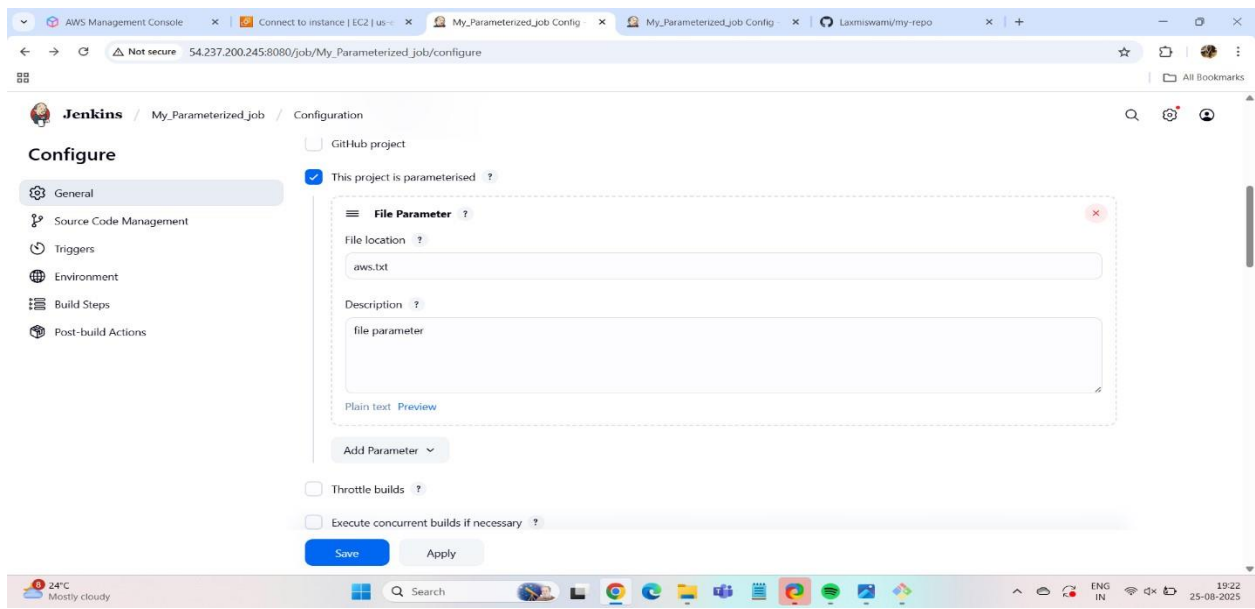

After applying and saving the job, when you build it, you can choose a file from your PC, and Jenkins will store it in the job's workspace (output)

AWS Management Console | Connect to instance | EC2 | us-... | Jenkins | My_Parameterized_job Config | Laxmishwami/my-repo

Not secure 54.237.200.245:8080/job/My_Parameterized_job/build?delay=0sec

Jenkins / My_Parameterized_job

- Status
- Changes
- Workspace
- Build with Parameters
- Configure
- Delete Project
- GitHub Hook Log
- Rename

Project My_Parameterized_job

This build requires parameters:

aws.txt
file parameter

Choose file No file chosen

Build Cancel

Builds

AWS Management Console | Connect to instance | EC2 | us-... | Jenkins | My_Parameterized_job Config | Laxmishwami/my-repo

Not secure 54.237.200.245:8080/job/My_Parameterized_job/build?delay=0sec

Jenkins / My_Parameterized_job

- Status
- Changes
- Workspace
- Build with Parameters
- Configure
- Delete Project
- GitHub Hook Log
- Rename

Project My_Parameterized_job

This build requires parameters:

aws.txt
file parameter

Choose file

Build

Builds

Filter

Today

13:39

13:39


Open


File name: All Files

Open Cancel

Name	Date modified	Type
jenkins-02		
Jenkins Assignm		
AWS -Project		
Project-1(Cost-Optimization)	23-08-2025 11:33	PDF F
Project-2	23-08-2025 13:27	PDF F

Run Parameter: In Jenkins, a **Run parameter** lets you select a specific build (run) of another job as input for your current job

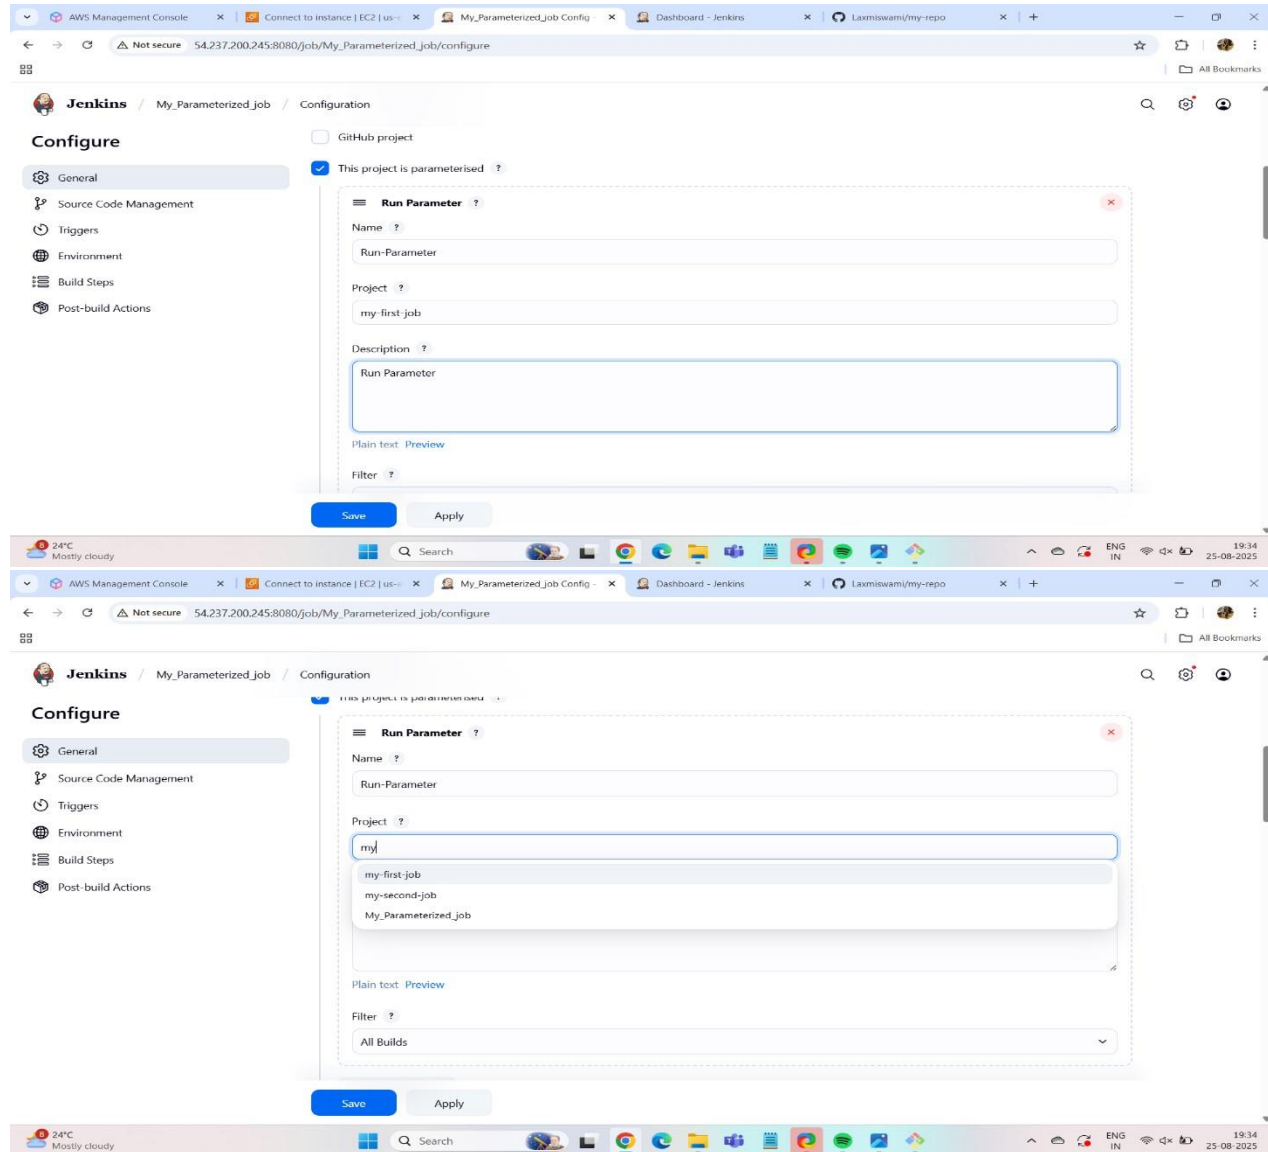

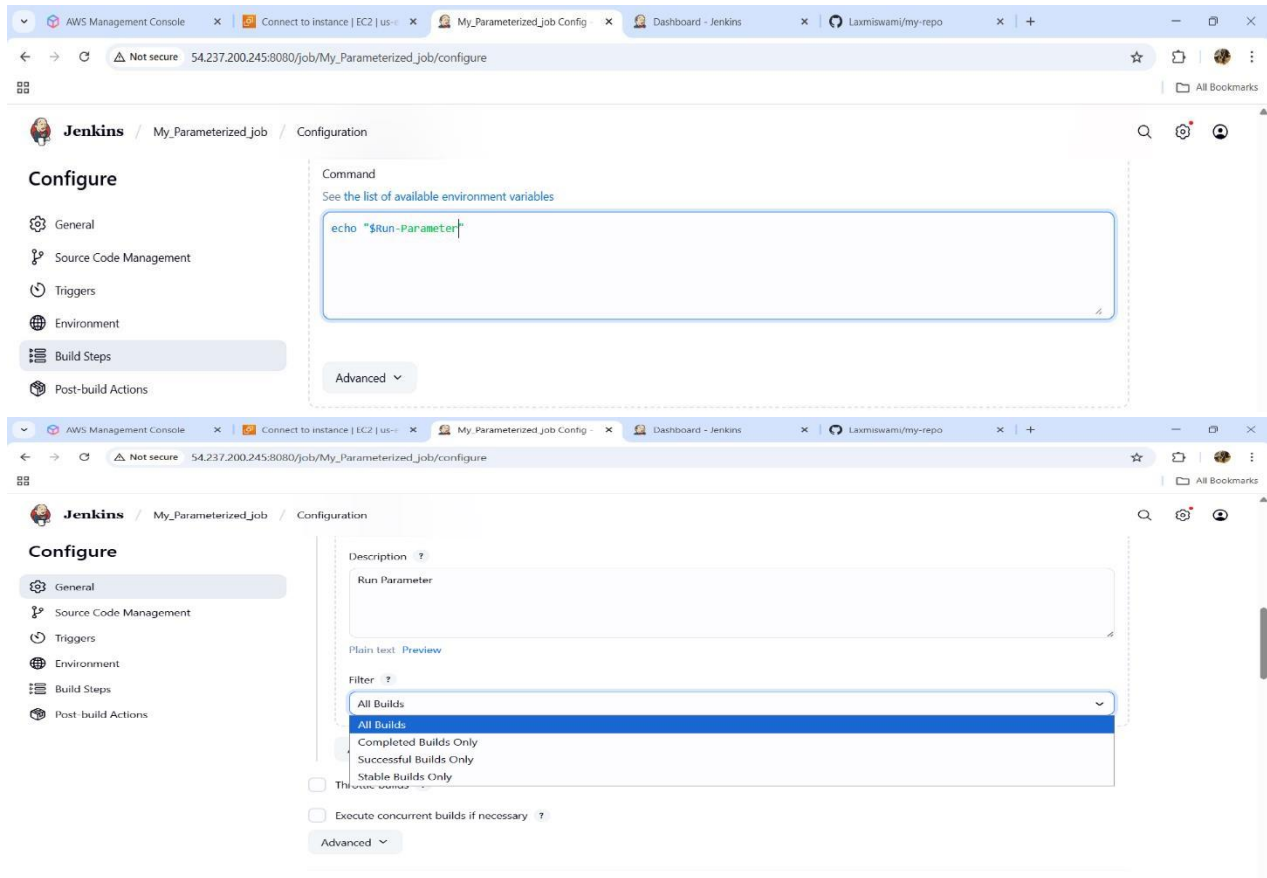


After applying and saving the job, when you build it, you can choose a specific build of another job, and Jenkins will use that build's data in your output

The top screenshot shows the Jenkins web interface for the project 'My_Parameterized_job'. The left sidebar contains navigation links: Status, Changes, Workspace, Build with Parameters, Configure, Delete Project, GitHub Hook Log, and Rename. The main content area shows the job configuration, including a dropdown menu for 'Run-Parameter' set to 'my-first-job #1' and a green 'Build' button.

The bottom screenshot shows the 'Console Output' for build #11. The output text is as follows:

```
Started by user Laxmi
Running as SYSTEM
Building in workspace /var/lib/jenkins/workspace/My_Parameterized_job
The recommended git tool is: NONE
No credentials specified
> git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/My_Parameterized_job/.git # timeout=10
Fetching changes from the remote Git repository
> git config remote.origin.url https://github.com/Laxmishwami/my-repo.git # timeout=10
Fetching upstream changes from https://github.com/Laxmishwami/my-repo.git
> git --version # timeout=10
> git --version # 'git version 2.34.1'
> git fetch --tags --force --progress -- https://github.com/Laxmishwami/my-repo.git :refs/heads/*:refs/remotes/origin/* # timeout=10
> git rev-parse refs/remotes/origin/master^{commit} # timeout=10
Checking out Revision 098201035486d20650df844027f79cfed3435965 (refs/remotes/origin/master)
> git config core.sparsecheckout # timeout=10
> git checkout -f 098201035486d20650df844027f79cfed3435965 # timeout=10
Commit message: "Create my file"
> git rev-list --no-walk 098201035486d20650df844027f79cfed3435965 # timeout=10
[My_Parameterized_job] $ /bin/sh -xe /tmp/jenkins703385833685999363.sh
+ echo -Parameter
-Parameter
Finished: SUCCESS
```

Multi-Line String: In Jenkins, a **Multi-line String parameter** lets you enter or paste multiple lines of text as input for your build like a block of configuration, script, or notes

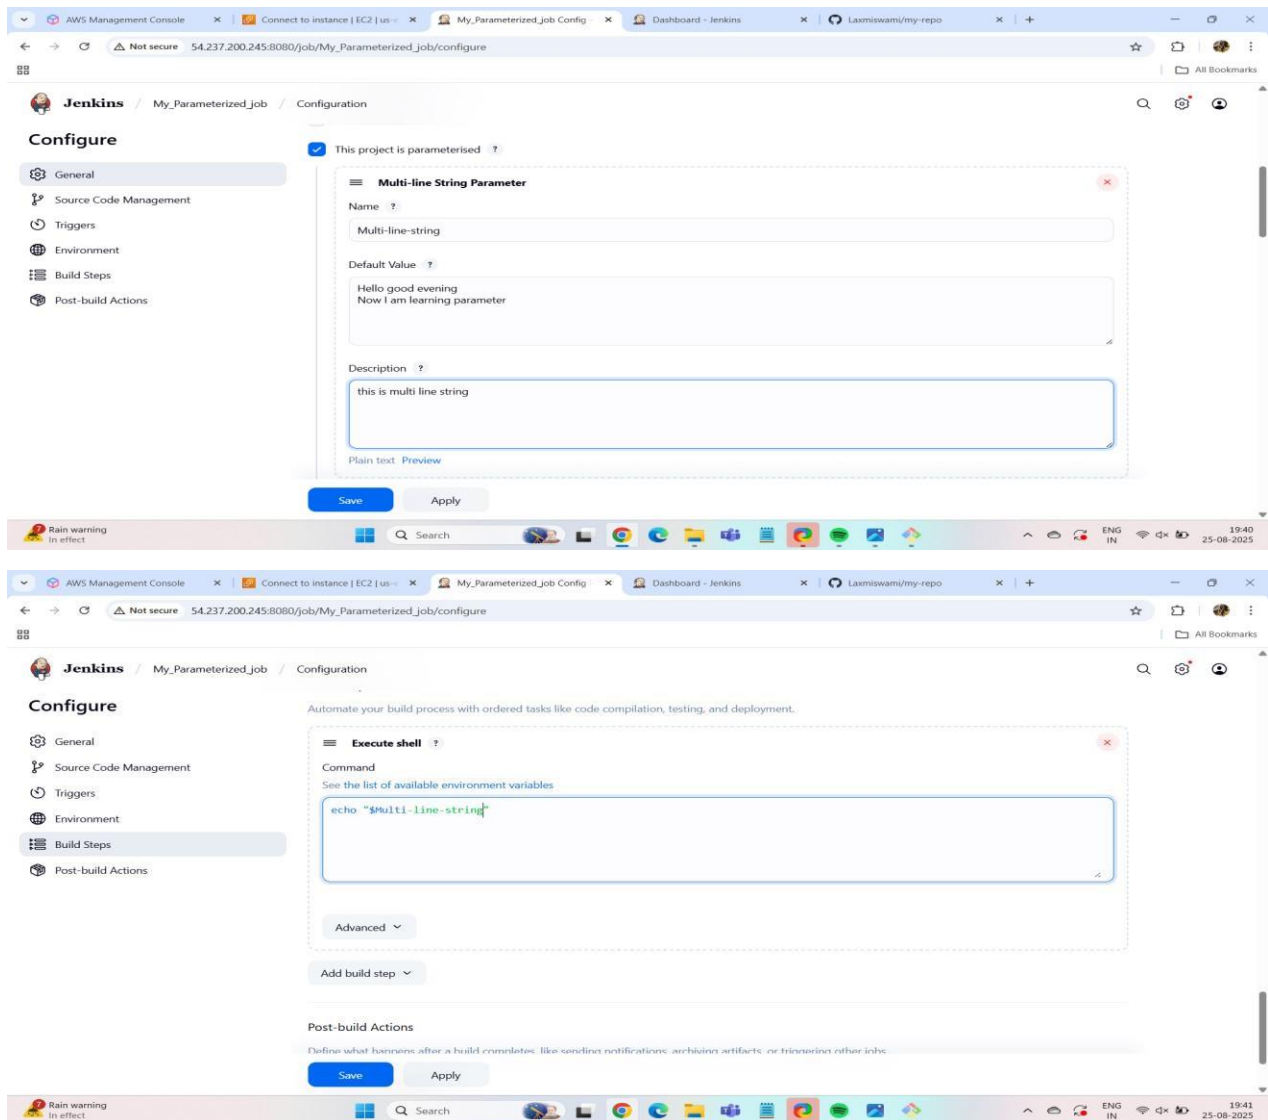

After applying and saving the job, when you build it, you can enter multiple lines of text, and Jenkins will store and use that text in your output

Builds

Filter

Today

#12 14:11

#11 14:05

#10 14:02

#9 13:54

#8 13:39

Project My_Parameterized_job

This build requires parameters:

Multi-line-string
this is multi line string

Hello good evening
Now I am learning parameter

Build Cancel

Builds

Filter

Today

#12 14:11

#11 14:05

#10 14:02

#9 13:54

#8 13:39

My_Parameterized_job / #12 / Console Output

Console Output

Download Copy View as plain text

```
Started by user laxmi
Running as SYSTEM
Building in workspace /var/lib/jenkins/workspace/My_Parameterized_job
The recommended git tool is: NONE
No credentials specified
> git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/My_Parameterized_job/.git # timeout=10
Fetching changes from the remote Git repository
> git config remote.origin.url https://github.com/Laxmiswami/my-repo.git # timeout=10
Fetching upstream changes from https://github.com/Laxmiswami/my-repo.git
> git --version # timeout=10
> git --version 'git version 2.34.1'
> git fetch --tags --force --progress -- https://github.com/Laxmiswami/my-repo.git +refs/heads/*:refs/remotes/origin/* # timeout=10
> git rev-parse refs/remotes/origin/master^{commit} # timeout=10
Checking out Revision 098201035486d20650df844027f79cfed3435965 (refs/remotes/origin/master)
> git config core.sparsecheckout # timeout=10
> git checkout -f 098201035486d20650df844027f79cfed3435965 # timeout=10
Commit message: "Create my file"
> git rev-list --no-walk 098201035486d20650df844027f79cfed3435965 # timeout=10
[My_Parameterized_job] $ /bin/sh -xe /tmp/jenkins7377895340692766260.sh
+ echo -line-string
-line-string
Finished: SUCCESS
```