



Name :- Laxmi Swami

Topic :- Slave/Nodes

STEP 1 :- Create 2 Instance

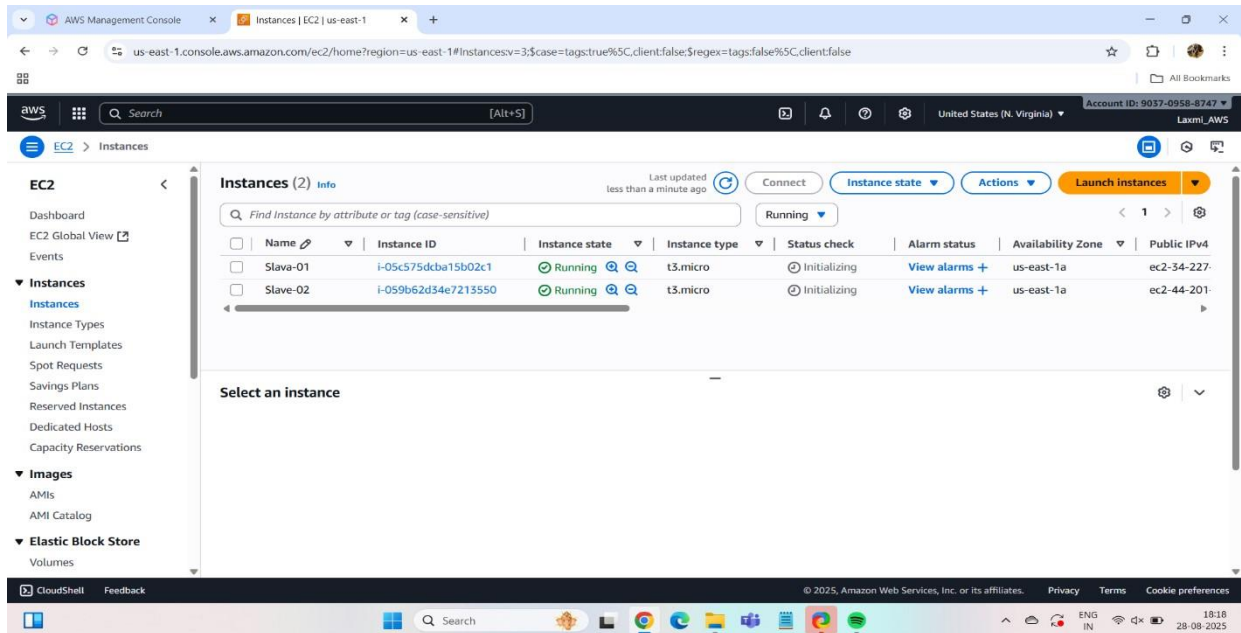

STEP 2 :- Connect the Jenkins go to system and check public Ip as we have stopped and start the instance.

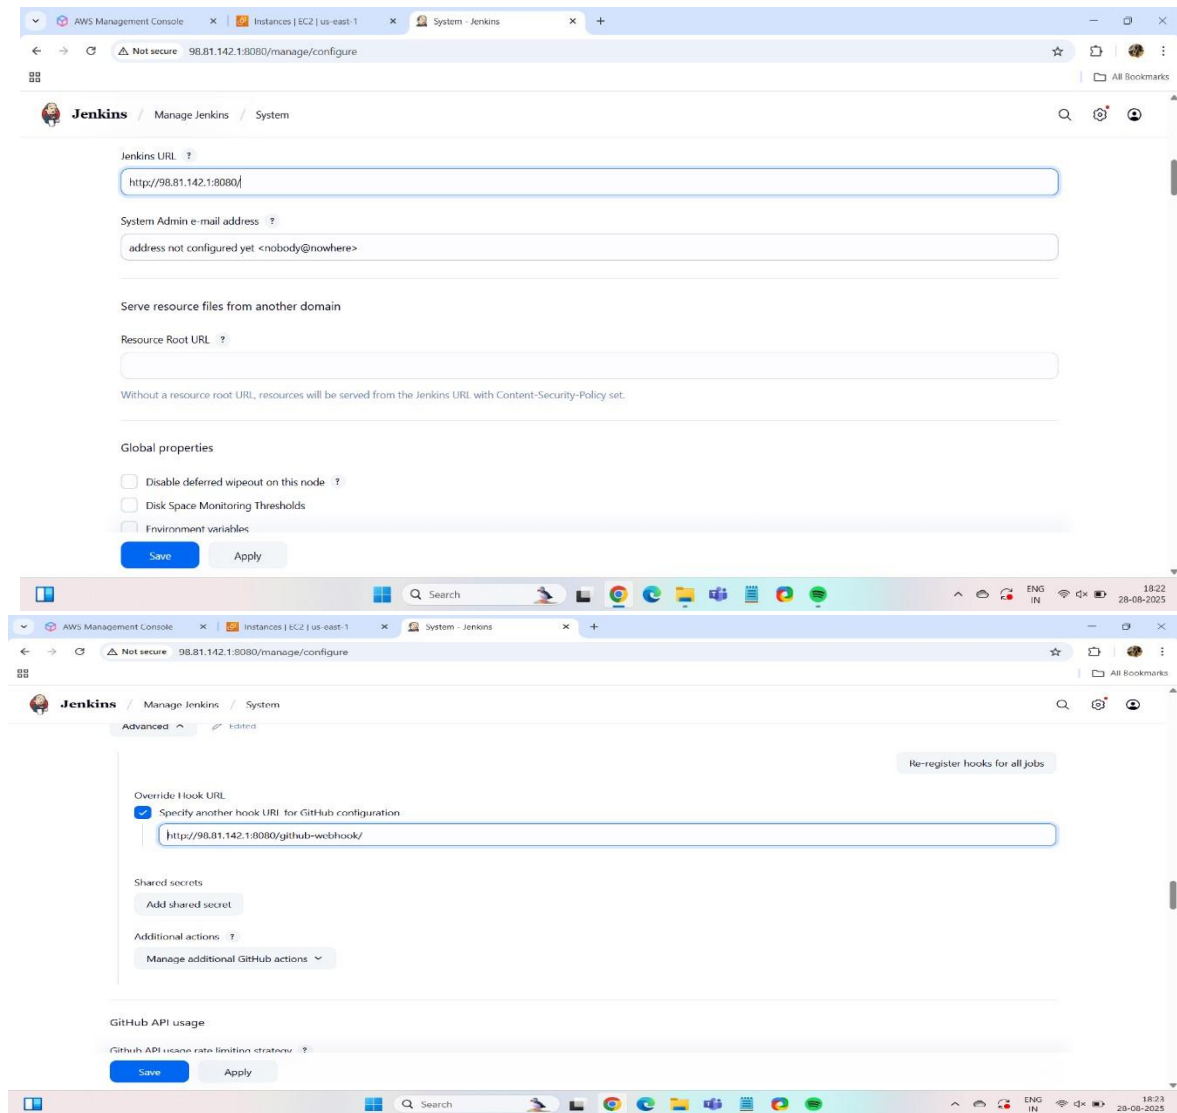

STEP 3 :- Connect slave1 and install java by creating slave1 folder.

```
root@ip-172-31-86-241: ~$ ssh -i "my-key.pem" ubuntu@ec2-34-227-29-54.compute-1.amazonaws.com -Y
The authenticity of host 'ec2-34-227-29-54.compute-1.amazonaws.com (34.227.29.54)' can't be established.
ED25519 key fingerprint is SHA256:21e8gkqPQ1pNAd6glb+zEbcAR5JEEoj9acJgln1jo.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Welcome to Ubuntu 22.04.5 LTS (GNU/Linux 6.8.0-1035-aws x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:        https://ubuntu.com/pro

System information as of Thu Aug 28 12:54:33 UTC 2025

System load:  0.08               Processes:    104
Usage of /:   22.5% of 7.57GB    Users logged in: 0
Memory usage: 23%              IPv4 address for ens5: 172.31.86.241
Swap usage:   0%

Expanded Security Maintenance for Applications is not enabled.
0 updates can be applied immediately.
Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

ubuntu@ip-172-31-86-241:~$ sudo su -
root@ip-172-31-86-241:~# java
```


```
Get:31 http://security.ubuntu.com/ubuntu jammy-security/main Translation-en [387 kB]
Get:32 http://security.ubuntu.com/ubuntu jammy-security/main amd64 c-n-f Metadata [13.8 kB]
Get:33 http://security.ubuntu.com/ubuntu jammy-security/restricted amd64 Packages [4195 kB]
Get:34 http://security.ubuntu.com/ubuntu jammy-security/restricted Translation-en [769 kB]
Get:35 http://security.ubuntu.com/ubuntu jammy-security/universe amd64 Packages [995 kB]
Get:36 http://security.ubuntu.com/ubuntu jammy-security/universe Translation-en [218 kB]
Get:37 http://security.ubuntu.com/ubuntu jammy-security/universe amd64 c-n-f Metadata [22.1 kB]
Get:38 http://security.ubuntu.com/ubuntu jammy-security/multiverse amd64 Packages [40.3 kB]
Get:39 http://security.ubuntu.com/ubuntu jammy-security/multiverse Translation-en [8908 B]
Get:40 http://security.ubuntu.com/ubuntu jammy-security/multiverse amd64 c-n-f Metadata [368 B]
Fetched 40.3 MB in 6s (6515 kB/s)
Reading package lists... Done
root@ip-172-31-86-241:~# ls
slave_snap
root@ip-172-31-86-241:~# cd slave
root@ip-172-31-86-241:~/slave# java
Command 'java' not found, but can be installed with:
apt install default-jre # version 2:1.11-72build2, or
apt install openjdk-11-jre-headless # version 11.0.28+6-1ubuntu1-22.04.1
apt install openjdk-17-jre-headless # version 17.0.16+8-us1-0ubuntu1-22.04.1
apt install openjdk-18-jre-headless # version 18.0.2+9-2-22.04
apt install openjdk-19-jre-headless # version 19.0.2+7-0ubuntu3-22.04
apt install openjdk-21-jre-headless # version 21.0.8+9-us1-0ubuntu1-22.04.1
apt install openjdk-8-jre-headless # version 8u462-ga-us1-0ubuntu2-22.04.2
root@ip-172-31-86-241:~/slave# apt install openjdk-17-jre-headless
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  alsa-topology-conf alsa-ucm-conf ca-certificates-java fontconfig-config fonts-dejavu-core java-common libasound2 libasound2-data
  libavahi-client3 libavahi-common-data libavahi-common3 libcupsw2 libfontconfig1 libgraphite2-3 libharfbuzz0b libjpeg-turbo8 libjpeg8
  liblcms2-2 libpcsc-lite
Suggested packages:
  default-jre libasound2-plugins alsa-utils cups-common liblcms2-utils pcscd libnss-mdns fonts-dejavu-extra fonts-ipafont-gothic
  fonts-ipafont-mincho fonts-wqy-microhei | fonts-wqy-zenhei fonts-indic
The following NEW packages will be installed:
  alsa-topology-conf alsa-ucm-conf ca-certificates-java fontconfig-config fonts-dejavu-core java-common libasound2 libasound2-data
  libavahi-client3 libavahi-common-data libavahi-common3 libcupsw2 libfontconfig1 libgraphite2-3 libharfbuzz0b libjpeg-turbo8 libjpeg8
  liblcms2-2 libpcsc-lite openjdk-17-jre-headless
0 upgraded, 20 newly installed, 0 to remove and 4 not upgraded.
Need to get 51.1 MB of archives.
```

Step 4 :- go to Jenkins > Nodes > New node.

The screenshot shows the Jenkins web interface. At the top, there's a navigation bar with 'Jenkins / Manage Jenkins / Nodes'. Below this, the 'Nodes' section is active, displaying a table of nodes. The table has columns for 'S', 'Name', 'Architecture', 'Clock Difference', 'Free Disk Space', 'Free Swap Space', 'Free Temp Space', and 'Response Time'. There are two nodes listed: 'Built-In Node' and 'last checked'. The 'last checked' node is highlighted in blue. To the right of the table, there's a '+ New Node' button and a 'Configure Monitors' link. Below the table, there's a 'Legend' section. At the bottom of the page, there's a status bar showing '96.81.143.13080/manage/computer/new', 'REST API', 'Jenkins 2.516.1', and a weather widget showing '2 cm of rain Friday'.

S	Name	Architecture	Clock Difference	Free Disk Space	Free Swap Space	Free Temp Space	Response Time
	Built-In Node	Linux (amd64)	In sync	3.95 GiB	0 B	3.95 GiB	0ms
	last checked	15 min	15 min	15 min	15 min	15 min	15 min

STEP 5 :- Give description and also provide proper path in root directory.

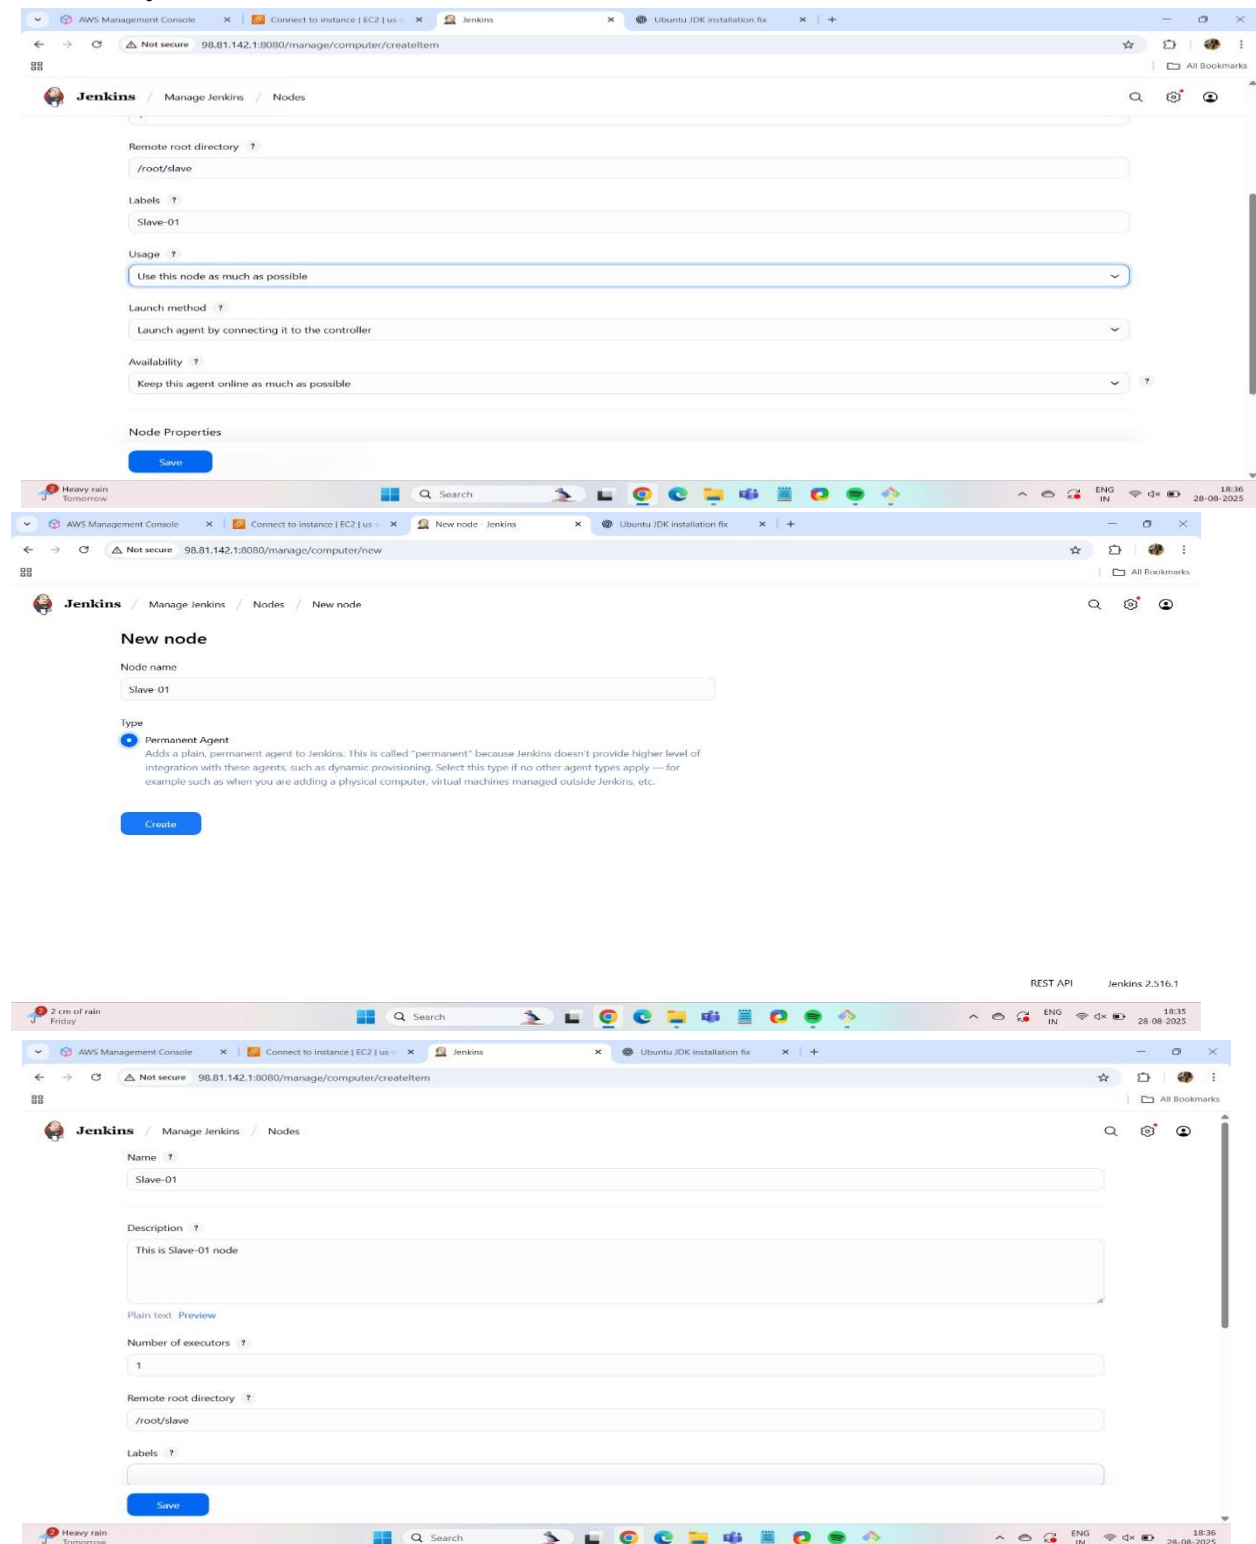

The screenshot displays the Jenkins 'New node' configuration page. The browser's address bar shows the URL '98.81.142.1:8080/manage/computer/new'. The page title is 'New node'. The 'Node name' field is filled with 'Slave-01'. The 'Type' is set to 'Permanent Agent'. The 'Description' field contains the text 'This is Slave-01 node'. The 'Number of executors' is set to '1'. The 'Remote root directory' is set to '/root/slave'. The 'Labels' field is empty. The 'Save' button is visible at the bottom.

REST API Jenkins 2.516.1

2 cm of rain Friday

Heavy rain Tomorrow

Search

98.81.142.1:8080/manage/computer/new

Jenkins / Manage Jenkins / Nodes

Name ?

Slave-01

Description ?

This is Slave-01 node

Plain text Preview

Number of executors ?

1


Remote root directory ?

/root/slave

Labels ?


Save


STEP 6 :- After completing above step you will get below dashboard.

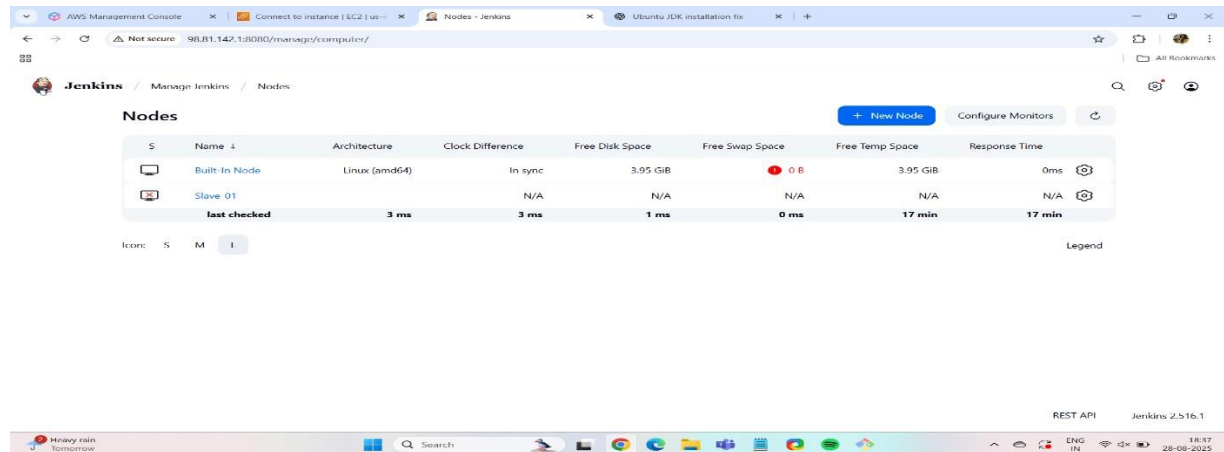


STEP 7 :- go to node slave1 refresh the page you will be connected to the system.

To stay connected to the system type `nohup` and `&` before pasting the command. You will be stay connected.

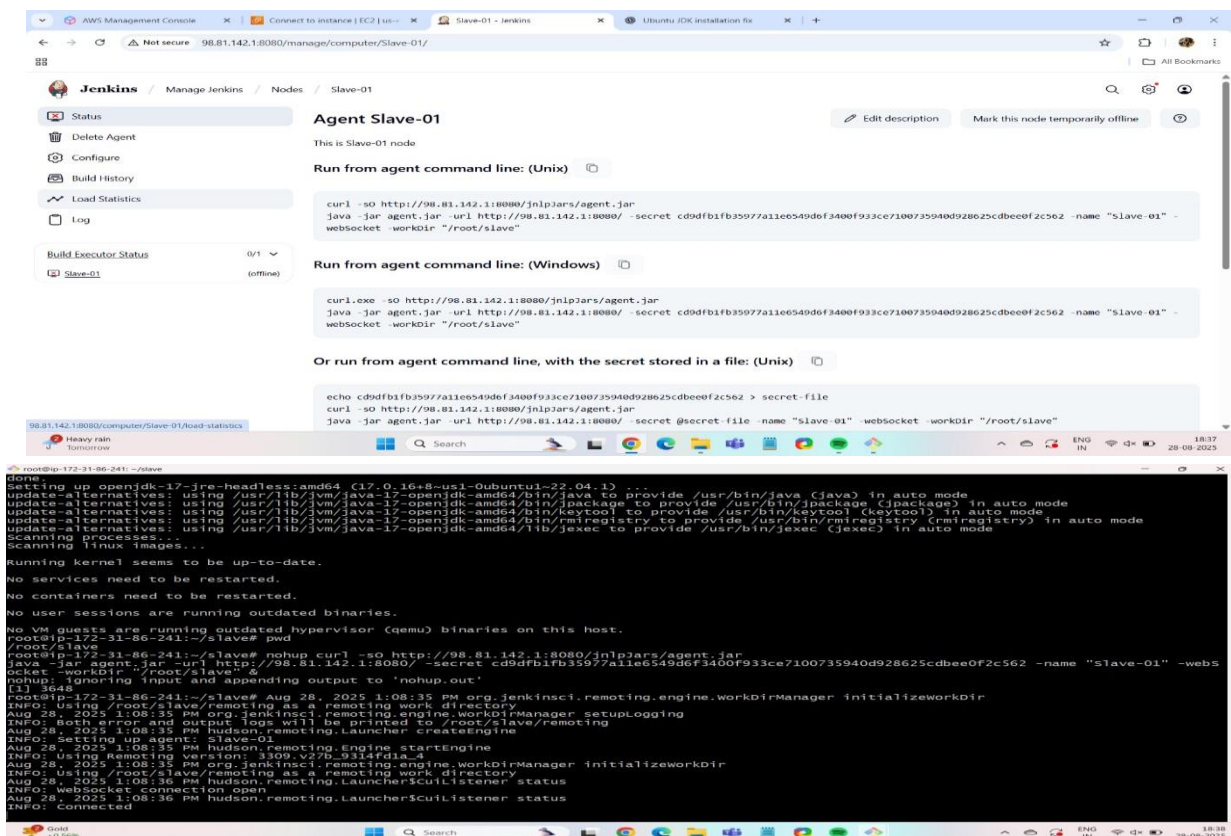

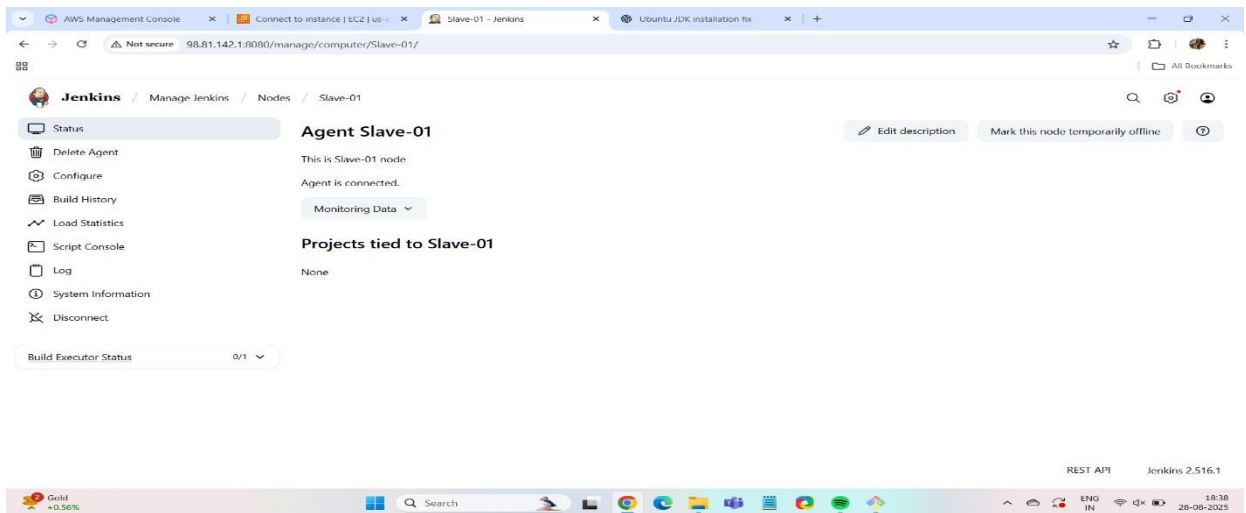

STEP 8 :- Now build the job and check it available inside slave1 or not.

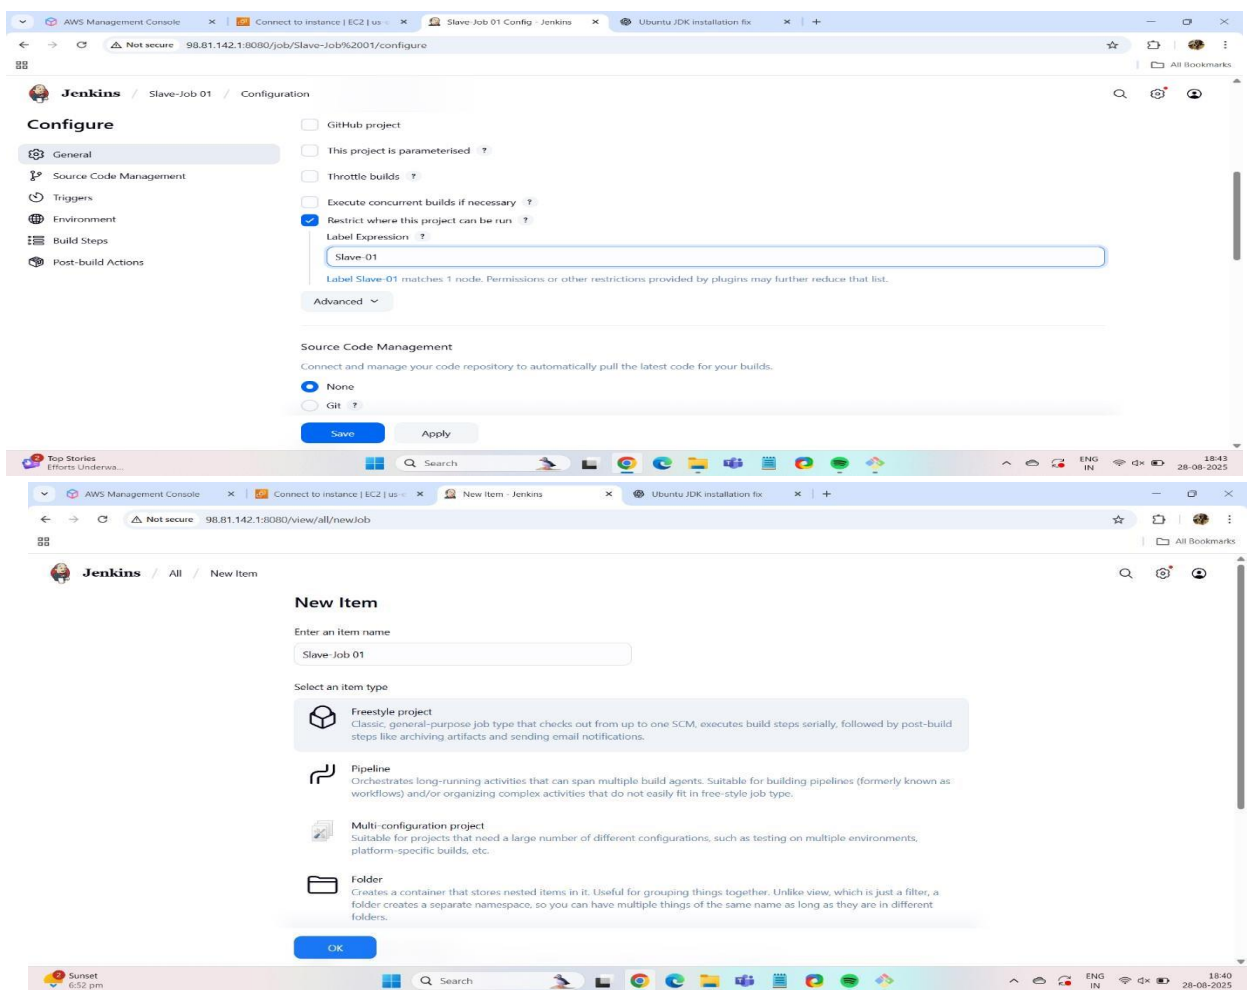

The screenshot shows the Jenkins web interface in a browser. The address bar indicates the URL is `https://98.81.142.1:8080/job/Slave-Job%2001/`. The page title is "Jenkins / Slave-Job 01". On the left, there is a sidebar with navigation links: "Status", "Changes", "Workspace", "Build Now", "Configure", "Delete Project", and "Rename". The main content area has the heading "Slave-Job 01" and the text "This is my first job". Below this, there is a section titled "Permalinks". At the bottom, there is a section titled "Builds" which currently shows "No builds".

The screenshot displays the Jenkins web interface for managing a slave node. The browser's address bar shows the URL `https://98.81.142.1:8080/manage/computer/Slave-01/`. The Jenkins sidebar on the left contains the following links: Status, Delete Agent, Configure, Build History, Load Statistics, Script Console, Log, System Information, and Disconnect. The main content area is titled 'Agent Slave-01' and indicates that the 'Agent is connected.' Below this, there is a 'Monitoring Data' dropdown menu. A section titled 'Projects tied to Slave-01' contains a table with the following data:

S	W	Name ↓	Last Success	Last Failure	Last Duration
✓	☀	Slave-Job 01	34 sec #1	N/A	0.57 sec

At the bottom of the page, there is a 'Build Executor Status' section showing '0/1' and a progress bar.

STEP 9 :- Check the job inside gitbash slave 1 instance.

```
root@ip-172-31-86-241: ~/slave
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/keytool to provide /usr/bin/keytool (keytool) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/miregistry to provide /usr/bin/miregistry (miregistry) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/lib/jexec to provide /usr/bin/jexec (jexec) in auto mode
Scanning processes...
Scanning linux images...
Running kernel seems to be up-to-date.
No services need to be restarted.
No containers need to be restarted.
No user sessions are running outdated binaries.
No VM guests are running outdated hypervisor (qemu) binaries on this host.
root@ip-172-31-86-241:~/slave# pwd
/root/slave
root@ip-172-31-86-241:~/slave# nohup curl -s -o http://98.81.142.1:8080/jnlpjars/agent.jar
java -jar agent.jar -url http://98.81.142.1:8080/ -secret cd9dfb1fb35977a11e6549d6f3400f933ce7100735940d928625cdebef02c562 -name "Slave-01" -websock
ket -workDir "/root/slave" &
nohup: ignoring input and appending output to 'nohup.out'
[1] 3648
root@ip-172-31-86-241:~/slave# Aug 28, 2025 1:08:35 PM org.jenkinsci.remoting.engine.WorkDirManager initializeWorkDir
INFO: Using /root/slave/remoting as a remoting work directory
Aug 28, 2025 1:08:35 PM org.jenkinsci.remoting.engine.WorkDirManager setupLogging
INFO: Both error and output logs will be printed to /root/slave/remoting
Aug 28, 2025 1:08:35 PM Hudson.remoting.Launcher createEngine
INFO: Setting up agent: Slave-01
Aug 28, 2025 1:08:35 PM Hudson.remoting.Engine startEngine
INFO: Using /root/slave/remoting as a remoting work directory
Aug 28, 2025 1:08:35 PM org.jenkinsci.remoting.engine.WorkDirManager initializeWorkDir
INFO: Using /root/slave/remoting as a remoting work directory
Aug 28, 2025 1:08:36 PM Hudson.remoting.Launcher$CuiListener status
INFO: Websocket connection open
Aug 28, 2025 1:08:36 PM Hudson.remoting.Launcher$CuiListener status
INFO: Connected
root@ip-172-31-86-241:~/slave# mkdir abc
root@ip-172-31-86-241:~/slave# ls
abc agent.jar nohup.out remoting workspace
root@ip-172-31-86-241:~/slave#
```

Step 10 :- Now for method 2 connect slave2 instance inside which create slave2 folder install java in it.

```
ubuntu@ip-172-31-88-177: ~/slave2
ls-198@AMZ: ~/Downloads
$ ssh -i "my-key.pem" ubuntu@ec2-44-201-223-195.compute-1.amazonaws.com
The authenticity of host 'ec2-44-201-223-195.compute-1.amazonaws.com (44.201.223.195)' can't be established.
ED25519 key fingerprint is SHA256:zhccu+gsxykvb1dchcQA1bHZAYDwfy8VqkJR28K18.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added 'ec2-44-201-223-195.compute-1.amazonaws.com' (ED25519) to the list of known hosts.
Welcome to Ubuntu 22.04.3 LTS (GNU/Linux 6.8.0-1035-aws x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

System information as of Thu Aug 28 13:16:17 UTC 2025

System load:  0.08               Processes:    103
Usage of /:   22.5% of 7.57GB    Users logged in: 0
Memory usage: 24%               IP4 address for ens5: 172.31.88.177
Swap usage:   0%

Expanded Security Maintenance for Applications is not enabled.

0 updates can be applied immediately.

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/*copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

ubuntu@ip-172-31-88-177:~$ mkdir slave02
ubuntu@ip-172-31-88-177:~$ sudo apt-get update
Hit:1 http://us-east-1.ec2.archive.ubuntu.com/ubuntu jammy InRelease
Get:2 http://us-east-1.ec2.archive.ubuntu.com/ubuntu jammy-updates InRelease [128 kB]
Get:3 http://us-east-1.ec2.archive.ubuntu.com/ubuntu jammy-backports InRelease [127 kB]
Get:4 http://security.ubuntu.com/ubuntu jammy-security InRelease [129 kB]
Get:5 http://us-east-1.ec2.archive.ubuntu.com/ubuntu jammy/universe amd64 Packages [14.1 MB]
Get:6 http://us-east-1.ec2.archive.ubuntu.com/ubuntu jammy/universe Translation-en [5652 kB]
Get:7 http://us-east-1.ec2.archive.ubuntu.com/ubuntu jammy/universe amd64 c-n-f Metadata [286 kB]
Get:8 http://us-east-1.ec2.archive.ubuntu.com/ubuntu jammy/multiverse amd64 Packages [217 kB]
Get:9 http://us-east-1.ec2.archive.ubuntu.com/ubuntu jammy/multiverse Translation-en [112 kB]
Get:10 http://us-east-1.ec2.archive.ubuntu.com/ubuntu jammy/multiverse amd64 c-n-f Metadata [8372 B]
Get:11 http://us-east-1.ec2.archive.ubuntu.com/ubuntu jammy-updates/main amd64 Packages [2874 kB]
Get:12 http://us-east-1.ec2.archive.ubuntu.com/ubuntu jammy-updates/main Translation-en [451 kB]
Get:13 http://us-east-1.ec2.archive.ubuntu.com/ubuntu jammy-updates/main amd64 c-n-f Metadata [18.9 kB]
```

STEP 11 :- Now before creating node go to TCP port for inbound inside manage Jenkins > security and select random type.

AWS Management Console x Connect to instance | EC2 | us- Security - Jenkins x Slave-01 - Jenkins x Ubuntu JDK installation fix x +

Not secure 98.81.142.1:8080/manage/configureSecurity/

Jenkins / Manage Jenkins / Security

Security

Authentication

☒ Disable "Keep me signed in" ?

Security Realm

Jenkins' own user database


☒ Allow users to sign up ?

With sign up enabled, anyone on your network can become an authenticated user. It is recommended in this case to minimize the permissions granted to any authenticated user.


Authorization


Matrix-based security



User/group	Overall	Credentials	Agent	Job	Run	View	SCM	Metrics
	Adminish							
	Read	Create	ManageDor					
		Delete	Update					
		View	Build					
			Configure					
			Create					
			Delete					
			Discove					
			Provisio					
			Build					
			Cancel					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					
			Ready					
			Update					
			Configure					
			Create					
			Delete					
			Discove					
			Move					
			Read					
			Workspace					
			Delete					

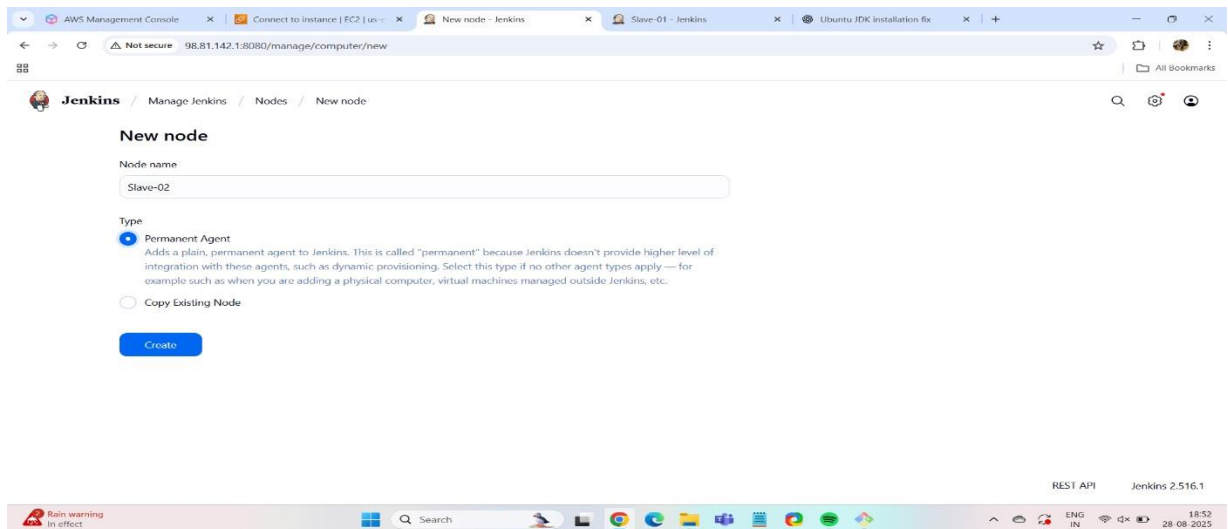

STEP 13 :- Select below options. Paste instance private key and also instance private IP.

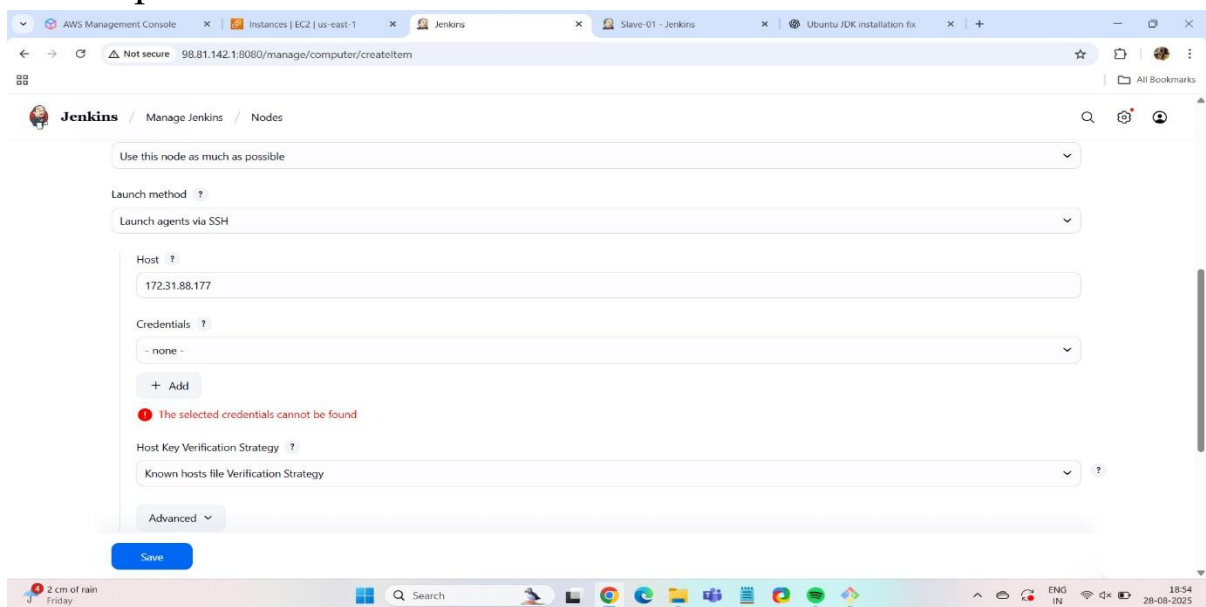

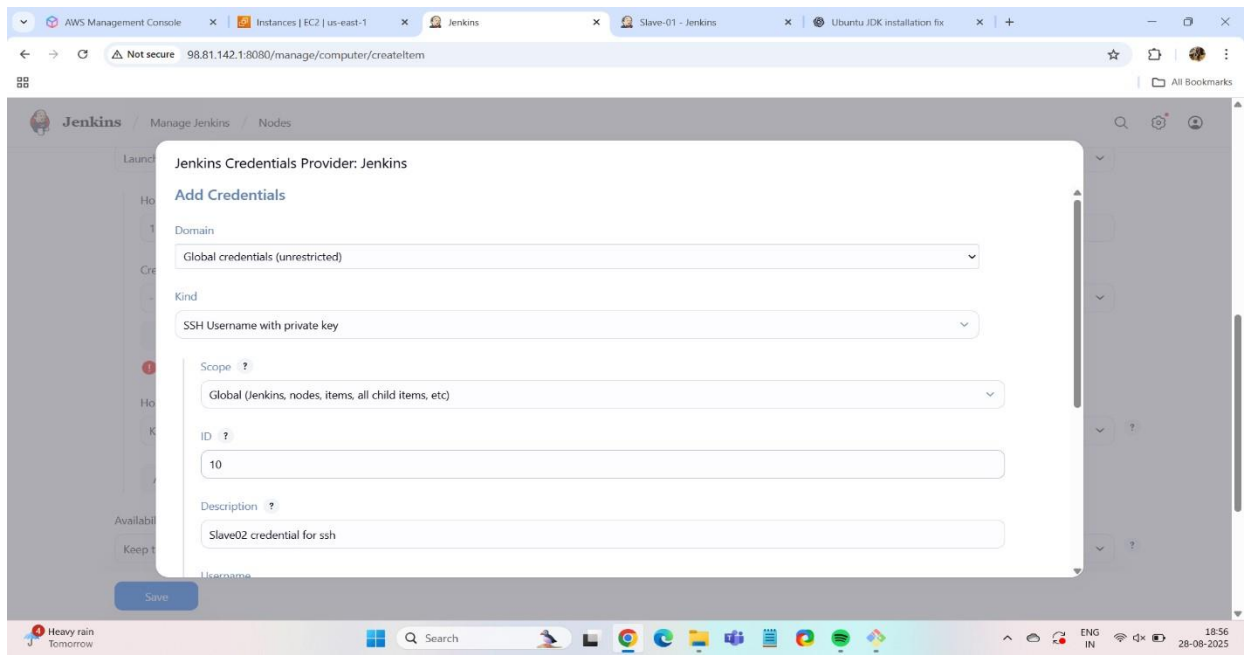

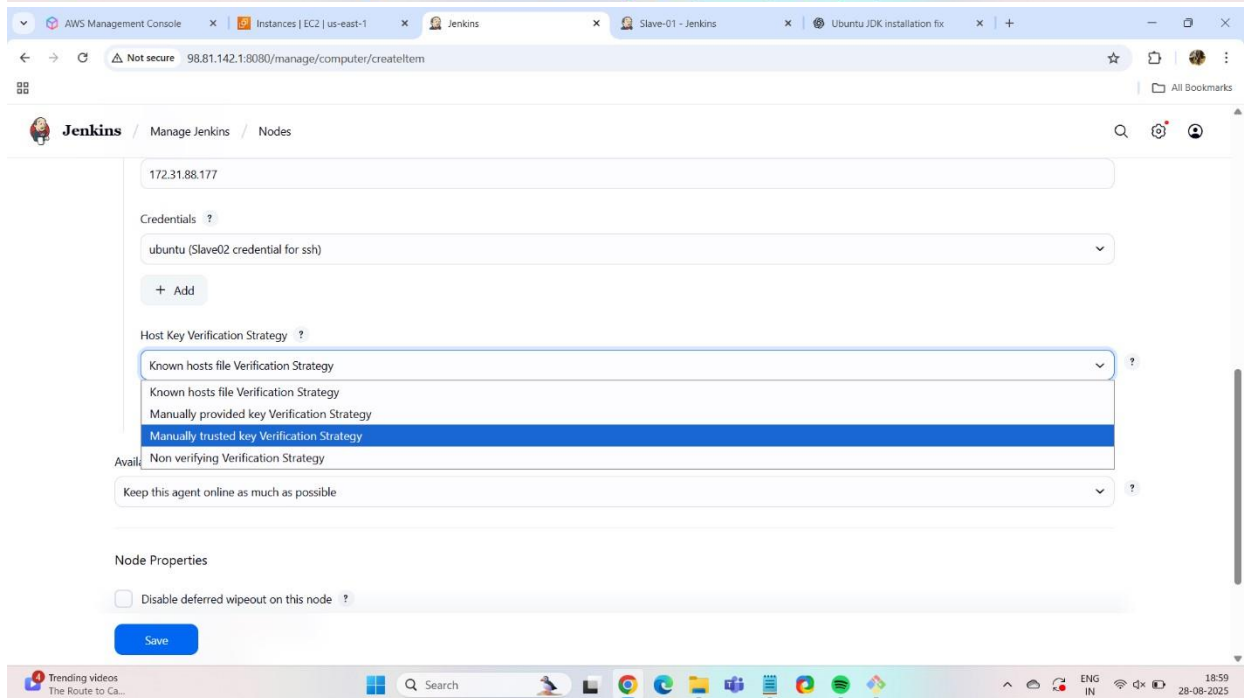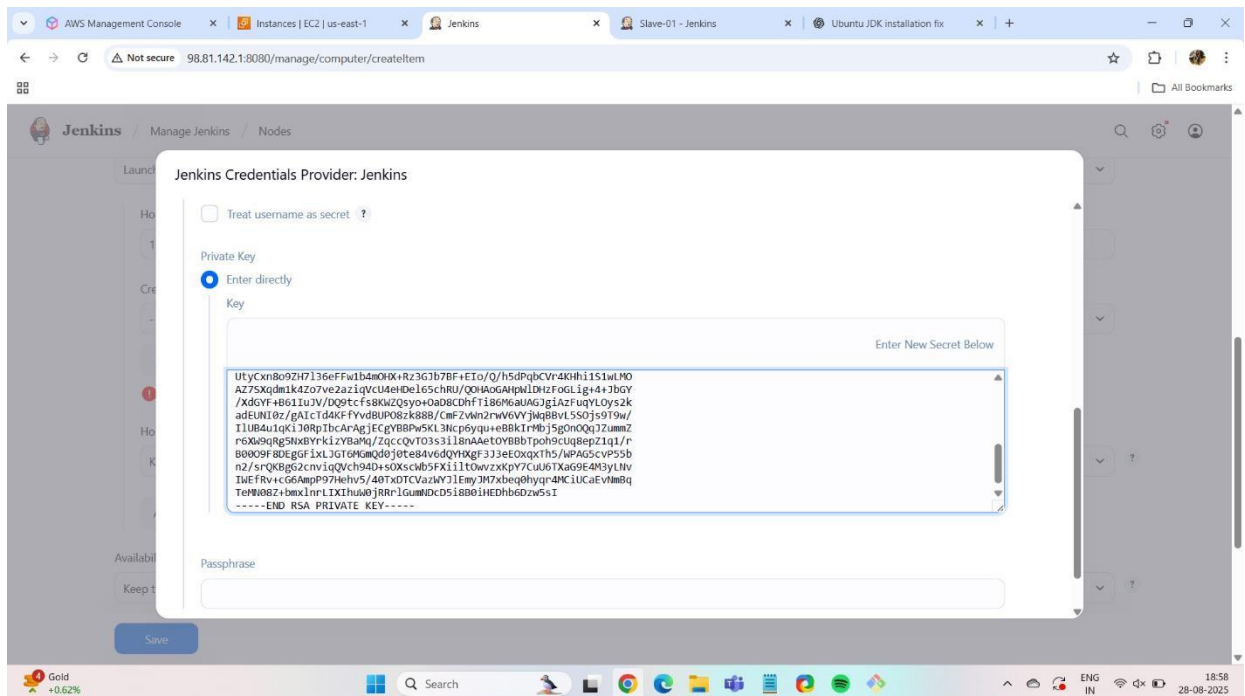

Nodes + New Node Configure Monitors

S	Name	Architecture	Clock Difference	Free Disk Space	Free Swap Space	Free Temp Space	Response Time
	Built-In Node	Linux (amd64)	In sync	3.88 GiB	0 B	3.88 GiB	0ms
	Slave-01	Linux (amd64)	In sync	5.42 GiB	0 B	5.42 GiB	105ms
	Slave-02		N/A	N/A	N/A	N/A	N/A
last checked		21 min	21 min	21 min	21 min	21 min	21 min

Icon: S M L [Legend](#)

98.81.142.1:8080/computer/Slave-02/

Jenkins / Manage Jenkins / Nodes / Slave-02

Status

Delete Agent

Configure

Build History

Load Statistics

Log

Trust SSH Host Key

Build Executor Status 0/1

Slave-02 (launching...)

Agent Slave-02

this is my 2nd node

This node is being launched. See log for more details

Monitoring Data

Projects tied to Slave-02

None

Edit description Relaunch agent Mark this node temporarily offline

98.81.142.1:8080/computer/Slave-02/log

Jenkins / Nodes / Slave-02 / Trust SSH Host Key

Status

Delete Agent

Configure

Build History

Load Statistics

Log

Trust SSH Host Key

Build Executor Status 0/1

Slave-02 (launching...)

Do you want to trust the SSH Host Key with fingerprint d3:39:fb:8d:94:dd:ee:5b:8e:b0:53:07:1e:6c:74:bd for future connections to this host? Yes No

98.81.142.1:8080/computer/Slave-02/log

Jenkins / Nodes / Slave-02 / Log

Status

Delete Agent

Configure

Build History

Load Statistics

Log




Build Executor Status 0/1

Slave-02 (launching...)

25°C Light rain

Search

28-08-2025

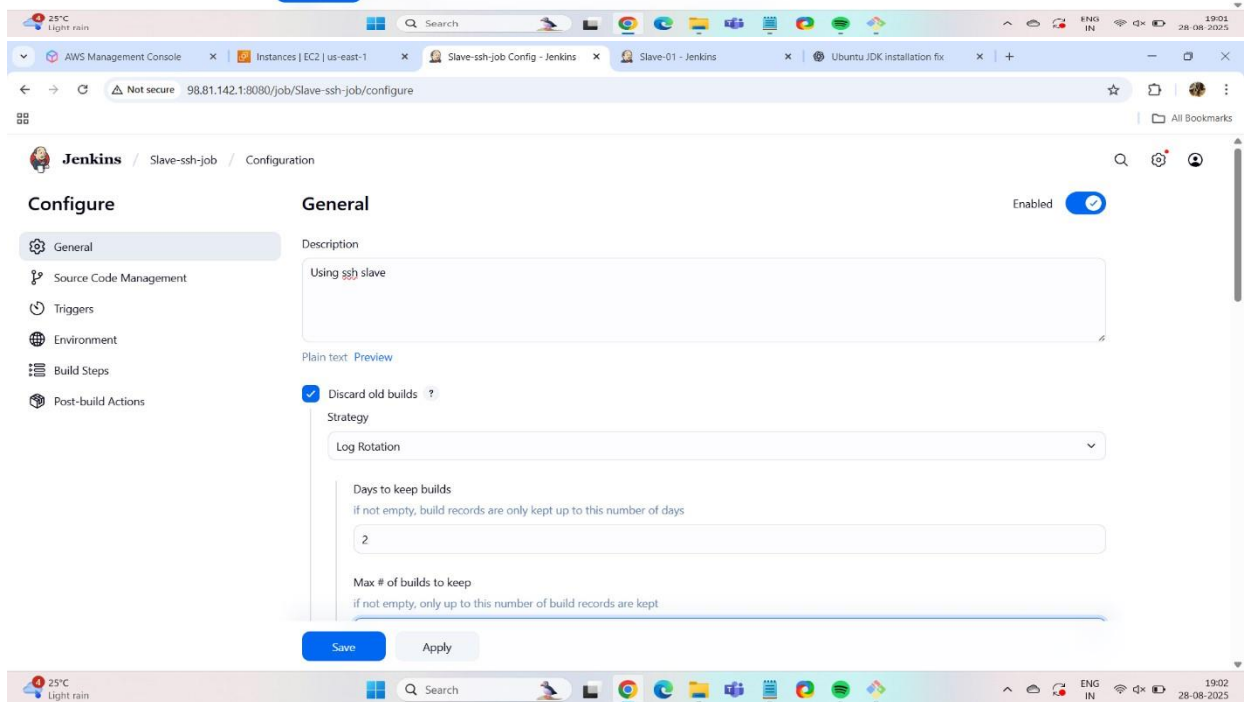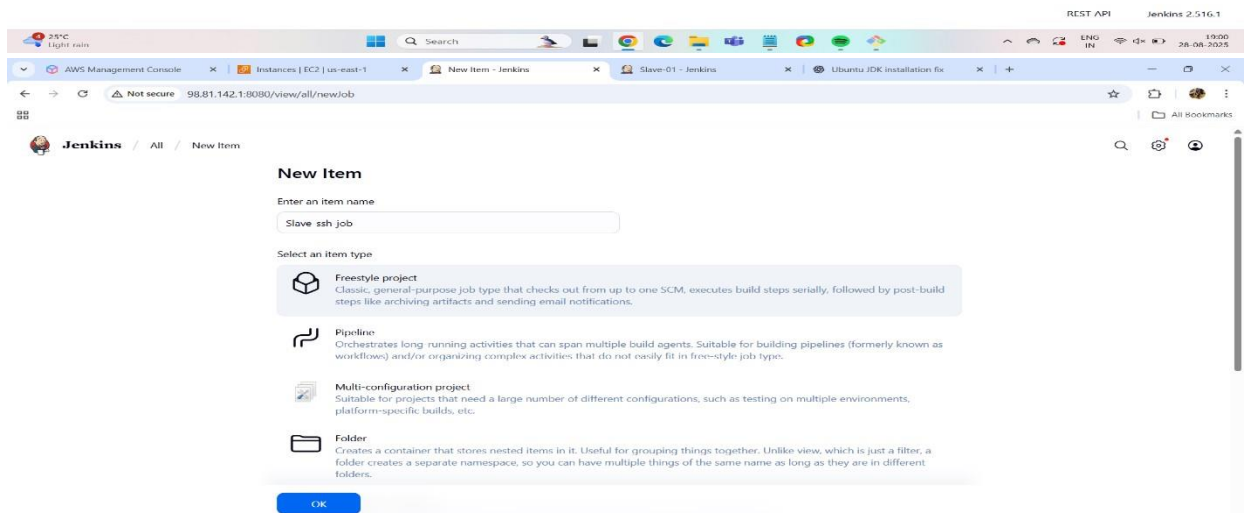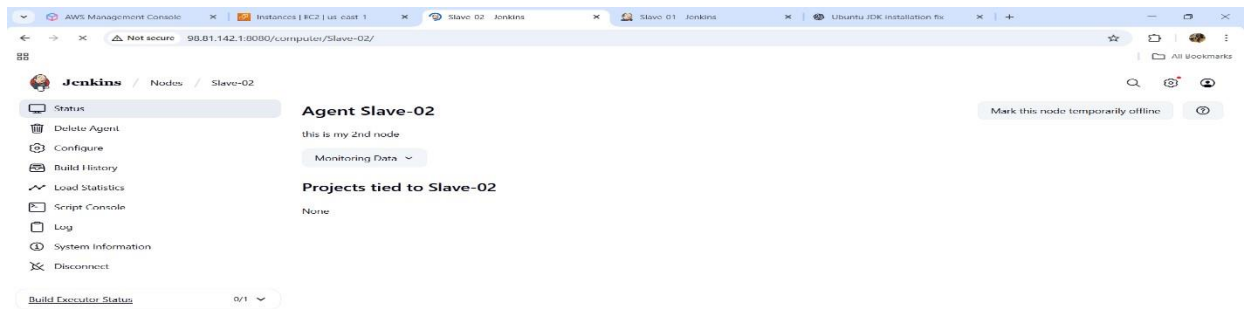

AWS Management Console x Instances | EC2 | us-east-1 x Slave-ssh-job Config - Jenkins x Slave-01 - Jenkins x Ubuntu JDK installation fix x +

Not secure 98.81.142.1:8080/job/Slave-ssh-job/configure

Jenkins / Slave-ssh-job / Configuration

Configure

- General
- Source Code Management
- Triggers
- Environment
- Build Steps
- Post-build Actions

if not empty, only up to this number of build records are kept

4

Advanced ▾

- ☐ GitHub project
- ☐ This project is parameterised ?
- ☐ Throttle builds ?
- ☐ Execute concurrent builds if necessary ?
- ☒ Restrict where this project can be run ?

Label Expression ?

Slave-02

Label Slave-02 matches 1 node. Permissions or other restrictions provided by plugins may further reduce that list.

Advanced ▾

Save Apply

25°C Light rain

AWS Management Console x Instances | EC2 | us-east-1 x Slave-ssh-job Config - Jenkins x Slave-01 - Jenkins x Ubuntu JDK installation fix x +

Not secure 98.81.142.1:8080/job/Slave-ssh-job/configure

Jenkins / Slave-ssh-job / Configuration

Configure

- General
- Source Code Management
- Triggers
- Environment
- Build Steps
- Post-build Actions

- ☐ Add timestamps to the console output
- ☐ Inspect build log for published build scans
- ☐ Terminate a build if it's stuck
- ☐ With Ant ?

Build Steps

Automate your build process with ordered tasks like code compilation, testing, and deployment.

Add build step ▾

Post-build Actions

Define what happens after a build completes, like sending notifications, archiving artifacts, or triggering other jobs.

Add post-build action ▾

Save Apply

✓ Saved

REST API Jenkins 2.516.1

AWS Management Console | Instances | EC2 | us-east-1 | Slavesafe-job - Jenkins | Slave-02 - Jenkins | Ubuntu JDK Installation fix

Not secure 98.81.142.1:8080/manage/computer/Slave-02/

Jenkins / Manage Jenkins / Nodes / Slave-02

Status
Delete Agent
Configure
Build History
Load Statistics
Script Console
Log
System Information
Disconnect

Agent Slave-02

this is my 2nd node

Monitoring Data

Projects tied to Slave-02

S	W	Name	Last Success	Last Failure	Last Duration
		Slave-ssh-job	19 sec #1	N/A	83 ms

Build Executor Status: 0/1

Icon: S M L

REST API Jenkins 2.516.1

98.81.142.1:8080/job/Slave-ssh-job/

25°C Light rain

```
ubuntu@ip-172-31-88-177: ~/slave2
Adding debian:DigiCert_Assured_ID_Root_CA.pem
done.
Processing triggers for libc-bin (2.35-0ubuntu3.10) ...
Processing triggers for man-db (2.10.2-1) ...
Processing triggers for ca-certificates (20240203~22.04.1) ...
Updating certificates in /etc/ssl/certs...
0 added, 0 removed; done.
Running hooks in /etc/ca-certificates/update.d...
done.
done.
Setting up openjdk-17-jre-headless:amd64 (17.0.16+8~us1-0ubuntu1~22.04.1) ...
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/java to provide /usr/bin/java (java) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jpackage to provide /usr/bin/jpackage (jpackage) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/keytool to provide /usr/bin/keytool (keytool) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/rmiregistry to provide /usr/bin/rmiregistry (rmiregistry) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/lib/jexec to provide /usr/bin/jexec (jexec) in auto mode
Scanning processes...
Scanning linux images...

Running kernel seems to be up-to-date.

No services need to be restarted.

No containers need to be restarted.

No user sessions are running outdated binaries.

No VM guests are running outdated hypervisor (qemu) binaries on this host.
ubuntu@ip-172-31-88-177:~/slave2$ pwd
/home/ubuntu/slave2
ubuntu@ip-172-31-88-177:~/slave2$ whoami
ubuntu
ubuntu@ip-172-31-88-177:~/slave2$ ls
remoting  remoting.jar  workspace
ubuntu@ip-172-31-88-177:~/slave2$
```

25°C Light rain