



a


TFScope nominates and corroborates a homeodomain motif for the orphan TF ZHX3

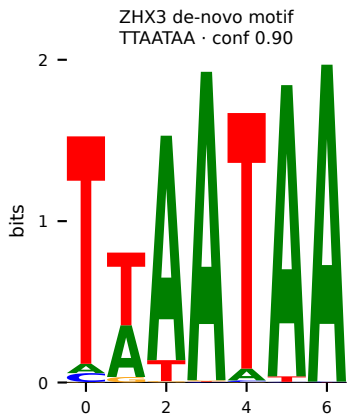

orphan, no curated motif; predicted from
sequence alone (retrieval inert here,
noRAG=RAG=r=1.0) · r=0.74 vs canonical TAAT



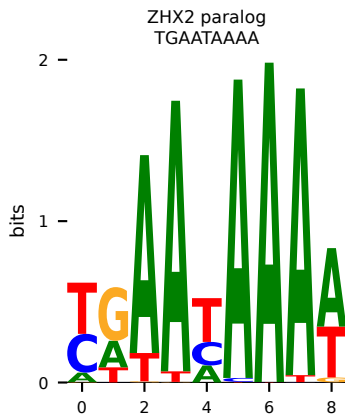


paralog consistency
ZHX2↔ZHX3 r = 0.78
(ZHX1 motif degenerate → no
curated reference exists)

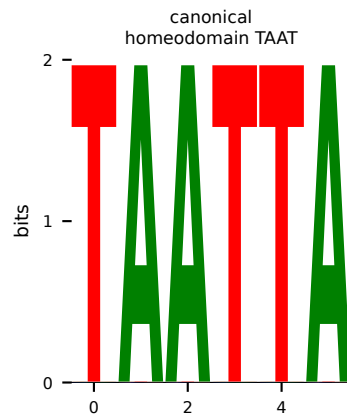

ZHX3 vs canonical TAAT
r = 0.74
(canonical, not a curated
ZHX motif)

functional: target-promoter enrichment
AUROC 0.712 (p=0.00051) > shuffled 0.607

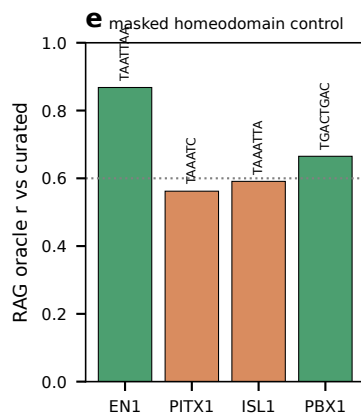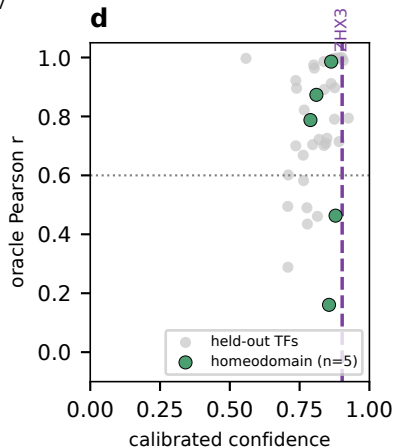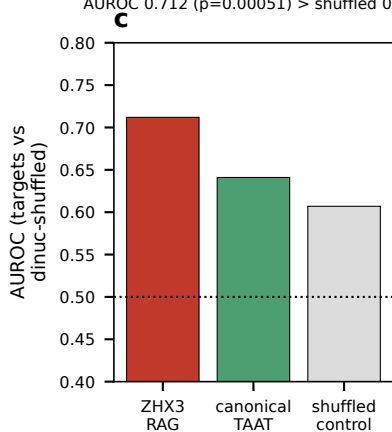

top targets: AFP, CCNA2, CCND1, CDKN1A