


注記 NOTES

 接点部までの嵌合長さ。  
LENGTH TO CONTACT POINT.

## 2. 使用材料 MATERIAL

ハウジング : 46ナイロン, UL 94 V-0

HOUSING : 46NYLON, UL94V-0

アクチュエータ：PPS, UL94V-0

ACTUATOR : PPS, UL94V-0

ターミナル : リン青銅 ( $t=0.25$ )

TERMINAL : PHOS-BRO.(+0.25)

メッキ : 錫ビスマスメッキ 1. 0マイクロメートル以上

PLATING : TIN-BISMUTH 1.0 MICROMETER MINIMUM

：ニッケル下地 1.0マイクロメートル以上

PLATING : NICKEL(UNDER PLATING)1.0 MICROMETER MINIMUM

金具 : 銅合金 ( $t=0.25$ )

六 FITTING NAIL : COPPER ALLOY (t=0.25)

メッキ : 錫メッキ 1.0マイクロメートル以上

PLATING : TIN 1.0 MICROMETER MINIMUM

：ニッケル下地 1.0マイクロメートル以上

PLATING : NICKEL(UNDER PLATING) 1.0 MICROMETER MINIMUM

### △3 パターンはくりしめ用金具

FITTING NAIL FOR PREVENTION OF PEELING OF P.C.B.PATTERN.

4. エンボステープ梱包時は、アクチュエータがロックした状態とする。  
WHEN CONNECTOR IS SHIPPED, ACTUATOR SHOULD BE LOCKED.


⑤ FPC挿入深さ。


INSERTION DEPTH OF FPC

△6 パターン書き込み禁止エリア。  
NO FOOT PRINT AREA.

7. 本製品は 52271-\*\*90 の鉛フリー品である。  
THIS PRODUCT IS LEAD FREE OF 52271-\*\*90




35	31.2	29	52271-3079	30
34	30.2	28	52271-2979	29
33	29.2	27	52271-2879	28
32	28.2	26	52271-2779	27
31	27.2	25	52271-2679	26
30	26.2	24	52271-2579	25
29.0	25.2	23	52271-2479	24
28.0	24.2	22	52271-2379	23
27.0	23.2	21	52271-2279	22
26.0	22.2	20	52271-2179	21
25.0	21.2	19	52271-2079	20
24.0	20.2	18	52271-1979	19
23.0	19.2	17	52271-1879	18
22.0	18.2	16	52271-1779	17
21.0	17.2	15	52271-1679	16
20.0	16.2	14	52271-1579	15
19.0	15.2	13	52271-1479	14
18.0	14.2	12	52271-1379	13
17.0	13.2	11	52271-1279	12
16.0	12.2	10	52271-1179	11
15.0	11.2	9	52271-1079	10
14.0	10.2	8	52271-0979	9
13.0	9.2	7	52271-0879	8
12.0	8.2	6	52271-0779	7
11.0	7.2	5	52271-0679	6
10.0	6.2	4	52271-0579	5
9.00	5.2	3	52271-0479	4
C	B	A	EMBOSSD PACKAGE	CKT No.
			Order No.	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
DIMENSION UNITS		SCALE		CURRENT REV DESC: REVISED		<div>molex</div>				
mm		8:1								
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 177347		DRWN: GSHARMA		2018/05/28		<div>1.0 FPC CONN ZIF SMT (BOTTOM CONTACT) -LEAD FREE-</div>		
ANGULAR TOL ± 3.0°		DRWN: CHK'D		RTAKEUCHI		2018/05/31				
4 PLACES ± 0.2		APPR: RTAKEUCHI		2018/05/31						
3 PLACES ± 0.2		INITIAL REVISION:				PRODUCT CUSTOMER DRAWING				
2 PLACES ± 0.2		DRWN: HKAWABATA		2004/03/18		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
1 PLACE ± 0.25		APPR: MSASAO		2004/03/19		SD-52271-036		PSD	001	E
0 PLACES ± 0.3		THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				A3-SIZE	52271	SEE TABLE		GENERAL MARKET		1 OF 2

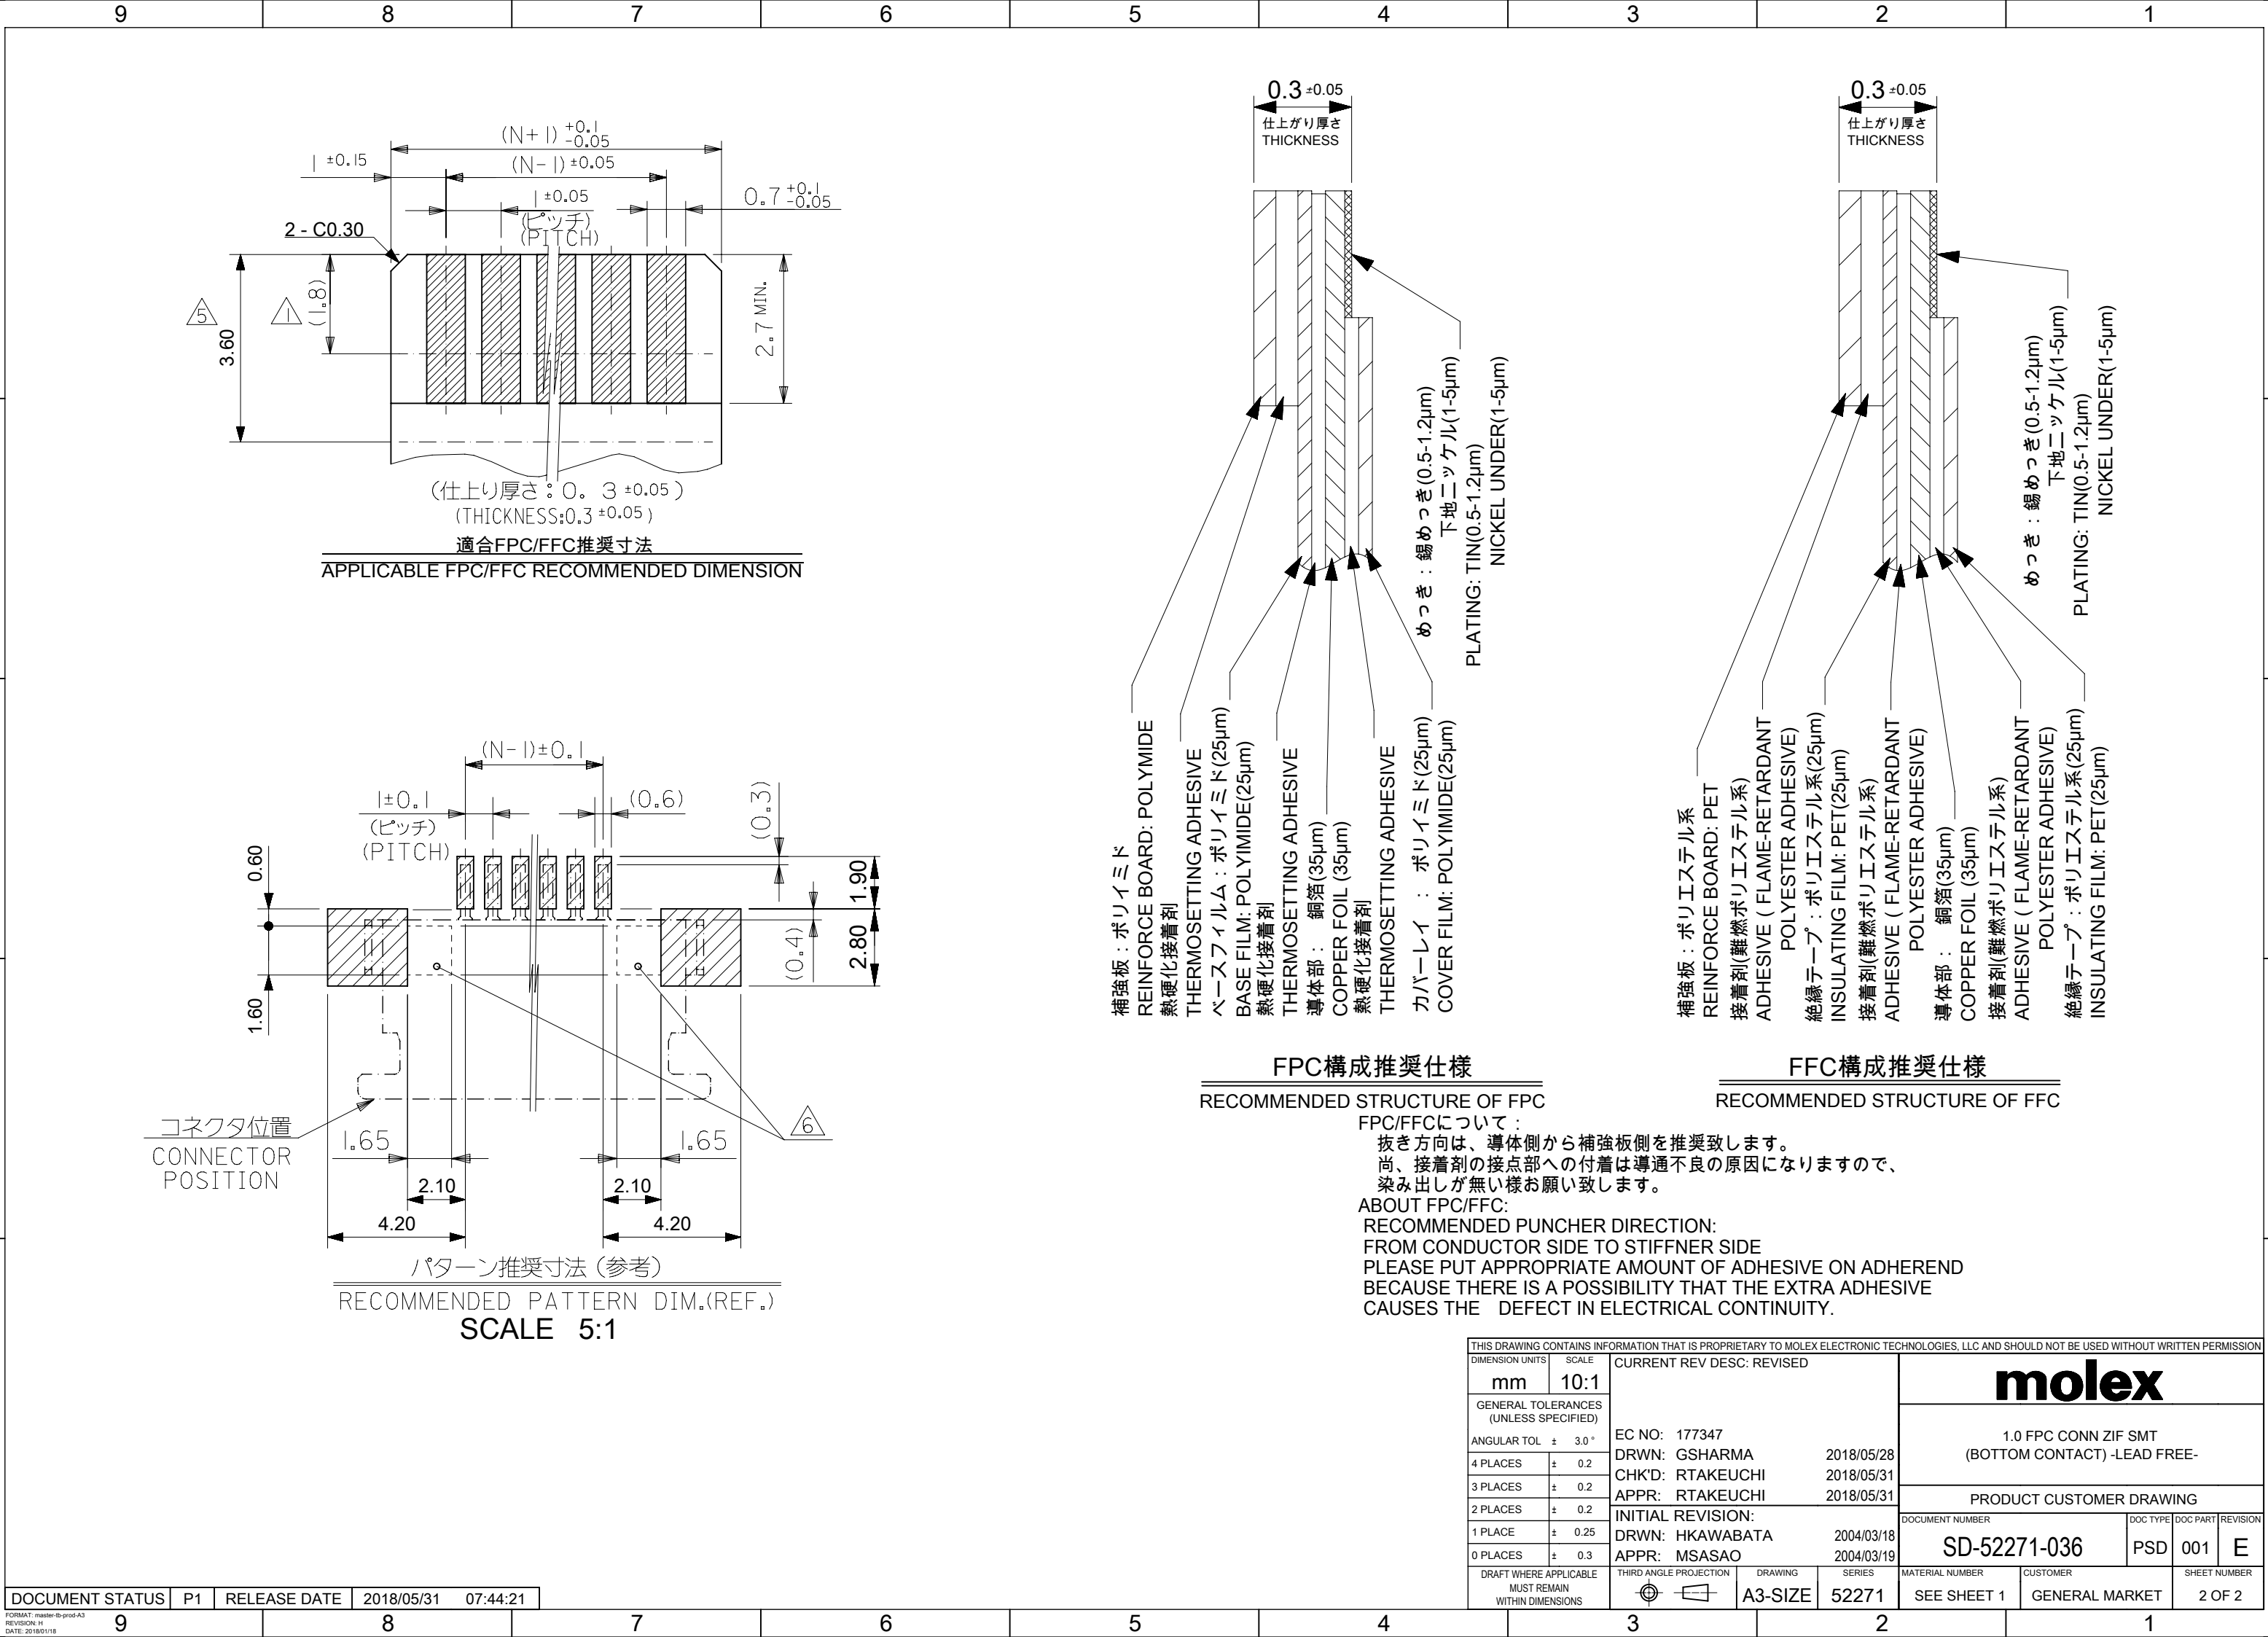

DOCUMENT STATUS		P1	RELEASE DATE	2018/05/31	07:44:21
FORMAT: master-B-prod-A3		REVISION: 14			
DATE: 2018/01/18					



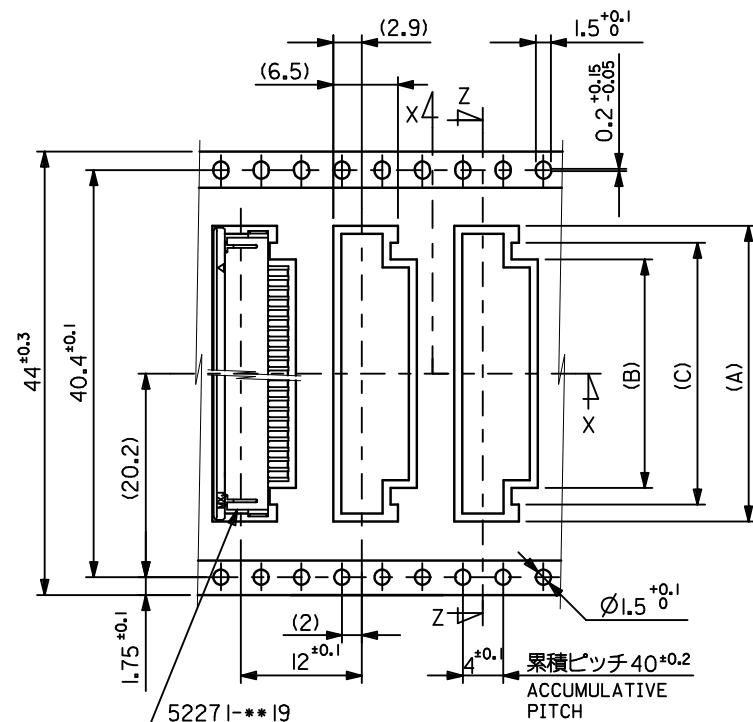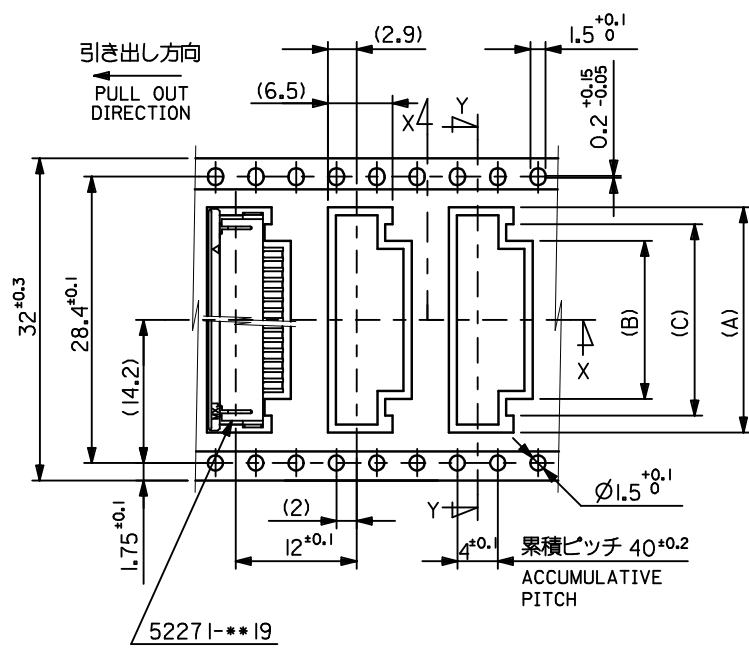

fb_frame_A3_J_ME_S Rev. E 2006/04/15	9	8	7
---	---	---	---

6	5	4	3	2	EN-02JA(021)
---	---	---	---	---	--------------

