

Statistical Natural Language Parsing



LLOs

- LLO1: Trình bày được các kiến thức cơ bản về phân tích cú pháp bao gồm bài toán và các tiếp cận giải quyết, các mô hình văn phạm CFG và PCFG, phân tích cú pháp theo tiếp cận thống kê và treebank, đánh giá kết quả phân tích cú pháp
- LLO2: Vận dụng được văn phạm CFG/PCFG trong mô tả cú pháp của ngôn ngữ tự nhiên như đọc hiểu dữ liệu treebank, dựng cây cú pháp thủ công, tính xác suất của cây
- LLO3: Vận dụng được các thuật toán: nhị phân hóa văn phạm phi ngữ cảnh (chuyển văn phạm sang dạng chuẩn Chomsky), lập bảng phân tích sử dụng thuật toán CKY


Statistical Natural Language Parsing

Two views of syntactic structure

Two views of linguistic structure:

1. Constituency (phrase structure)

- Phrase structure organizes words into nested constituents.
- How do we know what is a **constituent**? (Not that linguists don't argue about some cases.)
 - Distribution: a constituent behaves as a unit that can appear in different places:
 - John talked [to the children] [about drugs].
 - John talked [about drugs] [to the children].
 - *John talked drugs to the children about
 - Substitution/expansion/pro-forms:
 - I sat [on the box/right on top of the box/there].
 - Coordination, regular internal structure, no intrusion, fragments, semantics, ...

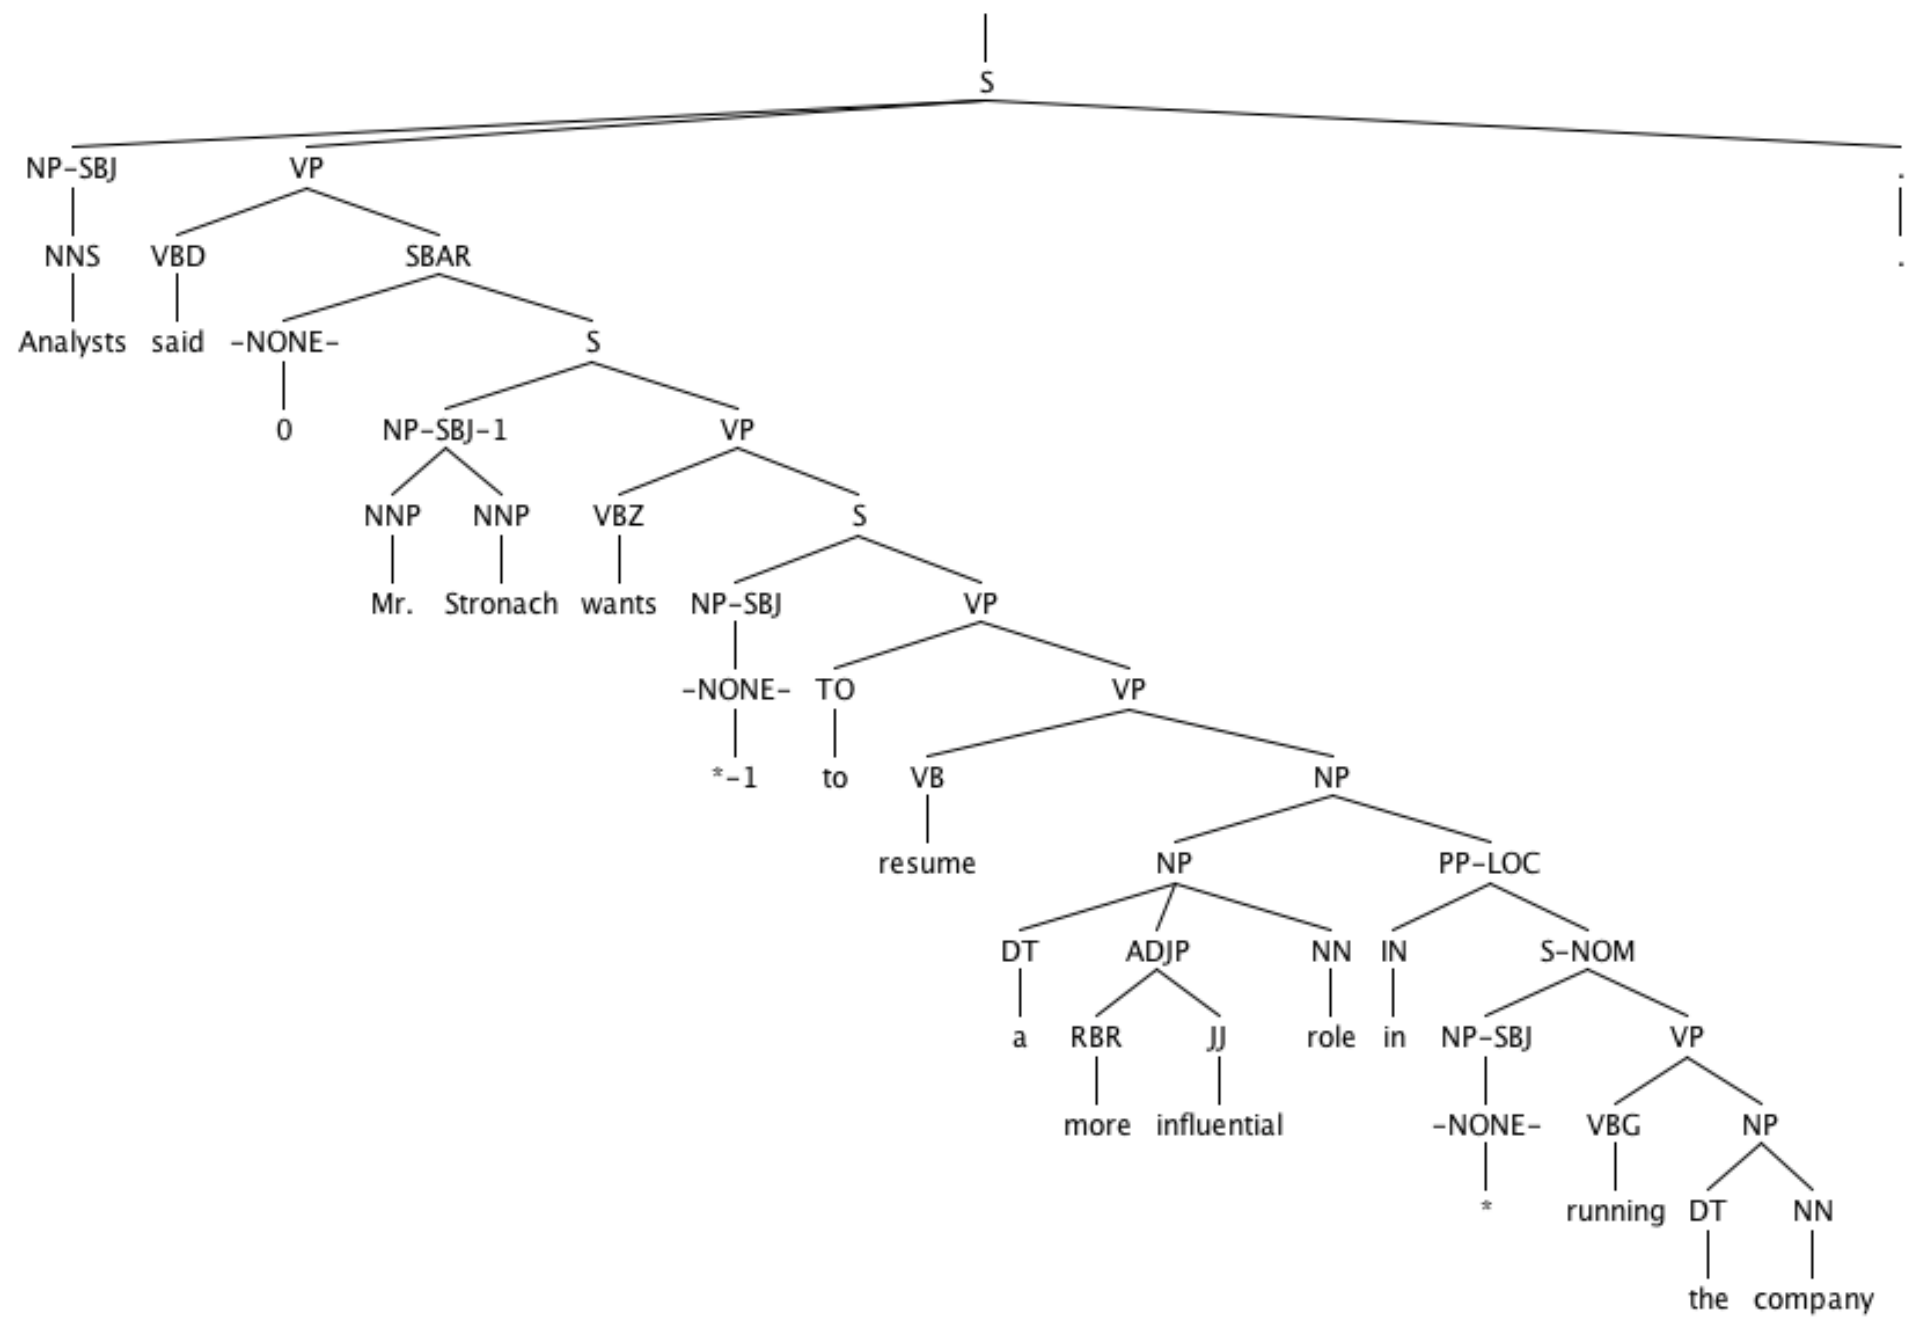



Headed phrase structure

- $VP \rightarrow \dots VB^* \dots$
- $NP \rightarrow \dots NN^* \dots$
- $ADJP \rightarrow \dots JJ^* \dots$
- $ADVP \rightarrow \dots RB^* \dots$
- $SBAR(Q) \rightarrow S | SINV | SQ \rightarrow \dots NP VP \dots$
- Plus minor phrase types:
 - QP (quantifier phrase in NP), CONJP (multi word constructions: *as well as*), INTJ (interjections), etc.

Two views of linguistic structure:

2. Dependency structure

- Dependency structure shows which words depend on (modify or are arguments of) which other words.

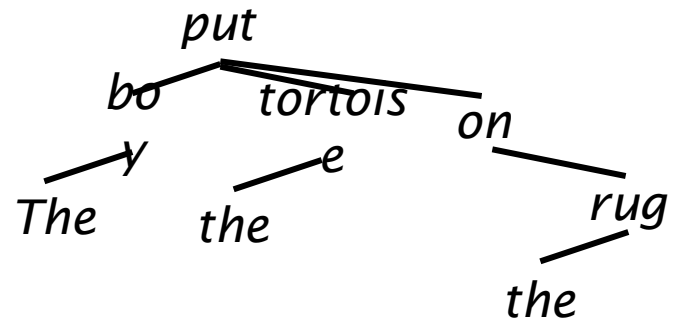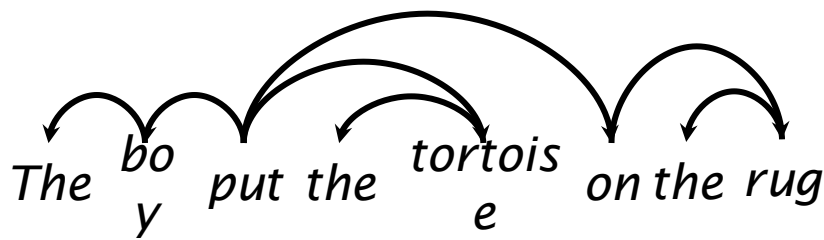

Statistical Natural Language Parsing



Parsing: The rise of
data and statistics

Pre 1990 (“Classical”) NLP Parsing

- Wrote symbolic grammar (CFG or often richer) and lexicon

$S \rightarrow NP VP$

$NN \rightarrow \textit{interest}$

$NP \rightarrow (DT) NN$

$NNS \rightarrow \textit{rates}$

$NP \rightarrow NN NNS$

$NNS \rightarrow \textit{raises}$

$NP \rightarrow NNP$

$VBP \rightarrow \textit{interest}$

$VP \rightarrow V NP$

$VBZ \rightarrow \textit{rates}$

- Used grammar/proof systems to prove parses from words
- This scaled very badly and didn't give coverage. For sentence:

Fed raises interest rates 0.5% in effort to control inflation

- Minimal grammar: 36 parses
- Simple 10 rule grammar: 592 parses
- Real-size broad-coverage grammar: millions of parses

Classical NLP Parsing:

The problem and its solution

- Categorical constraints can be added to grammars to limit unlikely/weird parses for sentences
 - But the attempt make the grammars not robust
 - In traditional systems, commonly 30% of sentences in even an edited text would have *no* parse.
- A less constrained grammar can parse more sentences
 - But simple sentences end up with ever more parses with no way to choose between them
- We need mechanisms that allow us to find the most likely parse(s) for a sentence
 - Statistical parsing lets us work with very loose grammars that admit millions of parses for sentences but still quickly find the best parse(s)

The rise of annotated data: The Penn Treebank

[Marcus et al. 1993, *Computational Linguistics*]

```
( (S
  (NP-SBJ (DT The) (NN move))
  (VP (VBD followed)
    (NP
      (NP (DT a) (NN round))
      (PP (IN of)
        (NP
          (NP (JJ similar) (NNS increases))
          (PP (IN by)
            (NP (JJ other) (NNS lenders))))
          (PP (IN against)
            (NP (NNP Arizona) (JJ real) (NN estate) (NNS loans))))))
    (, ,)
    (S-ADV
      (NP-SBJ (-NONE- *))
      (VP (VBG reflecting)
        (NP
          (NP (DT a) (VBG continuing) (NN decline))
          (PP-LOC (IN in)
            (NP (DT that) (NN market))))))
      (. .)))
```

The rise of annotated data

- Starting off, building a treebank seems a lot slower and less useful than building a grammar
- But a treebank gives us many things
 - Reusability of the labor
 - Many parsers, POS taggers, etc.
 - Valuable resource for linguistics
 - Broad coverage
 - Frequencies and distributional information
 - A way to evaluate systems



CFGs and PCFGs

(Probabilistic) Context-Free Grammars

A phrase structure grammar

$S \rightarrow NP VP$

$VP \rightarrow V NP$

$VP \rightarrow V NP PP$

$NP \rightarrow NP NP$

$NP \rightarrow NP PP$

$NP \rightarrow N$

$NP \rightarrow e$

$PP \rightarrow P NP$

$N \rightarrow \text{people}$

$N \rightarrow \text{fish}$

$N \rightarrow \text{tanks}$

$N \rightarrow \text{rods}$

$V \rightarrow \text{people}$

$V \rightarrow \text{fish}$

$V \rightarrow \text{tanks}$

$P \rightarrow \text{with}$

people fish tanks

people fish with rods

Phrase structure grammars = context-free grammars (CFGs)

- $G = (T, N, S, R)$
 - T is a set of terminal symbols
 - N is a set of nonterminal symbols
 - S is the start symbol ($S \in N$)
 - R is a set of rules/productions of the form $X \rightarrow \gamma$
 - $X \in N$ and $\gamma \in (N \cup T)^*$
- A grammar G generates a language L .

Phrase structure grammars in NLP

- $G = (T, C, N, S, L, R)$
 - T is a set of terminal symbols
 - C is a set of preterminal symbols
 - N is a set of nonterminal symbols
 - S is the start symbol ($S \in N$)
 - L is the lexicon, a set of items of the form $X \rightarrow x$
 - $X \in C$ and $x \in T$
 - R is the grammar, a set of items of the form $X \rightarrow \gamma$
 - $X \in N$ and $\gamma \in (N \cup C)^*$
- By usual convention, S is the start symbol, but in statistical NLP, we usually have an extra node at the top (ROOT, TOP)
- We usually write ϵ for an empty sequence, rather than nothing

A phrase structure grammar

$S \rightarrow NP VP$

$VP \rightarrow V NP$

$VP \rightarrow V NP PP$

$NP \rightarrow NP NP$

$NP \rightarrow NP PP$

$NP \rightarrow N$

$NP \rightarrow e$

$PP \rightarrow P NP$

$N \rightarrow \textit{people}$

$N \rightarrow \textit{fish}$

$N \rightarrow \textit{tanks}$

$N \rightarrow \textit{rods}$

$V \rightarrow \textit{people}$

$V \rightarrow \textit{fish}$

$V \rightarrow \textit{tanks}$

$P \rightarrow \textit{with}$

people fish tanks

people fish with rods

Probabilistic – or stochastic – context-free grammars (PCFGs)


- $G = (T, N, S, R, P)$
 - T is a set of terminal symbols
 - N is a set of nonterminal symbols
 - S is the start symbol ($S \in N$)
 - R is a set of rules/productions of the form $X \rightarrow \gamma$
 - P is a probability function
 - $P: R \rightarrow [0,1]$
 - $\forall X \in N, \sum_{X \rightarrow \gamma \in R} P(X \rightarrow \gamma) = 1$
- A grammar G generates a language model L .

$$\sum_{\gamma \in T^*} P(\gamma) = 1$$

A PCFG

$S \rightarrow NP VP$	1.0
$VP \rightarrow V NP$	0.6
$VP \rightarrow V NP PP$	0.4
$NP \rightarrow NP NP$	0.1
$NP \rightarrow NP PP$	0.2
$NP \rightarrow N$	0.7
$PP \rightarrow P NP$	1.0

$N \rightarrow \textit{people}$	0.5
$N \rightarrow \textit{fish}$	0.2
$N \rightarrow \textit{tanks}$	0.2
$N \rightarrow \textit{rods}$	0.1
$V \rightarrow \textit{people}$	0.1
$V \rightarrow \textit{fish}$	0.6
$V \rightarrow \textit{tanks}$	0.3
$P \rightarrow \textit{with}$	1.0

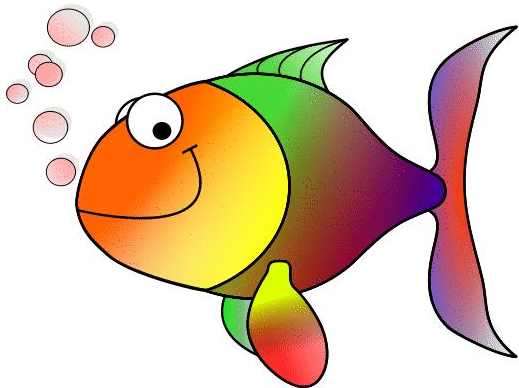


[With empty NP removed
so less ambiguous]

The probability of trees and strings


- $P(t)$ – The probability of a tree t is the product of the probabilities of the rules used to generate it.
- $P(s)$ – The probability of the string s is the sum of the probabilities of the trees which have that string as their yield

$$\begin{aligned} P(s) &= \sum_j P(s, t) \text{ where } t \text{ is a parse of } s \\ &= \sum_j P(t) \end{aligned}$$

t_1 :

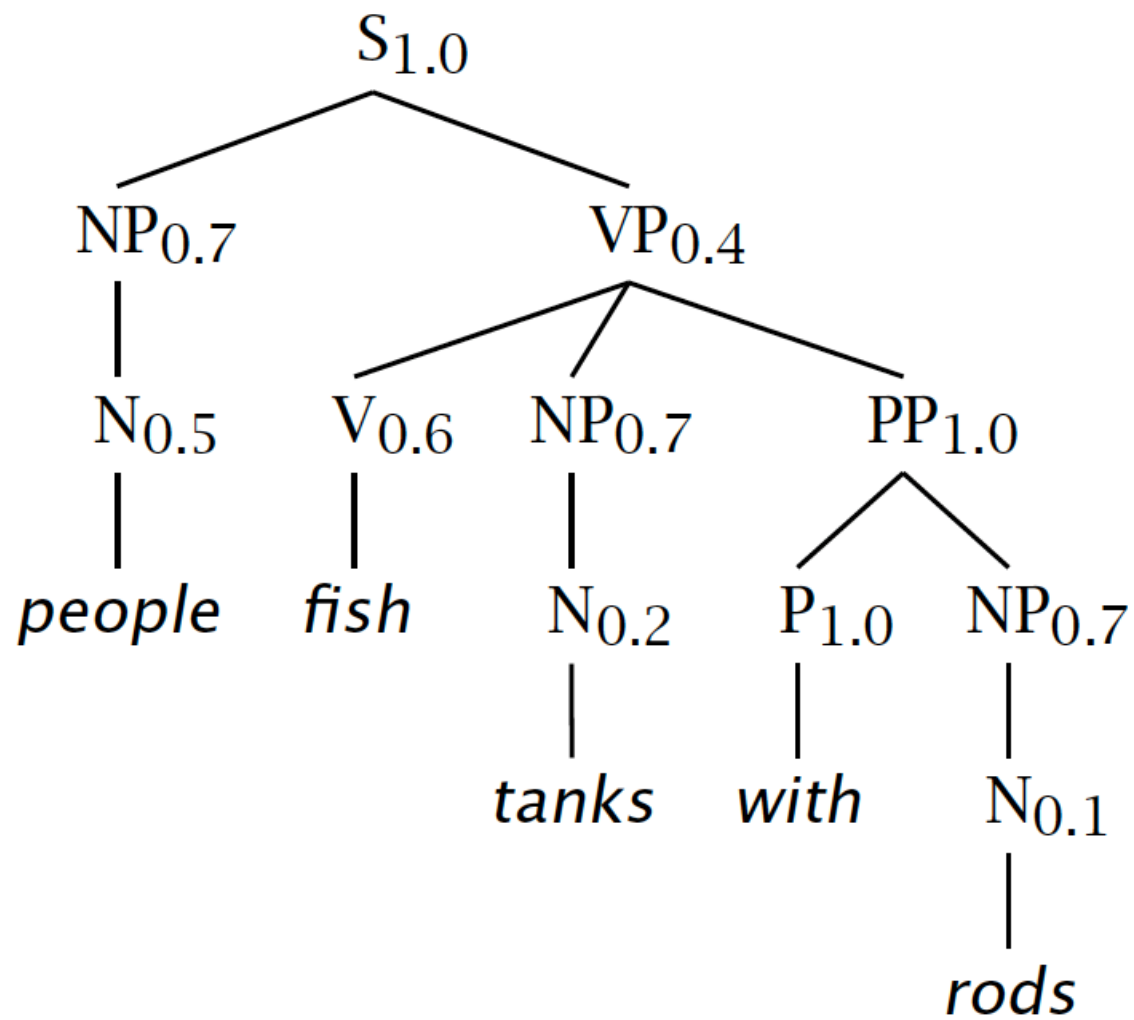

t_2 :

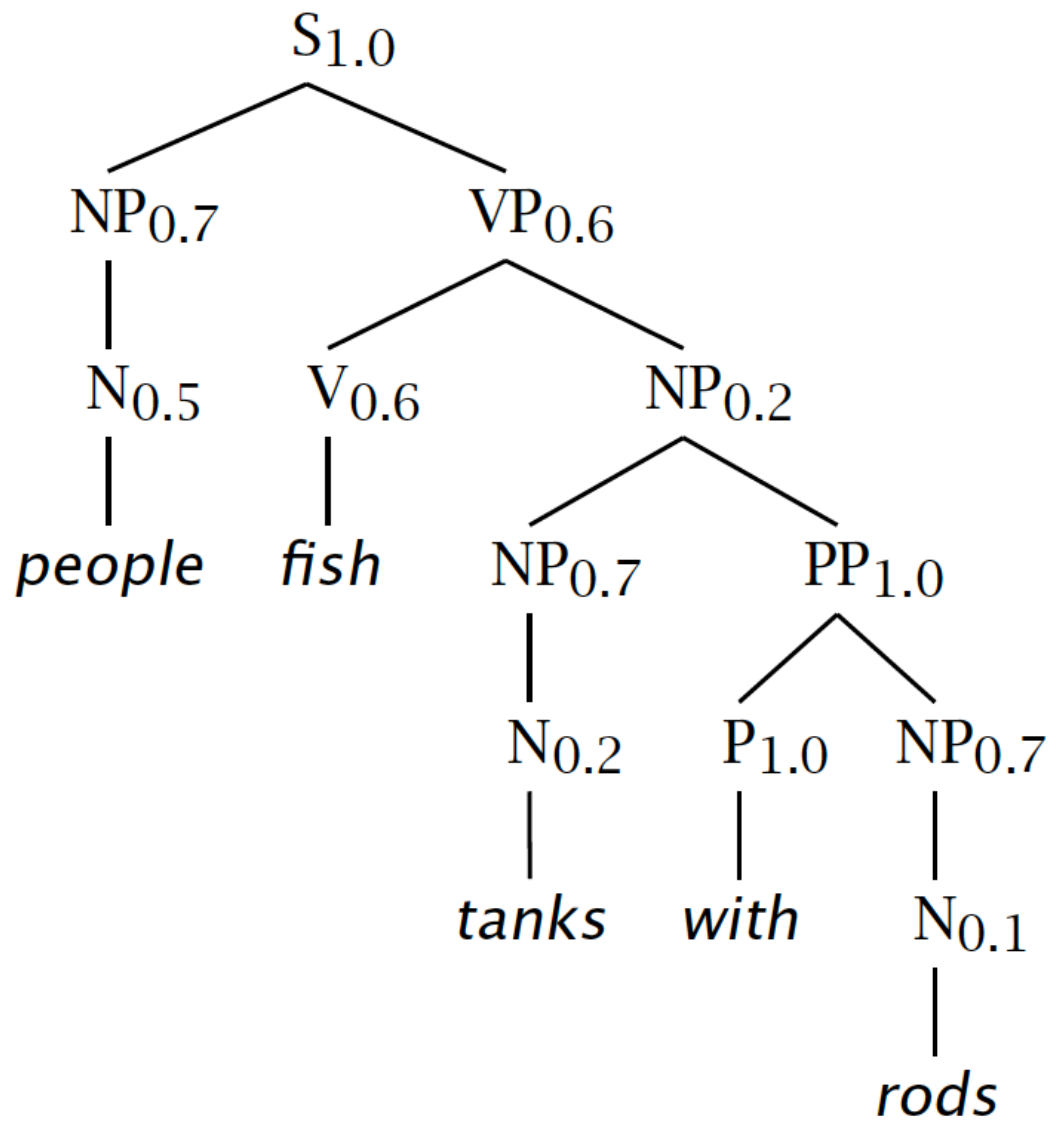


Tree and String Probabilities

- $s = \textit{people fish tanks with rods}$
- $P(t_1) = 1.0 \times 0.7 \times 0.4 \times 0.5 \times 0.6 \times 0.7$
 $\times 1.0 \times 0.2 \times 1.0 \times 0.7 \times 0.1$
 $= 0.0008232$
- $P(t_2) = 1.0 \times 0.7 \times 0.6 \times 0.5 \times 0.6 \times 0.2$
 $\times 0.7 \times 1.0 \times 0.2 \times 1.0 \times 0.7 \times 0.1$
 $= 0.00024696$
- $P(s) = P(t_1) + P(t_2)$
 $= 0.0008232 + 0.00024696$
 $= 0.00107016$


Verb attach

Noun
attach

t_1 :

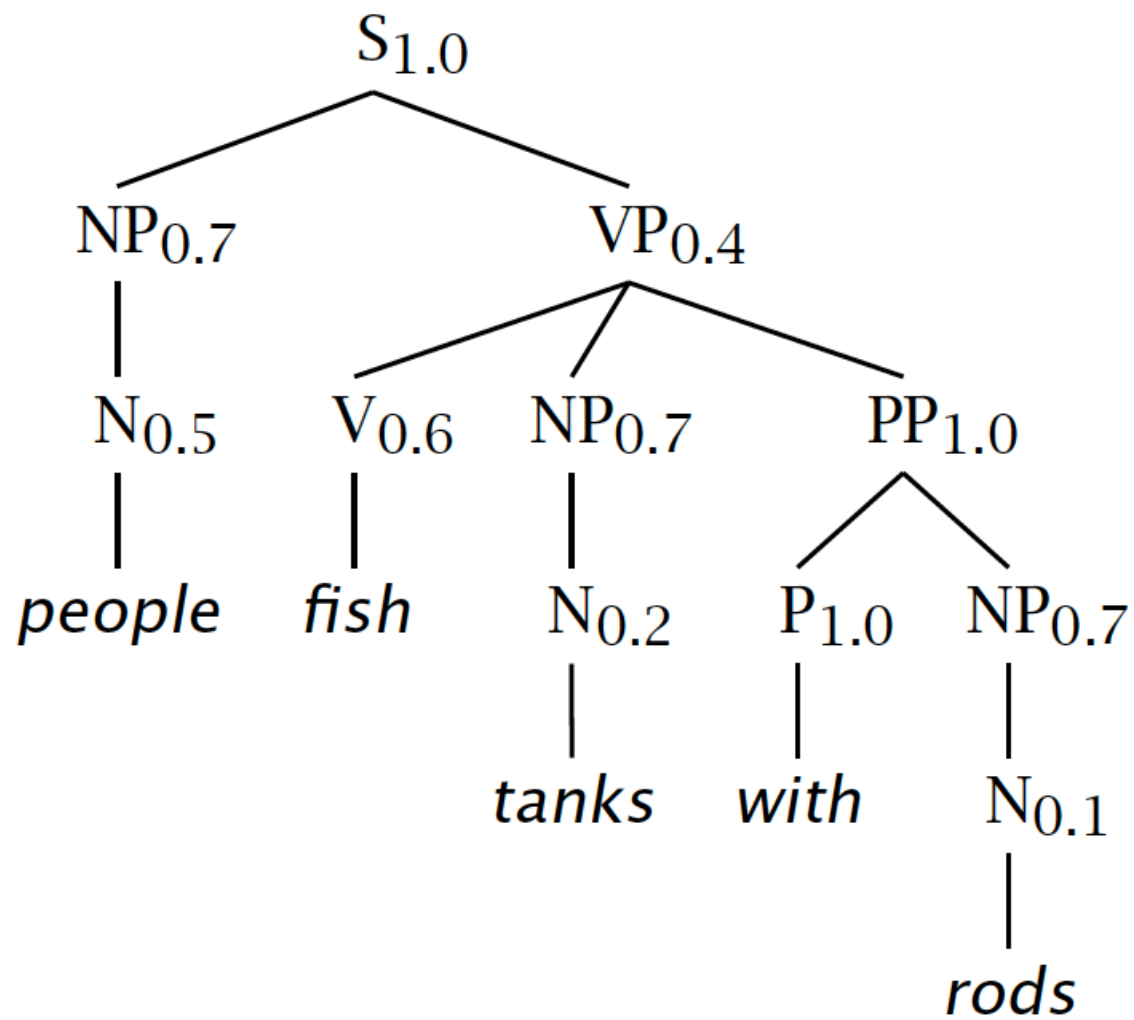

t_2 :

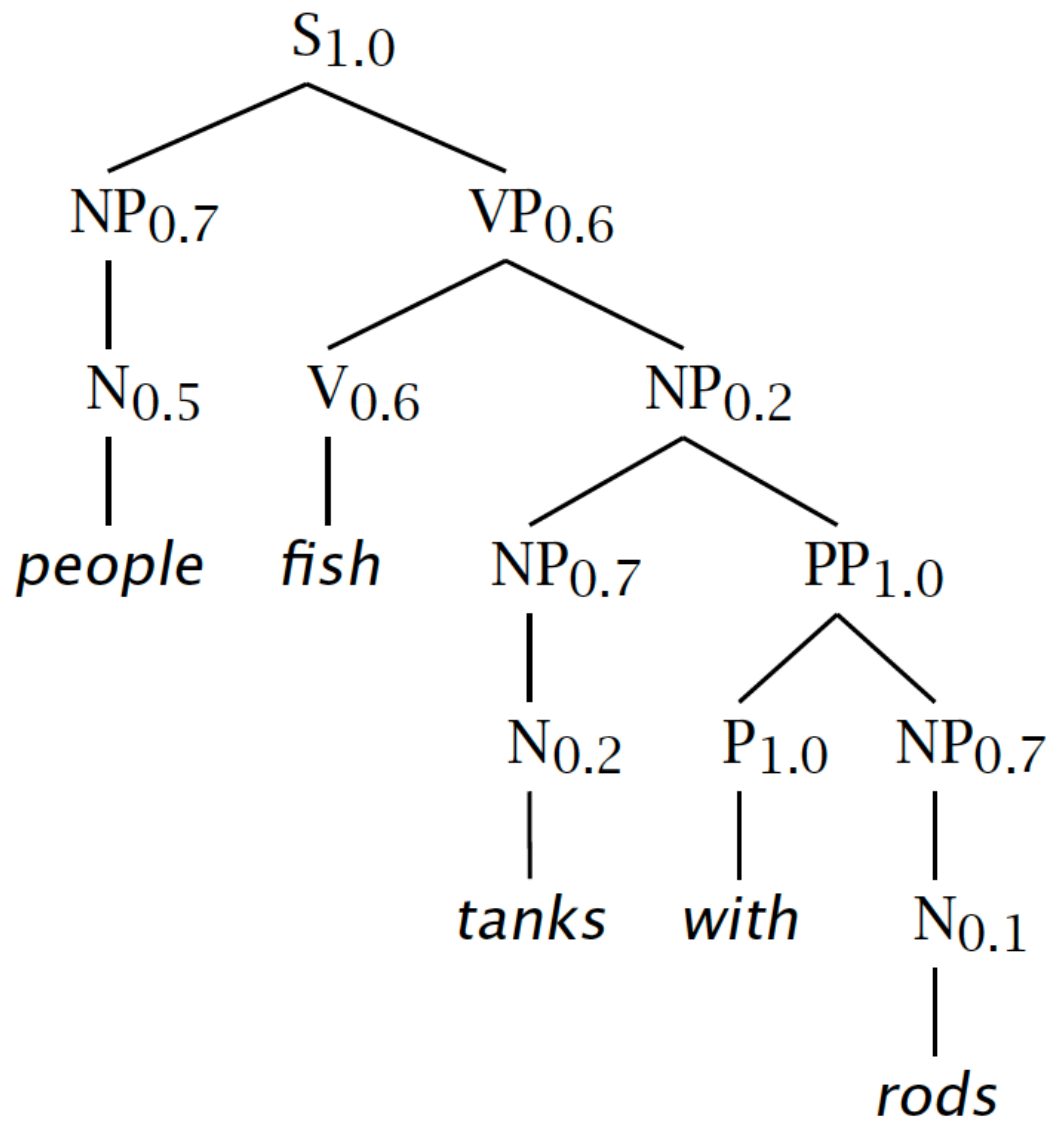

Restricting the grammar form for efficient parsing

Chomsky Normal Form

- All rules are of the form $X \rightarrow YZ$ or $X \rightarrow w$
 - $X, Y, Z \in N$ and $w \in T$
- A transformation to this form doesn't change the weak generative capacity of a CFG
 - That is, it recognizes the same language
 - But maybe with different trees
- Empties and unaries are removed recursively
- n-ary rules are divided by introducing new nonterminals ($n > 2$)

A phrase structure grammar

$S \rightarrow NP VP$

$VP \rightarrow V NP$

$VP \rightarrow V NP PP$

$NP \rightarrow NP NP$

$NP \rightarrow NP PP$

$NP \rightarrow N$

$NP \rightarrow e$

$PP \rightarrow P NP$

$N \rightarrow \textit{people}$

$N \rightarrow \textit{fish}$

$N \rightarrow \textit{tanks}$

$N \rightarrow \textit{rods}$

$V \rightarrow \textit{people}$

$V \rightarrow \textit{fish}$

$V \rightarrow \textit{tanks}$

$P \rightarrow \textit{with}$

Chomsky Normal Form steps

$S \rightarrow NP VP$

$S \rightarrow VP$

$VP \rightarrow V NP$

$VP \rightarrow V$

$VP \rightarrow V NP PP$

$VP \rightarrow V PP$

$NP \rightarrow NP NP$

$NP \rightarrow NP$

$NP \rightarrow NP PP$

$NP \rightarrow PP$

$NP \rightarrow N$

$PP \rightarrow P NP$

$PP \rightarrow P$

$N \rightarrow \textit{people}$

$N \rightarrow \textit{fish}$

$N \rightarrow \textit{tanks}$

$N \rightarrow \textit{rods}$

$V \rightarrow \textit{people}$

$V \rightarrow \textit{fish}$

$V \rightarrow \textit{tanks}$

$P \rightarrow \textit{with}$

Chomsky Normal Form steps

$S \rightarrow NP VP$

$VP \rightarrow V NP$

$S \rightarrow V NP$

$VP \rightarrow V$

$S \rightarrow V$

$VP \rightarrow V NP PP$

$S \rightarrow V NP PP$

$VP \rightarrow V PP$

$S \rightarrow V PP$

$NP \rightarrow NP NP$

$NP \rightarrow NP$

$NP \rightarrow NP PP$

$NP \rightarrow PP$

$NP \rightarrow N$

$PP \rightarrow P NP$

$PP \rightarrow P$

$N \rightarrow \textit{people}$

$N \rightarrow \textit{fish}$

$N \rightarrow \textit{tanks}$

$N \rightarrow \textit{rods}$

$V \rightarrow \textit{people}$

$V \rightarrow \textit{fish}$

$V \rightarrow \textit{tanks}$

$P \rightarrow \textit{with}$

Chomsky Normal Form steps

$S \rightarrow NP VP$

$VP \rightarrow V NP$

$S \rightarrow V NP$

$VP \rightarrow V$

$VP \rightarrow V NP PP$

$S \rightarrow V NP PP$

$VP \rightarrow V PP$

$S \rightarrow V PP$

$NP \rightarrow NP NP$

$NP \rightarrow NP$

$NP \rightarrow NP PP$

$NP \rightarrow PP$

$NP \rightarrow N$

$PP \rightarrow P NP$

$PP \rightarrow P$

$N \rightarrow \textit{people}$

$N \rightarrow \textit{fish}$

$N \rightarrow \textit{tanks}$

$N \rightarrow \textit{rods}$

$V \rightarrow \textit{people}$

$S \rightarrow \textit{people}$

$V \rightarrow \textit{fish}$

$S \rightarrow \textit{fish}$

$V \rightarrow \textit{tanks}$

$S \rightarrow \textit{tanks}$

$P \rightarrow \textit{with}$

Chomsky Normal Form steps

$S \rightarrow NP VP$

$VP \rightarrow V NP$

$S \rightarrow V NP$

$VP \rightarrow V NP PP$

$S \rightarrow V NP PP$

$VP \rightarrow V PP$

$S \rightarrow V PP$

$NP \rightarrow NP NP$

$NP \rightarrow NP$

$NP \rightarrow NP PP$

$NP \rightarrow PP$

$NP \rightarrow N$

$PP \rightarrow P NP$

$PP \rightarrow P$

$N \rightarrow \textit{people}$

$N \rightarrow \textit{fish}$

$N \rightarrow \textit{tanks}$

$N \rightarrow \textit{rods}$

$V \rightarrow \textit{people}$

$S \rightarrow \textit{people}$

$VP \rightarrow \textit{people}$

$V \rightarrow \textit{fish}$

$S \rightarrow \textit{fish}$

$VP \rightarrow \textit{fish}$

$V \rightarrow \textit{tanks}$

$S \rightarrow \textit{tanks}$

$VP \rightarrow \textit{tanks}$

$P \rightarrow \textit{with}$

Chomsky Normal Form steps

$S \rightarrow NP VP$

$VP \rightarrow V NP$

$S \rightarrow V NP$

$VP \rightarrow V NP PP$

$S \rightarrow V NP PP$

$VP \rightarrow V PP$

$S \rightarrow V PP$

$NP \rightarrow NP NP$

$NP \rightarrow NP PP$

$NP \rightarrow P NP$

$PP \rightarrow P NP$

$NP \rightarrow \textit{people}$

$NP \rightarrow \textit{fish}$

$NP \rightarrow \textit{tanks}$

$NP \rightarrow \textit{rods}$

$V \rightarrow \textit{people}$

$S \rightarrow \textit{people}$

$VP \rightarrow \textit{people}$

$V \rightarrow \textit{fish}$

$S \rightarrow \textit{fish}$

$VP \rightarrow \textit{fish}$

$V \rightarrow \textit{tanks}$

$S \rightarrow \textit{tanks}$

$VP \rightarrow \textit{tanks}$

$P \rightarrow \textit{with}$

$PP \rightarrow \textit{with}$

Chomsky Normal Form steps

$S \rightarrow NP VP$

$VP \rightarrow V NP$

$S \rightarrow V NP$

$VP \rightarrow V @VP_V$

$@VP_V \rightarrow NP PP$

$S \rightarrow V @S_V$

$@S_V \rightarrow NP PP$

$VP \rightarrow V PP$

$S \rightarrow V PP$

$NP \rightarrow NP NP$

$NP \rightarrow NP PP$

$NP \rightarrow P NP$

$PP \rightarrow P NP$

$NP \rightarrow \textit{people}$

$NP \rightarrow \textit{fish}$

$NP \rightarrow \textit{tanks}$

$NP \rightarrow \textit{rods}$

$V \rightarrow \textit{people}$

$S \rightarrow \textit{people}$

$VP \rightarrow \textit{people}$

$V \rightarrow \textit{fish}$

$S \rightarrow \textit{fish}$

$VP \rightarrow \textit{fish}$

$V \rightarrow \textit{tanks}$

$S \rightarrow \textit{tanks}$

$VP \rightarrow \textit{tanks}$

$P \rightarrow \textit{with}$

$PP \rightarrow \textit{with}$

A phrase structure grammar

$S \rightarrow NP VP$

$VP \rightarrow V NP$

$VP \rightarrow V NP PP$

$NP \rightarrow NP NP$

$NP \rightarrow NP PP$

$NP \rightarrow N$

$NP \rightarrow e$

$PP \rightarrow P NP$

$N \rightarrow \textit{people}$

$N \rightarrow \textit{fish}$

$N \rightarrow \textit{tanks}$

$N \rightarrow \textit{rods}$

$V \rightarrow \textit{people}$

$V \rightarrow \textit{fish}$

$V \rightarrow \textit{tanks}$

$P \rightarrow \textit{with}$

Chomsky Normal Form steps

$S \rightarrow NP VP$

$VP \rightarrow V NP$

$S \rightarrow V NP$

$VP \rightarrow V @VP_V$

$@VP_V \rightarrow NP PP$

$S \rightarrow V @S_V$

$@S_V \rightarrow NP PP$

$VP \rightarrow V PP$

$S \rightarrow V PP$

$NP \rightarrow NP NP$

$NP \rightarrow NP PP$

$NP \rightarrow P NP$

$PP \rightarrow P NP$

$NP \rightarrow \textit{people}$

$NP \rightarrow \textit{fish}$

$NP \rightarrow \textit{tanks}$

$NP \rightarrow \textit{rods}$

$V \rightarrow \textit{people}$

$S \rightarrow \textit{people}$

$VP \rightarrow \textit{people}$

$V \rightarrow \textit{fish}$

$S \rightarrow \textit{fish}$

$VP \rightarrow \textit{fish}$

$V \rightarrow \textit{tanks}$

$S \rightarrow \textit{tanks}$

$VP \rightarrow \textit{tanks}$


$P \rightarrow \textit{with}$

$PP \rightarrow \textit{with}$


Chomsky Normal Form

- You should think of this as a transformation for efficient parsing
- With some extra book-keeping in symbol names, you can even reconstruct the same trees with a detransform
- In practice full Chomsky Normal Form is a pain
 - Reconstructing n-aries is easy
 - Reconstructing unaries/empties is trickier
- **Binarization** is crucial for cubic time CFG parsing
- The rest isn't necessary; it just makes the algorithms cleaner and a bit quicker


An example: before binarization...

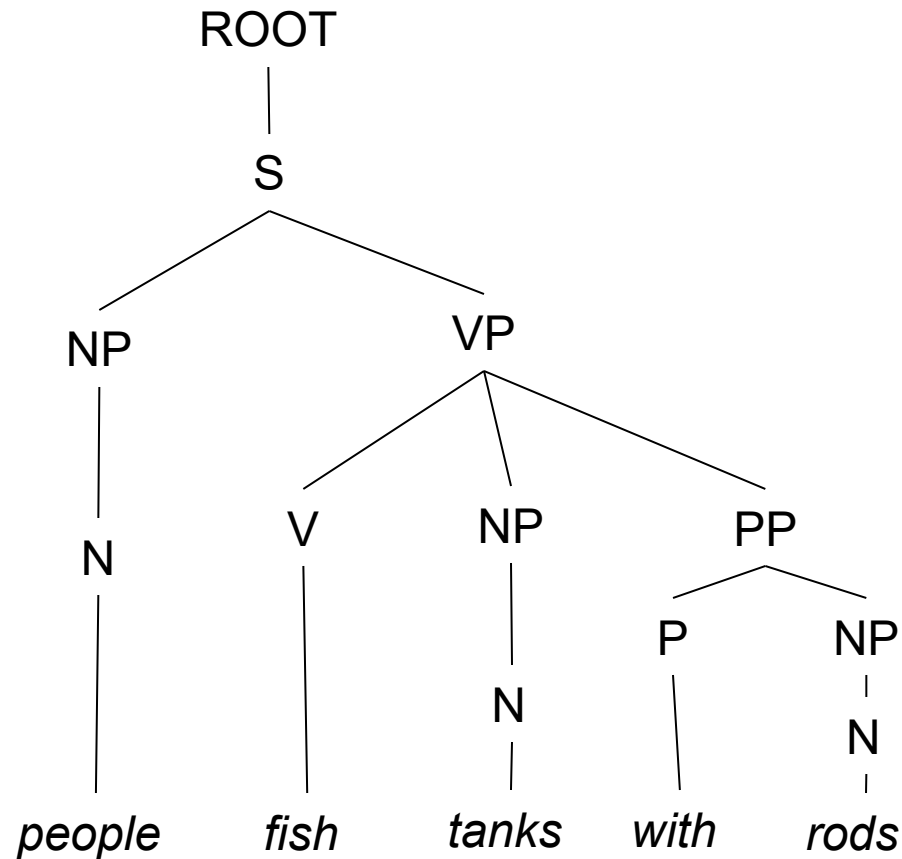

After binarization...

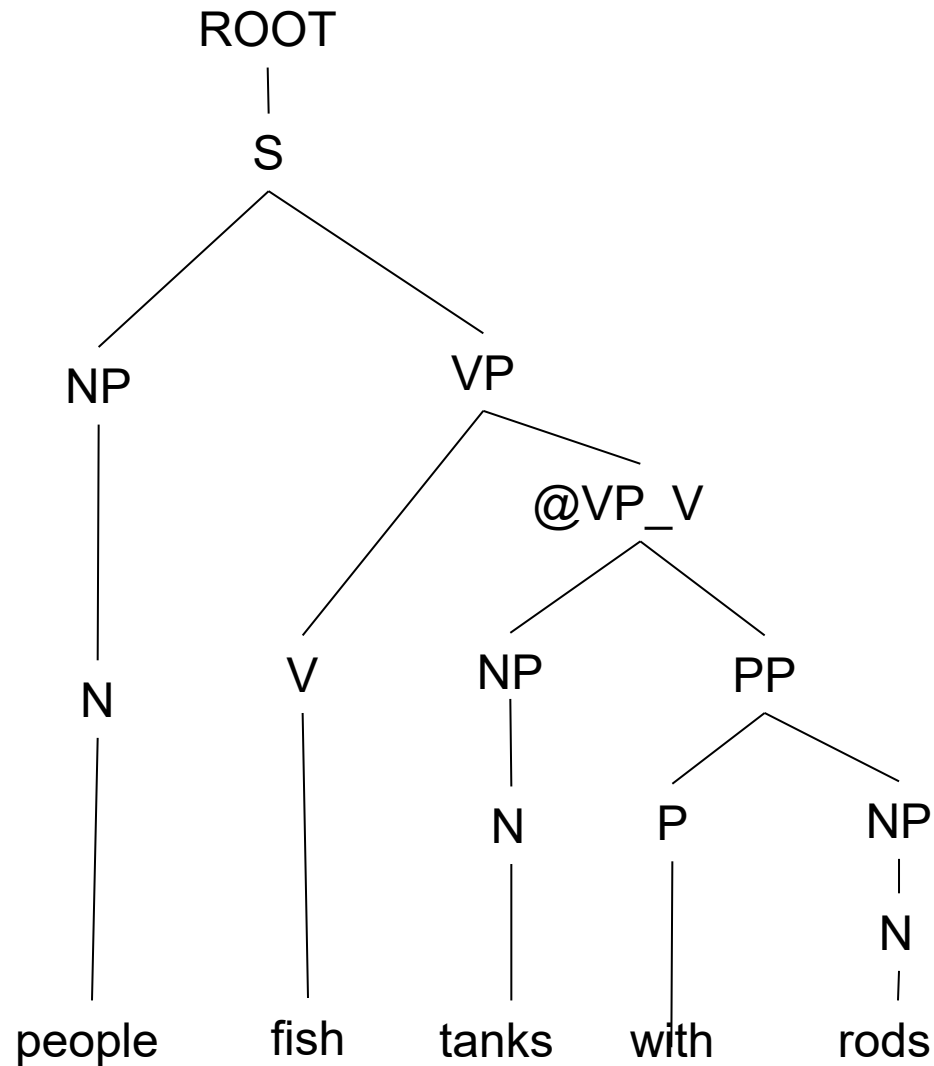

Treebank: empties and unaries

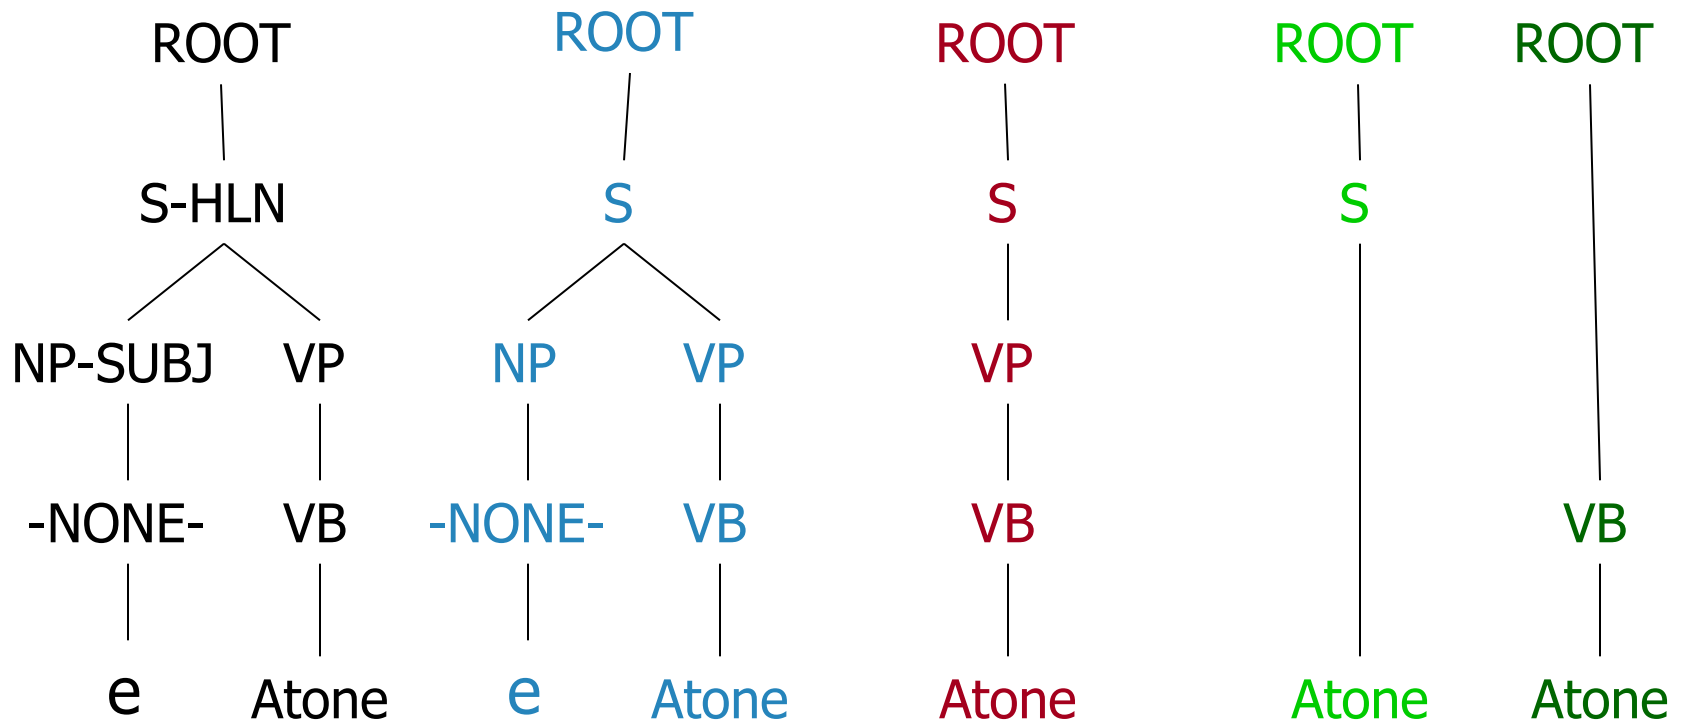

PTB Tree

NoFuncTags

NoEmpties

High

Low


NoUnaries

Unary rules: alchemy in the land of treebanks


The diagram illustrates a syntactic tree for the sentence: "But as Drexel analyst Linda Dunn, its properties will be developed over 15 to 20 years." The tree structure is as follows:


- ROOT**
 - S-1**
 - CC**: *But*
 - PRN**
 - SBAR-ADV**
 - IN**: *as*
 - S**
 - NP-SBJ**
 - NNP**: *Drexel*
 - NN**: *analyst*
 - NNP**: *Linda*
 - NNP**: *Dunn*
 - VP**
 - S**
 - NP-SBJ**: **-NONE-** → ***T*-1**
 - VP**: **VBZ**: *notes*
 - NP-SBJ-2**
 - PRP\$**: *its*
 - NNS**: *properties*
 - VP**
 - MD**: *will*
 - VP**
 - VB**: *be*
 - VP**
 - VP**
 - VP**: **VBN**: *developed*
 - NP**: **-NONE-** → ***-2**
 - PP-TMP**
 - IN**: *over*
 - NP**
 - QP**
 - CD**: *15*
 - TO**: *to*
 - CD**: *20*
 - NNS**: *years*

A green arrow points to the node ***T*-1**.



Same-Span Reachability

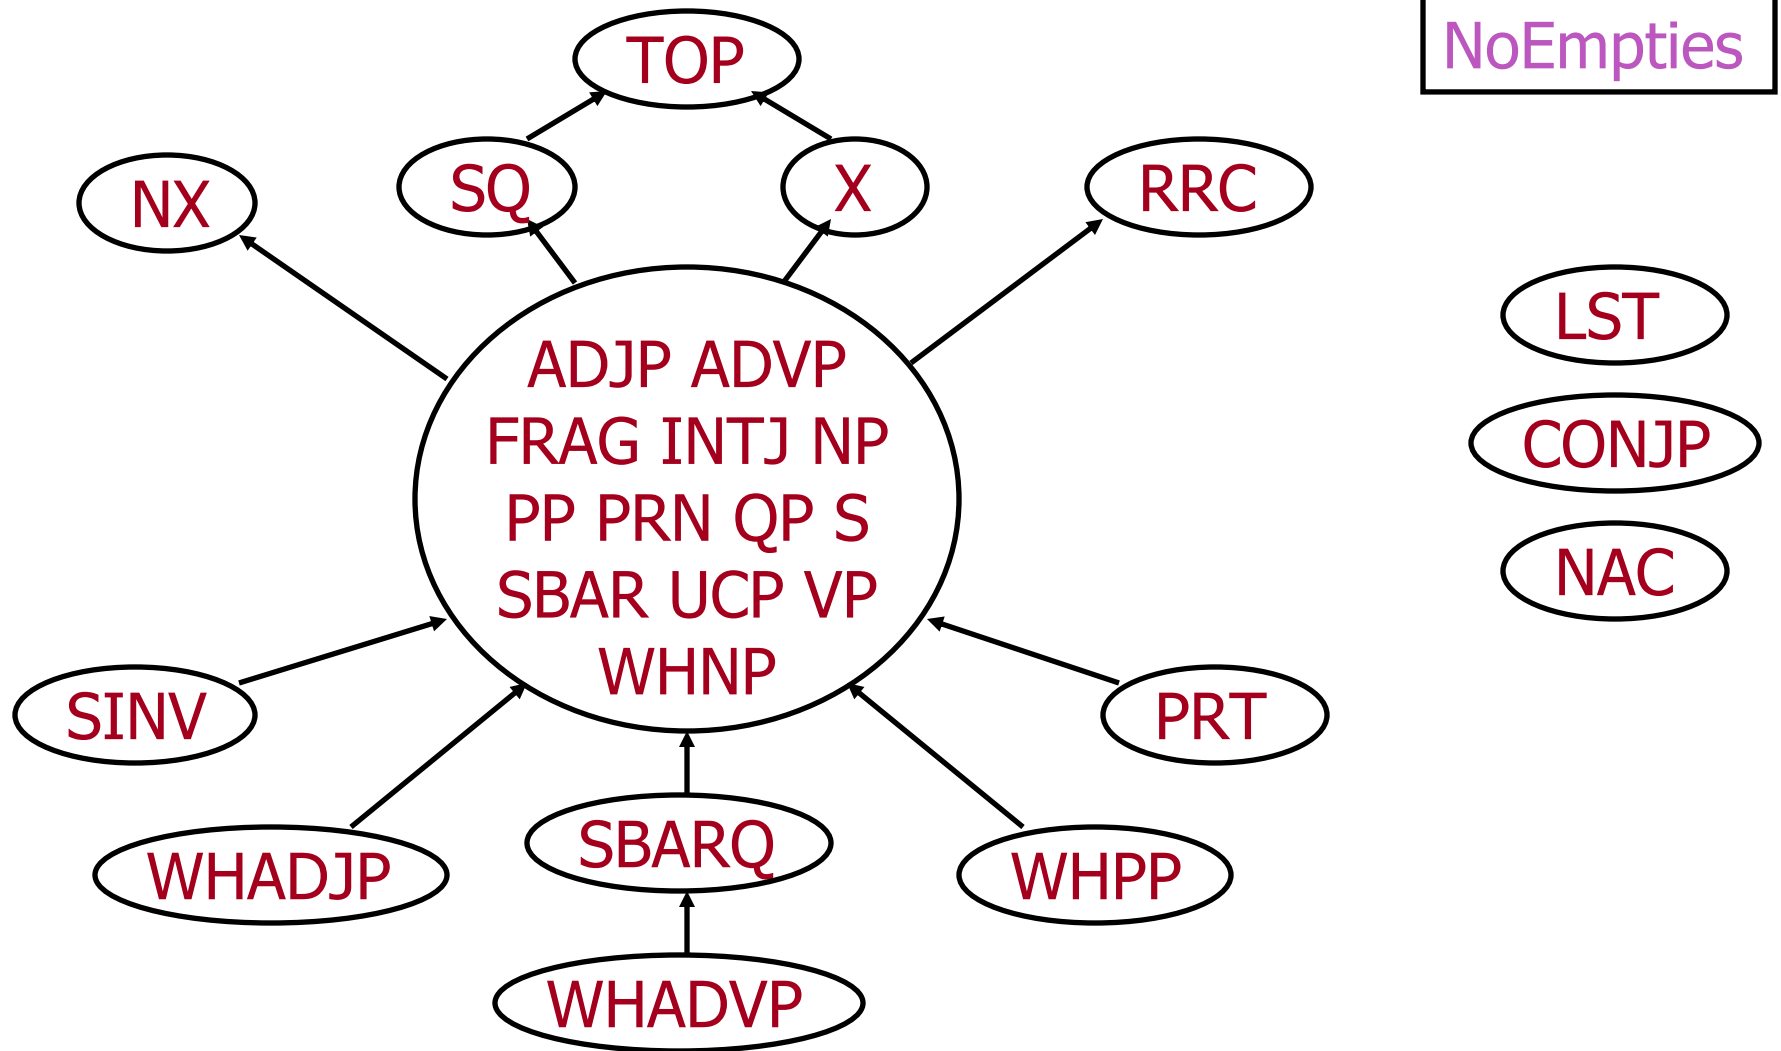


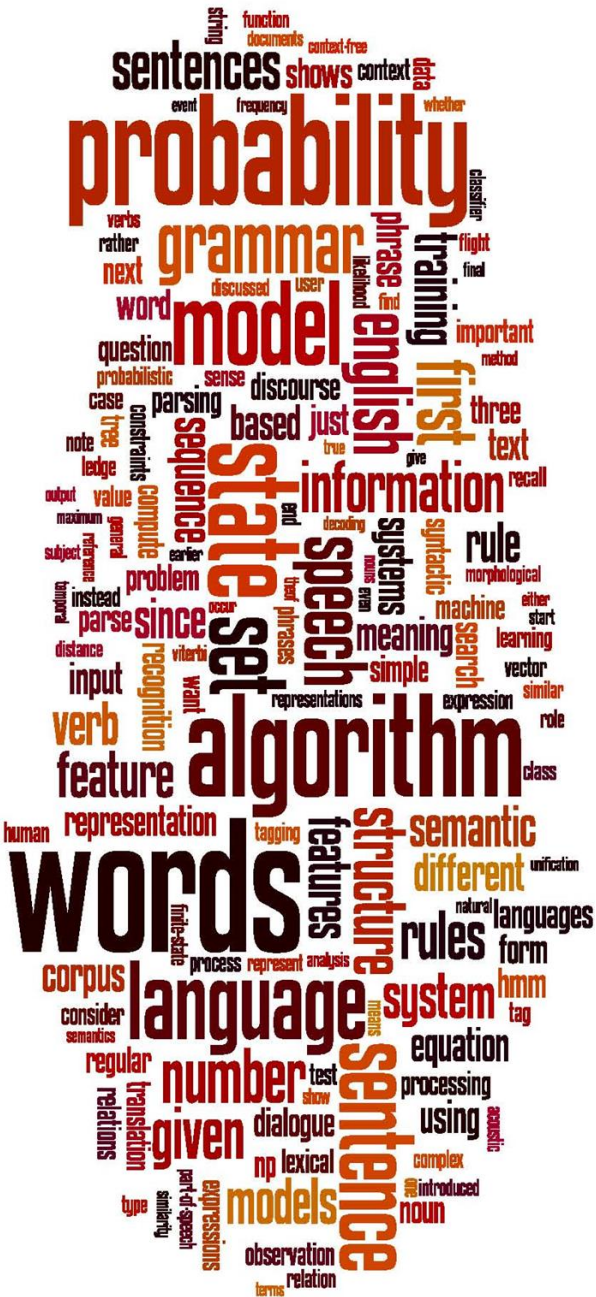

CKY Parsing

Exact polynomial time parsing of (P)CFGs

Constituency Parsing

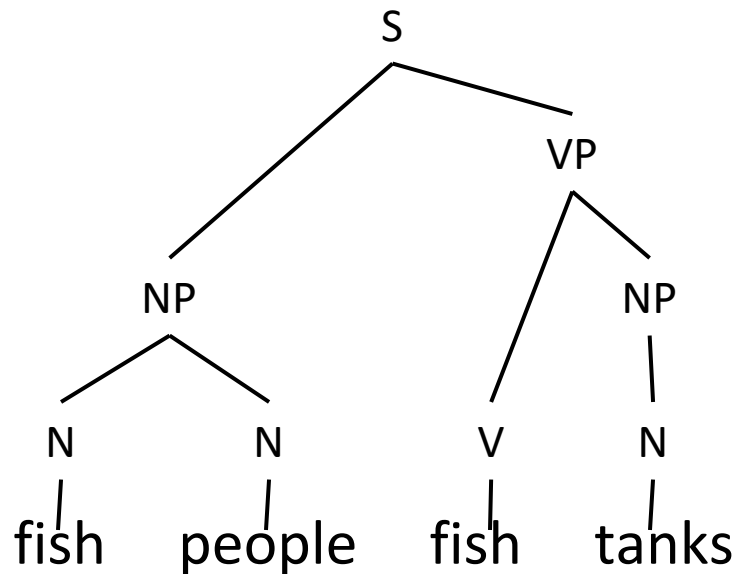

PCFG

Rule Prob θ_i

$S \rightarrow NP VP$ θ_0

$NP \rightarrow NP NP$ θ_1

...


$N \rightarrow \text{fish}$ θ_{42}

$N \rightarrow \text{people}$ θ_{43}

$V \rightarrow \text{fish}$ θ_{44}


...

Cocke-Kasami-Younger (CKY) Constituency Parsing

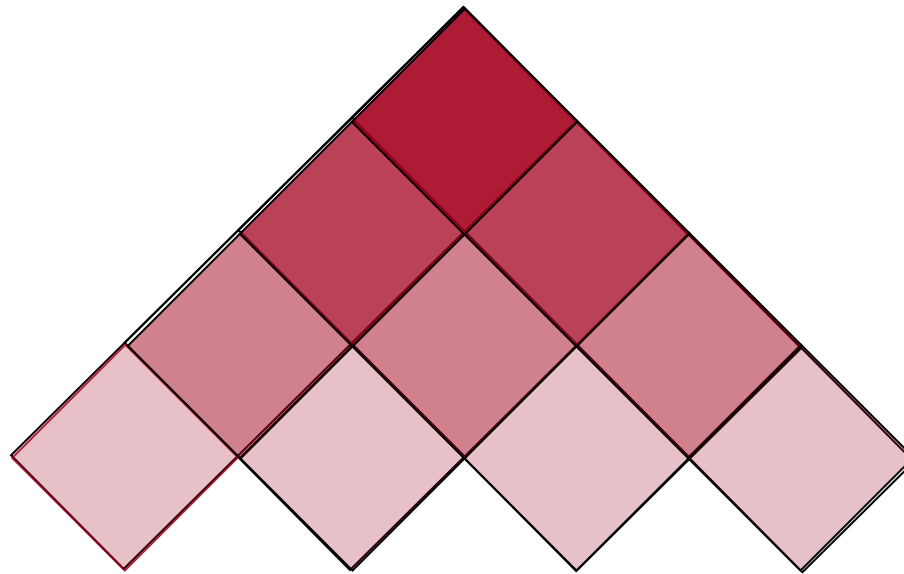


fish people fish tanks

Viterbi (Max) Scores

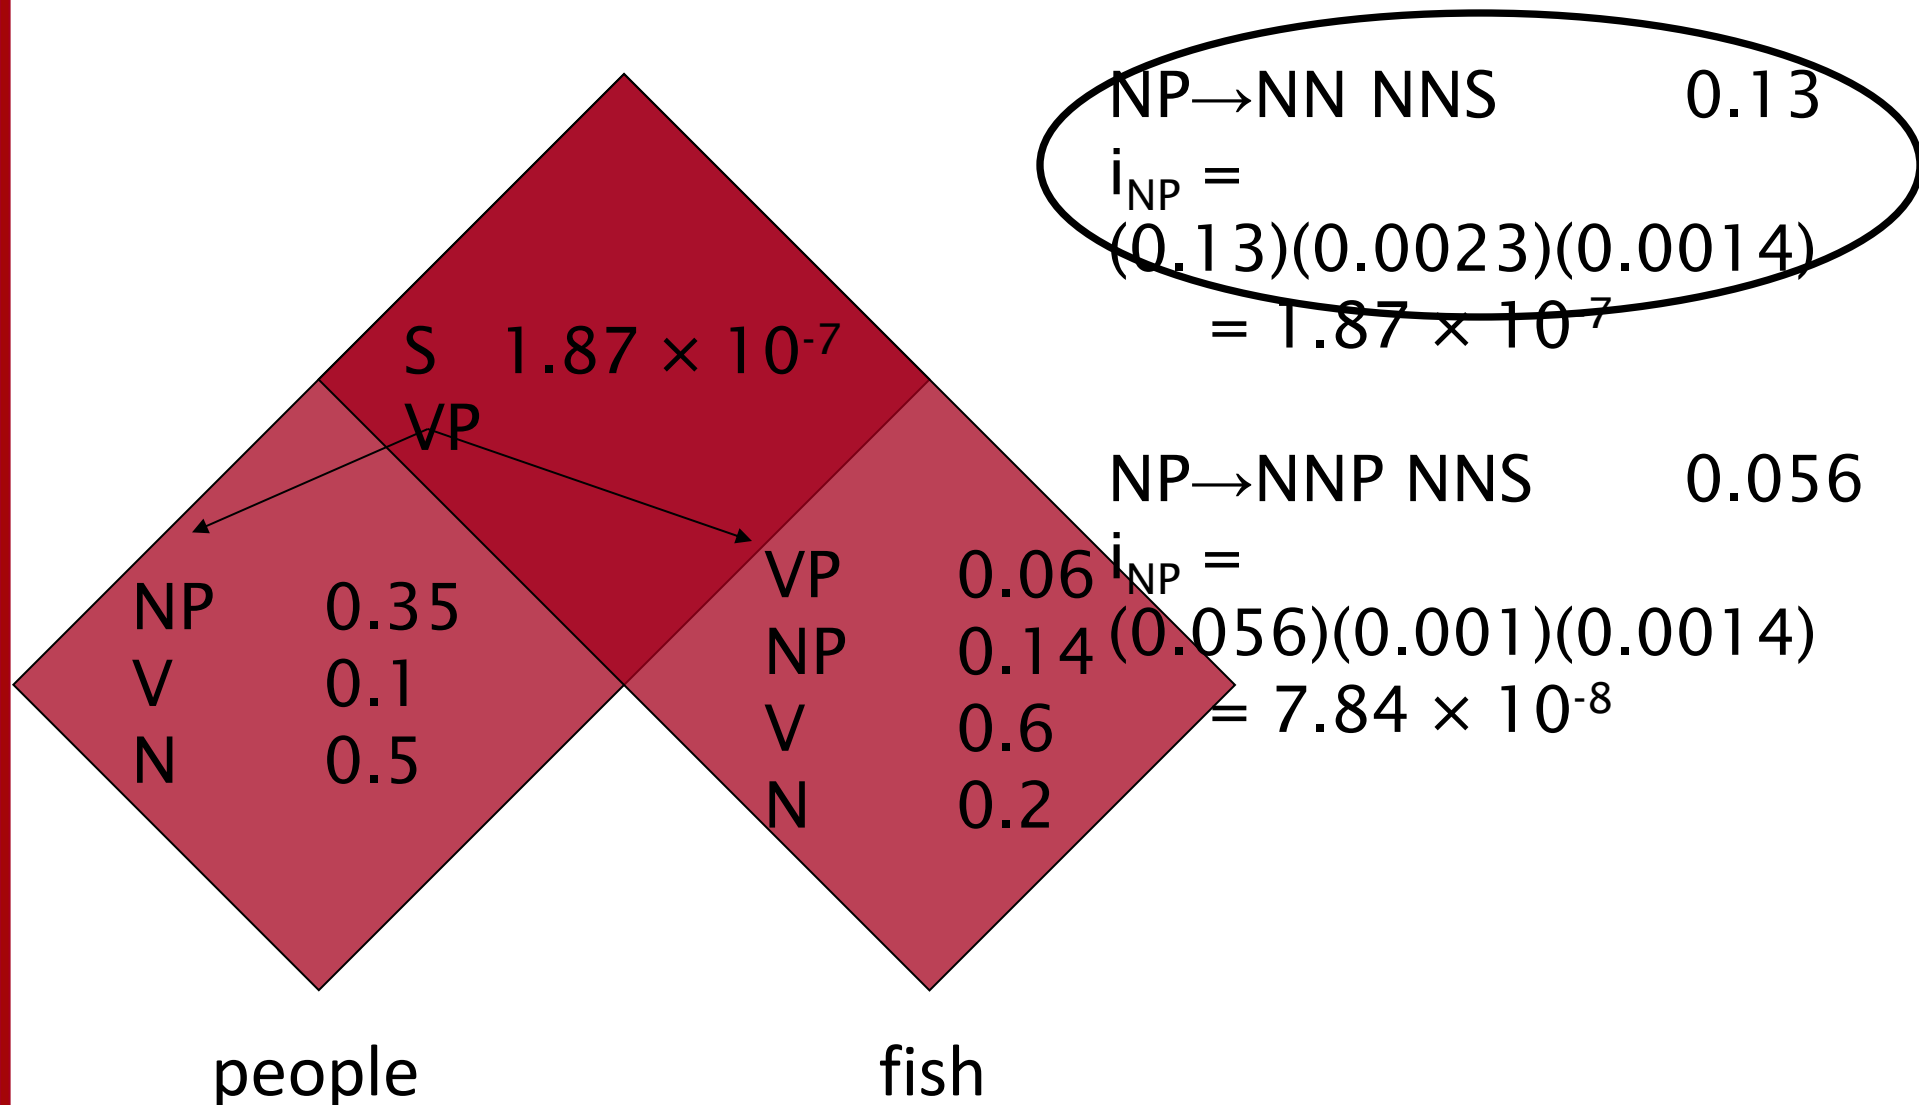

Viterbi (Max) Scores

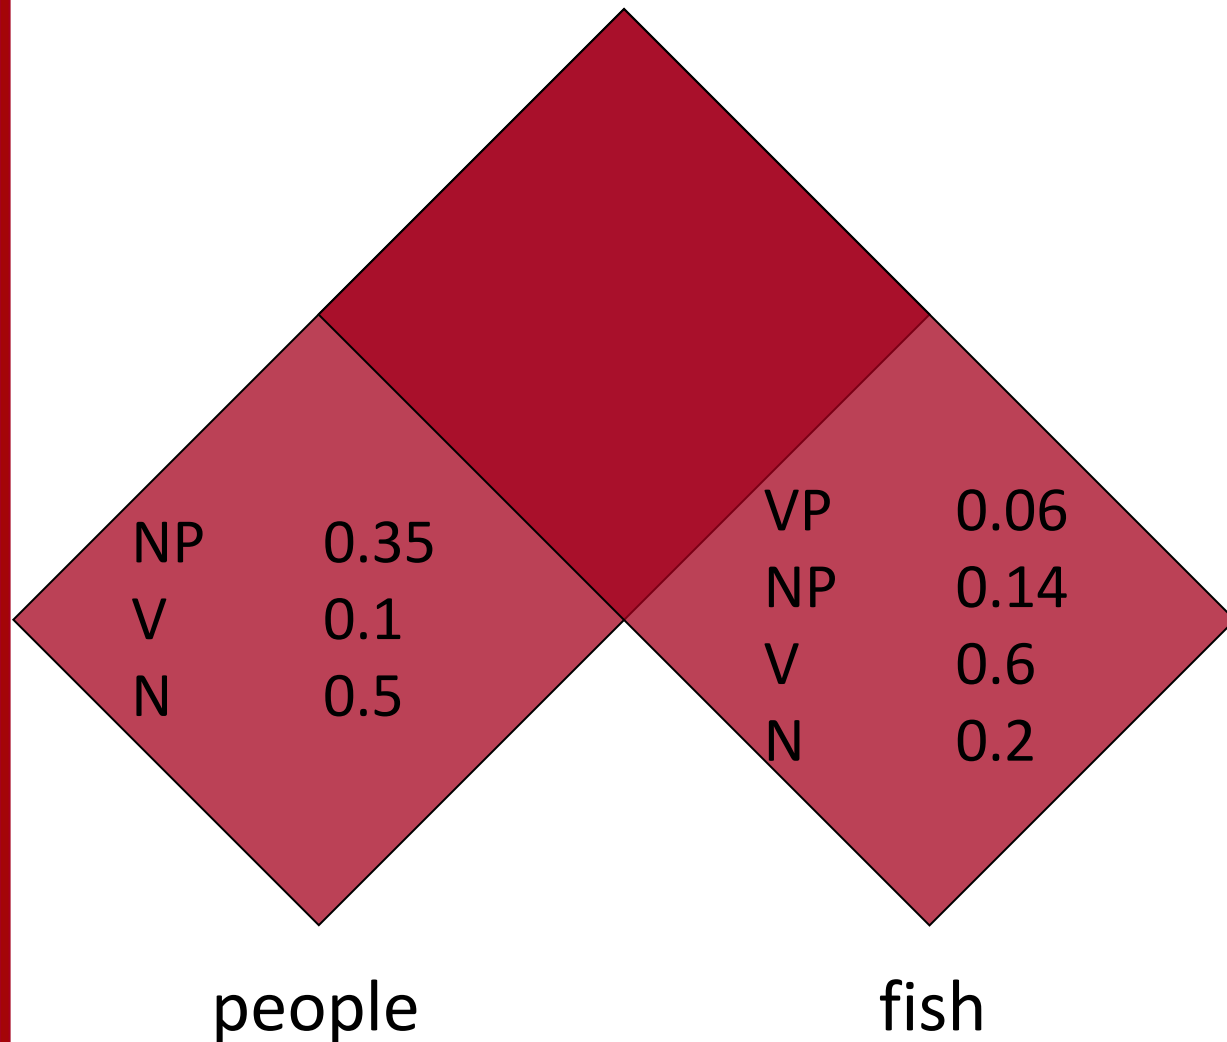

| | |
|----------------------------|-----|
| $S \rightarrow NP VP$ | 0.9 |
| $S \rightarrow VP$ | 0.1 |
| $VP \rightarrow V NP$ | 0.5 |
| $VP \rightarrow V$ | 0.1 |
| $VP \rightarrow V @VP_V$ | 0.3 |
| $VP \rightarrow V PP$ | 0.1 |
| $@VP_V \rightarrow NP PP$ | 1.0 |
| $NP \rightarrow NP NP$ | 0.1 |
| $NP \rightarrow NP PP$ | 0.2 |
| $NP \rightarrow N$ | 0.7 |
| $PP \rightarrow P NP$ | 1.0 |

Extended CKY parsing

- Unaries can be incorporated into the algorithm
 - Messy, but doesn't increase algorithmic complexity
- Empties can be incorporated
 - Use fenceposts
 - Doesn't increase complexity; essentially like unaries
- Binarization is *vital*
 - Without binarization, you don't get parsing cubic in the length of the sentence and in the number of nonterminals in the grammar
 - Binarization may be an explicit transformation or implicit in how the parser works (Early-style dotted rules), but it's always there.

The CKY algorithm (1960/1965)

... extended to unaries

```
function CKY(words, grammar) returns [most_probable_parse,prob]
  score = new double[#(words)+1][#(words)+1][#(nonterms)]
  back = new Pair[#(words)+1][#(words)+1][#(nonterms)]
  for i=0; i<#(words); i++
    for A in nonterms
      if A -> words[i] in grammar
        score[i][i+1][A] = P(A -> words[i])
  //handle unaries
  boolean added = true
  while added
    added = false
    for A, B in nonterms
      if score[i][i+1][B] > 0 && A->B in grammar
        prob = P(A->B)*score[i][i+1][B]
        if prob > score[i][i+1][A]
          score[i][i+1][A] = prob
          back[i][i+1][A] = B
          added = true
```

The CKY algorithm (1960/1965)

... extended to unaries

```
for span = 2 to #(words)
  for begin = 0 to #(words)- span
    end = begin + span
    for split = begin+1 to end-1
      for A,B,C in nonterms
        prob=score[begin][split][B]*score[split][end][C]*P(A->BC)
        if prob > score[begin][end][A]
          score[begin][end][A] = prob
          back[begin][end][A] = new Triple(split,B,C)
    //handle unaries
    boolean added = true
    while added
      added = false
      for A, B in nonterms
        prob = P(A->B)*score[begin][end][B];
        if prob > score[begin][end][A]
          score[begin][end][A] = prob
          back[begin][end][A] = B
          added = true
    return buildTree(score, back)
```


The grammar:


Binary, no epsilons,

| | |
|----------------------------|-----|
| $S \rightarrow NP VP$ | 0.9 |
| $S \rightarrow VP$ | 0.1 |
| $VP \rightarrow V NP$ | 0.5 |
| $VP \rightarrow V$ | 0.1 |
| $VP \rightarrow V @VP_V$ | 0.3 |
| $VP \rightarrow V PP$ | 0.1 |
| $@VP_V \rightarrow NP PP$ | 1.0 |
| $NP \rightarrow NP NP$ | 0.1 |
| $NP \rightarrow NP PP$ | 0.2 |
| $NP \rightarrow N$ | 0.7 |
| $PP \rightarrow P NP$ | 1.0 |

| | |
|------------------------|-----|
| $N \rightarrow people$ | 0.5 |
| $N \rightarrow fish$ | 0.2 |
| $N \rightarrow tanks$ | 0.2 |
| $N \rightarrow rods$ | 0.1 |
| $V \rightarrow people$ | 0.1 |
| $V \rightarrow fish$ | 0.6 |
| $V \rightarrow tanks$ | 0.3 |
| $P \rightarrow with$ | 1.0 |

| | fish | 1 | people | 2 | fish | 3 | tank | 4 |
|---|-------------|-------------|-------------|-------------|-------------|-------------|------|---|
| 0 | | | | | | | s | |
| | score[0][1] | score[0][2] | score[0][3] | score[0][4] | | | | |
| 1 | | | score[1][2] | score[1][3] | score[1][4] | | | |
| 2 | | | | score[2][3] | score[2][4] | | | |
| 3 | | | | | | score[3][4] | | |
| 4 | | | | | | | | |

- $S \rightarrow NP VP$ 0.9
- $S \rightarrow VP$ 0.1
- $VP \rightarrow V NP$ 0.5
- $VP \rightarrow V$ 0.1
- $VP \rightarrow V @VP_V$ 0.3
- $VP \rightarrow V PP$ 0.1
- $@VP_V \rightarrow NP PP$ 1.0
- $NP \rightarrow NP NP$ 0.1
- $NP \rightarrow NP PP$ 0.2
- $NP \rightarrow N$ 0.7
- $PP \rightarrow P NP$ 1.0
- $N \rightarrow people$ 0.5
- $N \rightarrow fish$ 0.2
- $N \rightarrow tanks$ 0.2
- $N \rightarrow rods$ 0.1
- $V \rightarrow people$ 0.1
- $V \rightarrow fish$ 0.6
- $V \rightarrow tanks$ 0.3
- $P \rightarrow with$ 1.0

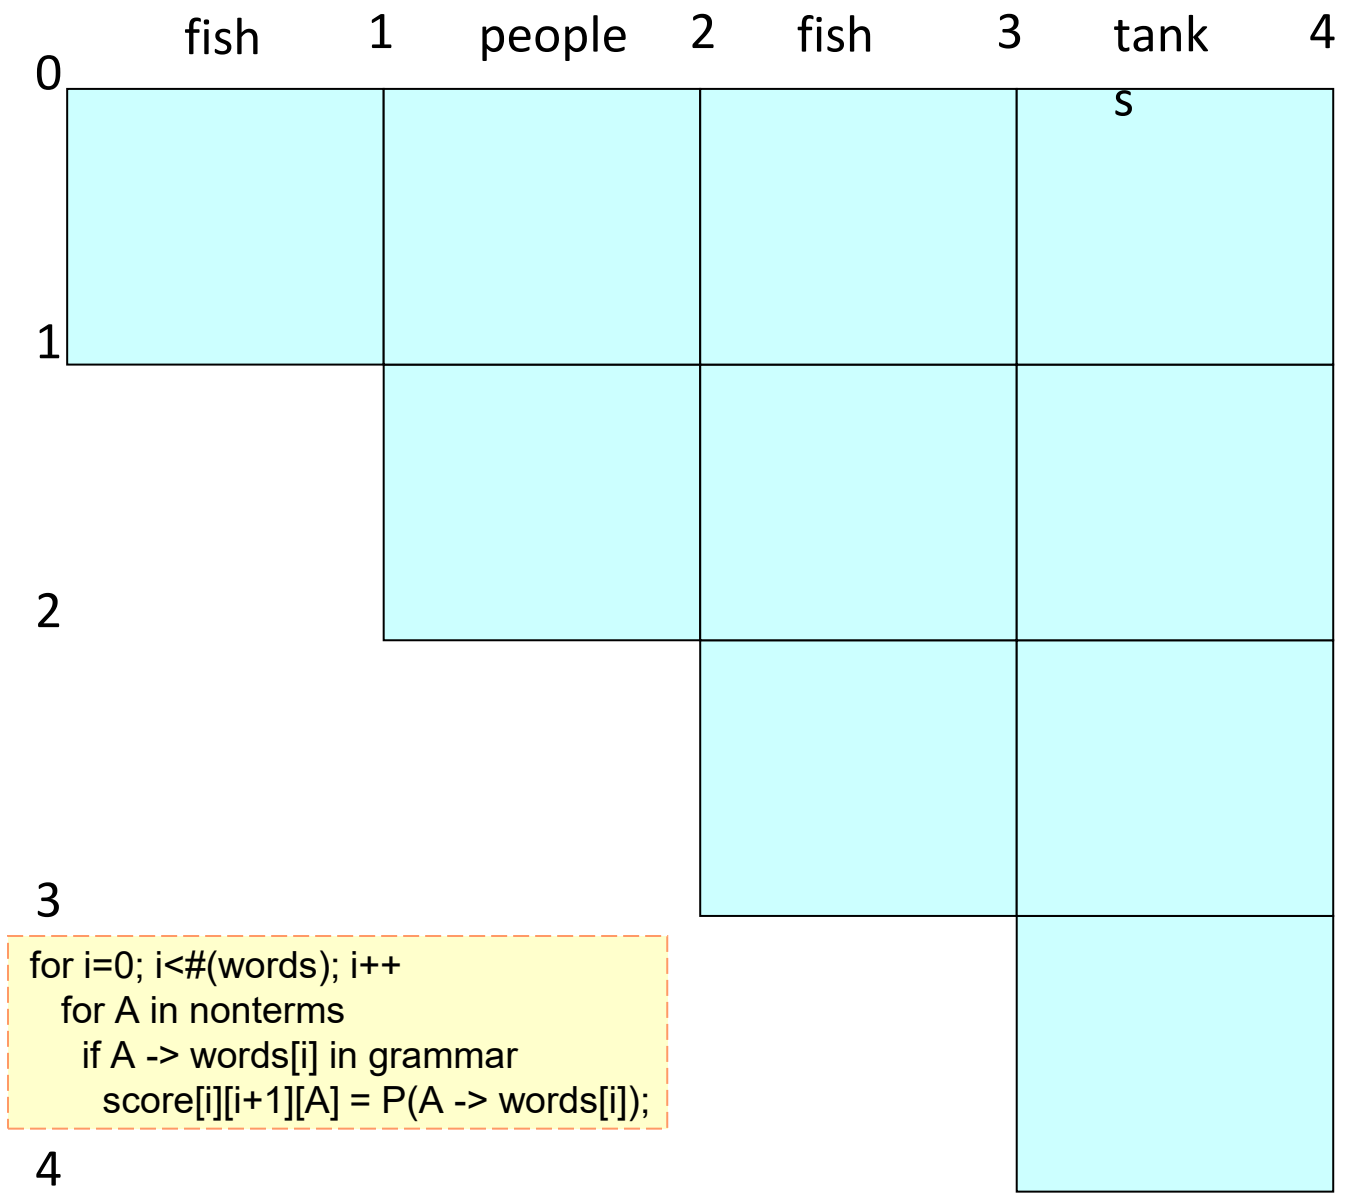

| | |
|----------------------------|-----|
| $S \rightarrow NP VP$ | 0.9 |
| $S \rightarrow VP$ | 0.1 |
| $VP \rightarrow V NP$ | 0.5 |
| $VP \rightarrow V$ | 0.1 |
| $VP \rightarrow V @VP_V$ | 0.3 |
| $VP \rightarrow V PP$ | 0.1 |
| $@VP_V \rightarrow NP PP$ | 1.0 |
| $NP \rightarrow NP NP$ | 0.1 |
| $NP \rightarrow NP PP$ | 0.2 |
| $NP \rightarrow N$ | 0.7 |
| $PP \rightarrow P NP$ | 1.0 |
| | |
| $N \rightarrow people$ | 0.5 |
| $N \rightarrow fish$ | 0.2 |
| $N \rightarrow tanks$ | 0.2 |
| $N \rightarrow rods$ | 0.1 |
| $V \rightarrow people$ | 0.1 |
| $V \rightarrow fish$ | 0.6 |
| $V \rightarrow tanks$ | 0.3 |
| $P \rightarrow with$ | 1.0 |

| | fish | 1 | people | 2 | fish | 3 | tank | 4 |
|---|--|---|--|--|------|---|--|---|
| 0 | $N \rightarrow fish\ 0.2$
$V \rightarrow fish\ 0.6$ | | | | | | S | |
| 1 | | | $N \rightarrow people\ 0.5$
$V \rightarrow people\ 0.1$ | | | | | |
| 2 | | | | $N \rightarrow fish\ 0.2$
$V \rightarrow fish\ 0.6$ | | | | |
| | | | | | | | $N \rightarrow tanks\ 0.2$
$V \rightarrow tanks\ 0.1$ | |

```
// handle unaries
boolean added = true
while added
    added = false
    for A, B in nonterms
        if score[i][i+1][B] > 0 && A->B in grammar
            prob = P(A->B)*score[i][i+1][B]
            if(prob > score[i][i+1][A])
                score[i][i+1][A] = prob
                back[i][i+1][A] = B
                added = true
```

- $S \rightarrow NP VP$ 0.9
- $S \rightarrow VP$ 0.1
- $VP \rightarrow V NP$ 0.5
- $VP \rightarrow V$ 0.1
- $VP \rightarrow V @VP_V$ 0.3
- $VP \rightarrow V PP$ 0.1
- $@VP_V \rightarrow NP PP$ 1.0
- $NP \rightarrow NP NP$ 0.1
- $NP \rightarrow NP PP$ 0.2
- $NP \rightarrow N$ 0.7
- $PP \rightarrow P NP$ 1.0
- $N \rightarrow people$ 0.5
- $N \rightarrow fish$ 0.2
- $N \rightarrow tanks$ 0.2
- $N \rightarrow rods$ 0.1
- $V \rightarrow people$ 0.1
- $V \rightarrow fish$ 0.6
- $V \rightarrow tanks$ 0.3
- $P \rightarrow with$ 1.0

| | fish | 1 | people | 2 | fish | 3 | tank | 4 |
|---|--|--|--|--|------|---|------|---|
| 0 | <div> $N \rightarrow fish$ 0.2
 $V \rightarrow fish$ 0.6
 $NP \rightarrow N$ 0.14
 $VP \rightarrow V$ 0.06
 $S \rightarrow VP$ 0.006 </div> | | | | | | | |
| 1 | | <div> $N \rightarrow people$ 0.5
 $V \rightarrow people$ 0.1
 $NP \rightarrow N$ 0.35
 $VP \rightarrow V$ 0.01
 $S \rightarrow VP$ 0.001 </div> | | | | | | |
| 2 | | | <div> $N \rightarrow fish$ 0.2
 $V \rightarrow fish$ 0.6
 $NP \rightarrow N$ 0.14
 $VP \rightarrow V$ 0.06
 $S \rightarrow VP$ 0.006 </div> | | | | | |
| 3 | | | | <div> $N \rightarrow tanks$ 0.2
 $V \rightarrow tanks$ 0.1
 $NP \rightarrow N$ 0.14
 $VP \rightarrow V$ 0.03
 $S \rightarrow VP$ 0.003 </div> | | | | |
| 4 | | | | | | | | |

```

prob=score[begin][split][B]*score[split][end][C]*P(A->BC)
if (prob > score[begin][end][A])
    score[begin][end][A] = prob
    back[begin][end][A] = new Triple(split,B,C)

```


- S → NP VP 0.9
- S → VP 0.1
- VP → V NP 0.5
- VP → V 0.1
- VP → V @VP_V 0.3
- VP → V PP 0.1
- @VP_V → NP PP 1.0
- NP → NP NP 0.1
- NP → NP PP 0.2
- NP → N 0.7
- PP → P NP 1.0

- N → people 0.5
- N → fish 0.2
- N → tanks 0.2
- N → rods 0.1
- V → people 0.1
- V → fish 0.6
- V → tanks 0.3
- P → with 1.0

| | fish | 1 | people | 2 | fish | 3 | tank | 4 |
|---|--|--|--|--|------|--|------|---|
| 0 | S | | | | | | | |
| 1 | N → fish 0.2
V → fish 0.6
NP → N 0.14
VP → V 0.06
S → VP 0.006 | NP → NP NP 0.0049
VP → V NP 0.105
S → NP VP 0.00126 | | | | | | |
| 2 | | N → people 0.5
V → people 0.1
NP → N 0.35
VP → V 0.01
S → VP 0.001 | NP → NP NP 0.0049
VP → V NP 0.007
S → NP VP 0.0189 | | | | | |
| 3 | | | N → fish 0.2
V → fish 0.6
NP → N 0.14
VP → V 0.06
S → VP 0.006 | NP → NP NP 0.00196
VP → V NP 0.042
S → NP VP 0.00378 | | | | |
| 4 | | | | | | N → tanks 0.2
V → tanks 0.1
NP → N 0.14
VP → V 0.03
S → VP 0.003 | | |

```
//handle unaries
boolean added = true
while added
    added = false
    for A, B in nonterms
        prob = P(A->B)*score[begin][end][B];
        if prob > score[begin][end][A]
            score[begin][end][A] = prob
            back[begin][end][A] = B
    added = true
```

- S → NP VP 0.9
- S → VP 0.1
- VP → V NP 0.5
- VP → V 0.1
- VP → V @VP_V 0.3
- VP → V PP 0.1
- @VP_V → NP PP 1.0
- NP → NP NP 0.1
- NP → NP PP 0.2
- NP → N 0.7
- PP → P NP 1.0
- N → people 0.5
- N → fish 0.2
- N → tanks 0.2
- N → rods 0.1
- V → people 0.1
- V → fish 0.6
- V → tanks 0.3
- P → with 1.0

| | fish | 1 | people | 2 | fish | 3 | tank | 4 |
|---|--|--|--|--|------|---|------|---|
| 0 | N → fish 0.2
V → fish 0.6
NP → N 0.14
VP → V 0.06
S → VP 0.006 | NP → NP NP
0.0049
VP → V NP
0.105
S → VP
0.0105 | | | | | S | |
| 1 | | N → people 0.5
V → people 0.1
NP → N 0.35
VP → V 0.01
S → VP 0.001 | NP → NP NP
0.0049
VP → V NP
0.007
S → NP VP
0.0189 | | | | | |
| 2 | | | N → fish 0.2
V → fish 0.6
NP → N 0.14
VP → V 0.06
S → VP 0.006 | NP → NP NP
0.00196
VP → V NP
0.042
S → VP
0.0042 | | | | |
| 3 | | | | N → tanks 0.2
V → tanks 0.1
NP → N 0.14
VP → V 0.03
S → VP 0.003 | | | | |
| 4 | <div>for split = begin+1 to end-1
 for A,B,C in nonterms
 prob=score[begin][split][B]*score[split][end][C]*P(A->BC)
 if prob > score[begin][end][A]
 score[begin][end][A] = prob
 back[begin][end][A] = new Triple(split,B,C)</div> | | | | | | | |

```

for split = begin+1 to end-1
  for A,B,C in nonterms
    prob=score[begin][split][B]*score[split][end][C]*P(A->BC)
    if prob > score[begin][end][A]
      score[begin][end][A] = prob
      back[begin][end][A] = new Triple(split,B,C)
  
```

$S \rightarrow NP VP$ 0.9
 $S \rightarrow VP$ 0.1
 $VP \rightarrow V NP$ 0.5
 $VP \rightarrow V$ 0.1
 $VP \rightarrow V @VP_V$ 0.3
 $VP \rightarrow V PP$ 0.1
 $@VP_V \rightarrow NP PP$ 1.0
 $NP \rightarrow NP NP$ 0.1
 $NP \rightarrow NP PP$ 0.2
 $NP \rightarrow N$ 0.7
 $PP \rightarrow P NP$ 1.0

 $N \rightarrow people$ 0.5
 $N \rightarrow fish$ 0.2
 $N \rightarrow tanks$ 0.2
 $N \rightarrow rods$ 0.1
 $V \rightarrow people$ 0.1
 $V \rightarrow fish$ 0.6
 $V \rightarrow tanks$ 0.3
 $P \rightarrow with$ 1.0

| | fish | 1 | people | 2 | fish | 3 | tank | 4 |
|---|--|--|--|--|---|--|------|---|
| 0 | S | | | | | | | |
| 1 | N → fish 0.2
V → fish 0.6
NP → N 0.14
VP → V 0.06
S → VP 0.006 | NP → NP NP
0.0049
VP → V NP
0.105
S → VP
0.0105 | NP → NP NP
0.0000686
VP → V NP
0.00147
S → NP VP
0.000882 | | | | | |
| 2 | | | N → people 0.5
V → people 0.1
NP → N 0.35
VP → V 0.01
S → VP 0.001 | NP → NP NP
0.0049
VP → V NP
0.007
S → NP VP
0.0189 | | | | |
| 3 | | | | N → fish 0.2
V → fish 0.6
NP → N 0.14
VP → V 0.06
S → VP 0.006 | NP → NP NP
0.00196
VP → V NP
0.042
S → VP
0.0042 | | | |
| 4 | <div>for split = begin+1 to end-1
 for A,B,C in nonterms
 prob=score[begin][split][B]*score[split][end][C]*P(A->BC)
 if prob > score[begin][end][A]
 score[begin][end][A] = prob
 back[begin][end][A] = new Triple(split,B,C)</div> | | | | | N → tanks 0.2
V → tanks 0.1
NP → N 0.14
VP → V 0.03
S → VP 0.003 | | |

$S \rightarrow NP VP$ 0.9
 $S \rightarrow VP$ 0.1
 $VP \rightarrow V NP$ 0.5
 $VP \rightarrow V$ 0.1
 $VP \rightarrow V @VP_V$ 0.3
 $VP \rightarrow V PP$ 0.1
 $@VP_V \rightarrow NP PP$ 1.0
 $NP \rightarrow NP NP$ 0.1
 $NP \rightarrow NP PP$ 0.2
 $NP \rightarrow N$ 0.7
 $PP \rightarrow P NP$ 1.0

 $N \rightarrow people$ 0.5
 $N \rightarrow fish$ 0.2
 $N \rightarrow tanks$ 0.2
 $N \rightarrow rods$ 0.1
 $V \rightarrow people$ 0.1
 $V \rightarrow fish$ 0.6
 $V \rightarrow tanks$ 0.3
 $P \rightarrow with$ 1.0

| | fish | 1 | people | 2 | fish | 3 | tank | 4 |
|---|--|--|--|--|---|---|--|---|
| 0 | S | | | | | | | |
| 1 | N → fish 0.2
V → fish 0.6
NP → N 0.14
VP → V 0.06
S → VP 0.006 | NP → NP NP
0.0049
VP → V NP
0.105
S → VP
0.0105 | NP → NP NP
0.0000686
VP → V NP
0.00147
S → NP VP
0.000882 | | | | | |
| 2 | N → people 0.5
V → people 0.1
NP → N 0.35
VP → V 0.01
S → VP 0.001 | | NP → NP NP
0.0049
VP → V NP
0.007
S → NP VP
0.0189 | NP → NP NP
0.0000686
VP → V NP
0.000098
S → NP VP
0.01323 | | | | |
| 3 | | | | N → fish 0.2
V → fish 0.6
NP → N 0.14
VP → V 0.06
S → VP 0.006 | NP → NP NP
0.00196
VP → V NP
0.042
S → VP
0.0042 | | | |
| 4 | <div>for split = begin+1 to end-1
 for A,B,C in nonterms
 prob=score[begin][split][B]*score[split][end][C]*P(A->BC)
 if prob > score[begin][end][A]
 score[begin][end][A] = prob
 back[begin][end][A] = new Triple(split,B,C)</div> | | | | | | N → tanks 0.2
V → tanks 0.1
NP → N 0.14
VP → V 0.03
S → VP 0.003 | |

| | | | fish | 1 | people | 2 | fish | 3 | tank | 4 |
|---------------|-----|---|------|---|--------|---|------|---|------|---|
| S → NP VP | 0.9 | 0 | | | | | | | | |
| S → VP | 0.1 | | | | | | | | | |
| VP → V NP | 0.5 | | | | | | | | | |
| VP → V | 0.1 | | | | | | | | | |
| VP → V @VP_V | 0.3 | | | | | | | | | |
| VP → V PP | 0.1 | | | | | | | | | |
| @VP_V → NP PP | 1.0 | | | | | | | | | |
| NP → NP NP | 0.1 | | | | | | | | | |
| NP → NP PP | 0.2 | | | | | | | | | |
| NP → N | 0.7 | 2 | | | | | | | | |
| PP → P NP | 1.0 | | | | | | | | | |
| N → people | 0.5 | | | | | | | | | |
| N → fish | 0.2 | | | | | | | | | |
| N → tanks | 0.2 | 3 | | | | | | | | |
| N → rods | 0.1 | | | | | | | | | |
| V → people | 0.1 | | | | | | | | | |
| V → fish | 0.6 | | | | | | | | | |
| V → tanks | 0.3 | 4 | | | | | | | | |
| P → with | 1.0 | | | | | | | | | |

| | | | |
|--|--|--|---|
| N → fish 0.2
V → fish 0.6
NP → N 0.14
VP → V 0.06
S → VP 0.006 | NP → NP NP
0.0049
VP → V NP
0.105
S → VP
0.0105 | NP → NP NP
0.0000686
VP → V NP
0.00147
S → NP VP
0.000882 | NP → NP NP
0.000009604
VP → V NP
0.00002058
S → NP VP |
| | N → people 0.5
V → people 0.1
NP → N 0.35
VP → V 0.01
S → VP 0.001 | NP → NP NP
0.0049
VP → V NP
0.007
S → NP VP
0.0189 | NP → NP NP
0.00018522
VP → V NP
0.0000686
VP → V NP
0.000098
S → NP VP
0.01323 |
| | | N → fish 0.2
V → fish 0.6
NP → N 0.14
VP → V 0.06
S → VP 0.006 | NP → NP NP
0.00196
VP → V NP
0.042
S → VP
0.0042 |
| | | | N → tanks 0.2
V → tanks 0.1
NP → N 0.14
VP → V 0.03
S → VP 0.003 |


Call buildTree(score, back) to get the best parse




Constituency Parser Evaluation

Evaluating constituency parsing

Gold standard brackets: S-(0:11), NP-(0:2), VP-(2:9), VP-(3:9), NP-(4:6), PP-(6:9), NP-(7,9), NP-(9:10)

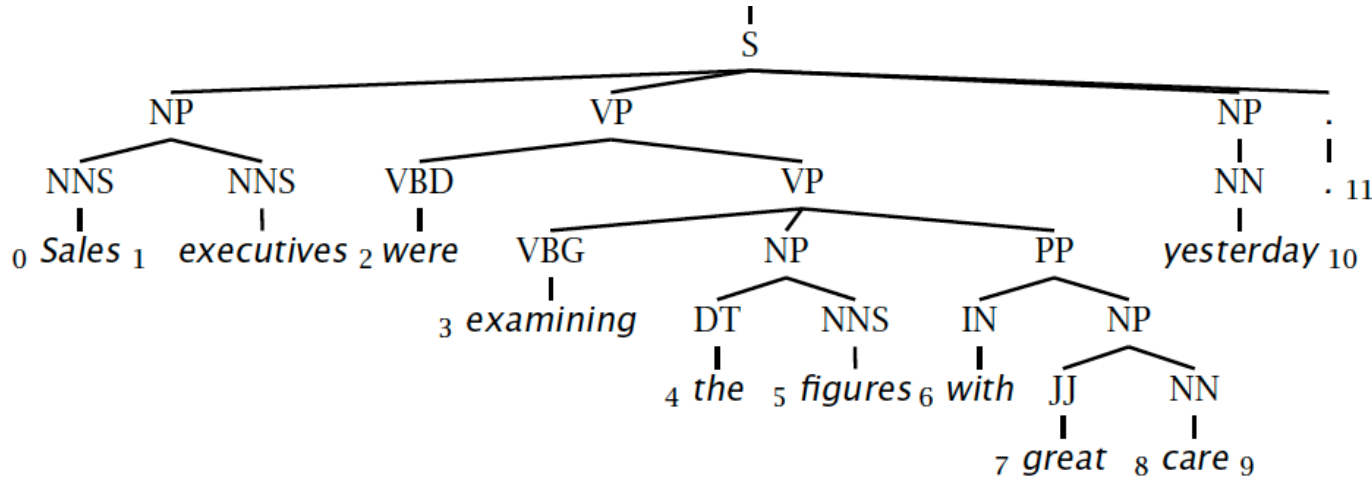

Candidate brackets: S-(0:11), NP-(0:2), VP-(2:10), VP-(3:10), NP-(4:6), PP-(6:10), NP-(7,10)

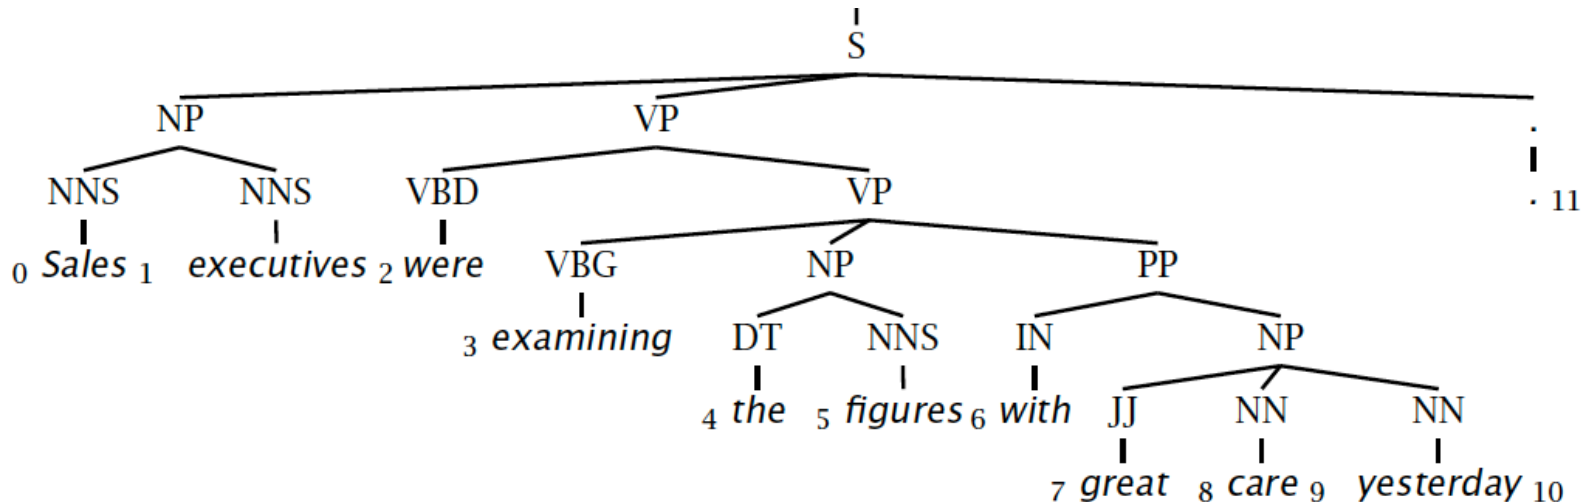

Evaluating constituency parsing

Gold standard brackets:

S-(0:11), NP-(0:2), VP-(2:9), VP-(3:9), **NP-(4:6)**, PP-(6-9), NP-(7,9), NP-(9:10)

Candidate brackets:

S-(0:11), NP-(0:2), VP-(2:10), VP-(3:10), **NP-(4:6)**, PP-(6-10), NP-(7,10)

Labeled Precision $3/7 = 42.9\%$

Labeled Recall $3/8 = 37.5\%$

LP/LR F1 40.0%

Tagging Accuracy $11/11 = 100.0\%$

How good are PCFGs?

- Penn WSJ parsing accuracy: about 73% LP/LR F1
- Robust
 - Usually admit everything, but with low probability
- Partial solution for grammar ambiguity
 - A PCFG gives some idea of the plausibility of a parse
 - But not so good because the independence assumptions are too strong
- Give a probabilistic language model
 - But in the simple case it performs worse than a trigram model
- The problem seems to be that PCFGs lack the lexicalization of a trigram model