

HTML Frames

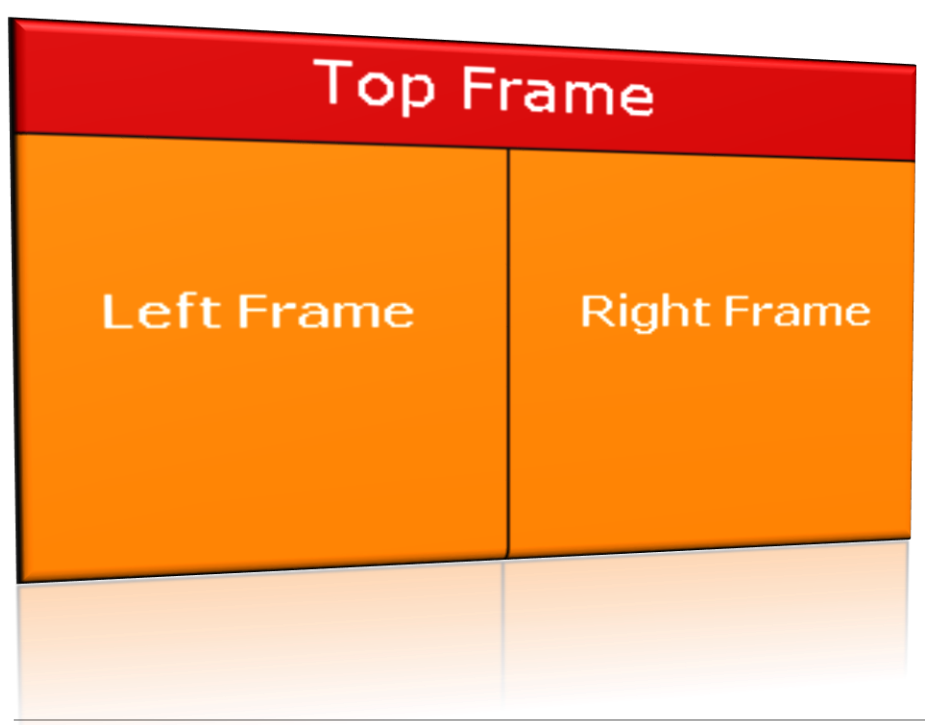

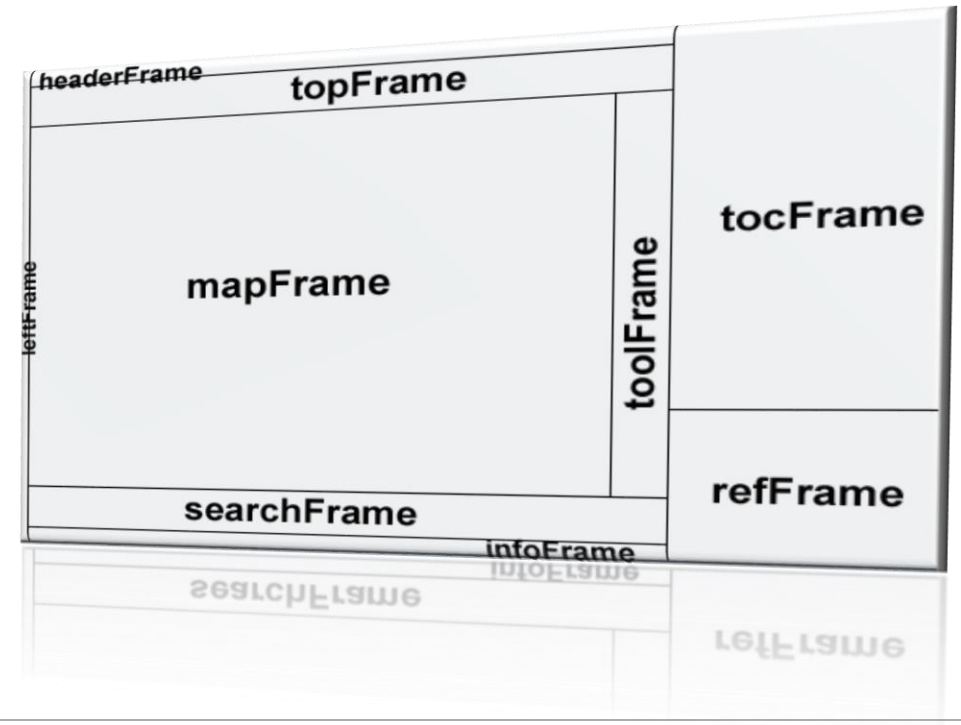

<FRAMESET>,

<FRAME> AND

<IFRAME>

HTML Frames

Frames provide a way to show multiple HTML documents in a single Web page.

Frames were popular in the early ages of HTML development, but now their usage is rejected.

- Frames are not supported by all user agents (browsers, search engines, etc.)
- A <noframes> element is used to provide content for non-compatible agents.

HTML Frames

In HTML, frames are used to divide your browser window into multiple sections where each section can load a separate HTML document.

A collection of frames in the browser window is known as a frameset.

The window is divided into frames in a similar way the tables are organized: into rows and columns.

HTML Frames

To use frames on a page, use <frameset> tag instead of <body> tag.

- The <frameset> tag defines how to divide the window into frames.
- The <frameset> tag specifies HOW MANY columns or rows there will be in the frameset, and HOW MUCH percentage/pixels of space will each of them occupy.
- The <frameset> tag holds one or more <frame> elements. Each <frame> element can hold a separate document.

HTML Frames

The <frame> tag defines one particular window (frame) within a <frameset>.

The rows attribute of <frameset> tag defines horizontal frames.

The cols attribute defines vertical frames.

Each frame is indicated by <frame> tag and it defines which HTML document shall open into the frame.

The <frameset> Tag Attributes	The <frame> Tag Attributes
Cols Rows Border (This attribute specifies the width of the border of each frame in pixels. For example border="5". A value of zero means no border.) Frameborder (for three-dimensional border should be displayed between frames. This attribute takes value of either 1 (yes) or 0 (no). For example frameborder="0" specifies no border.) Framespacing (This attribute specifies the amount of space between frames in a frameset. This can take any integer value. For example framespacing="10" means	Src Name Marginwidth Marginheight Noresize Scrolling longdesc

Attribute	Value	Description
frameborder	0 1	Not supported in HTML5. Specifies whether or not to display a border around a frame
longdesc	URL	Not supported in HTML5. Specifies a page that contains a long description of the content of a frame
marginheight	pixels	Not supported in HTML5. Specifies the top and bottom margins of a frame
marginwidth	pixels	Not supported in HTML5. Specifies the left and right margins of a frame
name	text	Not supported in HTML5. Specifies the name of a frame
noresize	noresize	Not supported in HTML5. Specifies that a frame is not resizable
scrolling	yes no auto	Not supported in HTML5. Specifies whether or not to display scrollbars in a frame
src	URL	Not supported in HTML5. Specifies the URL of the document to show in a frame

Frameset Document

The first HTML document you need to create is called the **frameset** document.

- define the layout of your frames, and
- the locations of the documents to be initially loaded in each frame.
- The <frameset> tag defines how to divide the window into frames
- Each frameset defines a set of rows or columns
- The values of the rows/columns indicate the amount of screen area each row/column will occupy

Syntax:

```
<html>
<head>
<title>Page Title</title>
</head>
<frameset cols="column width, ,">
```

OR

```
<frameset rows="20%,*, 20%">
<frame src="leftcol.html">
<frame src="midcol.html">
<frame src="rightcol.html">
</frameset>
</html>
```

The <frame> Tag

After you have your basic frameset laid out, you need to associate an HTML document with each frame by using the **<frame>** tag, which takes the following form:

<frame src="document URL">

For each frame defined in the <frameset> tag, you must include a corresponding <frame>

Example:

```
<html>
<head>
<title>The FRAME Tag</title>
</head>
<frameset rows="*,*,*">
<frame src="document1.html" />
<frame src="document2.html" />
<frame src="document3.html" />
</frameset>
</html>
```

Changing Frame Borders

You can add CSS to the <frame> tag.

Using two attributes, bordercolor and frameborder,

you can turn borders on and off and specify their color.

You can assign bordercolor any valid color value, either as a name or a hexadecimal triplet.

frameborder takes two possible

values: 1(to display borders) or

0 (to turn off the display of borders)

Example:

```
<html>
<head>
<title>Conflicting Borders</title>
</head>
<frameset frameborder="0"
rows="*,*,*">
<frame frameborder="1"
bordercolor="yellow"
src="document1.html">
<frame bordercolor="#cc3333"
src="document2.html">
<frame src="document3.html">
</frameset>
</html>
```

Frame

Some of the frame tags are:

<frameset> Defines a set of frames

- To display more than one HTML document in the same browser window.

<frame> Defines a sub window (a frame)

- Each HTML document is called a frame, and each frame is independent of the others.

<noframes> Defines a no frame section for browsers that do not handle frames

<iframe> Defines an inline sub window (frame)

The Frameset Tag

The Frame Tag

The <frame> tag defines what HTML document to put into each frame

E.g.

```
<frameset cols="25%,75%">
<frame src="frame_a.htm">
<frame src="frame_b.htm">
</frameset>
```

Examples

```
<html>

<head>

<title>Three Columns</title>

</head>

<frameset cols="10%,50%,*">

<frame src="leftcol.html">

<frame src="midcol.html">

<frame src="rightcol.html">

</frameset>

</html>
```

Examples

```
<html>

<head>

<title>Two Rows</title>

</head>

<frameset rows="50%,50%">

<frame src="toprow.html">

<frame src="botrow.html">

</frameset>

</html>
```

EXAMPLE 1

```
<html>
<head>
<title>example two framed page</title>
<frameset cols="25%,*">
  <frame src="frame_a.html">
  <frame src="frame_b.html">
</frameset>
</html>
```

EXAMPLE 2

```
<html>
<head>
<title>example two framed page</title>
</HEAD>
<FRAMESET cols="20%, 80%">
 <FRAMESET rows="100, 200">
    <FRAME src="form.html">
    <FRAME src="layoutExample.html">
 </FRAMESET>
 <FRAME src="HorizontalListwithCSS.html">
</FRAMESET>
 <NOFRAMES>
</html>
```

The disadvantages of using frames are:

The web developer must keep track of more HTML documents

It is difficult to print the entire page

Inline Frames: <iframe>

Inline frames provide a way to show one website inside another website:

iframe-demo.html

```
<iframe name="iframeGoogle"
width="600" height="400"
src=“myfile.html"
frameborder="yes"
scrolling="yes">
</iframe>
```

Assignment 2b

Due Date:

THE NEXT SLIDES CONSISTS OF GROUP ASSIGNMENTS

Group Assignment 2

Frame Assignment
Due Date:

Build a Technical Documentation Page

JS Documentation	Introduction
Introduction	JavaScript is a cross-platform, object-oriented scripting language. It is a small and lightweight language. Inside a host environment (for example, a web browser), JavaScript can be connected to the objects of its environment to provide programmatic control over them. JavaScript contains a standard library of objects, such as Array, Date, and Math, and a core set of language elements such as operators, control structures, and statements. Core JavaScript can be extended for a variety of purposes by supplementing it with additional objects; for example: • Client-side JavaScript extends the core language by supplying
What you should already know	
JavaScript and Java	
Hello world	
Variables	
Declaring variables	
Variable scope	

Project documentation page