


Postman Testing Guide for FinAccrual APIs


This guide provides step-by-step instructions to test your backend APIs using Postman. Based on your codebase structure, you have an Express.js backend exposing REST APIs, primarily using JSON Web Tokens (JWT) for authentication.

Step 1: A. Health Check

Checks your server, database, and Redis are connected.

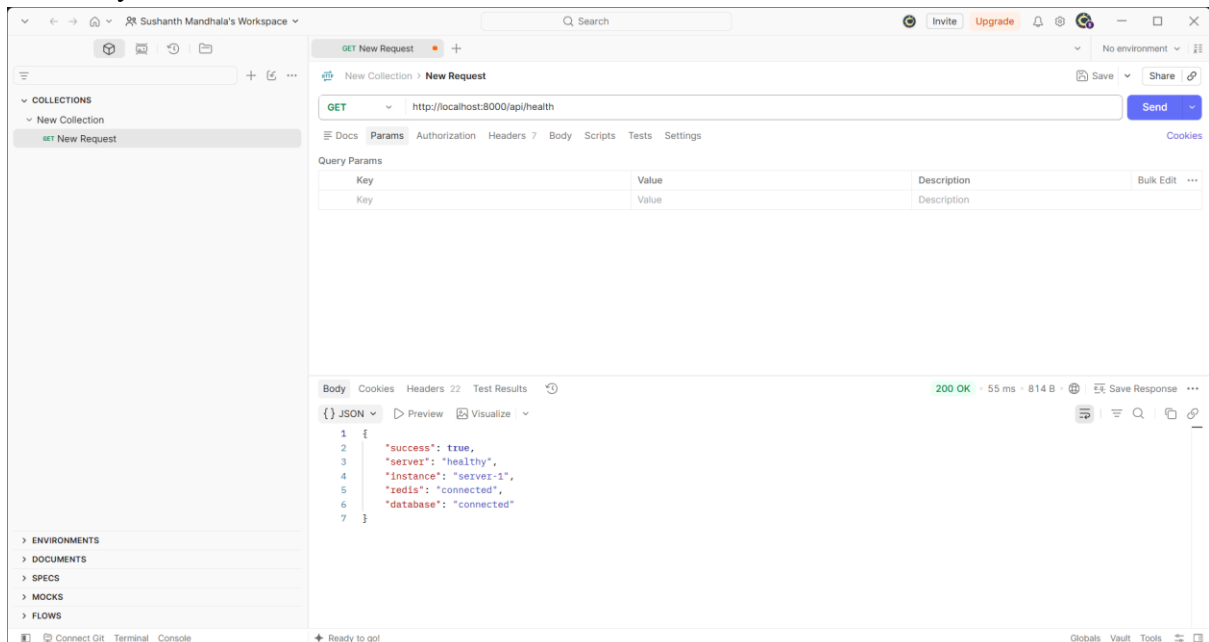


Step 2: Creates a new user account.

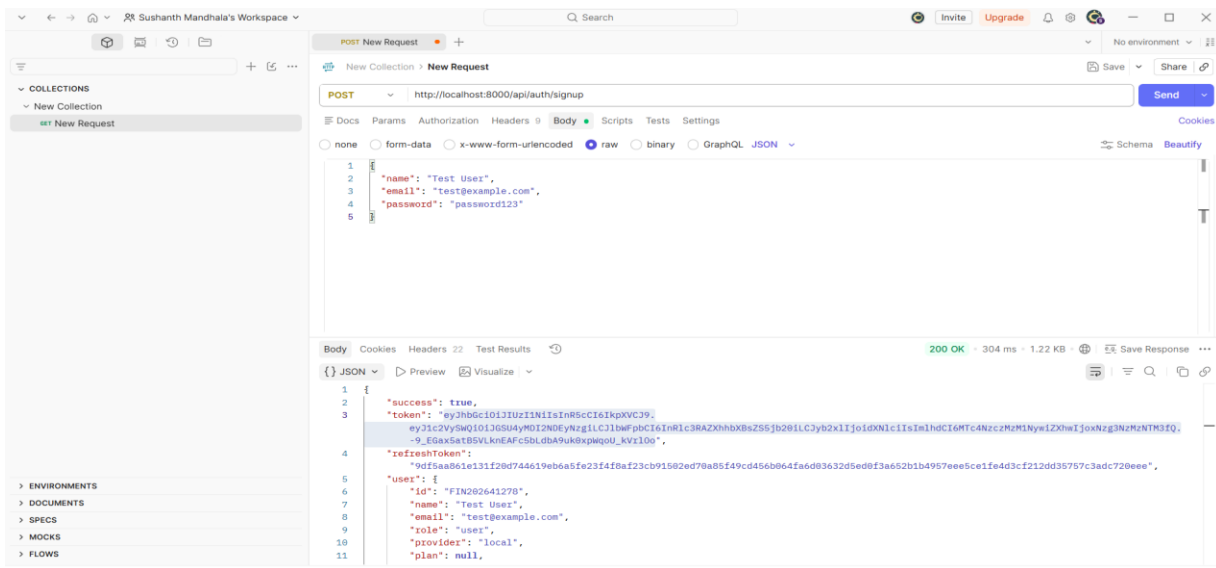

Step 3: Test Protected APIs


A: Get User Profile (/api/auth/me)

- **Method:** GET
- **URL:** <http://localhost:8000/api/auth/me>
- **Authorization:** Bearer Token (setup in step A)
- **Steps:** Click **Send**. You should see your user details (id, name, email, plan).

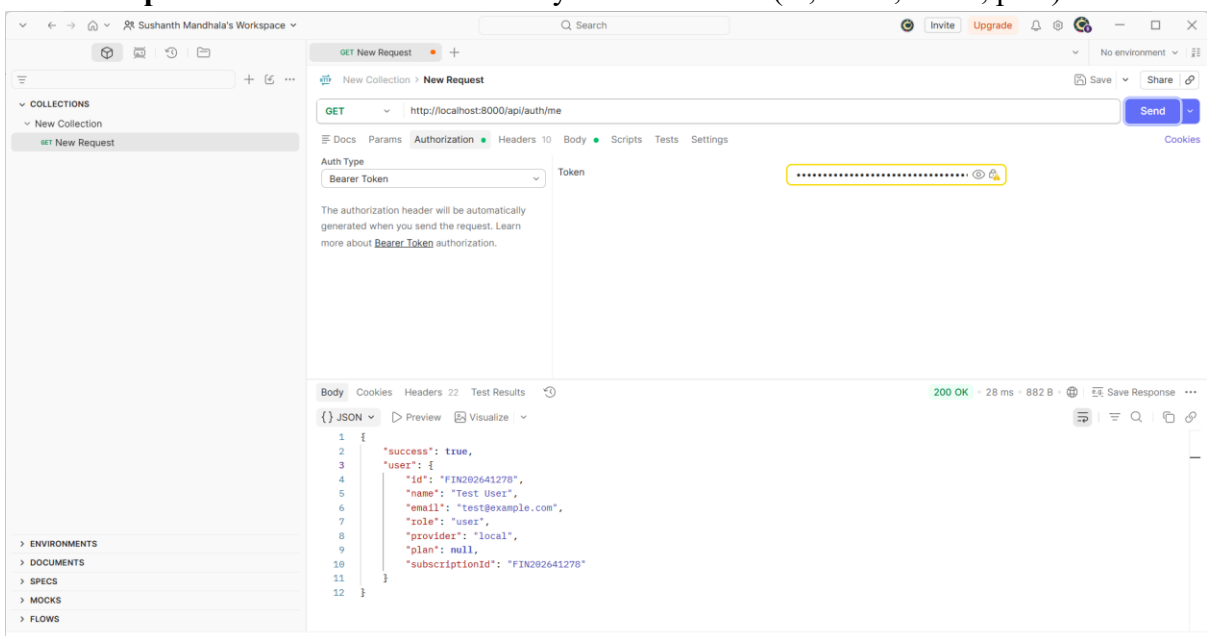


B : Get ERP Connections

- **Method:** GET
- **URL:** <http://localhost:8000/api/connections>
- **Authorization:** Bearer Token
- **Steps:** Click **Send**. You should get a list of active QuickBooks or Xero connections (an empty list [] if none exist yet).

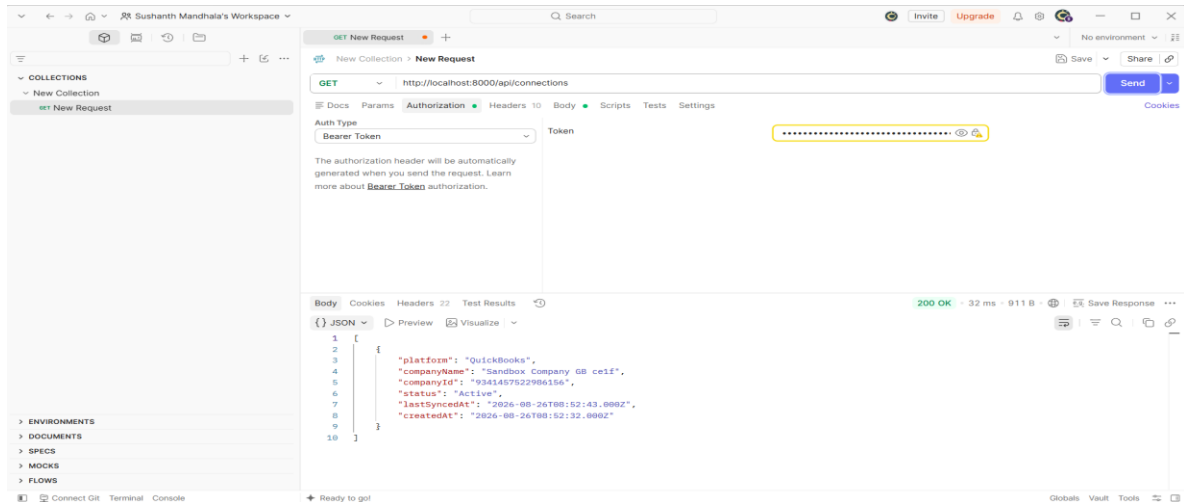

C:Update Plan

- **Method:** POST
- **URL:** <http://localhost:8000/api/auth/update-plan>
- **Authorization:** Bearer Token

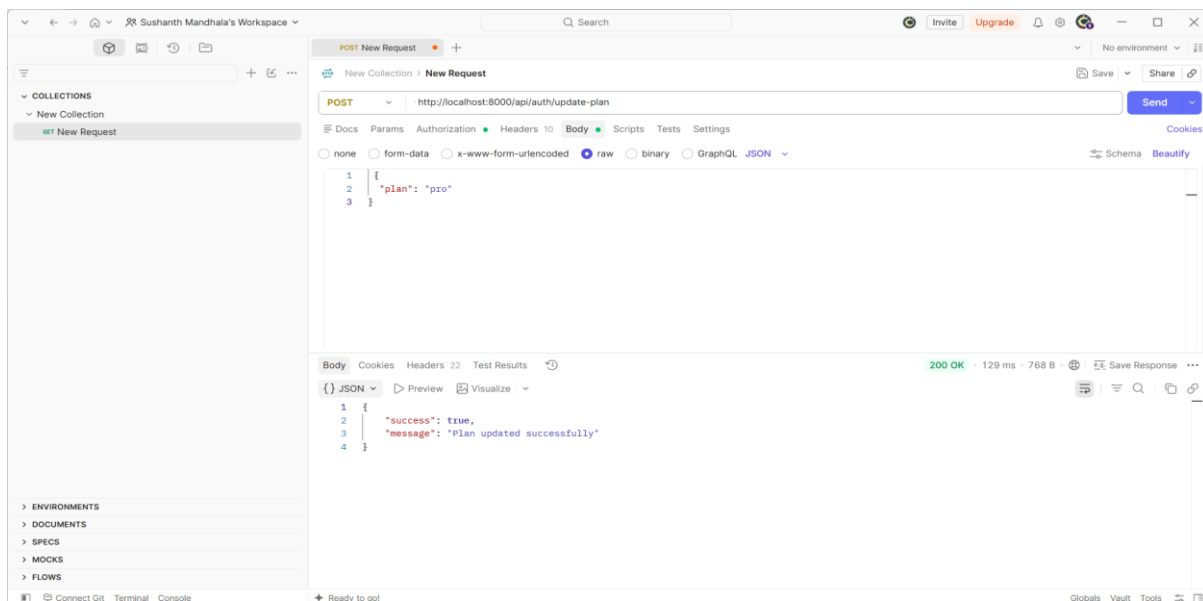


Test QuickBooks APIs

All QuickBooks endpoints are protected and mounted under `/api/quickbooks/`. They require the Bearer Token from step 4.

A. Connect to QuickBooks (OAuth)

This endpoint initiates the OAuth flow. Since it redirects to Intuit's login page, it's typically handled by a browser, but you can inspect the redirect URL in Postman.

- **Method:** GET
- **URL:** <http://localhost:8000/api/quickbooks/connect>
- **Authorization:** Bearer Token
- **Note:** In Postman, you'll receive an HTML page (the Intuit login page) because of the redirect.

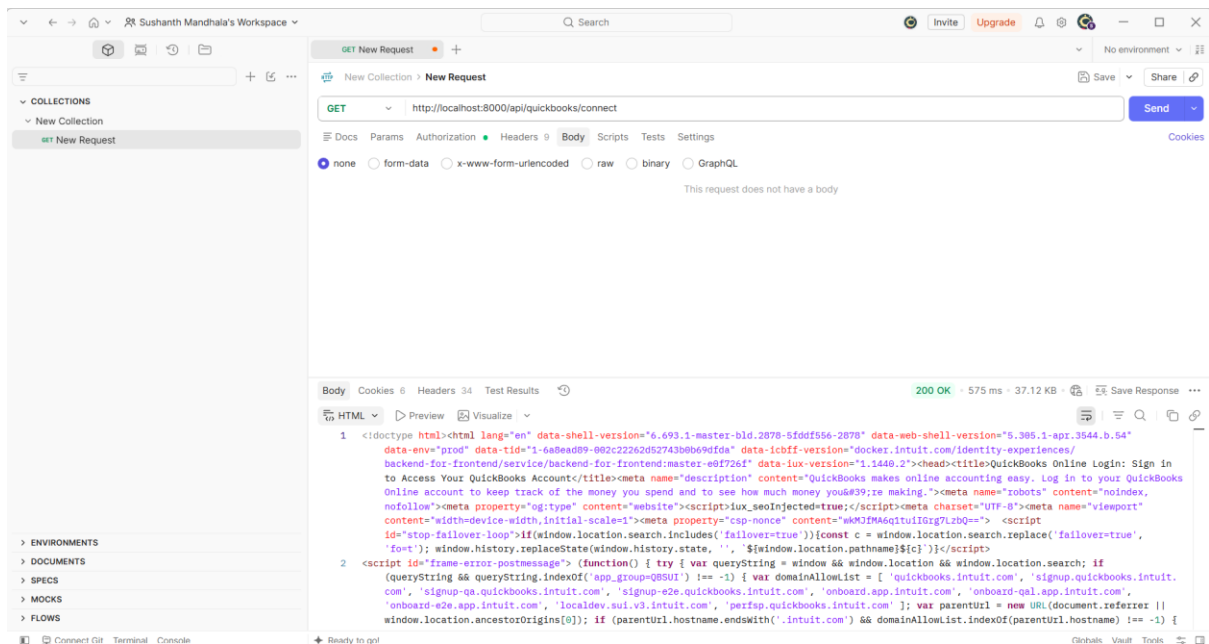


B. Fetch QuickBooks Data


Once a connection is established (via the frontend or browser), you can pull accounting data. The backend will use the active connection for your user.

- **Method:** GET
- **URL:** <http://localhost:8000/api/quickbooks/customers> (or `/vendors`, `/accounts`, `/classes`, `/locations`, `/company`)
- **Authorization:** Bearer Token
- **Steps:** Click **Send**. You will receive the synced QuickBooks master data.


I. URL: <http://localhost:8000/api/quickbooks/customers>

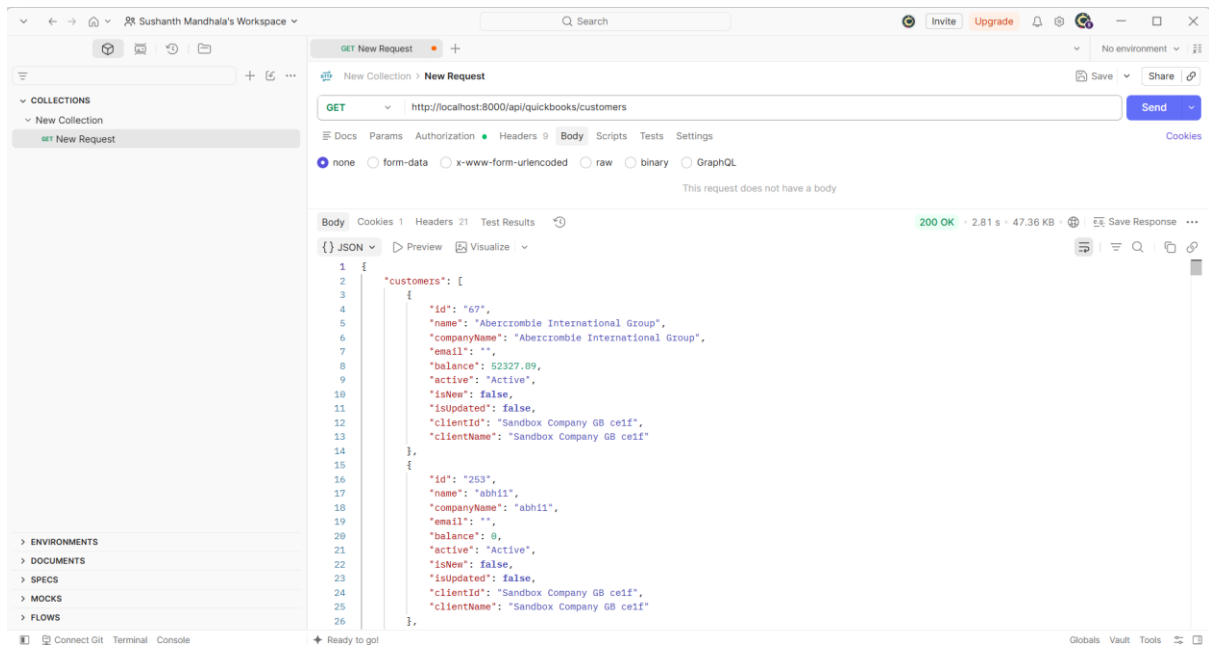


II. URL: <http://localhost:8000/api/quickbooks/vendors>

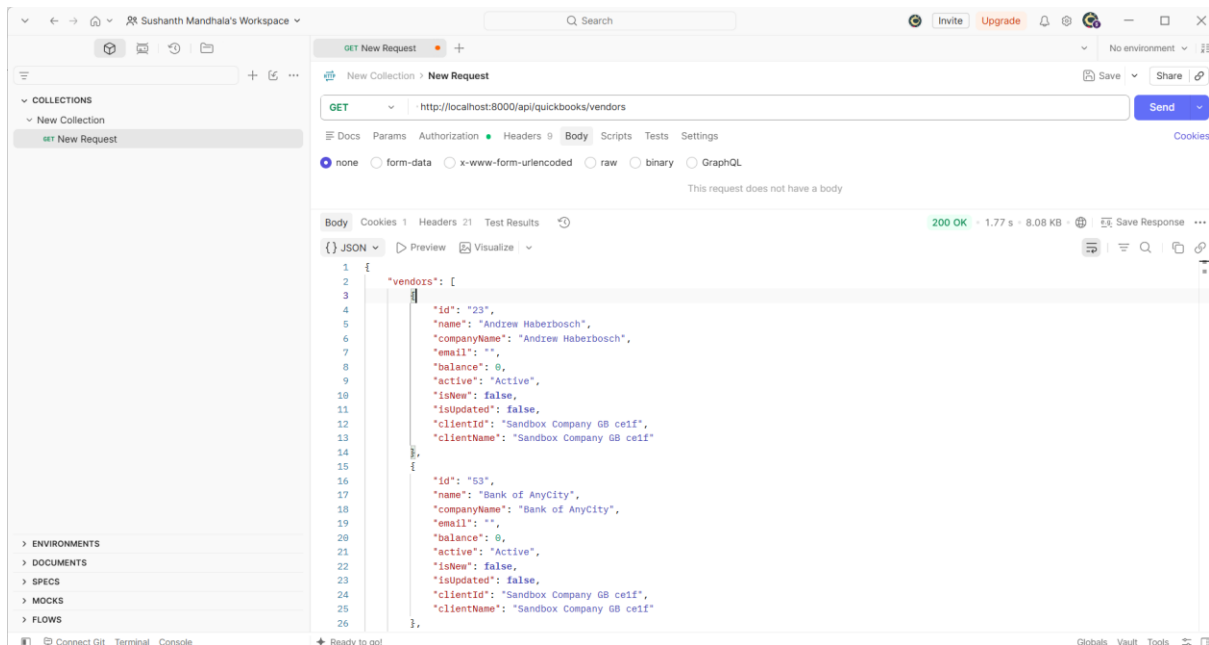

V. URL: <http://localhost:8000/api/quickbooks/locations>

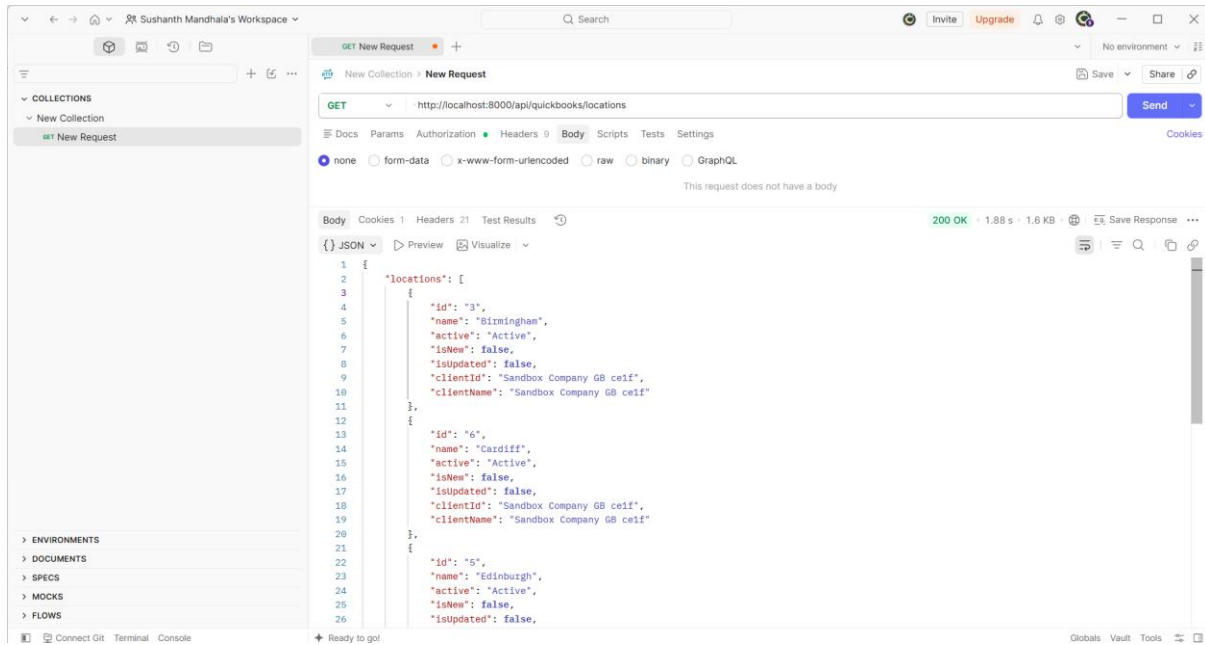


VI. URL: <http://localhost:8000/api/quickbooks/company>

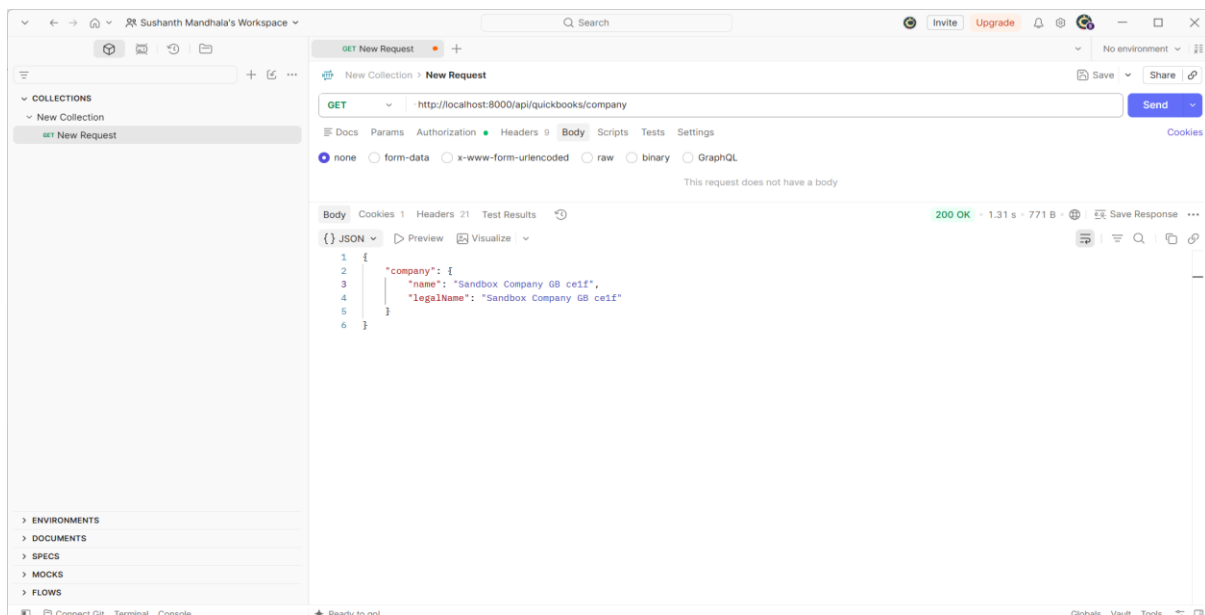

C. Pull Master Data

Triggers a fresh multi-threaded pull of the QuickBooks data.

- **Method:** GET
- **URL:** <http://localhost:8000/api/quickbooks/pull-master-data?tier=pro>
- **Authorization:** Bearer Token
- **Steps:** Click Send.

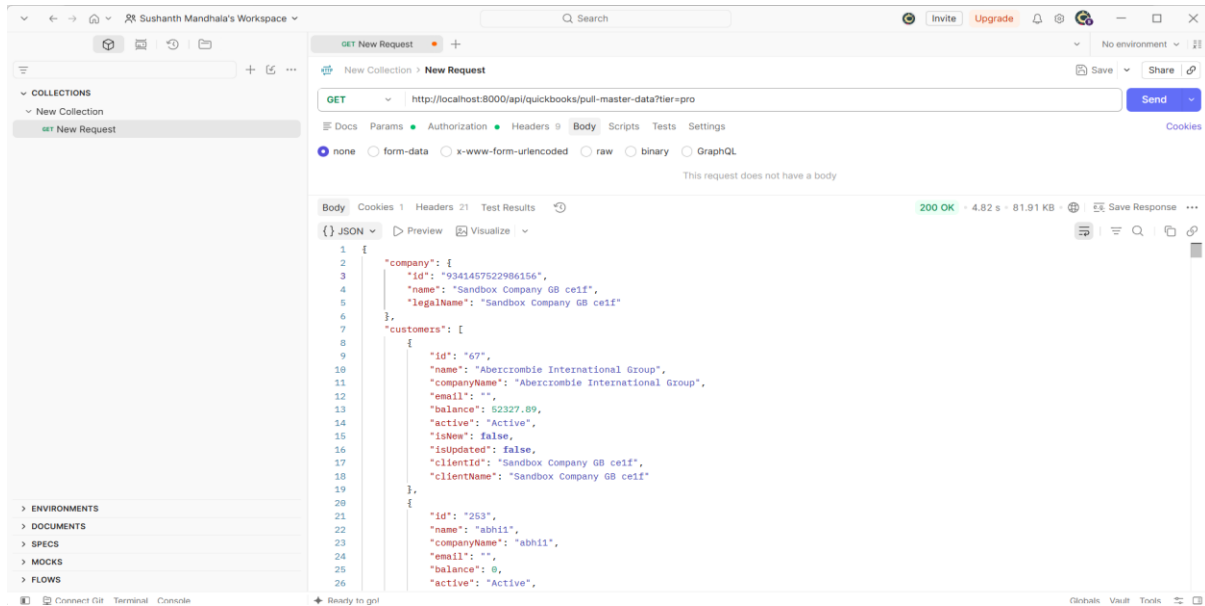


Test Xero APIs

All Xero endpoints are similarly protected and mounted under `/api/xero/`.

A. Connect to Xero (OAuth)

Initiates the Xero OAuth flow.

- **Method:** GET
- **URL:** <http://localhost:8000/api/xero/connect>
- **Authorization:** Bearer Token
- **Note:** Like QuickBooks, this returns the Xero login page HTML.

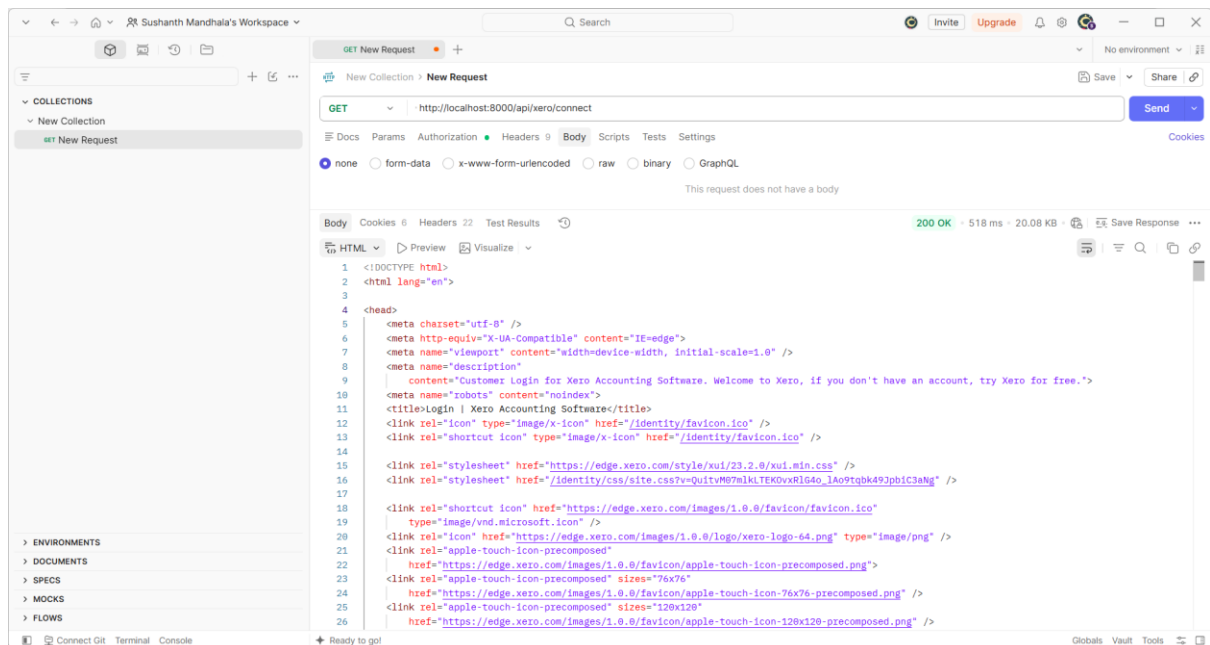


B. Fetch Xero Data


Once connected, you can pull the synced Xero master data.

- **Method:** GET
- **URL:** `http://localhost:8000/api/xero/contacts` (or `/accounts`, `/classes`, `/locations`, `/organisation`)
- **Authorization:** Bearer Token
- **Steps:** Click Send.


I. URL: <http://localhost:8000/api/xero/organisation>

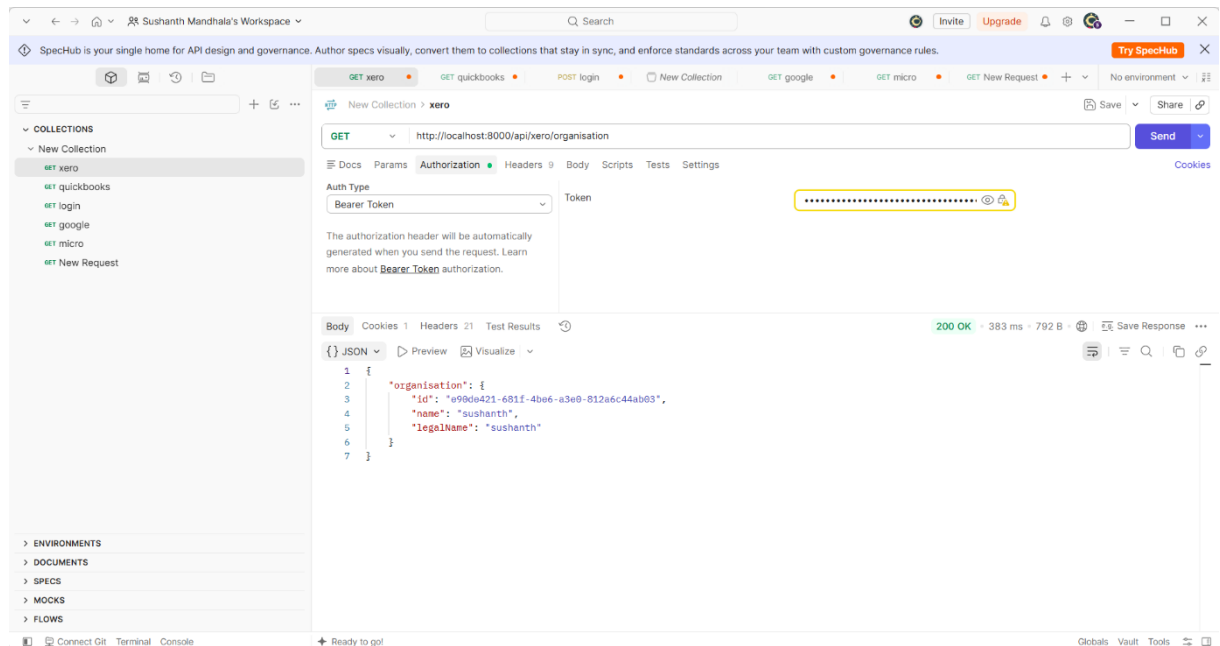

II. URL: <http://localhost:8000/api/xero/accounts>

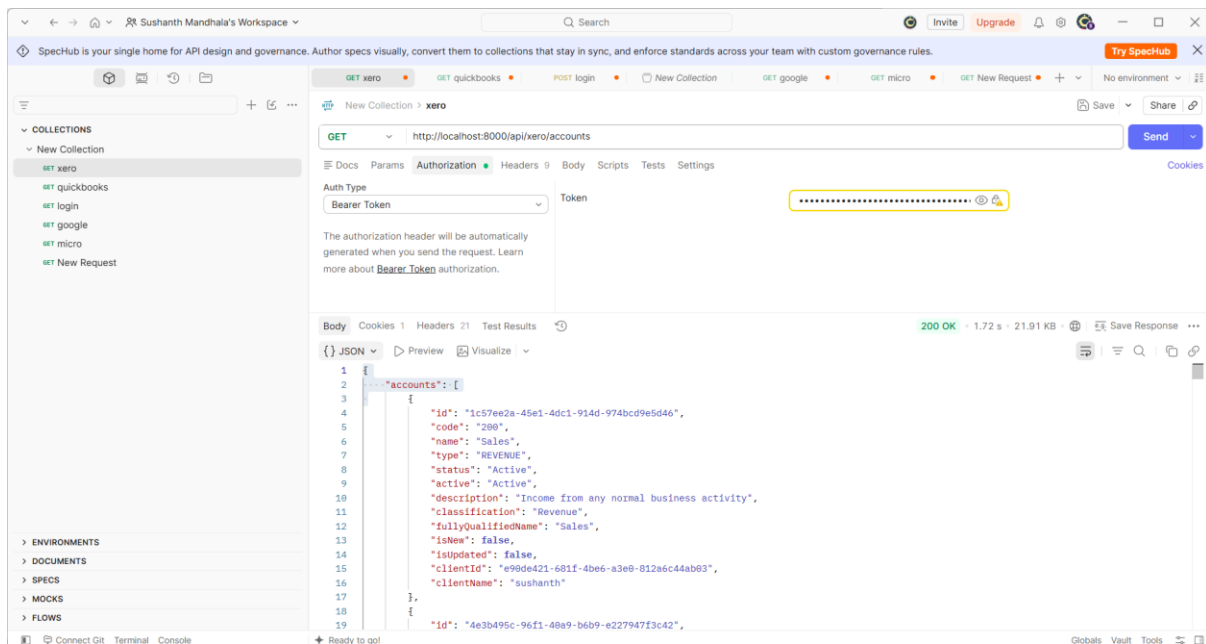

- **Method:** GET
- **URL:** <http://localhost:8000/api/auth/me>
- **Authorization:** Bearer Token
- **Steps:** Click **Send**. You should see your user details (id, name, email,role,provider plan ,subscriptionid).

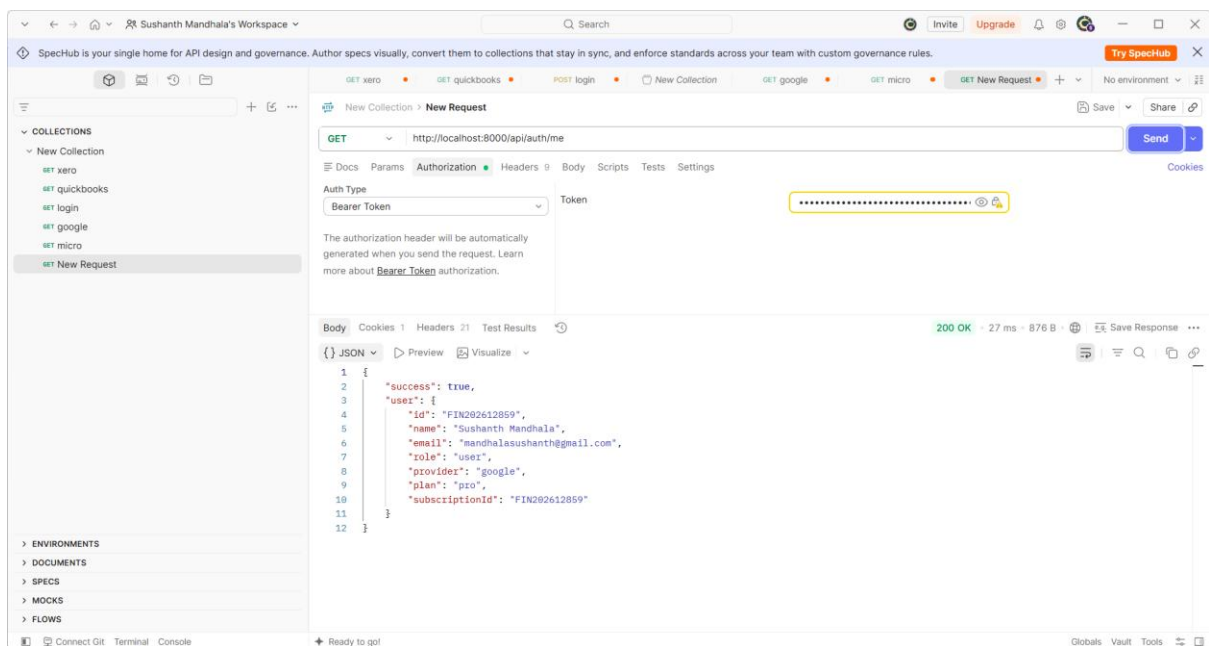

Microsoft

- **Method:** GET
- **URL:** <http://localhost:8000/api/auth/me>
- **Authorization:** Bearer Token
- **Steps:** Click **Send**. You should see your user details (id, name, email,role,provider plan ,subscriptionid).

