

# Bar Finder

By Lee-Loi Chieng

## Documentation

### Requirements:


- A Macintosh computer that is able to run xCode 7.1.
- You will also need to download CocoaPods dependency manager: <https://cocoapods.org/>

Getting Started: Launching Bar Finder is relatively simple. Contained in the zip file is the barFinder folder. This is where everything you need to launch the application is contained. Bar Finder uses CocoaPods and as such to view or make changes to the code, you will open “Bar finder.xcworkspace” NOT “Bar finder.xcodeproj”.

Running the app: Bar Finder is scalable to any iPhone screen size. It is set to the iPhone 6S setting by default to maximise screen size but if your running this app on a smaller screen computer, you may downsize it to an iPhone 5 for example.

When the app first launches you will need to allow location services to run to take advantage of the application. You will then need to change the location of the iPhone simulator to the Dublin City centre by choosing custom location. Dublin City centre’s co-ordinates are: 53.342332, -6.259758.

You may encounter a bug if you first launch the simulator in which the GPS will not activate even after allowing location services. Simply close the simulator and re-open it and the bug should be alleviated. This is a possible bug due to CocoaPods.

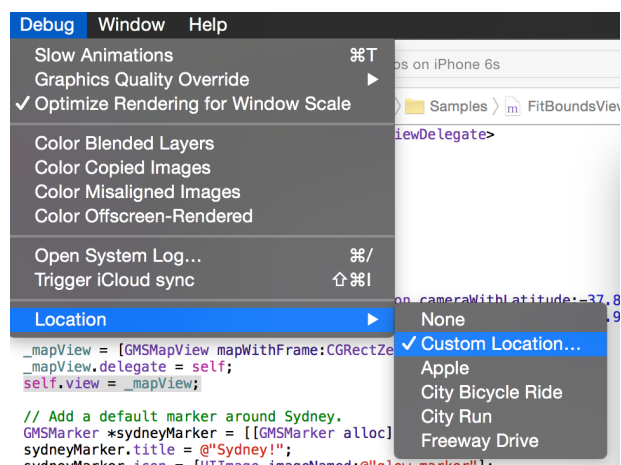

You then have everything you need to use the Bar Finder app to it's full advantage. Check out the list of personally curated bars that are well worth a visit including Copper Face Jacks, Irelands most famous bar.