



W13-P1: Demo prop drilling

=> Chrome, remove 4th person

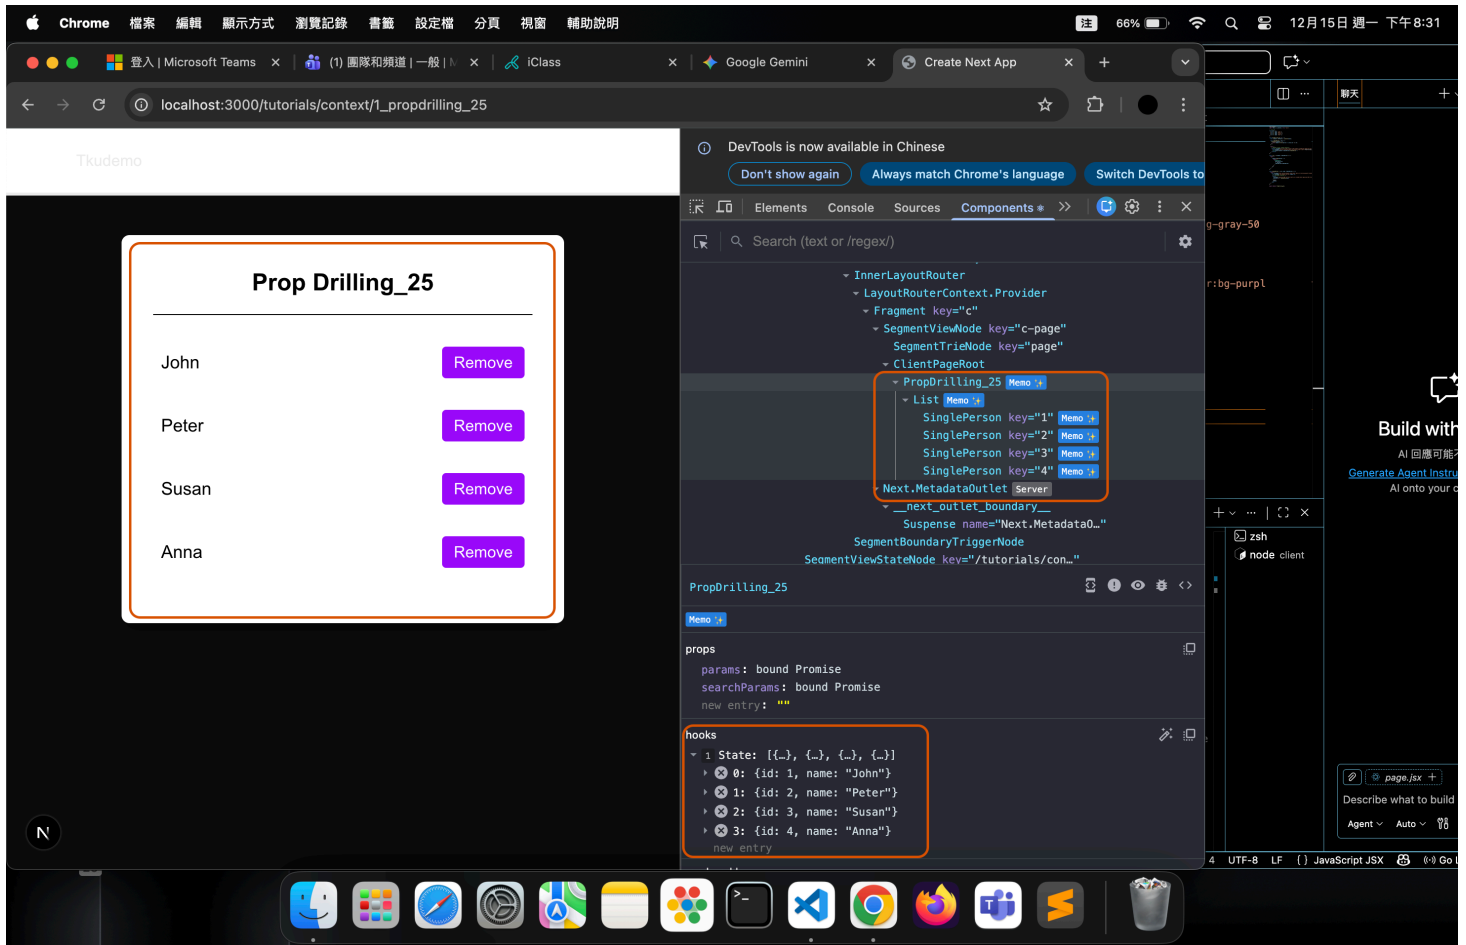

=> relevant code

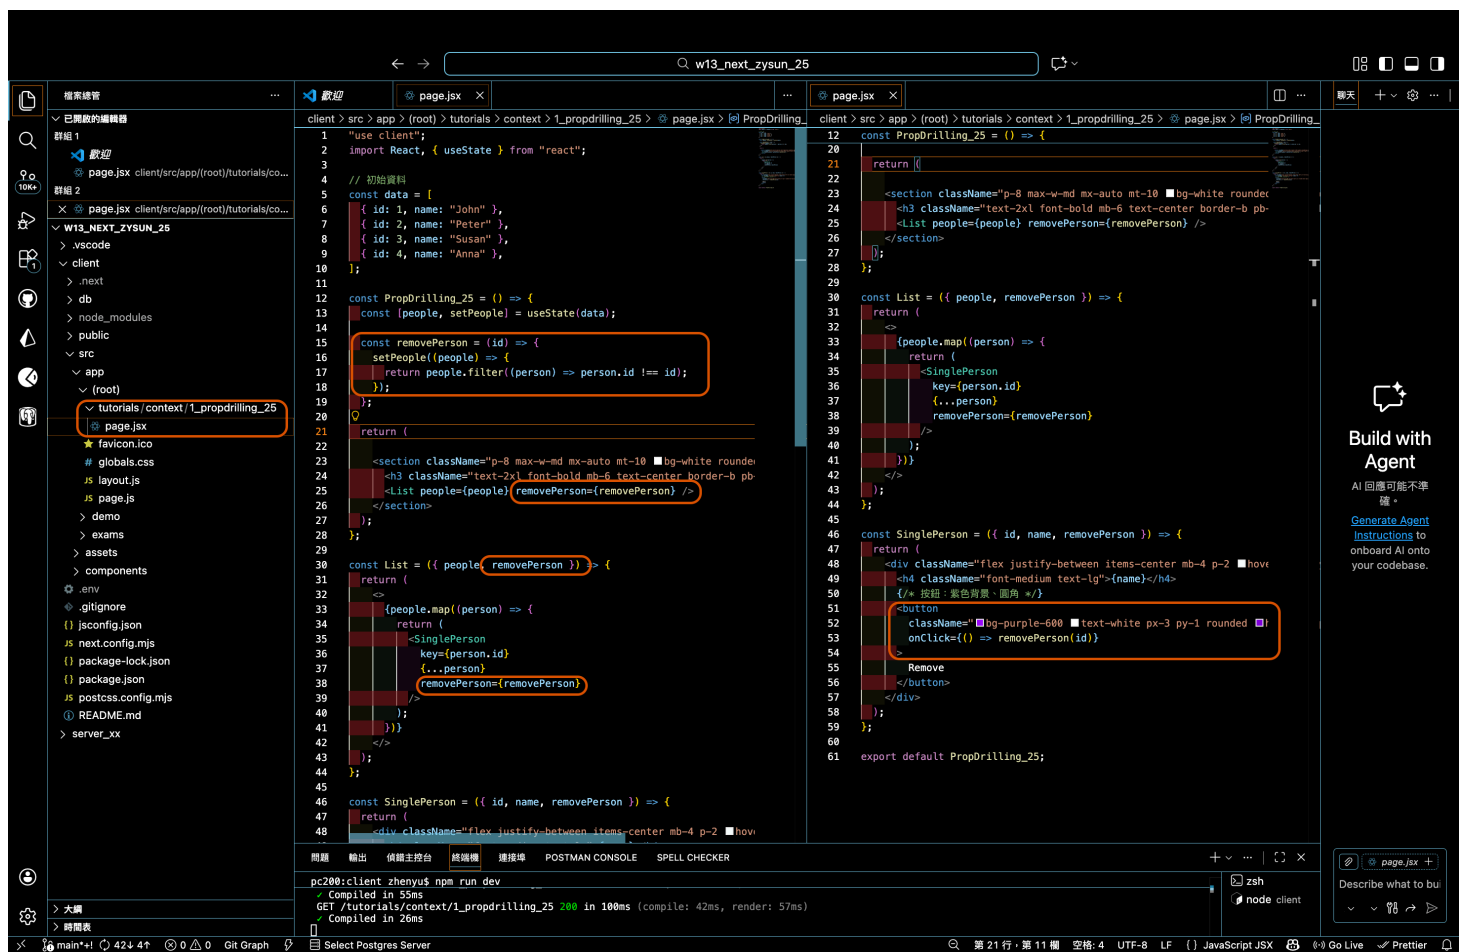

8c9330b zhenyu Mon Dec 15 21:02:22 2025 +0800 W13-P1: Demo prop drilling

W13-P2: Context API demo for W13-P1

=> Chrome, show PeopleContext.Provider by remove last person

The screenshot shows a web browser at `localhost:3000/tutorials/context/2_context_people_25` displaying a "Context API Demo_25". The demo lists four people: John, Peter, Susan, and Anna, each with a "Remove" button. The browser's DevTools component inspector is open, showing the component tree. The `PeopleContext.Provider` component is highlighted, and its props are visible in the bottom panel. The props include a `children` prop and a `new_entry` prop. The `hooks` section shows the state of the context, which is an array of objects representing people. The state is currently `[{id: 1, name: 'John'}, {id: 2, name: 'Peter'}, {id: 3, name: 'Susan'}, {id: 4, name: 'Anna'}]`. The `new_entry` prop is `''`.

Context API Demo_25

John Remove

Peter Remove

Susan Remove

Anna Remove

PeopleContext.Provider_25


props

```
children: <section />
new_entry: ''
```

hooks

```
1 State: [{id: 1, name: 'John'}, {id: 2, name: 'Peter'}, {id: 3, name: 'Susan'}, {id: 4, name: 'Anna'}]
0: {id: 1, name: 'John'}
1: {id: 2, name: 'Peter'}
2: {id: 3, name: 'Susan'}
3: {id: 4, name: 'Anna'}
new_entry
```


=> relevant code

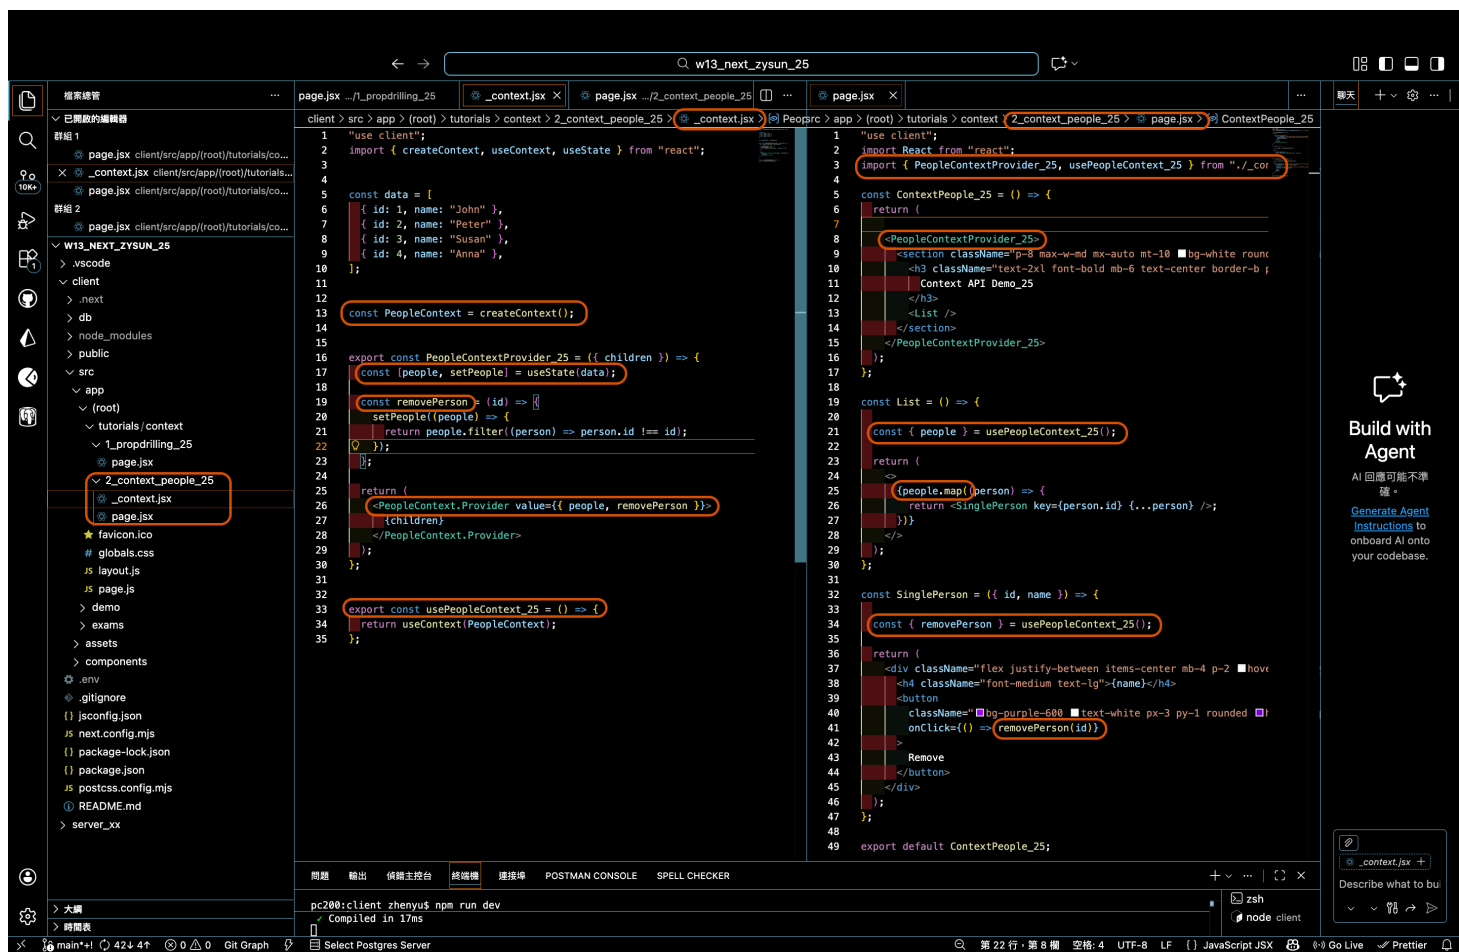


0b318a2 zhenyu Mon Dec 15 21:03:16 2025 +0800 W13-P2: Context API demo for W13-P1

W13-P3: Move W7 BlogJson2 page to the route /demo/blog_xx/localjson2_xx

=> Chrome, show the result

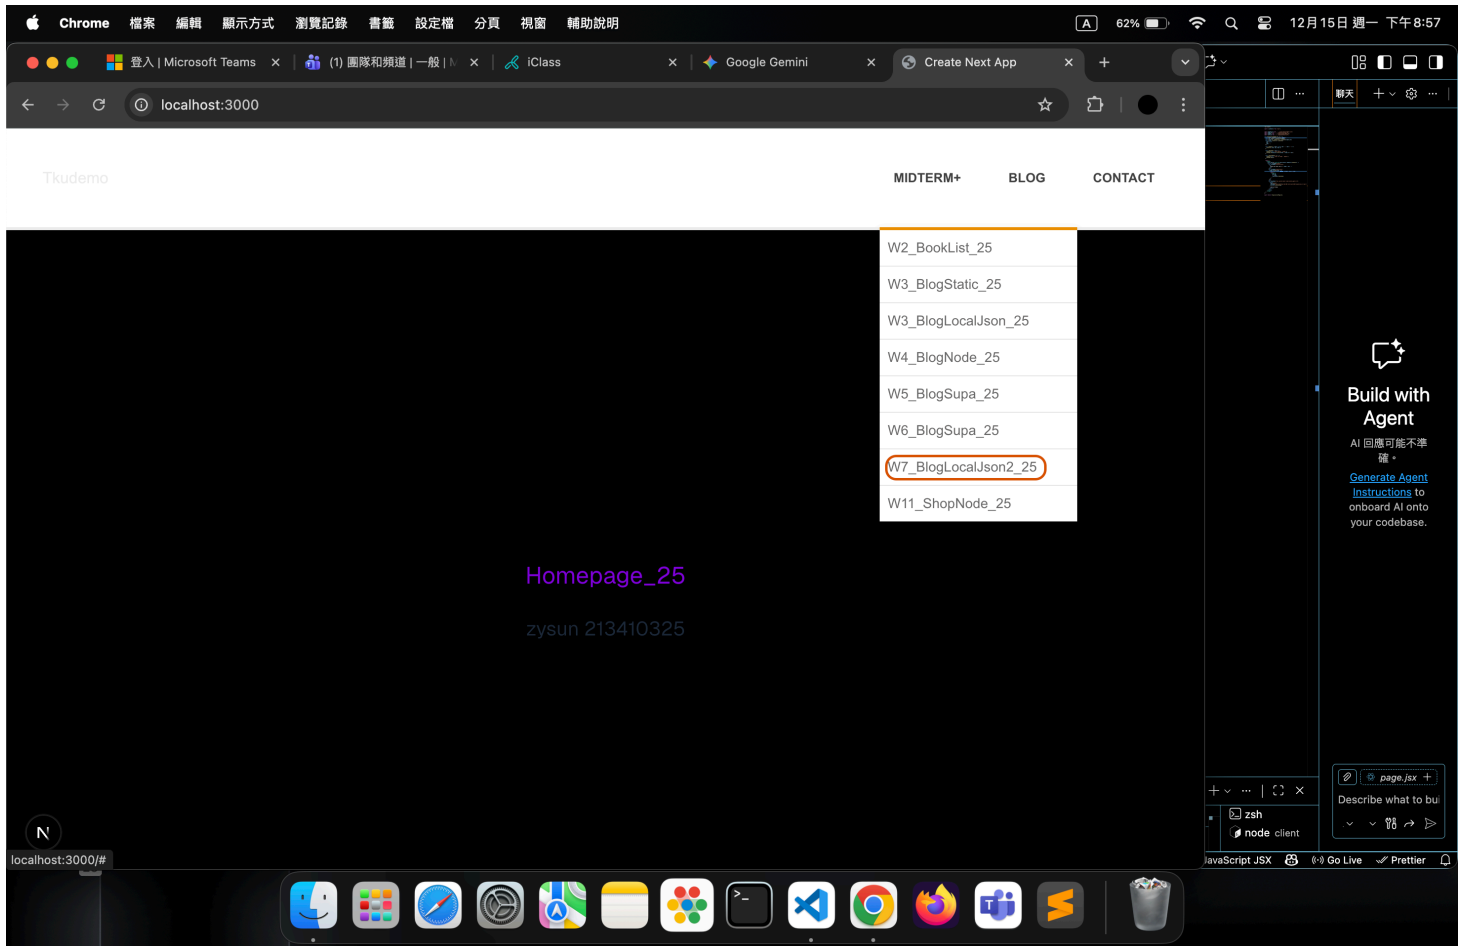

=> relevant code

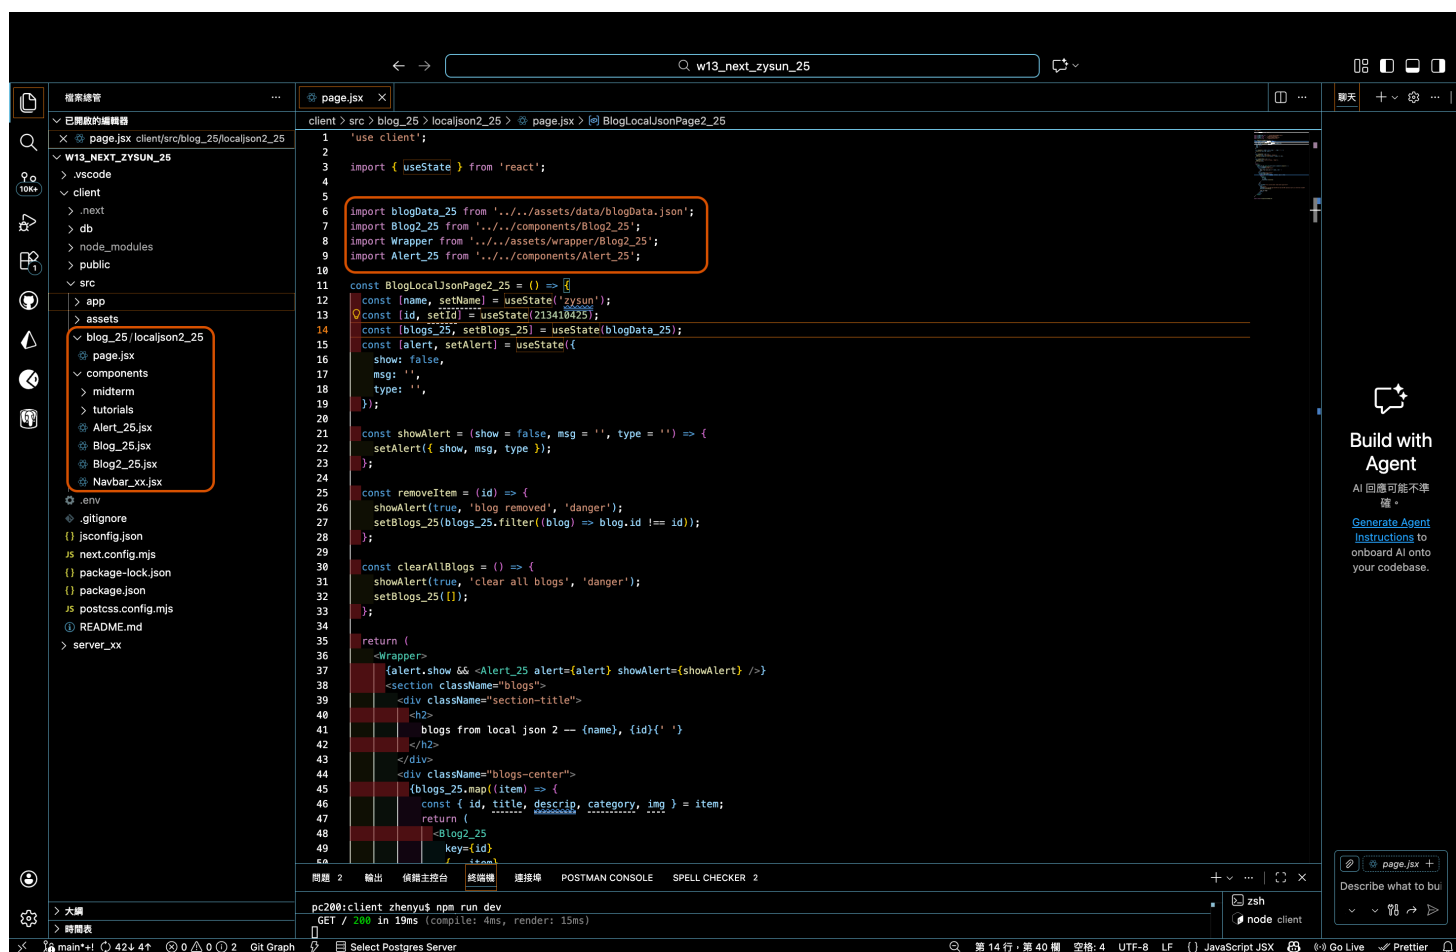

c286445 zhenyu Mon Dec 15 21:03:39 2025 +0800 W13-P3: Move W7 BlogJson2 page to the r