- Getting Started
  - Account Creation
  - Authentication
  - Requests
  - Rate Limits
  - Wrappers
- Examples
- Endpoints
  - Age Rating
  - Age Rating Category
  - Age Rating Content Description
  - Age Rating Content Description Type
  - Age Rating Content Description V2
  - Age Rating Organization
  - Alternative Name
  - Artwork
  - Artwork Type
  - Character
  - Character Gender
  - Character Mug Shot
  - Character Specie
  - Collection
  - Collection Membership
  - Collection Membership Type
  - Collection Relation
  - Collection Relation Type
  - Collection Type
  - Company
  - Company Logo
  - Company Size
  - Company Status
  - Company Type
  - Company Type History
  - Company Website
  - Content Safety Rating
  - Content Safety Rating Dimension
  - Cover
  - Date Format
  - Event
  - Event Logo
  - Event Network
  - External Game
  - External Game Source
  - Franchise
  - Game
  - Game Content Safety Rating
  - Game Engine
  - Game Engine Logo
  - Game Localization
  - Game Mode
  - Game Release Format
  - Game Status
  - Game Time To Beat
  - Game Type
  - Game Version
  - Game Version Feature
  - Game Version Feature Value
  - Game Video
  - Genre
  - Involved Company
  - Keyword
  - Language
  - Language Support
  - Language Support Type
  - Multiplayer Mode
  - Network Type
  - Platform
  - Platform Family
  - Platform Logo
  - Platform Type
  - Platform Version
  - Platform Version Company
  - Platform Version Release Date
  - Platform Website
  - Player Perspective
  - Popularity Primitive
  - Popularity Type
  - Region
  - Release Date
  - Release Date Region
  - Release Date Status
  - Screenshot
  - Search
  - Theme
  - Website
  - Website Type
- PopScore
  - Introducing IGDB PopScore - Your key to tracking the latest trends in the video game market.
  - Currently available PopScore primitives
  - How to use Popularity API
- Webhooks
- CORS Proxy
  - CORS

    - Proxy
- Reference
    - Images
    - Fields
    - Exclude
    - Expander
    - Filters
    - Sorting
    - Search
    - Pagination
    - Protocol Buffers
    - Tag Numbers
    - Multi-Query
    - APICalypse
- Migration Enums to Tables
    - Important Changes Coming to the IGDB API
    - What is Changing?
    - Migration Timeline
    - Questions or Concerns?
- Partnership
    - Data Dumps
- FAQ
    - Business related FAQ
    - Technical related FAQ
- Support
- License

Getting Started

One of the principles behind IGDB.com is accessibility of data. We wish to share the data with anyone who wants to build cool video game oriented websites, apps and services.

This means that you are not only contributing to the value of IGDB but to thousands of other projects as well. We are looking forward to see what exciting game related projects you come up with. Happy coding!

For a high level overview of our juicy data, check out the endpoints section.

Account Creation

In order to use our API, you must have a Twitch Account.

1. Sign Up with Twitch for a free account
2. Ensure you have Two Factor Authentication enabled
3. Register your application in the Twitch Developer Portal
    - The OAuth Redirect URL field is not used by IGDB. Please add 'localhost' to continue.
    - The Client Type must be set to `Confidential` to generate Client Secrets
4. Manage your newly created application
5. Generate a Client Secret by pressing [New Secret]
6. Take note of the Client ID and Client Secret

The IGDB.com API is free for **non-commercial** usage under the terms of the Twitch Developer Service Agreement.

> **Note:** We offer commercial partnership for users with a commercial need in their projects. For more details on that process please reach out to partner@igdb.com

---

Authentication

Now that you have a Client ID and Client Secret you will be authenticating as a Twitch Developer using Oauth2.
Detailed information can be found in the Twitch Developer Docs.

Make a `POST` request to `https://id.twitch.tv/oauth2/token` with the following query string parameters, substituting your Client ID and Client Secret accordingly.

`client_id=Client ID`

`client_secret=Client Secret`

`grant_type=client_credentials`

EXAMPLE

If your Client ID is `abcdefg12345` and your Client Secret is `hijklmn67890`, the whole url should look like the following.

```
POST: https://id.twitch.tv/oauth2/token?client_id=abcdefg12345&client_secret=hijklmn67890&grant_type=client_credentials
```

The response from this will be a json object containing the access token and the number of second until the token expires.

```
{
  "access_token": "access12345token",
  "expires_in": 5587808,
  "token_type": "bearer"
}
```

Note: The *expires_in* shows you the number of seconds before the *access_token* will expire and must be refreshed.

Requests

- Most of the requests to the API will use the `POST` method
- The base URL is: **https://api.igdb.com/v4**
- You define which endpoint you wish to query by appending `/{endpoint name}` to the base URL eg. **https://api.igdb.com/v4/games**
- Include your `Client ID` and `Access Token` in the `HEADER` of your request so that your headers look like the following.
    - Take special care of the capitalisation. `Bearer` should be hard-coded infront of your `access_token`

```
Client-ID: Client ID
Authorization: Bearer access_token
```

- You use the `BODY` of your request to specify the fields you want to retrieve as well as any other filters, sorting etc

EXAMPLE

If your Client ID is `abcdefg12345` and your access_token is `access12345token`, a simple request to get information about 10 games would be.

```
POST: https://api.igdb.com/v4/games
Client-ID: abcdefg12345
Authorization: Bearer access12345token
Body: "fields *;"
```

Note: If you are trying to make these requests via the Browser you will run into CORS errors as the API does not allow requests directly from browsers. You can read more about CORS and how to go around this issue in the CORS Proxy section

MORE EXAMPLES

You can find some examples requests here

Rate Limits

There is a rate limit of **4 requests per second**. If you go over this limit you will receive a response with status code `429 Too Many Requests`.

You are able to have up to 8 *open* requests at any moment in time. This can occur if requests take longer than 1 second to respond when multiple requests are being made.

Wrappers

Get setup quickly by using one of these wrappers!

APICALYPSE

- NodeJS
- JVM/Kotlin/Java
- Swift
- Python

THIRD PARTY

- PHP/Laravel
- GO
- Ruby
- C#/.NET
- Deno

THIRD PARTY DOCUMENTATION

- OpenAPI Documentation
- Postman Collection

Examples

It's recommended to try out your queries in an API viewer like Postman or Insomnia before using code. This helps you find problems a lot sooner!

Postman setup example

POST https://api.igdb.com/v4/games

Send Save

Headers

Headers 10 hidden

KEY	VALUE
Client-ID	retgzhvpsxjwun0rvrb1rfwheegu1yw ...
Authorization	Bearer prau3ol6mg5glgek8m89ec2s9q5i3i
Key	Value

Bulk Edit Presets

Body 200 OK 337 ms 5.91 KB Save Response

Pretty Raw Preview Visualize JSON


```
[
  {
    "id": 60226,
    "involved_companies": [
      {
        "id": 58772,
        "company": 950,
        "created_at": 1512345600,
        "developer": true,
        "game": 60226,
        "porting": false,
        "publisher": true,
        "supporting": false,
        "updated_at": 1512345600,
        "checksum": "db2d5a11-4ced-f850-2745-6d939ca7bb42"
      },
      {
        "id": 58773,
        "company": 13997,
        "created_at": 1512345600,
        "developer": false,
        "game": 60226,
        "porting": false,
        "publisher": false,
        "supporting": true,
        "updated_at": 1512345600,
        "checksum": "ba24723c-908d-857a-010a-329b3fcac2ab"
      }
    ]
  },
  {
    "id": 138149,
    "involved_companies": [
      {
        "id": 107092,
        "company": 27724,
        "created_at": 1598918400,
        "developer": true,
```

POST https://api.igdb.com/v4/games Send Save

Body raw Text

```
fields involved_companies.*;
where involved_companies != null;
```

Body 200 OK 337 ms 5.91 KB Save Response

Pretty Raw Preview Visualize JSON


```
[
  {
    "id": 60226,
    "involved_companies": [
      {
        "id": 58772,
        "company": 950,
        "created_at": 1512345600,
        "developer": true,
        "game": 60226,
        "porting": false,
        "publisher": true,
        "supporting": false,
        "updated_at": 1512345600,
        "checksum": "db2d5a11-4ced-f850-2745-6d939ca7bb42"
      },
      {
        "id": 58773,
        "company": 13997,
        "created_at": 1512345600,
        "developer": false,
        "game": 60226,
        "porting": false,
        "publisher": false,
        "supporting": true,
        "updated_at": 1512345600,
        "checksum": "ba24723c-908d-857a-010a-329b3fcac2ab"
      }
    ]
  },
  {
    "id": 138149,
    "involved_companies": [
      {
        "id": 107092,
        "company": 27724,
        "created_at": 1598918400,
        "developer": true,
```


A VERY BASIC EXAMPLE TO RETRIEVE THE NAME FOR 10 GAMES.

https://api.igdb.com/v4/games/

```
fields name; limit 10;
```

GET ALL INFORMATION FROM A SPECIFIC GAME

1942, is the ID of a game.

https://api.igdb.com/v4/games/

```
fields *; where id = 1942;
```

EXCLUDE IRRELEVANT DATA FROM YOUR QUERY

Remove alternative_name from your result query

https://api.igdb.com/v4/platforms/

```
fields *;
exclude alternative_name;
```

GET ALL GAMES FROM SPECIFIC GENRES

Notice how you can comma separate multiple IDs (8, 9, and 11). You can do this with games, companies and anything else. Also note that when you have multiple IDs they have to be surrounded by a parenthesis. Single ids can be queried both with and without the parenthesis.

https://api.igdb.com/v4/genres/

```
fields *; where id = (8,9,11);
```

COUNT TOTAL GAMES THAT HAVE A RATING HIGHER THAN 75

https://api.igdb.com/v4/games/count

```
where rating > 75;
```

ORDER BY RATING

https://api.igdb.com/v4/games/

```
fields name,rating; sort rating desc;
```

COMING SOON GAMES FOR PLAYSTATION 4

https://api.igdb.com/v4/release_dates/

```
fields *; where game.platforms = 48 & date > 1538129354; sort date asc;
```

1538129354: Is the timestamp in milliseconds of 28/09/2018 (This you need to generate yourself) 48 Is the platform id of Playstation 4.

RECENTLY RELEASED GAMES FOR PLAYSTATION 4

```
fields *; where game.platforms = 48 & date < 1538129354; sort date desc;
```

Note: "where game.platforms = 48 & date > 1538129354" It is possible to use either & (AND) or | (OR) to combine filters to better define the behaviour of your query

SEARCH, RETURN CERTAIN FIELDS.

https://api.igdb.com/v4/games/

```
search "Halo"; fields name,release_date.human;
```

https://api.igdb.com/v4/games/

```
fields name, involved_companies; search "Halo";
```

SEARCH GAMES BUT EXCLUDE VERSIONS (EDITIONS)

https://api.igdb.com/v4/games/

```
fields name, involved_companies; search "Assassins Creed"; where version_parent = null;
```

This will return search results with ID and name of the game but exclude editions such as “Collectors Edition”.

SEARCHING ALL ENDPOINTS

Note: Search is now also it's own endpoint. Search is usable on: Characters, Collections, Games, Platforms, and Themes

The example below searches for “Sonic the Hedgehog” which will find the Character Sonic, the collection Soninc the Hedgehog. And of course also several games with names containing Sonic the Hedgehog.

https://api.igdb.com/v4/search

```
fields *; search "sonic the hedgehog"; limit 50;
```

GET VERSIONS (EDITIONS) OF A GAME

https://api.igdb.com/v4/game_versions/

```
fields game.name,games.name; where game = 28540;
```

The resulting object will contain all games that are a version of the game with id 28540

GET THE PARENT GAME FOR A VERSION

https://api.igdb.com/v4/games/

```
fields version_parent.*; where id = 39047;
```

The resulting object will contain all main games

GET ALL GAMES THAT ARE PLAYSTATION 4 EXCLUSIVES

```
fields name,category,platforms;
where category = 0 & platforms = 48;
```

GET ALL GAMES THAT ARE ONLY RELEASED ON PLAYSTATION 4 AND PC

```
fields name,category,platforms;
where category = 0 & platforms = {48,6};
```

Endpoints

Age Rating

```
curl 'https://api.igdb.com/v4/age_ratings' \
-d 'fields category,checksum,content_descriptions,organization,rating,rating_category,rating_content_descriptions,rating_cover_url,synopsis;' \
-H 'Client-ID: Client ID' \
```

```
  -H 'Authorization: Bearer access_token' \
  -H 'Accept: application/json'
```

Deprecated Fields:

- `category`: DEPRECATED! Use `organization` instead
- `content_descriptions`: DEPRECATED! Use `rating_content_descriptions` instead
- `rating`: DEPRECATED! Use `rating_category` instead

Age Rating according to various rating organisations

REQUEST PATH

`https://api.igdb.com/v4/age_ratings`

field	type	description
category	Category Enum	DEPRECATED! Use `organization` instead
checksum	uuid	Hash of the object
content_descriptions	Array of Age Rating Content Description IDs	DEPRECATED! Use `rating_content_descriptions` instead
organization	Reference ID for Age Rating Organization	The organization that has issued a specific rating
rating	Rating Enum	DEPRECATED! Use `rating_category` instead
rating_category	Reference ID for Age Rating Category	The category of a rating
rating_content_descriptions	Array of Age Rating Content Description V2 IDs	The rating content descriptions
rating_cover_url	String	The url for the image of a age rating
synopsis	String	A free text motivating a rating

AGE RATING ENUMS

category

name	value
ESRB	1
PEGI	2
CERO	3
USK	4
GRAC	5
CLASS_IND	6
ACB	7

rating

name	value
Three	1
Seven	2
Twelve	3
Sixteen	4
Eighteen	5
RP	6
EC	7
E	8
E10	9
T	10
M	11
AO	12
CERO_A	13
CERO_B	14
CERO_C	15

name	value
CERO_D	16
CERO_Z	17
USK_0	18
USK_6	19
USK_12	20
USK_16	21
USK_18	22
GRAC_ALL	23
GRAC_Twelve	24
GRAC_Fifteen	25
GRAC_Eighteen	26
GRAC_TESTING	27
CLASS_IND_L	28
CLASS_IND_Ten	29
CLASS_IND_Twelve	30
CLASS_IND_Fourteen	31
CLASS_IND_Sixteen	32
CLASS_IND_Eighteen	33
ACB_G	34
ACB_PG	35
ACB_M	36
ACB_MA15	37
ACB_R18	38
ACB_RC	39

Age Rating Category

```
curl 'https://api.igdb.com/v4/age_rating_categories' \
-d 'fields checksum,created_at,organization,rating,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

The rating category from the organization

REQUEST PATH

`https://api.igdb.com/v4/age_rating_categories`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
organization	Reference ID for Age Rating Organization	The rating organization
rating	String	The rating name
updated_at	datetime	The last date this entry was updated in the IGDB database

Age Rating Content Description

```
curl 'https://api.igdb.com/v4/age_rating_content_descriptions' \
-d 'fields category,checksum,description;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Deprecated Fields:

- `category`: DEPRECATED!

DEPRECATED! Use `age_rating_content_descriptions_v2` instead

REQUEST PATH

`https://api.igdb.com/v4/age_rating_content_descriptions`

field	type	description
category	Category Enum	DEPRECATED!
checksum	uuid	Hash of the object
description	String	

AGE RATING CONTENT DESCRIPTION ENUMS

category

name	value
ESRB_alcohol_reference	1
ESRB_animated_blood	2
ESRB_blood	3
ESRB_blood_and gore	4
ESRB_cartoon_violence	5
ESRB_comic_mischief	6
ESRB_crude_humor	7
ESRB_drug_reference	8
ESRB_fantasy_violence	9
ESRB_intense_violence	10
ESRB_language	11
ESRB_lyrics	12
ESRB_mature_humor	13
ESRB_nudity	14
ESRB_partial_nudity	15
ESRB_real_gambling	16
ESRB_sexual_content	17
ESRB_sexual_themes	18
ESRB_sexual_violence	19
ESRB_simulated_gambling	20
ESRB_strong_language	21
ESRB_strong_lyrics	22
ESRB_strong_sexual content	23
ESRB_suggestive_themes	24
ESRB_tobacco_reference	25
ESRB_use_of alcohol	26
ESRB_use_of drugs	27
ESRB_use_of tobacco	28
ESRB_violence	29
ESRB_violent_references	30
ESRB_animated_violence	31
ESRB_mild_language	32
ESRB_mild_violence	33
ESRB_use_of drugs and alcohol	34
ESRB_drug_and alcohol reference	35

name	value
ESRB_mild_suggestive themes	36
ESRB_mild_cartoon violence	37
ESRB_mild_blood	38
ESRB_realistic_blood and gore	39
ESRB_realistic_violence	40
ESRB_alcohol_and tobacco reference	41
ESRB_mature_sexual themes	42
ESRB_mild_animated violence	43
ESRB_mild_sexual themes	44
ESRB_use_of alcohol and tobacco	45
ESRB_animated_blood and gore	46
ESRB_mild_fantasy violence	47
ESRB_mild_lyrics	48
ESRB_realistic_blood	49
PEGI_violence	50
PEGI_sex	51
PEGI_drugs	52
PEGI_fear	53
PEGI_discrimination	54
PEGI_bad_language	55
PEGI_gambling	56
PEGI_online_gameplay	57
PEGI_in_game_purchases	58
CERO_love	59
CERO_sexual_content	60
CERO_violence	61
CERO_horror	62
CERO_drinking_smoking	63
CERO_gambling	64
CERO_crime	65
CERO_controlled_substances	66
CERO_languages_and others	67
GRAC_sexuality	68
GRAC_violence	69
GRAC_fear_horror_threatening	70
GRAC_language	71
GRAC_alcohol_tobacco_drug	72
GRAC_crime_anti_social	73
GRAC_gambling	74
CLASS_IND_violencia	75
CLASS_IND_violencia_extrema	76
CLASS_IND_conteudo_sexual	77
CLASS_IND_nudez	78
CLASS_IND_sexo	79
CLASS_IND_sexo_explicito	80
CLASS_IND_drogas	81
CLASS_IND_drogas_licitas	82
CLASS_IND_drogas_ilicitas	83

name	value
CLASS_IND_linguagem_impropria	84
CLASS_IND_atos_criminosos	85

Age Rating Content Description Type

```
curl 'https://api.igdb.com/v4/age_rating_content_description_types' \
-d 'fields checksum,created_at,name,slug,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Age Rating Content Description Types

REQUEST PATH

`https://api.igdb.com/v4/age_rating_content_description_types`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
name	String	
slug	String	A url-safe, unique, lower-case version of the name
updated_at	datetime	The last date this entry was updated in the IGDB database

Age Rating Content Description V2

```
curl 'https://api.igdb.com/v4/age_rating_content_descriptions_v2' \
-d 'fields checksum,created_at,description,description_type,organization,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Age Rating Content Descriptions

REQUEST PATH

`https://api.igdb.com/v4/age_rating_content_descriptions_v2`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
description	String	
description_type	Reference ID for Age Rating Content Description Type	The age rating content description type
organization	Reference ID for Age Rating Organization	The rating organization
updated_at	datetime	The last date this entry was updated in the IGDB database

Age Rating Organization

```
curl 'https://api.igdb.com/v4/age_rating_organizations' \
-d 'fields checksum,created_at,name,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Age Rating according to various rating organisations

REQUEST PATH

`https://api.igdb.com/v4/age_rating_organizations`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database

field	type	description
name	String	The title of an age rating organization
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Alternative Name

```
curl 'https://api.igdb.com/v4/alternative_names' \
-d 'fields checksum,comment,game,name;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Alternative and international game titles

REQUEST PATH

`https://api.igdb.com/v4/alternative_names`

field	type	description
checksum	uuid	Hash of the object
comment	String	A description of what kind of alternative name it is (Acronym, Working title, Japanese title etc)
game	Reference ID for Game	The game this alternative name is associated with
name	String	An alternative name

Artwork

```
curl 'https://api.igdb.com/v4/artworks' \
-d 'fields alpha_channel,animated,artwork_type,checksum,game,height,image_id,url,width;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Official artworks (resolution and aspect ratio may vary)

REQUEST PATH

`https://api.igdb.com/v4/artworks`

field	type	description
alpha_channel	boolean	
animated	boolean	
artwork_type	Reference ID for Artwork Type	The artwork type
checksum	uuid	Hash of the object
game	Reference ID for Game	The game this artwork is associated with
height	Integer	The height of the image in pixels
image_id	String	The ID of the image used to construct an IGDB image link
url	String	The website address (URL) of the item
width	Integer	The width of the image in pixels

Artwork Type

```
curl 'https://api.igdb.com/v4/artwork_types' \
-d 'fields checksum,created_at,name,slug,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Artwork Types

REQUEST PATH

`https://api.igdb.com/v4/artwork_types`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
name	String	
slug	String	A url-safe, unique, lower-case version of the name
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Character

```
curl 'https://api.igdb.com/v4/characters' \
-d 'fields akas,character_gender,character_species,checksum,country_name,created_at,description,games,gender,mug_shot,name,slug,species,updated_at,url;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Deprecated Fields:

- `gender`: DEPRECATED! Use `character_gender` instead
- `species`: DEPRECATED! Use `character_species` instead

Video game characters

REQUEST PATH

`https://api.igdb.com/v4/characters`

field	type	description
akas	Array of Strings	Alternative names for a character
character_gender	Reference ID for Character Gender	
character_species	Reference ID for Character Specie	
checksum	uuid	Hash of the object
country_name	String	A characters country of origin
created_at	datetime	Date this was initially added to the IGDB database
description	String	A text describing a character
games	Array of Game IDs	
gender	Gender Enum	DEPRECATED! Use `character_gender` instead
mug_shot	Reference ID for Character Mug Shot	An image depicting a character
name	String	
slug	String	A url-safe, unique, lower-case version of the name
species	Species Enum	DEPRECATED! Use `character_species` instead
updated_at	datetime	The last date this entry was updated in the IGDB database
url	String	The website address (URL) of the item

CHARACTER ENUMS

gender

name	value
Male	0
Female	1
Other	2

species

name	value
Human	1
Alien	2
Animal	3

name	value
Android	4
Unknown	5

Character Gender

```
curl 'https://api.igdb.com/v4/character_genders' \
-d 'fields checksum,created_at,name,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Character Genders

REQUEST PATH

`https://api.igdb.com/v4/character_genders`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
name	String	
updated_at	datetime	The last date this entry was updated in the IGDB database

Character Mug Shot

```
curl 'https://api.igdb.com/v4/character_mug_shots' \
-d 'fields alpha_channel,animated,checksum,height,image_id,url,width;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Images depicting game characters

REQUEST PATH

`https://api.igdb.com/v4/character_mug_shots`

field	type	description
alpha_channel	boolean	
animated	boolean	
checksum	uuid	Hash of the object
height	Integer	The height of the image in pixels
image_id	String	The ID of the image used to construct an IGDB image link
url	String	The website address (URL) of the item
width	Integer	The width of the image in pixels

Character Specie

```
curl 'https://api.igdb.com/v4/character_species' \
-d 'fields checksum,created_at,name,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Character Species

REQUEST PATH

`https://api.igdb.com/v4/character_species`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database

field	type	description
name	String	
updated_at	datetime	The last date this entry was updated in the IGDB database

Collection

```
curl 'https://api.igdb.com/v4/collections' \
-d 'fields as_child_relations,as_parent_relations,checksum,created_at,games,name,slug,type,updated_at,url;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Collection, AKA Series

REQUEST PATH

`https://api.igdb.com/v4/collections`

field	type	description
as_child_relations	Array of Collection Relation IDs	
as_parent_relations	Array of Collection Relation IDs	
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
games	Array of Game IDs	The games that are associated with this collection
name	String	Umbrella term for a collection of games
slug	String	A url-safe, unique, lower-case version of the name
type	Reference ID for Collection Type	The type of collection
updated_at	datetime	The last date this entry was updated in the IGDB database
url	String	The website address (URL) of the item

Collection Membership

```
curl 'https://api.igdb.com/v4/collection_memberships' \
-d 'fields checksum,collection,created_at,game,type,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

The Collection Memberships.

REQUEST PATH

`https://api.igdb.com/v4/collection_memberships`

field	type	description
checksum	uuid	Hash of the object
collection	Reference ID for Collection	The collection that is associated with this membership
created_at	datetime	Date this was initially added to the IGDB database
game	Reference ID for Game	The game that is associated with this membership
type	Reference ID for Collection Membership Type	The Collection Membership Type
updated_at	datetime	The last date this entry was updated in the IGDB database

Collection Membership Type

```
curl 'https://api.igdb.com/v4/collection_membership_types' \
-d 'fields allowed_collection_type,checksum,created_at,description,name,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Enums for collection membership types.

REQUEST PATH

`https://api.igdb.com/v4/collection_membership_types`

field	type	description
allowed_collection_type	Reference ID for Collection Type	The allowed collection type
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
description	String	Description of the membership type.
name	String	The membership type name
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Collection Relation

```
curl 'https://api.igdb.com/v4/collection_relations' \
-d 'fields checksum,child_collection,created_at,parent_collection,type,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Describes Relationship between Collections.

REQUEST PATH

`https://api.igdb.com/v4/collection_relations`

field	type	description
checksum	uuid	Hash of the object
child_collection	Reference ID for Collection	The child collection of this collection.
created_at	datetime	Date this was initially added to the IGDB database
parent_collection	Reference ID for Collection	The parent collection of this collection.
type	Reference ID for Collection Relation Type	The collection relationship type
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Collection Relation Type

```
curl 'https://api.igdb.com/v4/collection_relation_types' \
-d 'fields allowed_child_type,allowed_parent_type,checksum,created_at,description,name,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Collection Relation Types

REQUEST PATH

`https://api.igdb.com/v4/collection_relation_types`

field	type	description
allowed_child_type	Reference ID for Collection Type	The allowed child collection type
allowed_parent_type	Reference ID for Collection Type	The allowed child collection type
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
description	String	The relationship type description
name	String	The relationship type name
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Collection Type

```
curl 'https://api.igdb.com/v4/collection_types' \
-d 'fields checksum,created_at,description,name,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
```

```
-H 'Accept: application/json'
```

Enums for collection types.

REQUEST PATH

`https://api.igdb.com/v4/collection_types`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
description	String	Description of the collection type.
name	String	The name of the collection type
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Company

```
curl 'https://api.igdb.com/v4/companies' \
-d 'fields change_date,change_date_category,change_date_format,changed_company_id,checksum,company_size,company_type_histories,country,created_at,description,developed,logo,name,parent,published,slug,start_date,start_date_category,
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Deprecated Fields:

- `change_date_category`: DEPRECATED! Use `change_date_format` instead
- `start_date_category`: DEPRECATED! Use `start_date_format` instead

Video game companies. Both publishers & developers

REQUEST PATH

`https://api.igdb.com/v4/companies`

field	type	description
change_date	Unix Time Stamp	The data when a company got a new ID
change_date_category	Change Date Category Enum	DEPRECATED! Use `change_date_format` instead
change_date_format	Reference ID for Date Format	The format of the change date
changed_company_id	Reference ID for Company	The new ID for a company that has gone through a merger or restructuring
checksum	uuid	Hash of the object
company_size	Reference ID for Company Size	The size of the company
company_type_histories	Array of Company Type History IDs	The history of company types
country	Integer	ISO 3166-1 country code
created_at	datetime	Date this was initially added to the IGDB database
description	String	A free text description of a company
developed	Array of Game IDs	An array of games that a company has developed
logo	Reference ID for Company Logo	The company's logo
name	String	
parent	Reference ID for Company	A company with a controlling interest in a specific company
published	Array of Game IDs	An array of games that a company has published
slug	String	A url-safe, unique, lower-case version of the name
start_date	Unix Time Stamp	The date a company was founded
start_date_category	Start Date Category Enum	DEPRECATED! Use `start_date_format` instead
start_date_format	Reference ID for Date Format	The format of the start date
status	Reference ID for Company Status	The status of the company
updated_at	datetime	The last date this entry was updated in the IGDB database
url	String	The website address (URL) of the item

field	type	description
websites	Array of Company Website IDs	The companies official websites

COMPANY ENUMS

change_date_category

name	value
YYYYMMMMDD	0
YYYYMMMM	1
YYYY	2
YYYYQ1	3
YYYYQ2	4
YYYYQ3	5
YYYYQ4	6
TBD	7

start_date_category

name	value
YYYYMMMMDD	0
YYYYMMMM	1
YYYY	2
YYYYQ1	3
YYYYQ2	4
YYYYQ3	5
YYYYQ4	6
TBD	7

Company Logo

```
curl 'https://api.igdb.com/v4/company_logos' \
-d 'fields alpha_channel,animated,checksum,height,image_id,url,width;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

The logos of developers and publishers

REQUEST PATH

`https://api.igdb.com/v4/company_logos`

field	type	description
alpha_channel	boolean	
animated	boolean	
checksum	uuid	Hash of the object
height	Integer	The height of the image in pixels
image_id	String	The ID of the image used to construct an IGDB image link
url	String	The website address (URL) of the item
width	Integer	The width of the image in pixels

Company Size

```
curl 'https://api.igdb.com/v4/company_sizes' \
-d 'fields checksum,created_at,name,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Company Size

REQUEST PATH

`https://api.igdb.com/v4/company_sizes`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
name	String	
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Company Status

```
curl 'https://api.igdb.com/v4/company_statuses' \
-d 'fields checksum,created_at,name,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Company Status

REQUEST PATH

`https://api.igdb.com/v4/company_statuses`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
name	String	
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Company Type

```
curl 'https://api.igdb.com/v4/company_types' \
-d 'fields checksum,created_at,name,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Company Type

REQUEST PATH

`https://api.igdb.com/v4/company_types`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
name	String	
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Company Type History

```
curl 'https://api.igdb.com/v4/company_type_histories' \
-d 'fields checksum,company,company_type,created_at,parent_company,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Company type history

REQUEST PATH

`https://api.igdb.com/v4/company_type_histories`

field	type	description
checksum	uuid	Hash of the object

field	type	description
company	Reference ID for Company	The company
company_type	Reference ID for Company Type	The company type
created_at	datetime	Date this was initially added to the IGDB database
parent_company	Reference ID for Company	The parent company
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Company Website

```
curl 'https://api.igdb.com/v4/company_websites' \
-d 'fields category,checksum,trusted,type,url;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Deprecated Fields:

- `category`: DEPRECATED! Use `type` instead

Company Website

REQUEST PATH

`https://api.igdb.com/v4/company_websites`

field	type	description
category	Category Enum	DEPRECATED! Use `type` instead
checksum	uuid	Hash of the object
trusted	boolean	
type	Reference ID for Website Type	The website type associated with the website
url	String	The website address (URL) of the item

COMPANY WEBSITE ENUMS

category

name	value
official	1
wikia	2
wikipedia	3
facebook	4
twitter	5
twitch	6
instagram	8
youtube	9
iphone	10
ipad	11
android	12
steam	13
reddit	14
itch	15
epicgames	16
gog	17
discord	18
bluesky	19

Content Safety Rating

```
curl 'https://api.igdb.com/v4/content_safety_ratings' \
-d 'fields checksum,created_at,name,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Content Safety Rating

REQUEST PATH

`https://api.igdb.com/v4/content_safety_ratings`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
name	String	The name of the content safety rating
updated_at	datetime	The last date this entry was updated in the IGDB database

Content Safety Rating Dimension

```
curl 'https://api.igdb.com/v4/content_safety_rating_dimensions' \
-d 'fields checksum,content_safety_rating,created_at,description,updated_at,value;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Content Safety Rating Dimension

REQUEST PATH

`https://api.igdb.com/v4/content_safety_rating_dimensions`

field	type	description
checksum	uuid	Hash of the object
content_safety_rating	Reference ID for Content Safety Rating	The content safety rating
created_at	datetime	Date this was initially added to the IGDB database
description	String	The description of the content safety rating value
updated_at	datetime	The last date this entry was updated in the IGDB database
value	Integer	The content safety rating value

Cover

```
curl 'https://api.igdb.com/v4/covers' \
-d 'fields alpha_channel,animated,checksum,game,game_localization,height,image_id,url,width;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

The cover art of games

REQUEST PATH

`https://api.igdb.com/v4/covers`

field	type	description
alpha_channel	boolean	
animated	boolean	
checksum	uuid	Hash of the object
game	Reference ID for Game	The game this cover is associated with. If it is empty then this cover belongs to a game_localization, which can be found under game_localization field
game_localization	Reference ID for Game Localization	The game localization this cover might be associated with
height	Integer	The height of the image in pixels

field	type	description
image_id	String	The ID of the image used to construct an IGDB image link
url	String	The website address (URL) of the item
width	Integer	The width of the image in pixels

Date Format

```
curl 'https://api.igdb.com/v4/date_formats' \
-d 'fields checksum,created_at,format,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

The Date Format

REQUEST PATH

`https://api.igdb.com/v4/date_formats`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
format	String	
updated_at	datetime	The last date this entry was updated in the IGDB database

Event

```
curl 'https://api.igdb.com/v4/events' \
-d 'fields checksum,created_at,description,end_time,event_logo,event_networks,games,live_stream_url,name,slug,start_time,time_zone,updated_at,videos;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Gaming event like GamesCom, Tokyo Game Show, PAX or GSL

REQUEST PATH

`https://api.igdb.com/v4/events`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
description	String	The description of the event
end_time	datetime	End time of the event in UTC
event_logo	Reference ID for Event Logo	Logo of the event.
event_networks	Array of Event Network IDs	Urls associated with the event
games	Array of Game IDs	Games featured in the event
live_stream_url	String	URL to the livestream of the event.
name	String	The name of the event
slug	String	A url-safe, unique, lower-case version of the name
start_time	datetime	Start time of the event in UTC
time_zone	String	Timezone the event is in.
updated_at	datetime	The last date this entry was updated in the IGDB database
videos	Array of Game Video IDs	Trailers featured in the event

Event Logo

```
curl 'https://api.igdb.com/v4/event_logos' \
-d 'fields alpha_channel,animated,checksum,created_at,event,height,image_id,updated_at,url,width;' \
-H 'Client-ID: Client ID' \
```

```
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Logo for the event

REQUEST PATH

`https://api.igdb.com/v4/event_logos`

field	type	description
alpha_channel	boolean	
animated	boolean	
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
event	Reference ID for Event	The event associated with this logo.
height	Integer	The height of the image in pixels
image_id	String	The ID of the image used to construct an IGDB image link
updated_at	datetime	The last date this entry was updated in the IGDB database
url	String	The website address (URL) of the item
width	Integer	The width of the image in pixels

Event Network

```
curl 'https://api.igdb.com/v4/event_networks' \
-d 'fields checksum,created_at,event,network_type,updated_at,url;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Urls related to the event like twitter, facebook and youtube

REQUEST PATH

`https://api.igdb.com/v4/event_networks`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
event	Reference ID for Event	The event associated with this URL.
network_type	Reference ID for Network Type	Network type
updated_at	datetime	The last date this entry was updated in the IGDB database
url	String	The website address (URL) of the item

External Game

```
curl 'https://api.igdb.com/v4/external_games' \
-d 'fields category,checksum,countries,created_at,external_game_source,game,game_release_format,media,name,platform,uid,updated_at,url,year;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Deprecated Fields:

- `category`: DEPRECATED! Use `external_game_source` instead
- `media`: DEPRECATED! Use `game_release_format` instead

Game IDs on other services

REQUEST PATH

`https://api.igdb.com/v4/external_games`

field	type	description
category	Category Enum	DEPRECATED! Use `external_game_source` instead
checksum	uuid	Hash of the object
countries	Array of Integers	The ISO country code of the external game product.
created_at	datetime	Date this was initially added to the IGDB database
external_game_source	Reference ID for External Game Source	The source of the external game.
game	Reference ID for Game	The IGDB ID of the game
game_release_format	Reference ID for Game Release Format	The release format of the external game.
media	Media Enum	DEPRECATED! Use `game_release_format` instead
name	String	The name of the game according to the other service
platform	Reference ID for Platform	The platform of the external game product.
uid	String	The other services ID for this game
updated_at	datetime	The last date this entry was updated in the IGDB database
url	String	The website address (URL) of the item
year	Integer	The year in full (2018)

EXTERNAL GAME ENUMS

category

name	value
steam	1
gog	5
youtube	10
microsoft	11
apple	13
twitch	14
android	15
amazon_asin	20
amazon_luna	22
amazon_adg	23
epic_game_store	26
oculus	28
utomik	29
itch_io	30
xbox_marketplace	31
kartridge	32
playstation_store_us	36
focus_entertainment	37
xbox_game_pass_ultimate_cloud	54
gamejolt	55

media

name	value
digital	1
physical	2

External Game Source

```
curl 'https://api.igdb.com/v4/external_game_sources' \
-d 'fields checksum,created_at,name,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Sources for the external games

REQUEST PATH

`https://api.igdb.com/v4/external_game_sources`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
name	String	
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Franchise

```
curl 'https://api.igdb.com/v4/franchises' \
-d 'fields checksum,created_at,games,name,slug,updated_at,url;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

A list of video game franchises such as Star Wars.

REQUEST PATH

`https://api.igdb.com/v4/franchises`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
games	Array of Game IDs	The games that are associated with this franchise
name	String	The name of the franchise
slug	String	A url-safe, unique, lower-case version of the name
updated_at	datetime	The last date this entry was updated in the IGDB database
url	String	The website address (URL) of the item

Game

```
curl 'https://api.igdb.com/v4/games' \
-d 'fields age_ratings,aggregated_rating,aggregated_rating_count,alternative_names,artworks,bundles,category,checksum,collection,collections,cover,created_at,dlcs,expanded_games,expansions,external_games,first_release_date,follows,
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Deprecated Fields:

- `category`: DEPRECATED! Use `game_type` instead
- `collection`: DEPRECATED! Use `collections` instead
- `follows`: DEPRECATED! - To be removed
- `status`: DEPRECATED! Use `game_status` instead

Video Games!

REQUEST PATH

`https://api.igdb.com/v4/games`

field	type	description
age_ratings	Array of Age Rating IDs	The PEGI rating
aggregated_rating	Double	Rating based on external critic scores
aggregated_rating_count	Integer	Number of external critic scores

field	type	description
alternative_names	Array of Alternative Name IDs	Alternative names for this game
artworks	Array of Artwork IDs	Artworks of this game
bundles	Array of Game IDs	The bundles this game is a part of
category	Category Enum	DEPRECATED! Use `game_type` instead
checksum	uuid	Hash of the object
collection	Reference ID for Collection	DEPRECATED! Use `collections` instead
collections	Array of Collection IDs	The collections that this game is in.
cover	Reference ID for Cover	The cover of this game
created_at	datetime	Date this was initially added to the IGDB database
dlcs	Array of Game IDs	DLCs for this game
expanded_games	Array of Game IDs	Expanded games of this game
expansions	Array of Game IDs	Expansions of this game
external_games	Array of External Game IDs	External IDs this game has on other services
first_release_date	Unix Time Stamp	The first release date for this game
follows	Integer	DEPRECATED! - To be removed
forks	Array of Game IDs	Forks of this game
franchise	Reference ID for Franchise	The main franchise
franchises	Array of Franchise IDs	Other franchises the game belongs to
game_engines	Array of Game Engine IDs	The game engine used in this game
game_localizations	Array of Game Localization IDs	Supported game localizations for this game. A region can have at most one game localization for a given game
game_modes	Array of Game Mode IDs	Modes of gameplay
game_status	Reference ID for Game Status	The status of the games release
game_type	Reference ID for Game Type	The type of game
genres	Array of Genre IDs	Genres of the game
hypes	Integer	Number of follows a game gets before release
involved_companies	Array of Involved Company IDs	Companies who developed this game
keywords	Array of Keyword IDs	Associated keywords
language_supports	Array of Language Support IDs	Supported Languages for this game
multiplayer_modes	Array of Multiplayer Mode IDs	Multiplayer modes for this game
name	String	
parent_game	Reference ID for Game	If a DLC, expansion or part of a bundle, this is the main game or bundle
platforms	Array of Platform IDs	Platforms this game was released on
player_perspectives	Array of Player Perspective IDs	The main perspective of the player
ports	Array of Game IDs	Ports of this game
rating	Double	Average IGDB user rating
rating_count	Integer	Total number of IGDB user ratings
release_dates	Array of Release Date IDs	Release dates of this game
remakes	Array of Game IDs	Remakes of this game
remasters	Array of Game IDs	Remasters of this game
screenshots	Array of Screenshot IDs	Screenshots of this game
similar_games	Array of Game IDs	Similar games
slug	String	A url-safe, unique, lower-case version of the name
standalone_expansions	Array of Game IDs	Standalone expansions of this game
status	Status Enum	DEPRECATED! Use `game_status` instead
storyline	String	A short description of a games story
summary	String	A description of the game
tags	Array of Tag Numbers	Related entities in the IGDB API
themes	Array of Theme IDs	Themes of the game

field	type	description
total_rating	Double	Average rating based on both IGDB user and external critic scores
total_rating_count	Integer	Total number of user and external critic scores
updated_at	datetime	The last date this entry was updated in the IGDB database
url	String	The website address (URL) of the item
version_parent	Reference ID for Game	If a version, this is the main game
version_title	String	Title of this version (i.e Gold edition)
videos	Array of Game Video IDs	Videos of this game
websites	Array of Website IDs	Websites associated with this game

GAME ENUMS

category

name	value
main_game	0
dlc_addon	1
expansion	2
bundle	3
standalone_expansion	4
mod	5
episode	6
season	7
remake	8
remaster	9
expanded_game	10
port	11
fork	12
pack	13
update	14

status

name	value
released	0
alpha	2
beta	3
early_access	4
offline	5
cancelled	6
rumored	7
delisted	8

Game Content Safety Rating

```
curl 'https://api.igdb.com/v4/game_content_safety_ratings' \
-d 'fields checksum,content_safety_rating,content_safety_rating_dimension,created_at,game,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Game Content Safety Rating

REQUEST PATH

`https://api.igdb.com/v4/game_content_safety_ratings`

field	type	description
checksum	uuid	Hash of the object
content_safety_rating	Reference ID for Content Safety Rating	The content safety rating
content_safety_rating_dimension	Reference ID for Content Safety Rating Dimension	The content safety rating dimension
created_at	datetime	Date this was initially added to the IGDB database
game	Reference ID for Game	The IGDB ID of the game
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Game Engine

```
curl 'https://api.igdb.com/v4/game_engines' \
-d 'fields checksum,companies,created_at,description,logo,name,platforms,slug,updated_at,url;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Video game engines such as unreal engine.

REQUEST PATH

`https://api.igdb.com/v4/game_engines`

field	type	description
checksum	uuid	Hash of the object
companies	Array of Company IDs	Companies who used this game engine
created_at	datetime	Date this was initially added to the IGDB database
description	String	Description of the game engine
logo	Reference ID for Game Engine Logo	Logo of the game engine
name	String	Name of the game engine
platforms	Array of Platform IDs	Platforms this game engine was deployed on
slug	String	A url-safe, unique, lower-case version of the name
updated_at	datetime	The last date this entry was updated in the IGDB database
url	String	The website address (URL) of the item

Game Engine Logo

```
curl 'https://api.igdb.com/v4/game_engine_logos' \
-d 'fields alpha_channel,animated,checksum,height,image_id,url,width;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

The logos of game engines

REQUEST PATH

`https://api.igdb.com/v4/game_engine_logos`

field	type	description
alpha_channel	boolean	
animated	boolean	
checksum	uuid	Hash of the object
height	Integer	The height of the image in pixels
image_id	String	The ID of the image used to construct an IGDB image link
url	String	The website address (URL) of the item
width	Integer	The width of the image in pixels

Game Localization

```
curl 'https://api.igdb.com/v4/game_localizations' \
-d 'fields checksum,cover,created_at,game,name,region,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Game localization for a game

REQUEST PATH

`https://api.igdb.com/v4/game_localizations`

field	type	description
checksum	uuid	Hash of the object
cover	Reference ID for Cover	The cover of this game localization
created_at	datetime	Date this was initially added to the IGDB database
game	Reference ID for Game	The Game the localization belongs to
name	String	
region	Reference ID for Region	The Region of the localization
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Game Mode

```
curl 'https://api.igdb.com/v4/game_modes' \
-d 'fields checksum,created_at,name,slug,updated_at,url;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Single player, Multiplayer etc

REQUEST PATH

`https://api.igdb.com/v4/game_modes`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
name	String	The name of the game mode
slug	String	A url-safe, unique, lower-case version of the name
updated_at	datetime	The last date this entry was updated in the IGDB database
url	String	The website address (URL) of the item

Game Release Format

```
curl 'https://api.igdb.com/v4/game_release_formats' \
-d 'fields checksum,created_at,format,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

The format of the game release

REQUEST PATH

`https://api.igdb.com/v4/game_release_formats`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
format	String	
updated_at	datetime	The last date this entry was updated in the IGDB database

Game Status

```
curl 'https://api.igdb.com/v4/game_statuses' \
-d 'fields checksum,created_at,status,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

The release status of the game

REQUEST PATH

`https://api.igdb.com/v4/game_statuses`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
status	String	
updated_at	datetime	The last date this entry was updated in the IGDB database

Game Time To Beat

```
curl 'https://api.igdb.com/v4/game_time_to_beats' \
-d 'fields checksum,completely,count,created_at,game_id,hastily,normally,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Average time to beat times for a game.

REQUEST PATH

`https://api.igdb.com/v4/game_time_to_beats`

field	type	description
checksum	uuid	Hash of the object
completely	Integer	Average time (in seconds) to finish the game to 100% completion.
count	Integer	Total number of time to beat submissions for this game
created_at	datetime	Date this was initially added to the IGDB database
game_id	Integer	The ID of the game associated with the time to beat data
hastily	Integer	Average time (in seconds) to finish the game to its credits without spending notable time on extras such as side quests.
normally	Integer	Average time (in seconds) to finish the game while mixing in some extras such as side quests without being overly thorough.
updated_at	datetime	The last date this entry was updated in the IGDB database

Game Type

```
curl 'https://api.igdb.com/v4/game_types' \
-d 'fields checksum,created_at,type,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

The type that this game is

REQUEST PATH

`https://api.igdb.com/v4/game_types`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
type	String	
updated_at	datetime	The last date this entry was updated in the IGDB database

Game Version

```
curl 'https://api.igdb.com/v4/game_versions' \
-d 'fields checksum,created_at,features,game,games,updated_at,url;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Details about game editions and versions.

REQUEST PATH

`https://api.igdb.com/v4/game_versions`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
features	Array of Game Version Feature IDs	Features and descriptions of what makes each version/edition different from the main game
game	Reference ID for Game	The game these versions/editions are of
games	Array of Game IDs	Game Versions and Editions
updated_at	datetime	The last date this entry was updated in the IGDB database
url	String	The website address (URL) of the item

Game Version Feature

```
curl 'https://api.igdb.com/v4/game_version_features' \
-d 'fields category,checksum,description,position,title,values;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Features and descriptions of what makes each version/edition different from the main game

REQUEST PATH

`https://api.igdb.com/v4/game_version_features`

field	type	description
category	Category Enum	The category of the feature description
checksum	uuid	Hash of the object
description	String	The description of the feature
position	Integer	Position of this feature in the list of features
title	String	The title of the feature
values	Array of Game Version Feature Value IDs	The bool/text value of the feature

GAME VERSION FEATURE ENUMS

category

name	value
boolean	0
description	1

Game Version Feature Value

```
curl 'https://api.igdb.com/v4/game_version_feature_values' \
-d 'fields checksum,game,game_feature,included_feature,note;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

The bool/text value of the feature

REQUEST PATH

`https://api.igdb.com/v4/game_version_feature_values`

field	type	description
checksum	uuid	Hash of the object
game	Reference ID for Game	The version/edition this value refers to
game_feature	Reference ID for Game Version Feature	The id of the game feature
included_feature	Included Feature Enum	The boole value of this feature
note	String	The text value of this feature

GAME VERSION FEATURE VALUE ENUMS

included_feature

name	value
NOT_INCLUDED	0
INCLUDED	1
PRE_ORDER_ONLY	2

Game Video

```
curl 'https://api.igdb.com/v4/game_videos' \
-d 'fields checksum,game,name,video_id;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

A video associated with a game

REQUEST PATH

`https://api.igdb.com/v4/game_videos`

field	type	description
checksum	uuid	Hash of the object
game	Reference ID for Game	The game this video is associated with
name	String	The name of the video
video_id	String	The external ID of the video (YouTube Links)

Genre

```
curl 'https://api.igdb.com/v4/genres' \
-d 'fields checksum,created_at,name,slug,updated_at,url;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Genres of video game

REQUEST PATH

`https://api.igdb.com/v4/genres`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
name	String	
slug	String	A url-safe, unique, lower-case version of the name
updated_at	datetime	The last date this entry was updated in the IGDB database
url	String	The website address (URL) of the item

Involved Company

```
curl 'https://api.igdb.com/v4/involved_companies' \
-d 'fields checksum,company,created_at,developer,game,porting,publisher,supporting,updated_at;' \
```

```
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

REQUEST PATH

`https://api.igdb.com/v4/involved_companies`

field	type	description
checksum	uuid	Hash of the object
company	Reference ID for Company	
created_at	datetime	Date this was initially added to the IGDB database
developer	boolean	
game	Reference ID for Game	
porting	boolean	
publisher	boolean	
supporting	boolean	
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Keyword

```
curl 'https://api.igdb.com/v4/keywords' \
-d 'fields checksum,created_at,name,slug,updated_at,url;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Keywords are words or phrases that get tagged to a game such as “world war 2” or “steampunk”.

REQUEST PATH

`https://api.igdb.com/v4/keywords`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
name	String	
slug	String	A url-safe, unique, lower-case version of the name
updated_at	datetime	The last date this entry was updated in the IGDB database
url	String	The website address (URL) of the item

Language

```
curl 'https://api.igdb.com/v4/languages' \
-d 'fields checksum,created_at,locale,name,native_name,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Languages that are used in the Language Support endpoint.

REQUEST PATH

`https://api.igdb.com/v4/languages`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
locale	String	The combination of Language code and Country code
name	String	The English name of the Language
native_name	String	The Native Name of the Language
updated_at	datetime	The last date this entry was updated in the IGDB database

Language Support

```
curl 'https://api.igdb.com/v4/language_supports' \
-d 'fields checksum,created_at,game,language,language_support_type,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Games can be played with different languages for voice acting, subtitles, or the interface language.

REQUEST PATH

`https://api.igdb.com/v4/language_supports`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
game	Reference ID for Game	
language	Reference ID for Language	
language_support_type	Reference ID for Language Support Type	
updated_at	datetime	The last date this entry was updated in the IGDB database

Language Support Type

```
curl 'https://api.igdb.com/v4/language_support_types' \
-d 'fields checksum,created_at,name,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Language Support Types contains the identifiers for the support types that Language Support uses.

REQUEST PATH

`https://api.igdb.com/v4/language_support_types`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
name	String	
updated_at	datetime	The last date this entry was updated in the IGDB database

Multiplayer Mode

```
curl 'https://api.igdb.com/v4/multiplayer_modes' \
-d 'fields campaigncoop,checksum,dropin,game,lancoop,offlinecoop,offlinecoopmax,offlinemax,onlinecoop,onlinecoopmax,onlinemax,platform,splitscreen,splitscreenonline;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Data about the supported multiplayer types

REQUEST PATH

`https://api.igdb.com/v4/multiplayer_modes`

field	type	description
campaigncoop	boolean	True if the game supports campaign coop
checksum	uuid	Hash of the object
dropin	boolean	True if the game supports drop in/out multiplayer
game	Reference ID for Game	The game this multiplayer mode is associated with
lancoop	boolean	True if the game supports LAN coop
offlinecoop	boolean	True if the game supports offline coop
offlinecoopmax	Integer	Maximum number of offline players in offline coop

field	type	description
offlinemax	Integer	Maximum number of players in offline multiplayer
onlinecoop	boolean	True if the game supports online coop
onlinecoopmax	Integer	Maximum number of online players in online coop
onlinemax	Integer	Maximum number of players in online multiplayer
platform	Reference ID for Platform	The platform this multiplayer mode refers to
splitscreen	boolean	True if the game supports split screen, offline multiplayer
splitscreenonline	boolean	True if the game supports split screen, online multiplayer

---

Network Type

```
curl 'https://api.igdb.com/v4/network_types' \
-d 'fields checksum,created_at,event_networks,name,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Social networks related to the event like twitter, facebook and youtube

REQUEST PATH

`https://api.igdb.com/v4/network_types`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
event_networks	Array of Event Network IDs	Urls associated with the event type
name	String	
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Platform

```
curl 'https://api.igdb.com/v4/platforms' \
-d 'fields abbreviation,alternative_name,category,checksum,created_at,generation,name,platform_family,platform_logo,platform_type,slug,summary,updated_at,url,versions,websites;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Deprecated Fields:

- `category`: DEPRECATED! Use `platform_type` instead

The hardware used to run the game or game delivery network

REQUEST PATH

`https://api.igdb.com/v4/platforms`

field	type	description
abbreviation	String	An abbreviation of the platform name
alternative_name	String	An alternative name for the platform
category	Category Enum	DEPRECATED! Use `platform_type` instead
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
generation	Integer	The generation of the platform
name	String	The name of the platform
platform_family	Reference ID for Platform Family	The family of platforms this one belongs to
platform_logo	Reference ID for Platform Logo	The logo of the first Version of this platform

field	type	description
platform_type	Reference ID for Platform Type	The type of the platform
slug	String	A url-safe, unique, lower-case version of the name
summary	String	The summary of the first Version of this platform
updated_at	datetime	The last date this entry was updated in the IGDB database
url	String	The website address (URL) of the item
versions	Array of Platform Version IDs	Associated versions of this platform
websites	Array of Platform Website IDs	The main website

PLATFORM ENUMS

category

name	value
console	1
arcade	2
platform	3
operating_system	4
portable_console	5
computer	6

Platform Family

```
curl 'https://api.igdb.com/v4/platform_families' \
-d 'fields checksum,name,slug;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

A collection of closely related platforms

REQUEST PATH

`https://api.igdb.com/v4/platform_families`

field	type	description
checksum	uuid	Hash of the object
name	String	The name of the platform family
slug	String	A url-safe, unique, lower-case version of the name

---

Platform Logo

```
curl 'https://api.igdb.com/v4/platform_logos' \
-d 'fields alpha_channel,animated,checksum,height,image_id,url,width;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Logo for a platform

REQUEST PATH

`https://api.igdb.com/v4/platform_logos`

field	type	description
alpha_channel	boolean	
animated	boolean	
checksum	uuid	Hash of the object
height	Integer	The height of the image in pixels
image_id	String	The ID of the image used to construct an IGDB image link
url	String	The website address (URL) of the item
width	Integer	The width of the image in pixels

Platform Type

```
curl 'https://api.igdb.com/v4/platform_types' \
-d 'fields checksum,created_at,name,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Types of platforms

REQUEST PATH

`https://api.igdb.com/v4/platform_types`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
name	String	
updated_at	datetime	The last date this entry was updated in the IGDB database

Platform Version

```
curl 'https://api.igdb.com/v4/platform_versions' \
-d 'fields checksum,companies,connectivity,cpu,graphics,main_manufacturer,media,memory,name,os,output,platform_logo,platform_version_release_dates,resolutions,slug,sound,storage,summary,url;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

REQUEST PATH

`https://api.igdb.com/v4/platform_versions`

field	type	description
checksum	uuid	Hash of the object
companies	Array of Platform Version Company IDs	Who developed this platform version
connectivity	String	The network capabilities
cpu	String	The integrated control processing unit
graphics	String	The graphics chipset
main_manufacturer	Reference ID for Platform Version Company	Who manufactured this version of the platform
media	String	The type of media this version accepted
memory	String	How much memory there is
name	String	The name of the platform version
os	String	The operating system installed on the platform version
output	String	The output video rate
platform_logo	Reference ID for Platform Logo	The logo of this platform version
platform_version_release_dates	Array of Platform Version Release Date IDs	When this platform was released
resolutions	String	The maximum resolution
slug	String	A url-safe, unique, lower-case version of the name
sound	String	The sound chipset
storage	String	How much storage there is
summary	String	A short summary
url	String	The website address (URL) of the item

Platform Version Company

```
curl 'https://api.igdb.com/v4/platform_version_companies' \
-d 'fields checksum,comment,company,developer,manufacturer;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

A platform developer

REQUEST PATH

`https://api.igdb.com/v4/platform_version_companies`

field	type	description
checksum	uuid	Hash of the object
comment	String	Any notable comments about the developer
company	Reference ID for Company	The company responsible for developing this platform version
developer	boolean	
manufacturer	boolean	

Platform Version Release Date

```
curl 'https://api.igdb.com/v4/platform_version_release_dates' \
-d 'fields category,checksum,created_at,date,date_format,human,m,platform_version,region,release_region,updated_at,y;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Deprecated Fields:

- `category`: DEPRECATED! Use `date_format` instead
- `region`: DEPRECATED! Use `release_region` instead

A handy endpoint that extends platform release dates. Used to dig deeper into release dates, platforms and versions.

REQUEST PATH

`https://api.igdb.com/v4/platform_version_release_dates`

field	type	description
category	Category Enum	DEPRECATED! Use `date_format` instead
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
date	Unix Time Stamp	The release date
date_format	Reference ID for Date Format	The format of the change date
human	String	A human readable version of the release date
m	Integer	The month as an integer starting at 1 (January)
platform_version	Reference ID for Platform Version	The platform this release date is for
region	Region Enum	DEPRECATED! Use `release_region` instead
release_region	Reference ID for Release Date Region	The region of the release
updated_at	datetime	The last date this entry was updated in the IGDB database
y	Integer	The year in full (2018)

PLATFORM VERSION RELEASE DATE ENUMS

category

name	value
YYYYMMMMDD	0
YYYYMMMM	1
YYYY	2
YYYYQ1	3
YYYYQ2	4
YYYYQ3	5
YYYYQ4	6

name	value
TBD	7

region

name	value
europe	1
north_america	2
australia	3
new_zealand	4
japan	5
china	6
asia	7
worldwide	8
korea	9
brazil	10

Platform Website

```
curl 'https://api.igdb.com/v4/platform_websites' \
-d 'fields category,checksum,trusted,type,url;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Deprecated Fields:

- `category`: DEPRECATED! Use `type` instead

The main website for the platform

REQUEST PATH

`https://api.igdb.com/v4/platform_websites`

field	type	description
category	Category Enum	DEPRECATED! Use `type` instead
checksum	uuid	Hash of the object
trusted	boolean	
type	Reference ID for Website Type	The website type associated with the website
url	String	The website address (URL) of the item

PLATFORM WEBSITE ENUMS

category

name	value
official	1
wikia	2
wikipedia	3
facebook	4
twitter	5
twitch	6
instagram	8
youtube	9
iphone	10
ipad	11
android	12

name	value
steam	13
reddit	14
discord	15
google_plus	16
tumblr	17
linkedin	18
pinterest	19
soundcloud	20

Player Perspective

```
curl 'https://api.igdb.com/v4/player_perspectives' \
-d 'fields checksum,created_at,name,slug,updated_at,url;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Player perspectives describe the view/perspective of the player in a video game.

REQUEST PATH

`https://api.igdb.com/v4/player_perspectives`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
name	String	
slug	String	A url-safe, unique, lower-case version of the name
updated_at	datetime	The last date this entry was updated in the IGDB database
url	String	The website address (URL) of the item

Popularity Primitive

```
curl 'https://api.igdb.com/v4/popularity_primitives' \
-d 'fields calculated_at,checksum,created_at,external_popularity_source,game_id,popularity_source,popularity_type,updated_at,value;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Deprecated Fields:

- `popularity_source`: DEPRECATED! Use `external_popularity_source` instead

Popularity Primitives, this endpoint lists available primitives with their source and popularity type.

REQUEST PATH

`https://api.igdb.com/v4/popularity_primitives`

field	type	description
calculated_at	datetime	
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
external_popularity_source	Reference ID for External Game Source	
game_id	Integer	
popularity_source	Popularity Source Enum	DEPRECATED! Use `external_popularity_source` instead
popularity_type	Reference ID for Popularity Type	

field	type	description
updated_at	datetime	The last date this entry was updated in the IGDB database
value	bigdecimal	

POPULARITY PRIMITIVE ENUMS

popularity_source

name	value
igdb	121

Popularity Type

```
curl 'https://api.igdb.com/v4/popularity_types' \
-d 'fields checksum,created_at,external_popularity_source,name,popularity_source,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Deprecated Fields:

- `popularity_source`: DEPRECATED! Use `external_popularity_source` instead

This describes what type of popularity primitive or popularity indicator the popularity value is.

REQUEST PATH

`https://api.igdb.com/v4/popularity_types`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
external_popularity_source	Reference ID for External Game Source	
name	String	
popularity_source	Popularity Source Enum	DEPRECATED! Use `external_popularity_source` instead
updated_at	datetime	The last date this entry was updated in the IGDB database

POPULARITY TYPE ENUMS

popularity_source

name	value
steam	1
igdb	121

Region

```
curl 'https://api.igdb.com/v4/regions' \
-d 'fields category,checksum,created_at,identifier,name,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Region for game localization

REQUEST PATH

`https://api.igdb.com/v4/regions`

field	type	description
category	String	This can be either ’locale’ or ‘continent’
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
identifier	String	This is the identifier of each region

field	type	description
name	String	
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Release Date

```
curl 'https://api.igdb.com/v4/release_dates' \
-d 'fields category,checksum,created_at,d,date,date_format,game,human,m,platform,region,release_region,status,updated_at,y;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Deprecated Fields:

- `category`: DEPRECATED! Use `date_format` instead
- `region`: DEPRECATED! Use `release_region` instead

A handy endpoint that extends game release dates. Used to dig deeper into release dates, platforms and versions.

REQUEST PATH

`https://api.igdb.com/v4/release_dates`

field	type	description
category	Category Enum	DEPRECATED! Use `date_format` instead
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
d	Integer	The day of the month as an integer
date	datetime	The date of the release
date_format	Reference ID for Date Format	The format of the change date
game	Reference ID for Game	
human	String	A human readable representation of the date
m	Integer	The month as an integer starting at 1 (January)
platform	Reference ID for Platform	The platform of the release
region	Region Enum	DEPRECATED! Use `release_region` instead
release_region	Reference ID for Release Date Region	The region of the release
status	Reference ID for Release Date Status	The status of the release.
updated_at	datetime	The last date this entry was updated in the IGDB database
y	Integer	The year in full (2018)

RELEASE DATE ENUMS

category

name	value
YYYYMMMMDD	0
YYYYMMMM	1
YYYY	2
YYYYQ1	3
YYYYQ2	4
YYYYQ3	5
YYYYQ4	6
TBD	7

region

name	value
europe	1

name	value
north_america	2
australia	3
new_zealand	4
japan	5
china	6
asia	7
worldwide	8
korea	9
brazil	10

Release Date Region

```
curl 'https://api.igdb.com/v4/release_date_regions' \
-d 'fields checksum,created_at,region,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Regions for release dates

REQUEST PATH

`https://api.igdb.com/v4/release_date_regions`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
region	String	
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Release Date Status

```
curl 'https://api.igdb.com/v4/release_date_statuses' \
-d 'fields checksum,created_at,description,name,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

An endpoint to provide definition of all of the current release date statuses.

REQUEST PATH

`https://api.igdb.com/v4/release_date_statuses`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
description	String	The description of the release date status.
name	String	The name of the release date status.
updated_at	datetime	The last date this entry was updated in the IGDB database

---

Screenshot

```
curl 'https://api.igdb.com/v4/screenshots' \
-d 'fields alpha_channel,animated,checksum,game,height,image_id,url,width;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Screenshots of games

REQUEST PATH

`https://api.igdb.com/v4/screenshots`

field	type	description
alpha_channel	boolean	
animated	boolean	
checksum	uuid	Hash of the object
game	Reference ID for Game	The game this video is associated with
height	Integer	The height of the image in pixels
image_id	String	The ID of the image used to construct an IGDB image link
url	String	The website address (URL) of the item
width	Integer	The width of the image in pixels

Search

```
curl 'https://api.igdb.com/v4/search' \
-d 'fields alternative_name,character,checksum,collection,company,description,game,name,platform,published_at,test_dummy,theme;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

REQUEST PATH

`https://api.igdb.com/v4/search`

field	type	description
alternative_name	String	
character	Reference ID for Character	
checksum	uuid	Hash of the object
collection	Reference ID for Collection	
company	Reference ID for Company	
description	String	
game	Reference ID for Game	
name	String	
platform	Reference ID for Platform	
published_at	Unix Time Stamp	The date this item was initially published by the third party
test_dummy	Reference ID for Test Dummy	
theme	Reference ID for Theme	

Theme

```
curl 'https://api.igdb.com/v4/themes' \
-d 'fields checksum,created_at,name,slug,updated_at,url;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Video game themes

REQUEST PATH

`https://api.igdb.com/v4/themes`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
name	String	
slug	String	A url-safe, unique, lower-case version of the name
updated_at	datetime	The last date this entry was updated in the IGDB database

field	type	description
url	String	The website address (URL) of the item

Website

```
curl 'https://api.igdb.com/v4/websites' \
-d 'fields category,checksum,game,trusted,type,url;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Deprecated Fields:

- `category`: DEPRECATED! Use `type` instead

A website url, usually associated with a game

REQUEST PATH

`https://api.igdb.com/v4/websites`

field	type	description
category	Category Enum	DEPRECATED! Use `type` instead
checksum	uuid	Hash of the object
game	Reference ID for Game	The game this website is associated with
trusted	boolean	
type	Reference ID for Website Type	The website type associated with the website
url	String	The website address (URL) of the item

WEBSITE ENUMS

category

name	value
official	1
wikia	2
wikipedia	3
facebook	4
twitter	5
twitch	6
instagram	8
youtube	9
iphone	10
ipad	11
android	12
steam	13
reddit	14
itch	15
epicgames	16
gog	17
discord	18
bluesky	19

Website Type

```
curl 'https://api.igdb.com/v4/website_types' \
```

```
-d 'fields checksum,created_at,type,updated_at;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

A website type, usually the name of the website

REQUEST PATH

`https://api.igdb.com/v4/website_types`

field	type	description
checksum	uuid	Hash of the object
created_at	datetime	Date this was initially added to the IGDB database
type	String	The website type
updated_at	datetime	The last date this entry was updated in the IGDB database

---

PopScore

Introducing IGDB PopScore - Your key to tracking the latest trends in the video game market.

Accessible through our API, IGDB PopScore offers “popularity primitives” from sources like IGDB page visits and list additions, with more sources and primitives coming in the future.

With IGDB PopScore, you can define and create your own trend and popularity indicators using individual primitives or by combining them to fit your needs. Updated every 24 hours, our data ensures you always have the latest insights into the gaming market covering all platforms. Stay ahead of the curve, uncover emerging trends, and improve your data-driven decisions by checking out IGDB PopScore today

---

Currently available PopScore primitives

1. **IGDB Visits**: Game page visits on IGDB.com.
2. **“IGDB Want to Play”**: Additions to IGDB.com users’ “Want to Play” lists.
3. **“IGDB Playing”**: Additions to IGDB.com users’ “Playing” lists.
4. **“IGDB Played”**: Additions to IGDB.com users’ “Played” lists.
5. **“Steam 24hr Peak Players”**: Peak CCU over the past 24 hours.
6. **“Steam Postitive Reviews”**: Total number of positive reviews
7. **“Steam Negative Reviews”**: Total number of negative reviews.
8. **“Steam Total Reviews”**: Total number of reviews (positive and negative).

We’re constantly refining and expanding IGDB PopScore to ensure you have access to the most up-to-date and relevant data as possible. Stay tuned for exciting new features and data points as we continue to push the boundaries of what’s possible in the realm of video game trend analysis.

You can check the current popularity types we support. to do so feel free to query the api /popularity-types. More details can be found under Popularity Types

---

How to use Popularity API

Start by discovering the available popularity types mentioned above

```
curl 'https://api.igdb.com/v4/popularity_types' \
-d 'fields name,popularity_source,updated_at; sort id asc;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Result:

```
[
    {
        "id": 1,
        "popularity_source": 121,
        "name": "Visits",
    },
    {
        "id": 2,
        "popularity_source": 121,
        "name": "Want to Play",
    },
    {
        "id": 3,
        "popularity_source": 121,
        "name": "Playing",
    },
    {
        "id": 4,
```

```
        "popularity_source": 121,
        "name": "Played",
    },
    {
        "id": 5,
        "popularity_source": 1,
        "name": "24hr Peak Players",
    },
    {
        "id": 6,
        "popularity_source": 1,
        "name": "Postitive Reviews",
    },
    {
        "id": 7,
        "popularity_source": 1,
        "name": "Negative Reviews",
    },
    {
        "id": 8,
        "popularity_source": 1,
        "name": "Total Reviews",
    }
]
```

Below you can find some example use case of how you can use popularity primitives

USE CASE 1:

As an API user I'd like to fetch the top 10 games based on IGDB visits.

Query:

```
curl 'https://api.igdb.com/v4/popularity_primitives' \
-d 'fields game_id,value,popularity_type; sort value desc; limit 10; where popularity_type = 1;' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Accept: application/json'
```

Result:

```
[
  {
    "id": 15456,
    "game_id": 121,
    "popularity_type": 1,
    "value": 0.006605335786569
  },
  {
    "id": 16211,
    "game_id": 1244,
    "popularity_type": 1,
    "value": 0.005482980680773
  },
...
  {
    "id": 33353,
    "game_id": 135400,
    "popularity_type": 1,
    "value": 0.002741490340386
  },
  {
    "id": 17317,
    "game_id": 3277,
    "popularity_type": 1,
    "value": 0.002695492180313
  }
]
```

In the preview of the result above you can see that the top game is the game with IGDB ID 121. https://www.igdb.com/games/minecraft # ID 121

USE CASE 2:

Define your own trend metrics. For example, by combining two or more primitives with equal or different weight ratios, you can create a unique popularity metric and ensure it fits your needs.

In our use case here we want to combine "Want to play" with a weight of 0.6 and "Playing" with a remaining weight of 0.4.

For each game we would need to calculate this in a matter of: 0.6 * ("Want to play" -> value) + 0.4 * ("Playing" -> value) = custom_popularity_value

To do that you would have to pull the values for each popularity type in your own system and then combine them accordingly.

To pull the date you'll need locally a data structure similar to the existing popularity primitive where it will have the attributes.

game_id, popularity_type, value The Want to Play maps to the popularity_type = 2 while Playing = 3

An example SQL query that would give you the top 100 of your custom_popularity would be

```
SELECT igdb_game_id,
       SUM(CASE WHEN popularity_type_id = '2' THEN value ELSE 0 END) AS value1,
       SUM(CASE WHEN popularity_type_id = '3' THEN value ELSE 0 END) AS value2,
       (
           0.6 * SUM(CASE WHEN popularity_type_id = '2' THEN value ELSE 0 END) +
           0.4 * SUM(CASE WHEN popularity_type_id = '3' THEN value ELSE 0 END)
           )  AS weighted_score
FROM popularity_primitives
GROUP BY igdb_game_id
ORDER BY weighted_score DESC LIMIT 10;
```

You can find detailed API documentation under Popularity Types and Popularity Primitives

---

Webhooks

WHAT?

Webhooks allow us to push data to you when it is added, updated, or deleted. Instead of polling the API for changes, you can listen on your own HTTP endpoint (Webhook) and we will deliver the data to you.

Using Webhooks will ensure that your data is always up to date!

```
curl -X POST 'https://api.igdb.com/v4/ENDPOINT/webhooks/' \
-d 'url=YOUR_WEBHOOK_URL&secret=YOUR_WEBHOOK_SECRET&method=create' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token' \
-H 'Content-Type: application/x-www-form-urlencoded'
```

HOW TO REGISTER YOUR WEBHOOK

To register a new webhook you need to send a `POST` request to `ENDPOINT/webhooks`. The endpoint is required as it specifies what type of data you want from your webhook.

The post request should contain `x-www-form-urlencoded` body with three parameters:

- `url` this is your prepared url that is ready to accept data from us.
- `method` this is the type of data you are expecting to your url, there are three types of methods
  - `create`, sends new items from the API
  - `delete`, sends deleted items from the API
  - `update`, sends updated items from the API
- `secret` this is your "secret" password for your webhook. Every request from the webhook service will have your secret in the header called `X-Secret`.

```
// Example response upon registering your webhook
{
    "id": WEBHOOK_ID, // A unique ID for the webhook
    "url": "YOUR_WEBHOOK_URL", // Your chosen URL
    "category": 1, // Based on the endpoint you chose
    "sub_category": 0, // Based on your method (can be 0, 1, 2)
    "active": true, // Is the webhook currently active
    "api_key": "YOUR_CLIENT_ID", // Displays the api key the webhook is connected to
    "secret": "YOUR_SECRET", // Your chosen secret
    "created_at": "2018-11-25T23:00:00.000Z", // Created at date
    "updated_at": "2018-11-25T23:00:00.000Z" // Updated at date
}
```

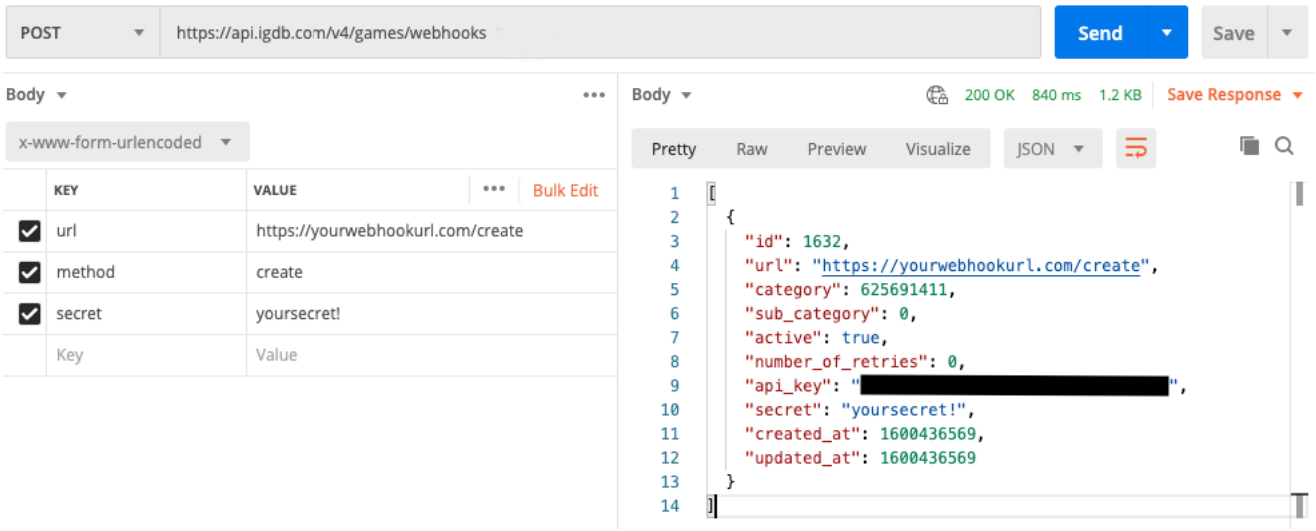

Registering your webhook in Postman Once your webhook is registered you will receive a response with the new webhook object

```
// Delete Response from Webhook
{
  "id": "1234"
}
```

That's it!
The data will now be sent to your webhook in the body of a post request. The data is a single json object representing an **unexpanded entity**.
Webhooks from **DELETE** do not send the entire object but only the **ID**.

> **Tip!** Always validate your received data with you secret!

Webhooks have an `active` field, as you can see in the JSON response above, The service will keep the webhook active as long as the webhook url is capable of receiving data from the service. If the url fails **5** times the webhook will be set to inactive (`active: false`) and the service will stop to send data to this webhook.

Reactivating the webhook is done by re-registering it, this will update the `active` status to true.

> **Tip!** Re-register your webhook on service start, to make sure it's always active!

```
# Get ALL registered Webhooks
curl 'https://api.igdb.com/v4/webhooks/' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token'
```

VIEWING YOUR WEBHOOKS

You can always get information about your webhooks from the API. To get ALL of your registered webhooks simply send a `GET` request to `/webhooks`, without the endpoint. This will return a JSON array of your webhooks

To get information about a specific webhook you can make a `GET` request with the webhook id to `/webhooks/WEBHOOK_ID`, without the endpoint. This will return the webhook of that id.

```
curl -X DELETE 'https://api.igdb.com/v4/webhooks/WEBHOOK_ID' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token'
```

REMOVING A WEBHOOK

To remove your existing webhook you need to send a `DELETE` request to `/webhooks/WEBHOOK_ID`, without the endpoint. The Webhook id is returned during the registration process or can be found with a `GET` request to `/webhooks/`.

The `DELETE` request will receive the deleted webhook as confirmation.

```
curl -X POST 'https://api.igdb.com/v4/ENDPOINT/webhooks/test/WEBHOOK_ID?entityId=ENTITY_ID' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token'
```

TESTING

To make sure you have everything setup just right we have a test endpoint for the webhook service. This endpoint will send an object of your choosing to your newly created webhook.

Send a `POST` request to `ENDPOINT/webhooks/test/WEBHOOK_ID?entityId=ENTITY_ID`. The entity id is the id of the object from the endpoint you wish to test with, example:

`POST` to `games/webhooks/test/42?entityId=1337`:
This request will send the game object with id 1337 to your webhook url.

HANDLING WEBHOOKS ON YOUR END

When recieveing the webhook message on your end what we expect is to recieve a `200 OK` back within **15 seconds**. If the endpoint takes longer than 15 seconds to respond the event will be deemed as a failed event, fail 5 times and the webhook will be set to inactive.

CORS Proxy

CORS

If you intend to use our API from your website you will encounter an issue with security; namely CORS Cross-Origin Resource Sharing.

There are security mechanisms in place by all major browsers to stop websites from accessing other domains without getting explicit permission. This is done through HTTP headers. So, for example, amazinggameswebsite.com cannot access api.igdb.com without us explicitly stating in the HTTP headers (Access-Control-Allow-Origin) that they have permission.

We do not offer the configuration of these headers as a service, so any browser-based javascript and mobile javascript frameworks will not be able to communicate directly with the IGDB API.

WORKAROUND

See the guide for setting up a proxy or set up a proxy using CORS Anywhere

---

Proxy

There are a number of reasons why you may wish to proxy requests to the IGDB API.

- To have a backend that keeps track of your Oauth Application Tokens
- Caching requests to the API for better performance
- Enable application logging to track/debug usage
- Enable CORS between the proxy and applications

HOW DO I SET UP A PROXY?

Proxies can be complex, but to get you started we have a simple guide to get you up and running quickly through AWS.

We have provided a single link that will let you deploy an AWS Api Gateway in your own AWS account that will serve as a proxy. This Stack will also handle your Access Token rotations automatically for you, so you don't need to think about that.

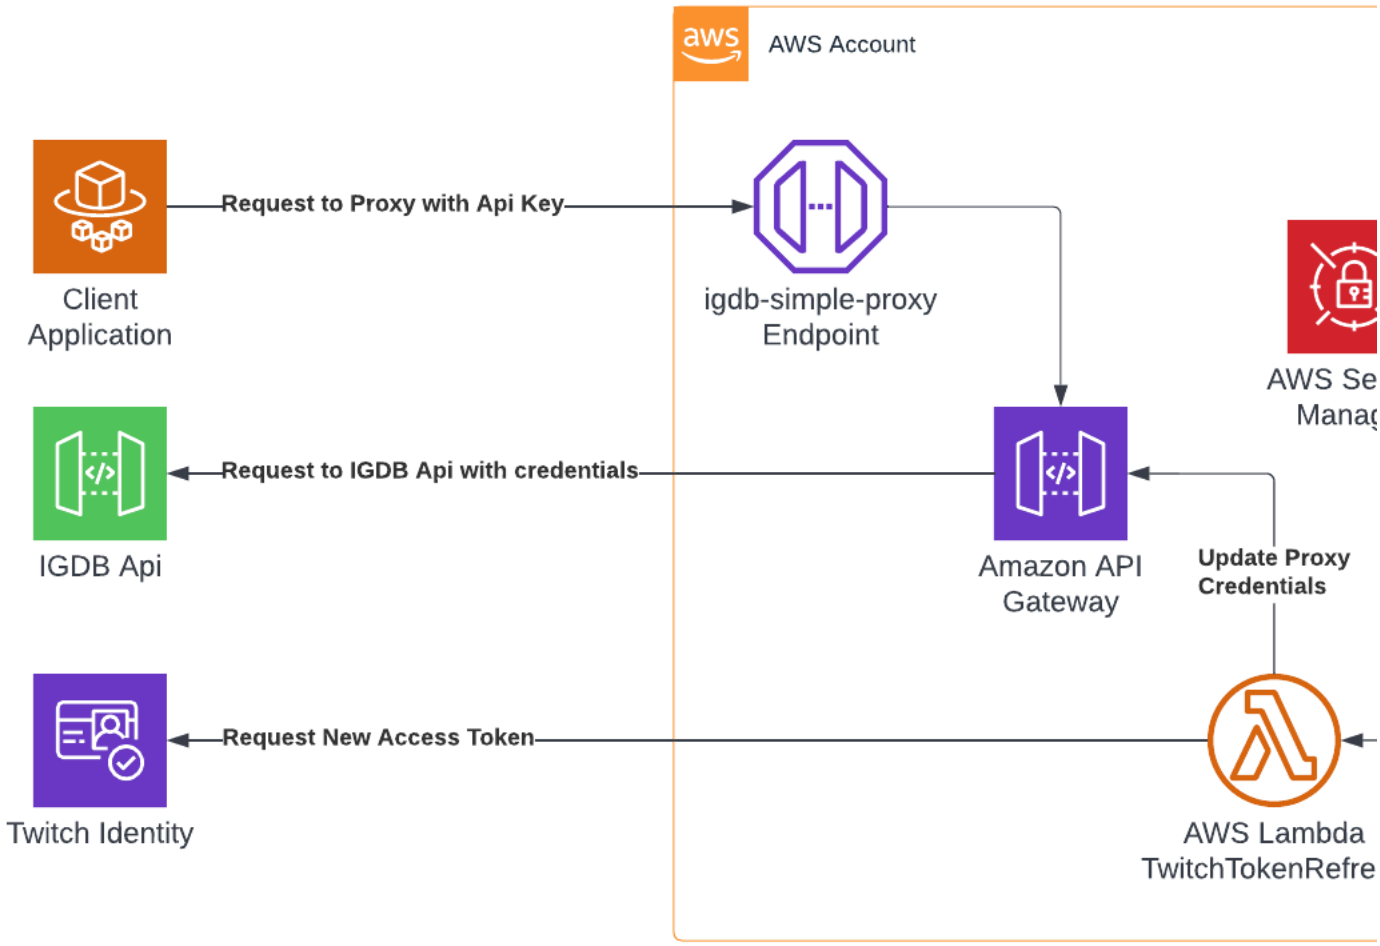

WHAT WILL IT COST?

AWS has a very generous free-tier for new users and the services used in the provided solution (Api Gateway, Secrets Manager, Lambda). Please use the AWS Pricing Calculator to gauge how much this will cost you before setting up your Stack.

STACK SETUP

Prerequisites: You need to have an AWS account with permissions to deploy CloudFormation stacks.

1. Click this link to get started.
2. Go over the Stack Details
    - You have to agree to the terms and conditions.
    - You have to fill in your Twitch Application Credentials
    - It's recommended to protect your proxy by enabling Api Keys
    - **NOTE:** Enabling Caching will come with extra costs as this is NOT covered by the Free-tier
    - **NOTE:** Enabling CORS will 'break' Protobuf responses, some libraries might not work.
3. Click Next
4. Configure Stack Options - Nothing is required here, you can click Next
5. Verify Settings, click the checkbox at the bottom, then click "Create Stack"
6. You will now see the "Stack Details" screen, hit the refresh arrow button on the right until your stack name on the left says "UPDATE_COMPLETE"
7. Click on the "Outputs" tab to get the URL to your new proxy.
    - The "Resources" tab summarises all the services deployed on your account.
    - The "Template" tab displays the template used for deployment.
8. You can now post requests to your URL and it will proxy to our API
    - If you enabled Api Keys you will need to specify the header `x-api-key` and the key can be found via a link through the "Resources" tab for "ApiDefaultKey"

Important Note: The url generated will end in `production`, so you will want to post to `https://<your-api-gateway-unique-id>.execute-api.us-west-2.amazonaws.com/production/v4/games`

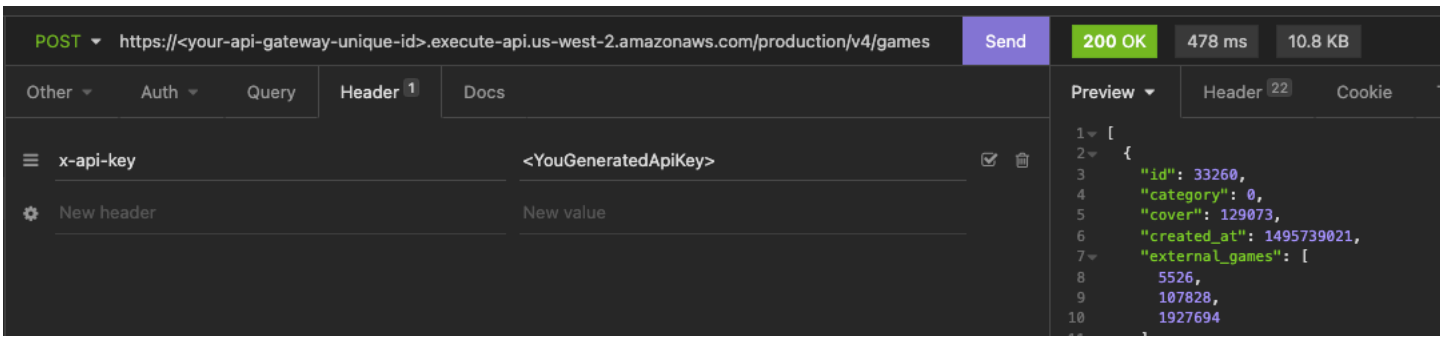

WHAT'S NEXT?

You can do a lot of things via API Gateway.

- You can improve the security of your proxy by creating another sort of Authentication, to prevent others from using up your RPS quota.
- You can also setup your own Domain name and SSL with Route53

- You can modify the path of the proxy to have it serve as the front-end to your own APIs
    - Perform a calculation? Lambda Integration
    - Just want to store some records? DynamoDB Integration
    - Want users to be able to upload/download files? S3 Integration
- Enable request logging

ALTERNATIVES

- CORS: Setup a proxy using CORS Anywhere

Reference

Images

> **Note:** Images that are removed or replaced from IGDB.com exist for **30 days** before they are removed. Keep that in mind when designing cache logic.

EXAMPLES

- Address:
    - `https://api.igdb.com/v4/games/`
- Body:
    - `fields screenshots.*;`
      `where id = 1942;`

Here we retrieve the image properties of the game with the id “1942”

```
[{
    "id": 1942,
    "screenshots": [{
            "id": 9742,
            "game": 1942,
            "height": 1080,
            "image_id": "mnljdjtrh44x4snmierh",
            "url": "//images.igdb.com/igdb/image/upload/t_thumb/mnljdjtrh44x4snmierh.jpg",
            "width": 1920
        },
        {
            "id": 9743,
            "game": 1942,
            "height": 1080,
            "image_id": "em1y2ugcwy2myuhvb9db",
            "url": "//images.igdb.com/igdb/image/upload/t_thumb/em1y2ugcwy2myuhvb9db.jpg",
            "width": 1920
        }
    ]
}]
```

Response example on the right –>

Image url structure:

`https://images.igdb.com/igdb/image/upload/t_screenshot_med_2x/dfgkfivjrhcksyymh9vw.jpg`

Break down:

`https://images.igdb.com/igdb/image/upload/t_{size}/{hash}.jpg`

`size` is one of the interchangeable size types listed below. `hash` is the id of the image. The image sizes are all maximum size but by appending `_2x` to any size, you can get retina (DPR 2.0) sizes (`cover_small_2x`).

Name	Size	Extra
cover_small	90 x 128	Fit
screenshot_med	569 x 320	Lfill, Center gravity
cover_big	264 x 374	Fit
logo_med	284 x 160	Fit
screenshot_big	889 x 500	Lfill, Center gravity
screenshot_huge	1280 x 720	Lfill, Center gravity
thumb	90 x 90	Thumb, Center gravity
micro	35 x 35	Thumb, Center gravity
720p	1280 x 720	Fit, Center gravity
1080p	1920 x 1080	Fit, Center gravity

Fields

WHAT?

Fields are properties of an entity. For example, a Game field would be `genres` or `release_dates`. Some fields have properties of their own, for example, the `genres` field has the property `name`.

WHERE?

Fields can be used on any entity that has sub-properties such as Games, Companies, People etc.

HOW?

Fields are requested in a comma separated list. For example, to get some information for some Games, Genres, Themes or anything else, you could request it like this:

Apicalypse

```
where id = (4356,189,444);
fields name,release_dates,genres.name,rating
```

Legacy Parameters

```
/games/4356,189,444?fields=name,release_dates,genres.name,rating
```

Note in Apicalypse the `name` property of `genres` can be accessed directly with a dot (genres.name).

A full list of fields can be obtained by passing a `*` as a field. Alternatively you can use the `meta` postfix: `/games/meta` to get a list of all fields.

SHORTHAND

Another way of writing fields is to use the shorthand **f** which achieves the same result.

```
f name,release_dates,genres.name,rating;
w id = (4356,189,444);
```

Exclude

WHAT?

Exclude is a complement to the regular fields which allows you to request all fields with the exception of any numbers of fields specified with exclude.

HOW?

Fields to be excluded are specified as a comma separated list. For example, to get all fields excpect for screenshots, you could request it like this:

Apicalypse

```
fields *;
exclude screenshots;
```

SHORTHAND

Another way of writing exclude is to use the shorthand **x** which achieves the same result.

```
f *;
x screenshots;
```

Expander

WHAT?

Some fields are actually ids pointing to another endpoint. The expander feature is a convenient way to go into these other endpoints and access more information from them in the same query, instead of having to do multiple queries.

WHERE?

Expands are specificed among the regular fields in the body of the query.

HOW?

Fields can be expanded with a dot followed by the fields you want to access from a certain endpoint.

EXAMPLES

In the example below we request the fields name and genres for the game The Witcher 3 with id 1942.

```
fields name,genres;
where id = 1942;
```

But this query will only return ids for the genres, which can be seen in the first response to the right:

```
"First example response showing genre ids"
[
    {
        "id ": 1942,
        "genres":[
            12,
            31
        ],
        "name": "The Witcher 3: Wild Hunt"
    }
]
```

For some use cases the id is all that is needed, but other times more data is needed, This is when the expander features comes in handy.

```
fields name,genres.name;
where id = 1942;
```

This example with expander retrieves the name of each genre which can be seen in the second response to the right.

```
"Second example response showing genre ids and name"
[
    {
        "id": 1942,
        "genres": [
            {
                "id": 12,
                "name": "Role-playing (RPG)"
            },
```

```
            {
                "id": 31,
                "name": "Adventure"
            }
        ],
        "name": "The Witcher 3: Wild Hunt"
    }
]
```

And lastly lets take a look at how you can use a wildcard character * to retrieve all data from genres in the previous example.

`fields name,genres.*;`
`where id = 1942;`

See the third response to the right where all available data for each genre is included in the response.

```
"Third example response showing all available genre data"
[
    {
        "id": 1942,
        "genres": [
            {
                "id": 12,
                "created_at": 1297555200,
                "name": "Role-playing (RPG)",
                "slug": "role-playing-rpg",
                "updated_at": 1323216000,
                "url": "https://www.igdb.com/genres/role-playing-rpg"
            },
            {
                "id": 31,
                "created_at": 1323561600,
                "name": "Adventure",
                "slug": "adventure",
                "updated_at": 1323561600,
                "url": "https://www.igdb.com/genres/adventure"
            }
        ],
        "name": "The Witcher 3: Wild Hunt"
    }
]
```

Filters

WHAT?

Filters are used to sift through results to get what you want. You can exclude and include results based on their properties. For example you could remove all Games where the `rating` was below 80 (`where rating >= 80`).

HOW?

Filters are parameter arrays so must be added using special keys like this:

- Address:
  - `https://api.igdb.com/v4/games/`
- Body:
  - `search “zelda”;`
    `where rating >= 80 & release_dates.date > 631152000;`

WHERE?

Filters can be used on any entity that has sub-properties such as Games, Companies, People etc.

AVAILABLE POSTFIXES

- `=` Equal: Exact match equal.
- `!=` Not Equal: Exact match equal.
- `>` Greater than (works only on numbers).
- `>=` Greater than or equal to (works only on numbers).
- `<` Less than (works only on numbers).
- `<=` Less than or equal to (works only on numbers).
- `= "Your input string"*` Prefix: Exact match on the beginning of the string, can end with anything. (Case sensitive).
- `~ "Your input string"*` Prefix: Exact match on the beginning of the string, can end with anything. (Case insensitive).
- `= *"Your input string"` Postfix: Exact match at the end of the string, can start with anything. (Case sensitive).
- `~ *"Your input string"` Postfix: Exact match at the end of the string, can start with anything. (Case insensitive).
- `= *"Your input string"*` Infix Exact match in the middle of the string, can start and end with anything. (Case sensitive).
- `~ *"Your input string"*` Infix Exact match in the middle of the string, can start and end with anything. (Case insensitive).
- `!= null` The value is not null.
- `= null` The value is null.
- `[V1,V2,...Vn]` The value exists within the (comma separated) array (AND between values).
- `![V1,V2,...Vn]` The values must not exist within the (comma separated) array (AND between values).
- `(V1,V2,...Vn)` The value has any within the (comma separated) array (OR between values).
- `!(V1,V2,...Vn)` The values must not exist within the (comma separated) array (OR between values).
- `{V1,V2,...V2}` Exact match on arrays. (Does not work on ids, strings, etc).

EXAMPLES

Filter by multiple platforms

To get games that are released on PS4 OR XBOX ONE OR PC

- Address:
  - `https://api.igdb.com/v4/games/`
- Body:
  - `fields name;`
    `where release_dates.platform = (48,49,6);`

Similarly if you want games released on PS4 AND XBOX ONE AND PC

- Address:
  - `https://api.igdb.com/v4/games/`
- Body:

- `fields name;`
  `where release_dates.platform = [48,49,6];`

If you want games released only on PC

- Address:
  - `https://api.igdb.com/v4/games/`
- Body:
  - `fields name;`
    `where release_dates.platform = 6;`

And if you want games released for PC OR any other platform

- Address:
  - `https://api.igdb.com/v4/games/`
- Body:
  - `fields name;`
    `where release_dates.platform = (6);`

COMBINING MULTIPLE FILTERS

It is possible to to use logical operators between filters, which could look something like this:

- Address:
  - `https://api.igdb.com/v4/games/`
- Body:
  - `fields name,platforms,genres.name;`
    `where (platforms = [6,48] & genres = 13) | (platforms = [130,48] & genres = 12);`

The response from this example query will be games that fulfil one or both of two sets or requirements:

- Games released for for both PC (6), and PS4 (48) and also has the genre simulator (13).
- Games released for for both Switch (130), and PS4 (48) and also has the genre Role-Playing (13).

PREFIX, POSTFIX AND INFIX

Prefix

Filtering for game names beginning with “Super” (this will return games such as for example Super Mario World)

- Address:
  - `https://api.igdb.com/v4/games/`
- Body:
  - `fields name;`
    `where name = "Super"*;`

Postfix

Filtering for game names ending with with “World” (this will also return games such as for example Super Mario World)

- Address:
  - `https://api.igdb.com/v4/games/`
- Body:
  - `fields name;`
    `where name = *"World";`

Infix

Filtering for game names containing the string “Smash” anywhere (this will return games such as for example Super Smash Bros)

- Address:
  - `https://api.igdb.com/v4/games/`
- Body:
  - `fields name;`
    `where name = *"Smash"*;`

case insensitive version

Filtering for game names containing the string “Smash” (this will return games such as for example Super Smash Bros)

- Address:
  - `https://api.igdb.com/v4/games/`
- Body:
  - `fields name;`
    `where name ~ *"Smash"*;`

REMOVING EROTIC GAMES FROM API RESPONSES

Some queries may return games with erotic themes. All erotic games in the database has the theme ’erotic’ (id = 42). So by adding a simple filter like the one below you can remove them from your responses.

- Address:
  - `https://api.igdb.com/v4/games/`
- Body:
  - `fields name;`
    `where themes != (42);`

Sorting

WHAT?

Sorting is used to order results by a specific field.

HOW?

You can order results like this:

- Address:
  - `https://api.igdb.com/v4/games/`
- Body:
  - `sort release_dates.date desc;`
    `where rating >= 80;`

Notice the appended `:desc` (descending) which could also be `:asc` (ascending) if required.

Order by rating

Rating parameter for games. You can access it like this:

- Address:
  - `https://api.igdb.com/v4/games/`
- Body:
  - ```
    fields name,rating;
    sort rating desc;
    where rating != null;
    ```

WHERE?

Ordering can be used on any entity.

Search

WHAT?

Search based on name, results are sorted by similarity to the given search string.

WHERE?

Searchable endpoints:

- Characters
- Collections
- Games
- People
- Platforms
- Themes

HOW?

You specify which endpoint to search through in the Address field of your request. The search string is then entered in the body of the request by typing `search`, blank space followed by the string you wish to search for.

- Address:
  - `https://api.igdb.com/v4/games/`
- Body:
  - `search “zelda”;`

Pagination

Here is an example for how to use **limit**. The default limit is 10. The maximum value you can set for limit is 500.

- Address:
  - `https://api.igdb.com/v4/platforms/`
- Body:
  - `limit 33;`

There is also an **offset**. This will start the list at position 22 and give 33 results.

- Address:
  - `https://api.igdb.com/v4/platforms/`
- Body:
  - ```
    limit 33;
    offset 22;
    ```

Protocol Buffers

Google Protocol Buffers is a language neutral method for serializing structured data.
The IGDB API supports responses in this format so you do not have to write your own serialization libraries, but instead you could just generate one.
Since this is langage neutral it is supported by a variatey of languages.

HOW?

Generate the objects in your language of choise with our own Protobuf file, here
This file contains the mapping of the entire IGDB API and can be used to generate wrappers, code and tooling in any programming language.
The protobuf file is created in accordance with the proto3 specification

There are plenty of examples on how to do this Online and on the Protobuf Site.

WHERE?

To start recieving protobuf compatible responses from then api all you need to do is add `.pb` at the end of your request:
`https://api.igdb.com/v4/games.pb`
Then use your generated files to parse the response into the expected object.

Tag Numbers

Tag numbers are automatically generated numbers which provide a compact and fast way to do complex filtering on the IGDB API. The number calculation can be easily achieved with any programming language.

The basis of the calculation is a 32bit integer, where the first 4 bits contain the object type ID, and the remaining 28 bits represent the ID of the object we are generating the tag number for.

Using this method a flat index of custom object 'hashes' can be maintained in which index the search and filtering is faster than using conventional methods.

Currently the following object types use tags:

Type ID	Name
0	Theme
1	Genre
2	Keyword
3	Game
4	Player Perspective

Let's see two examples for tag number calculation.

```
// Javascript
const genreTypeID = 1; // The type ID from the table above
const shooterGenreID = 5; // The Shooter genre's ID, coming from the genres endpoint.
let tagNumber = genreTypeID << 28; // Bit-shifting the genre's type ID by 28 bits, ensuring that it will get into the first four bits. The result will be 268435456
tagNumber |= shooterGenreID; // Adding the Shooter genre ID to the tag number with a bitwise OR operation. The result will be 268435461.
```

We try to find all the games which relate to the Shooter genre. The tag number generation in Javascript would look something like the example on the right.

Javascript example query:

- Address:
  - `https://api.igdb.com/v4/games/`
- Body:
  - `where tags = (268435461);`

Python example query:

- Address:
  - `https://api.igdb.com/v4/games/`
- Body:
  - `where tags = (536871060);`

Multi-Query

Multi-Query is a new way to request a huge amount of information in one request! With Multi-Query you can request multiple endpoints at once, it also works with multiple requests to a single endpoint as well.

A Multi-Query is made by making a `POST` request to: `https://api.igdb.com/v4/multiquery`.

Syntax Structure The Multi-Query syntax is made up of three pieces; "Endpoint name", "Result Name (Given by you)", and the APICalypse query inside the body {}.

important You can only run a maximum of 10 queries.

EXAMPLE 1:

Get the count of platforms in the api.

```
query platforms/count "Count of Platforms" {
  // here we can have additional filters
};
```

This above query will give us the following result:

```
[
  {
    "name": "Count of Platforms",
    "count": 155
  }
]
```

EXAMPLE 2:

Get Playstation 4 Exclusives

```
query games "Playstation Games" {
        fields name,platforms.name;
        where platforms !=n & platforms = {48};
        limit 1;
};
```

This above query will give us the following result:

```
[
    {
        "name": "Playstation Games",
        "result": [
            {
                "id": 52826,
                "name": "Skate 4",
                "platforms": [
                    {
                        "id": 48,
```

```
                "name": "PlayStation 4"
            }
        ]
    }
]
```

EXAMPLE 3:

Combining the queries of example 1 and 2.

```
query platforms/count "Count of Platforms" {
  // here we can ahve additional filters
};

query games "Playstation Games" {
        fields name,platforms.name;
        where platforms !=n & platforms = {48};
        limit 1;
};
```

```
[
    {
        "name": "Count of Platforms",
        "count": 155
    },
    {
        "name": "Playstation Games",
        "result": [
            {
                "id": 52826,
                "name": "Skate 4",
                "platforms": [
                    {
                        "id": 48,
                        "name": "PlayStation 4"
                    }
                ]
            }
        ]
    }
]
```

APICalypse

APICALYPSE CHEATSHEET

APICalypse is a new language used for this api which greatly simplifies how you can query your requests compared to the url parameters used in API V2.

FIELDS

Fields are used to select which fields you want back from your request to the api.

To select fields you need the APICalypse command `fields` or its shorthand `f`.

Popular wildcard is to add `*` instead of a field, this will give you all of the fields.

`fields name,release_dates,genres.name,rating;`
`f name,release_dates,genres.name,rating;`

EXCLUDE

Commonly used with selecting all fields with the wildcard `*` this command will exclude the fields that you select.

To exclude fields you don't need the APICalypse command `exclude` or its shorthand `x`.

`fields *;`
`exclude tags,keywords;`

`f *;`
`x tags,keywords;`

WHERE

Where is easiest described as a filter. With where you can filter on specific fields.

To filter your results use the APICalypse command `where` or its shorthand `w`.

`fields *;`
`where genres = 4;`

`f *;`
`w genres = 4;`

LIMIT

Limit describes how many results you will get back from the api, the standard value is 10.

To set a new limit use the APICalypse command `limit` or it's shorthand `l`.

`fields *;`
`limit 50;`

`f *;`
`l 50;`

OFFSET

Offset describes how many results you will skip over, standard is 0.

To set a new offset use the APICalypse command `offset` or it's shorthand `o`.
Offset is often used together with Limit for pagination.

```
limit 50;
offset 50;
```

```
l 50;
o 50;
```

SORT

Use Sort to order the results to your liking.

To order the results use the APICalypse command `sort` or it's shorthand `s`.
Sort has two accompaning commands for "direction"; `asc` Ascending order and `desc` Decending order.

```
fields *;
sort rating asc;
```

```
f *;
s rating desc;
```

SEARCH

To find a specific title you can use Search.

To use search use the APICalypse command `search`, it has no shorthand :(. Search has it's own endpoint where it is good to use a filter for specific kinds of results, example `where game != null;` for only games.

```
search "Halo";
fields name;
```

```
search "Halo";
f name;
```

OTHER SHORTS

Null can be written `null` or `n`. Booleans can be written as `true` or `t` and `false` or `f`

Migration Enums to Tables

Important Changes Coming to the IGDB API

We're announcing upcoming changes to the IGDB API that will affect how certain data fields are structured and accessed. These changes are designed to make our gaming database more dynamic and better suited to the evolving gaming industry.

KEY CHANGES

We're moving away from using static enum values in our API to using more flexible table-based structures. While this is primarily an internal change, it affects how certain fields are named in our API. To ensure a smooth transition:

- All current enum values will remain the same in the new table structure
- Only the field names are changing, not the values they contain
    - **NOTE:** Changes are expected for the Age Rating Categories, IDs will not reflect the same enum values here.
- This change will allow us to evolve our data structure more efficiently in the future
- This change will allow you to expand these fields instead of keeping hardcoded enums

---

What is Changing?

Several field names are being standardized across our endpoints for better clarity and consistency:

Endpoint	Current Field	New Field
age_rating	category	organization
age_rating	rating	rating_category
character	gender	character_gender
character	species	character_species
companies	change_date_category	change_date_format
companies	start_date_category	start_date_format
company_website	category	type
external_game	category	external_game_source
external_game	media	game_release_format
platform	category	platform_type
website	category	type

Additionally, we're adding some new fields:

- The `age_rating` endpoint will now use `rating_content_descriptions` instead of `content_descriptions` (replacing age_rating_content_descriptions with age_rating_content_descriptions_v2)
- The `companies` endpoint will have a `status` field for active,defunct,merged, or renamed.

New Endpoints replacing enum values

- age_rating_organizations
- age_rating_categories
- age_rating_content_descriptions_v2
- character_genders
- character_species
- company_status
- company_websites
- date_formats
- external_game_sources
- game_release_formats
- game_status
- game_types
- platform_types
- release_date_regions
- website_types

Datadumps
All of these changes will be reflected in the daily data dumps.

Migration Timeline

- Migration Period: starting on February 18 to August 31 (6 months)
- During this period, both old and new field names will be available
- Monthly reminders will be sent to all API users about the upcoming deprecation
- After the migration period, the old field names will be removed

HOW DOES THIS AFFECT YOU?

If your application uses any of the fields listed above, you'll need to update your code to use the new field names within the next 6 months. The current field names will be removed after the migration period ends.

MIGRATION RECOMMENDATIONS

1. Begin updating your applications to use the new field names as soon as possible
2. Test your applications thoroughly with the new field names
3. Complete all necessary changes before the end of the 6 month migration period
4. Keep an eye on Discord for monthly deprecation reminders

Questions or Concerns?

If you have any questions about these changes or need assistance with migration, please:

- Review our updated API documentation
- Reach out to our support team
- Join our discord community for discussions

We're committed to making this transition as smooth as possible for all our API users.

Partnership

Interested about using the API for a commercial project? No problem, we allow commercial usage. Get in touch with us about our partner program!

HOW?

To register for a commertial agreement reach out to partner@igdb.com

EXCLUSIVE FEATURES

Automatic data dumps every 24 hours.
More features coming soon.

Data Dumps

All endpoints are available as CSV Data Dumps!

Daily updated CSV Data Dumps which can be used to kick start your projects or keep your data up to date (within 24 hours).

> *Please note that data dumps are exclusively available to our Data Partners.*

```
curl -X GET 'https://api.igdb.com/v4/dumps' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token'
```

LISTING DUMPS

To list the available data dumps make a GET request to `/dumps`.
This will return a list of available Data Dumps describing the `endpoint`, `file name`, and `updated at`.

```
# Example response from /dumps
[
    {
        "endpoint": "games",
        "file_name": "1234567890_games.csv",
        "updated_at": 1234567890
```

```
    }
]
```

```
curl -X GET 'https://api.igdb.com/v4/dumps/ENDPOINT' \
-H 'Client-ID: Client ID' \
-H 'Authorization: Bearer access_token'
```

DOWNLOADING CSV

To get the download link for the csv files make a GET request to `/dumps/ENDPOINT` The response object will contain the download link for the CSV and the schema version & schema JSON structure of the data.

S3 Download Url:
The download Url is a presigned S3 url that is valid for 5 minutes.

Schema
The `schema_version` and `schema` will reflect the current data structure and data type that the Dump is using.
The schema version number will change when the `schema` changes, so if you are planning on an automated setup for this you will need to keep this in mind.

```
# Example response from /dumps/games
{
    "s3_url": "S3_DOWNLOAD_URL",
    "endpoint": "games",
    "file_name": "1234567890_games.csv",
    "size_bytes": 123456789,
    "updated_at": 1234567890,
    "schema_version": "1234567890",
    "schema": {
        "id": "LONG",
        "name": "STRING",
        "url": "STRING",
        "franchises": "LONG[]",
        "rating": "DOUBLE",
        "created_at": "TIMESTAMP",
        "checksum": "UUID",
    }
}
```

FAQ

Business related FAQ

1. I WANT TO USE THE API FOR A COMMERCIAL PROJECT, IS IT ALLOWED?

Yes, we offer commercial partnerships for users looking to integrate the API in monetized products. From our side, as part of the partnership, we ask for user facing attribution to IGDB.com from products integrating the IGDB API.

For more details on that process, please reach out to partner@igdb.com

2. WHAT IS THE PRICE OF THE API?

The API is free for both non-commercial and commercial projects.

3. AM I ALLOWED TO STORE/CACHE THE DATA LOCALLY?

Yes. In fact, we prefer if you store and serve the data to your end users. You remain in control over your user experience, while alleviating pressure on the API itself.

4. REGARDING USER FACING ATTRIBUTION (RELATING TO THE COMMERCIAL PARTNERSHIP), ANY SPECIFIC GUIDELINES?

Not really. We expect fair attribution, i.e. attribution that is visible to your users and located in a static location (e.g. not in a change log).

5. WHAT HAPPENS WITH THE DATA RETRIEVED, IN THE CASE OF PARTNERSHIP TERMINATION?

You are allowed to keep all data you retrieve from the API and we will not ask you to remove the data in case of partnership termination.

6. WE DON'T WISH TO ATTRIBUTE IGDB.COM AS PART OF THE PARTNERSHIP. ARE THERE ANY OTHER WAY?

Yes. If you have data that we think will complete the overall IGDB data set and you are willing to share that data with us, we can opt for this approach instead. Please be aware, however, that we are only interested in publicly available data that we can re-distribute using this API.

Technical related FAQ

1. CAN I USE TWITCH USER CREDENTIALS TO ACCESS THE API?

The IGDB API uses `Application Credentials` to authenticate, you **cannot** use user credentials to authenticate API requests

More information about authentication can be found in the documentation, here

2. THE REQUESTED IMAGES ARE IN THE WRONG FORMAT!

Requesting images using the API returns a default image url using the `t_thumb` format. To request larger image sizes you should manually create your own image url using the `image_id` and the appropriate image size. example: `https://images.igdb.com/igdb/image/upload/t_{size}/{image_id}.png`

More information about images and image sizes can be found in our documentation, here

3. WHY AM I RECIEVING A CORS ERROR?

The IGDB API does not support browser requests, CORS, for security reasons. This is because the request would leak your access token! We suggest that you create a backend proxy which authenticates and queries the API directly, and can be set up as a trusted connection for your client application.

For more information see our documentation, here

4. MY ACCESSTOKEN STOPPED WORKING, WHY?

Your Access Token is only active for **60 days** and your application can only have **25 active** Access Tokens at one time, going over this limit starts to inactivate older tokens.

5. WHY AM I ONLY RECEIVING IDS?

An empty request will only yield a list of IDs. To request more information in a single request you should *expand* your request.
Ex: `fields *, cover.*;`

More information about expanding requests, here
More example requests, here

6. WHY AM I ONLY RECEIVING 10 ITEMS, HOW DO I GET MORE?

The default item limit is set to 10. To edit this limit simply specify the limit in your request.
Ex: `limit 50;`
The maximum limit is set to 500 items/request.

Read more about query syntax, here

Support

HAVE A QUESTION?

If you have any questions about the API we recommend that you join our Discord, there you can discuss the API with other people working with it as well as the developers of the API and ask questions.

REPORTING A BUG

If you would like to report a bug you can do so in Discord or use Uservoice

---

License

Any code examples or snippets found under api-docs.igdb.com are made available under the Twitch Developer Services Agreement as Program Materials.